


Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
11	SD	78	0.0/R16.5	101	144

REGISTERED CIVIL ENGINEER  
 Roberta L. McLaughlin  
 No. C40375  
 Exp. 3-31-15  
 CIVIL  
 STATE OF CALIFORNIA


July 19, 2013  
 PLANS APPROVAL DATE

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.


### EXIT RAMP NEUTRAL AREA (GORE) TREATMENT

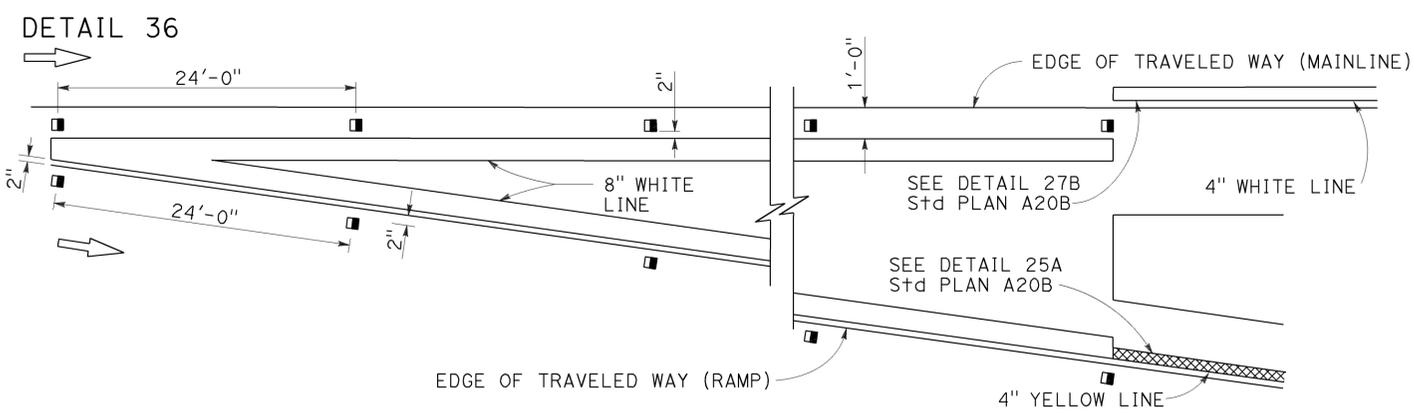

### ENTRANCE RAMP NEUTRAL AREA (MERGE) TREATMENT

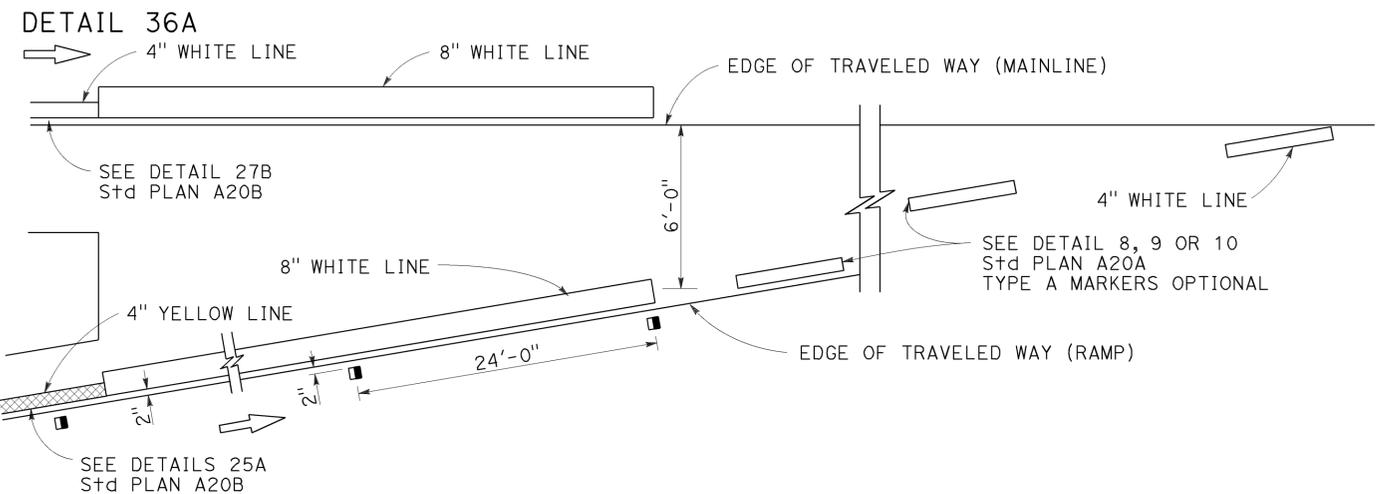


### ENTRANCE RAMP NEUTRAL AREA (ACCELERATION LANE) TREATMENT

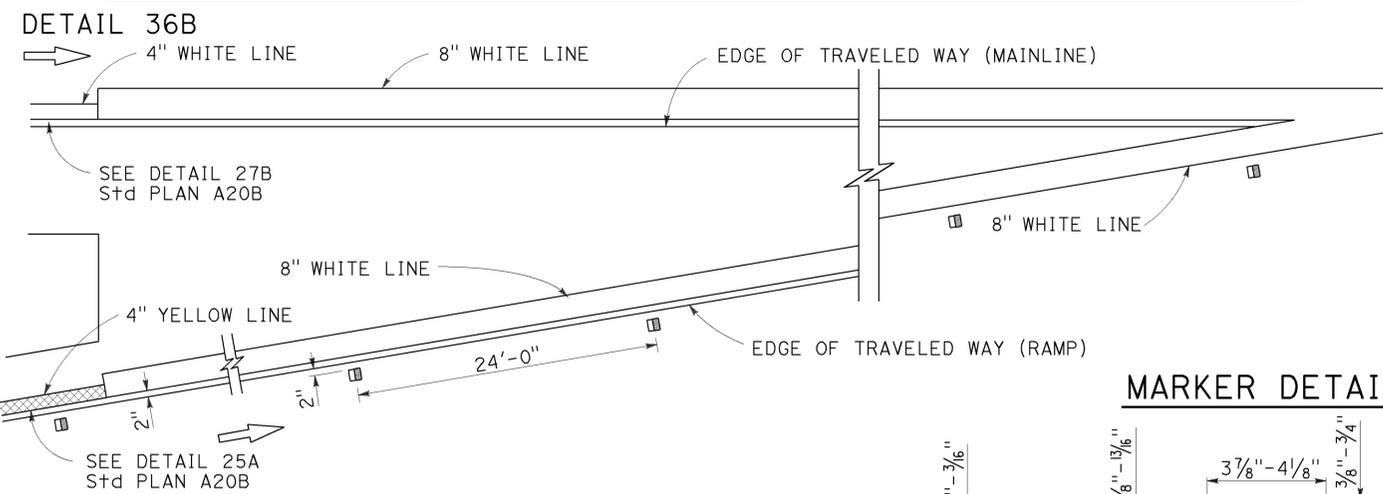



### MARKER DETAILS

#### LEGEND:

- MARKERS
- TYPE A WHITE NON-REFLECTIVE
  - ◻ TYPE C RED-CLEAR RETROREFLECTIVE
  - TYPE G ONE-WAY CLEAR RETROREFLECTIVE


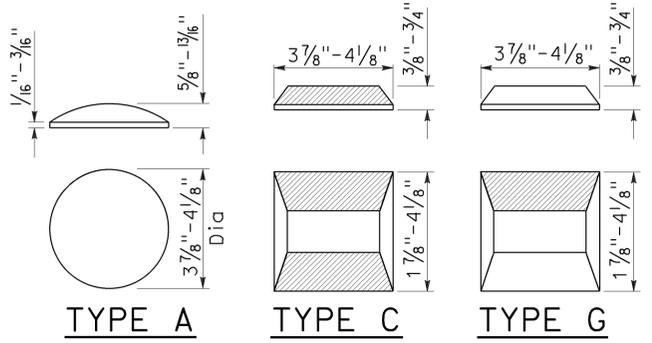


### LANE DROP AT EXIT RAMPS

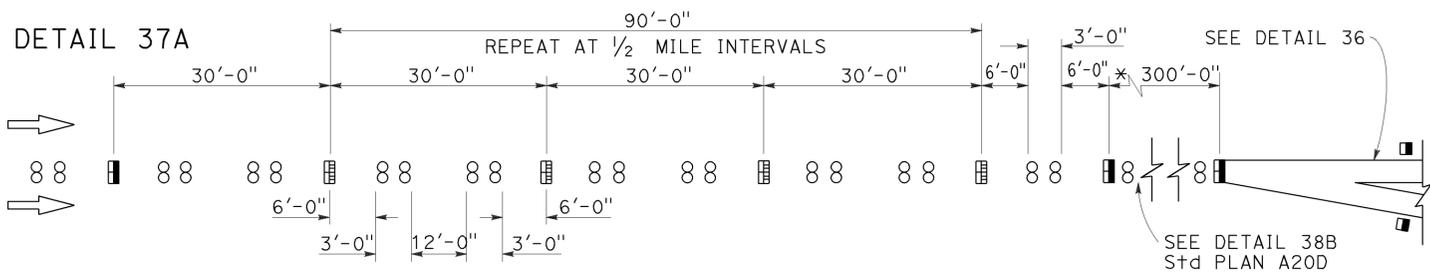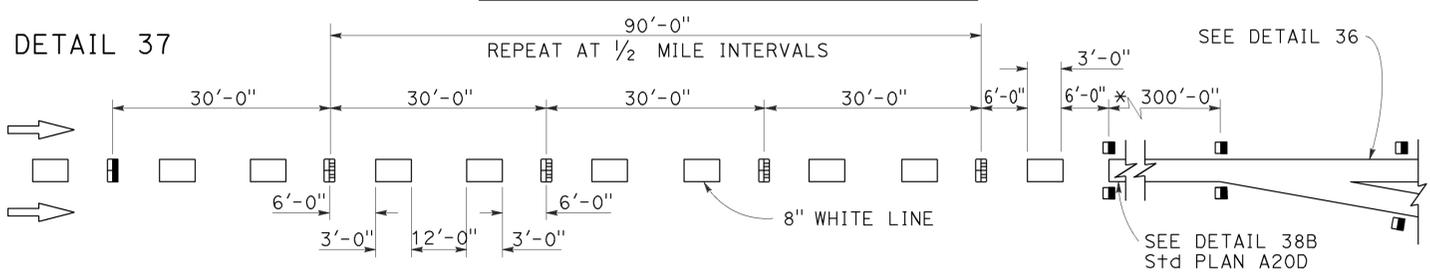

\* The solid channelizing line shown may be omitted on short auxiliary lanes where weaving length is critical.

### LANE DROP AT INTERSECTIONS

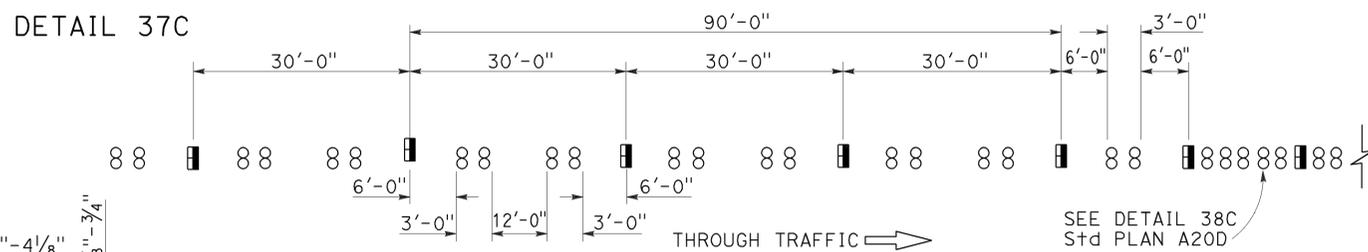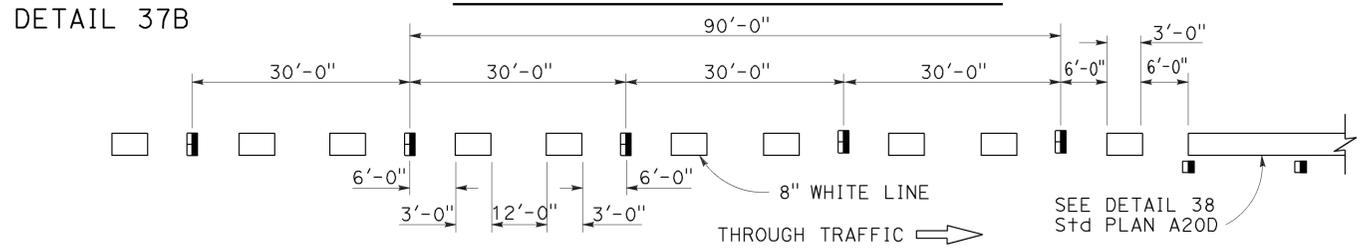

STATE OF CALIFORNIA  
 DEPARTMENT OF TRANSPORTATION

## PAVEMENT MARKERS AND TRAFFIC LINE TYPICAL DETAILS

NO SCALE

RSP A20C DATED JULY 19, 2013 SUPERSEDES STANDARD PLAN A20C DATED MAY 20, 2011 - PAGE 11 OF THE STANDARD PLANS BOOK DATED 2010.

## REVISED STANDARD PLAN RSP A20C

2010 REVISED STANDARD PLAN RSP A20C


Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
11	SD	78	0.0/R16.5	102	144

Registered Professional Engineer  
 Roberta L. McLaughlin  
 No. C40375  
 Exp. 3-31-13  
 CIVIL  
 STATE OF CALIFORNIA


April 20, 2012  
 PLANS APPROVAL DATE

THE STATE OF CALIFORNIA OR ITS OFFICERS  
 OR AGENTS SHALL NOT BE RESPONSIBLE FOR  
 THE ACCURACY OR COMPLETENESS OF SCANNED  
 COPIES OF THIS PLAN SHEET.


TO ACCOMPANY PLANS DATED 08-01-16

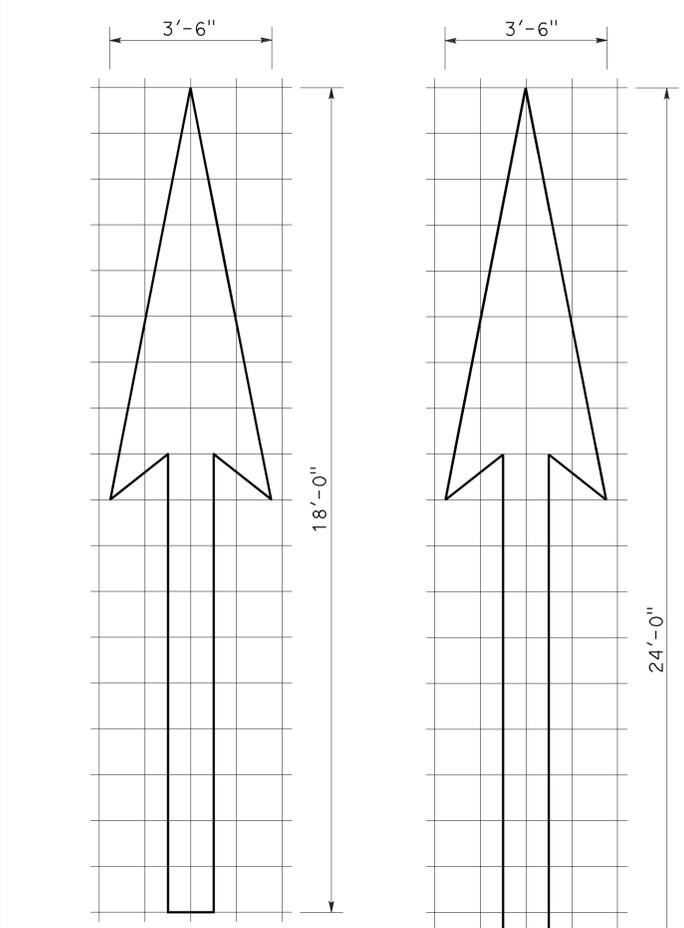


**TYPE I 18'-0" ARROW**  
A=25 ft<sup>2</sup>

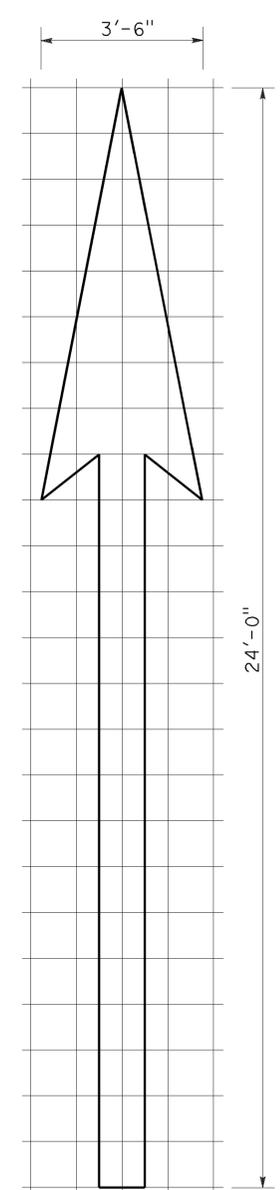


**TYPE I 24'-0" ARROW**  
A=31 ft<sup>2</sup>

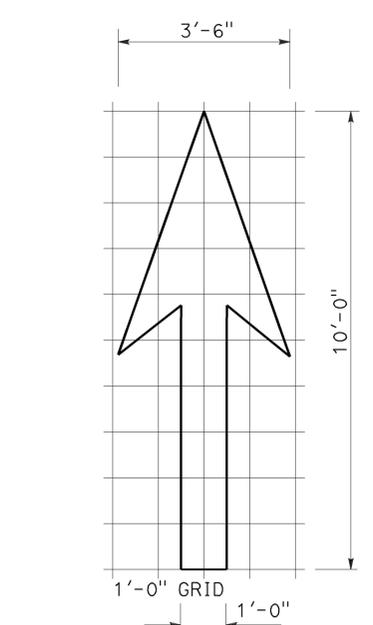


**TYPE I 10'-0" ARROW**  
A=14 ft<sup>2</sup>

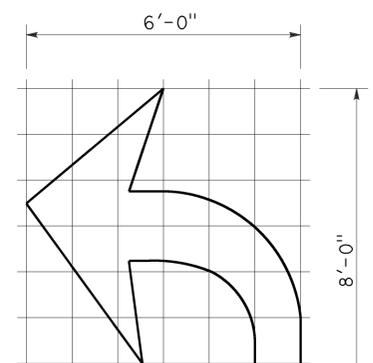


**TYPE IV (L) ARROW**  
A=15 ft<sup>2</sup>  
(For Type IV (R) arrow,  
use mirror image)

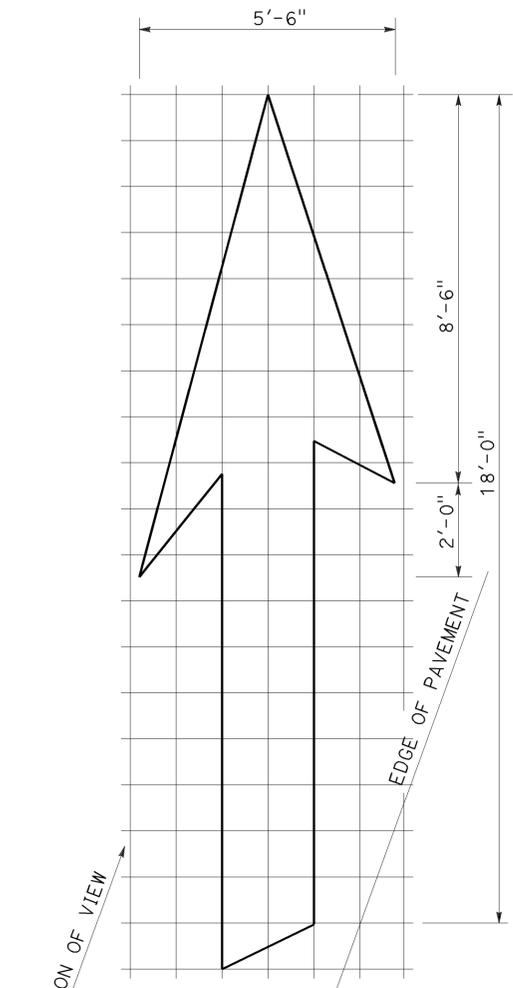


**TYPE VI ARROW**  
A=42 ft<sup>2</sup>  
Right lane drop arrow  
(For left lane,  
use mirror image)

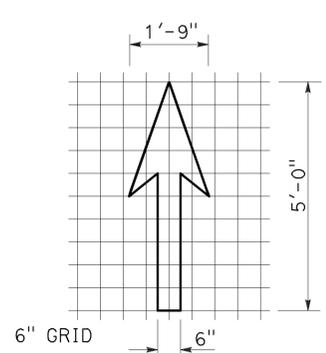


**BIKE LANE ARROW**  
A=3.5 ft<sup>2</sup>

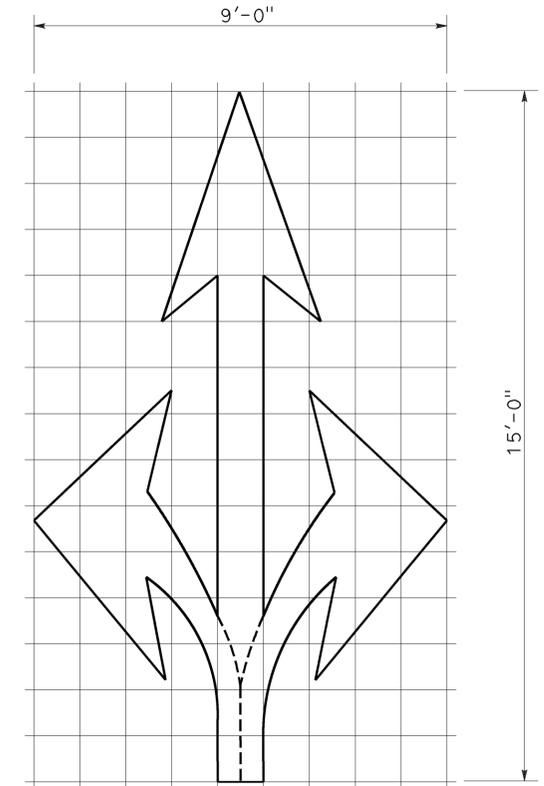

**TYPE VIII ARROW**  
A=36 ft<sup>2</sup>

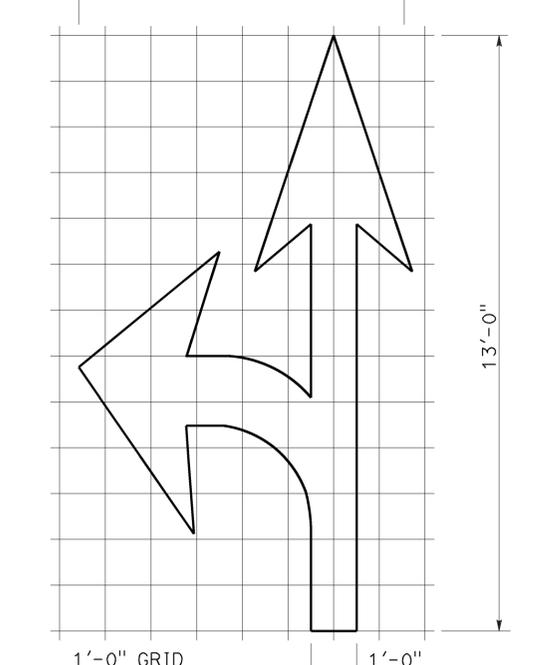

**TYPE VII (L) ARROW**  
A=27 ft<sup>2</sup>  
(For Type VII (R) arrow,  
use mirror image)

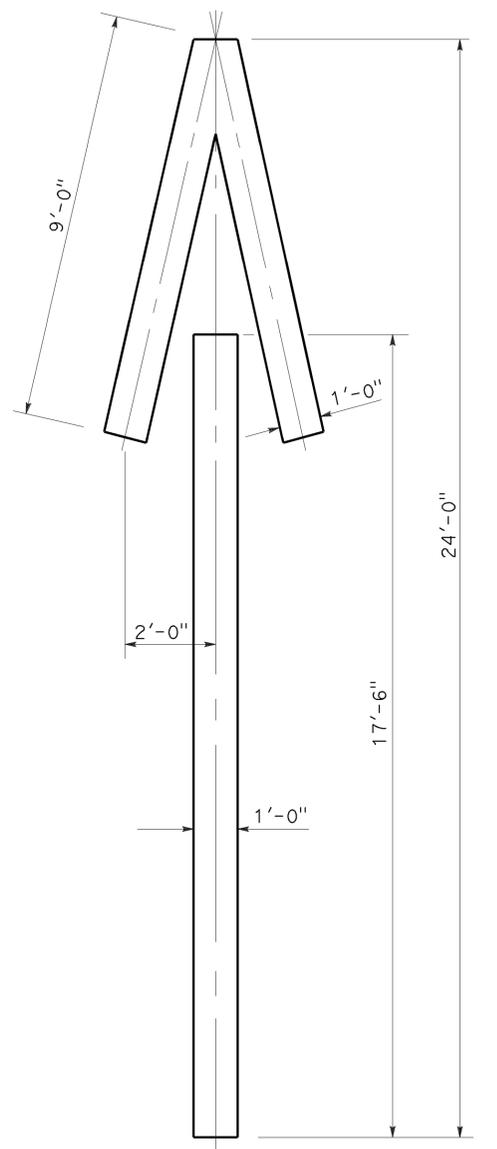

**TYPE V ARROW**  
A=33 ft<sup>2</sup>

**NOTE:**  
Minor variations in dimensions  
may be accepted by the Engineer.

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION  
**PAVEMENT MARKINGS  
ARROWS**  
NO SCALE

RSP A24A DATED APRIL 20, 2012 SUPERSEDES STANDARD PLAN A24A  
DATED MAY 20, 2011 - PAGE 13 OF THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP A24A**


2010 REVISED STANDARD PLAN RSP A24A

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
11	SD	78	0.0/R16.5	103	144


Registered Professional Engineer  
 Roberto L. McLaughlin  
 No. C40375  
 Exp. 3-31-13  
 CIVIL  
 STATE OF CALIFORNIA

October 19, 2012  
 PLANS APPROVAL DATE


THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

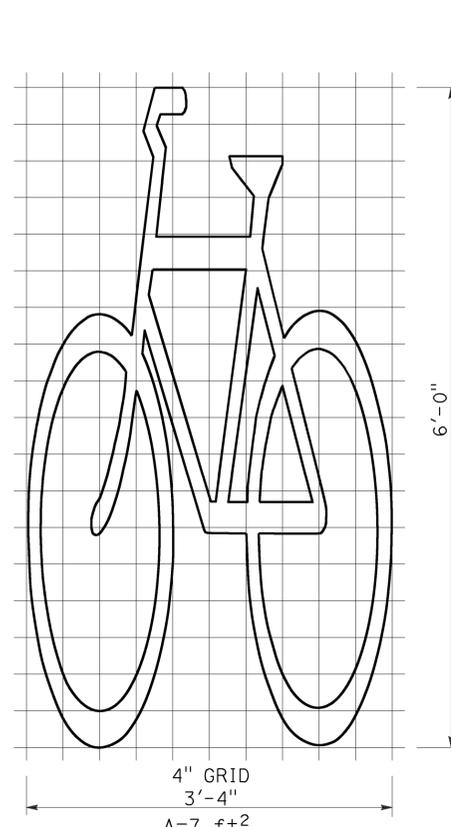


**BIKE LANE SYMBOL WITHOUT PERSON**

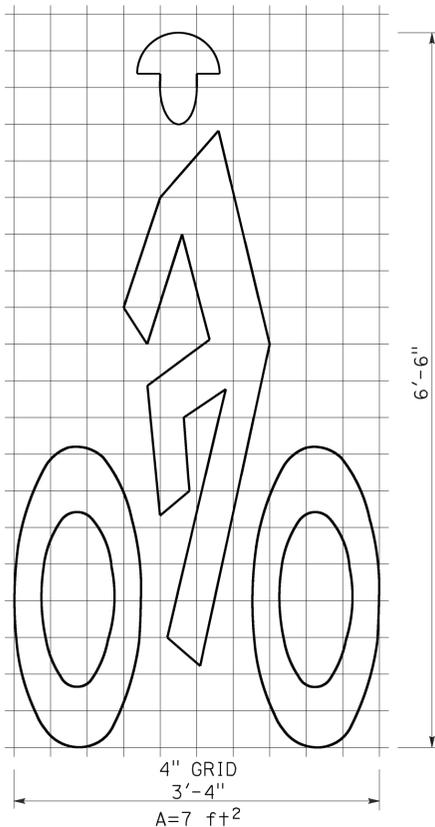


**BIKE LANE SYMBOL WITH PERSON**

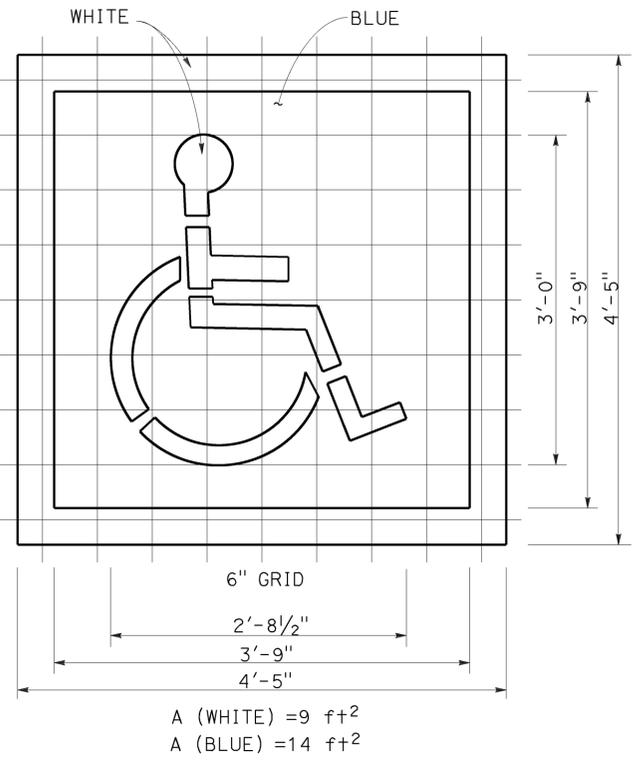


**INTERNATIONAL SYMBOL OF ACCESSIBILITY (ISA) MARKING**

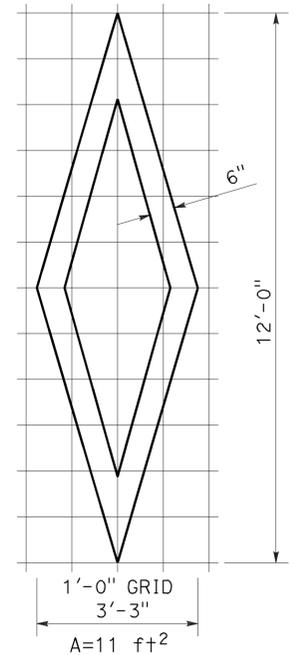




**DIAMOND SYMBOL**

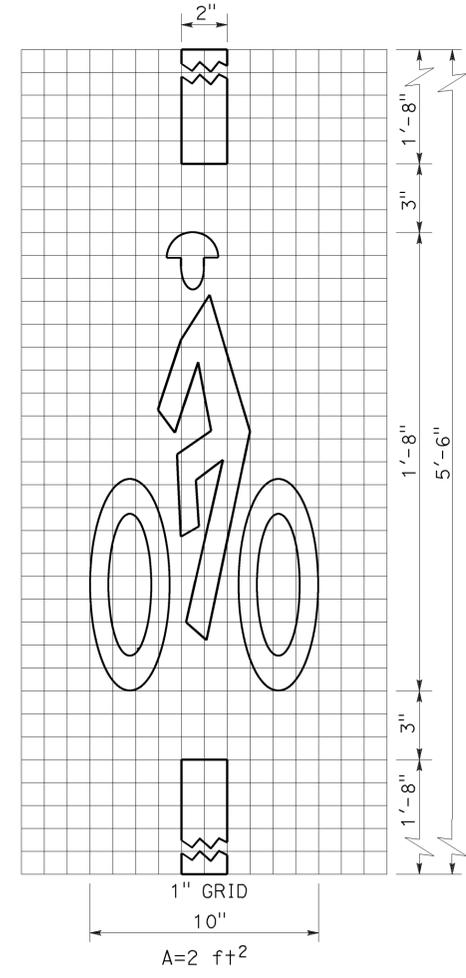

**BICYCLE LOOP DETECTOR SYMBOL**

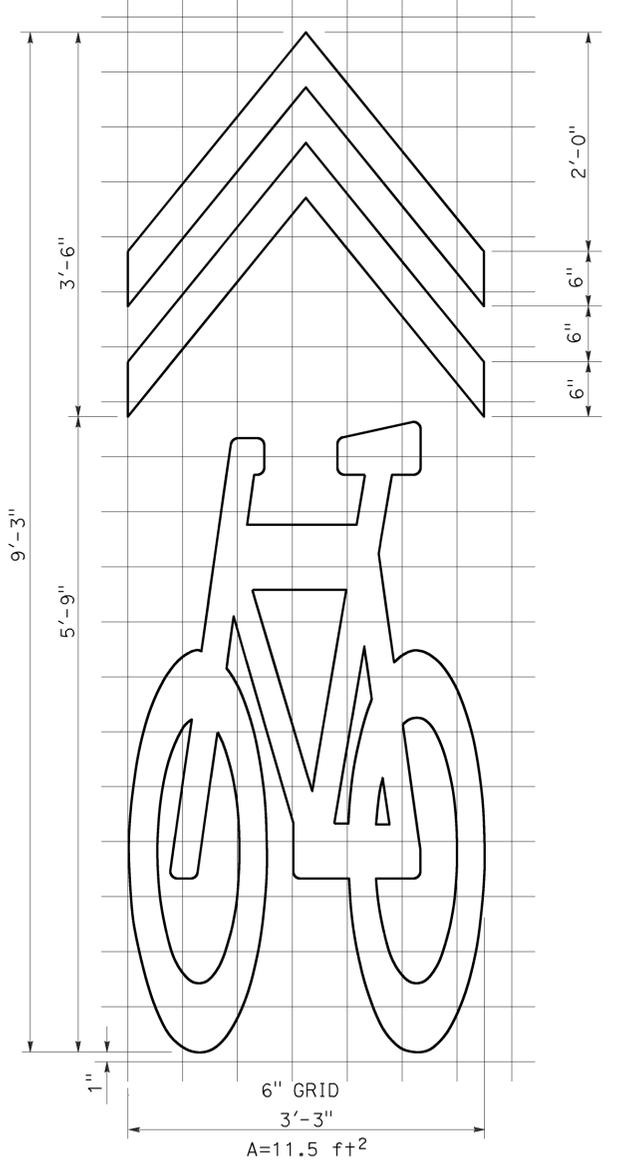

**SHARED ROADWAY BICYCLE MARKING**

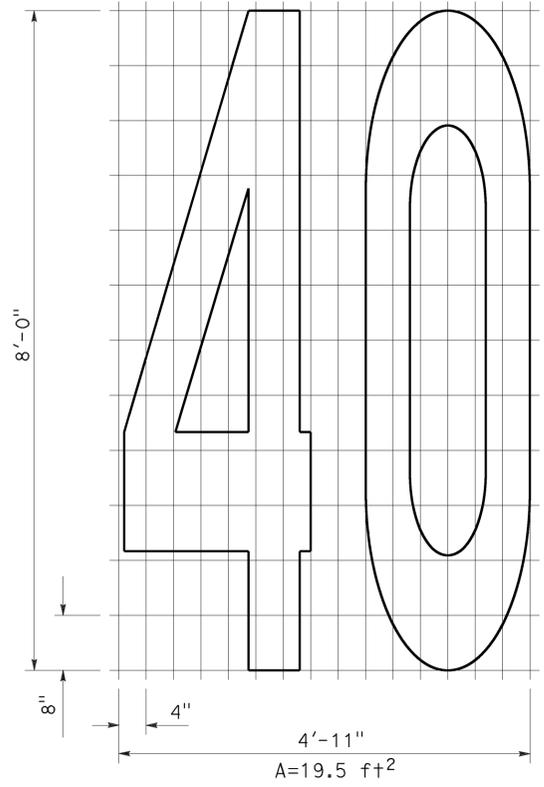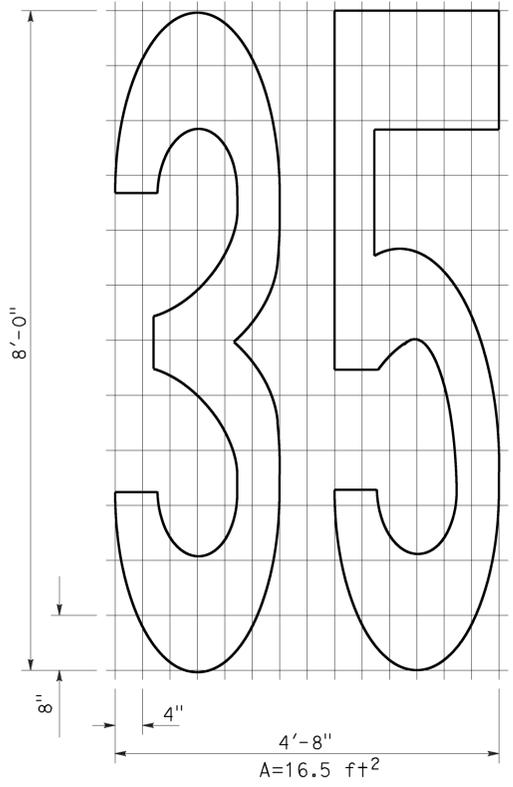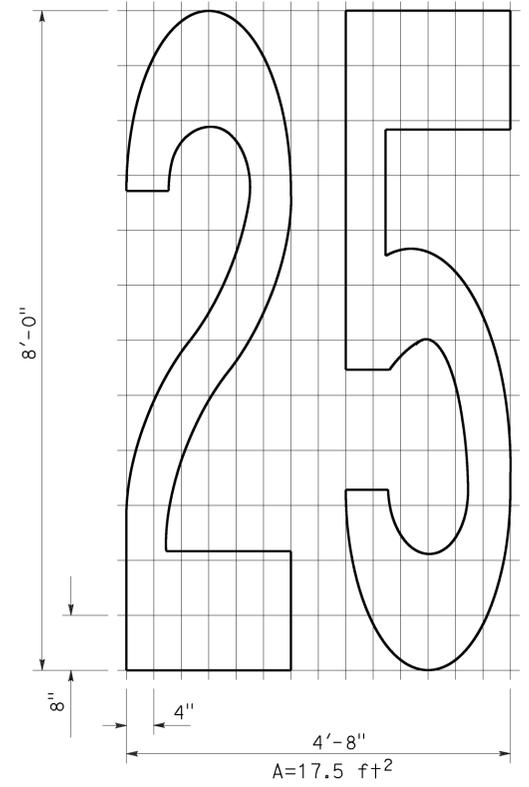

**NUMERALS**

STATE OF CALIFORNIA  
 DEPARTMENT OF TRANSPORTATION  
**PAVEMENT MARKINGS SYMBOLS AND NUMERALS**  
 NO SCALE

RSP A24C DATED OCTOBER 19, 2012 SUPERSEDES STANDARD PLAN A24C DATED MAY 20, 2011 - PAGE 15 OF THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP A24C**

**2010 REVISED STANDARD PLAN RSP A24C**





DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
11	SD	78	0.0/R16.5	104	144

<i>Roberta L. McLaughlin</i>	
REGISTERED CIVIL ENGINEER	
July 20, 2012	
PLANS APPROVAL DATE	
<small>THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.</small>	

TO ACCOMPANY PLANS DATED 08-01-16


2010 REVISED STANDARD PLAN RSP A24F

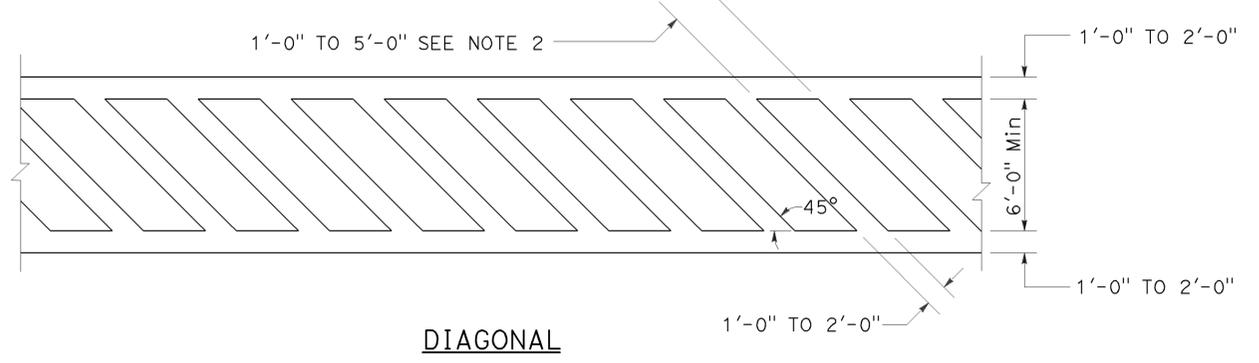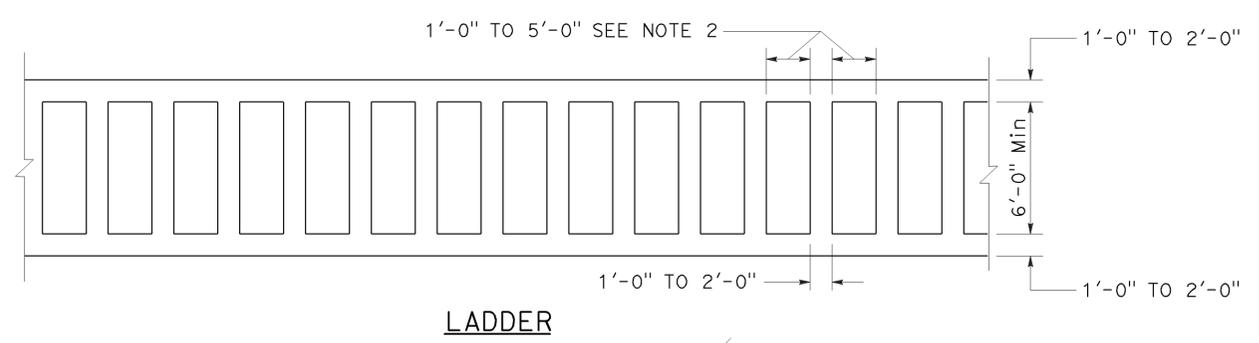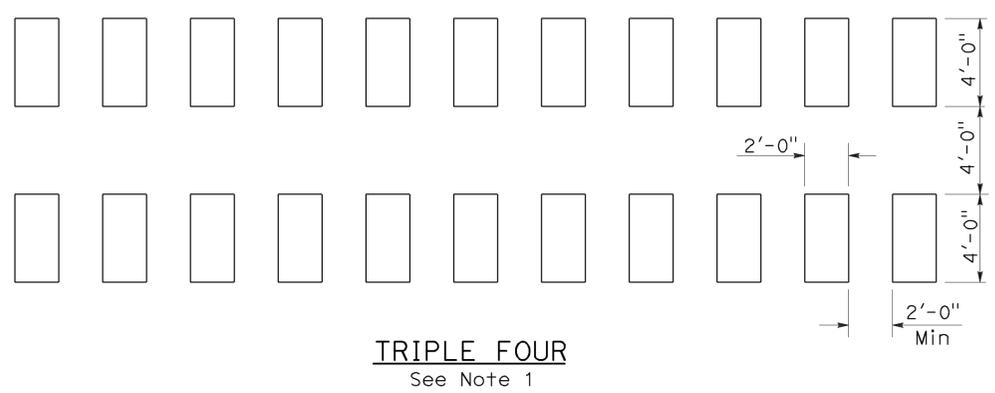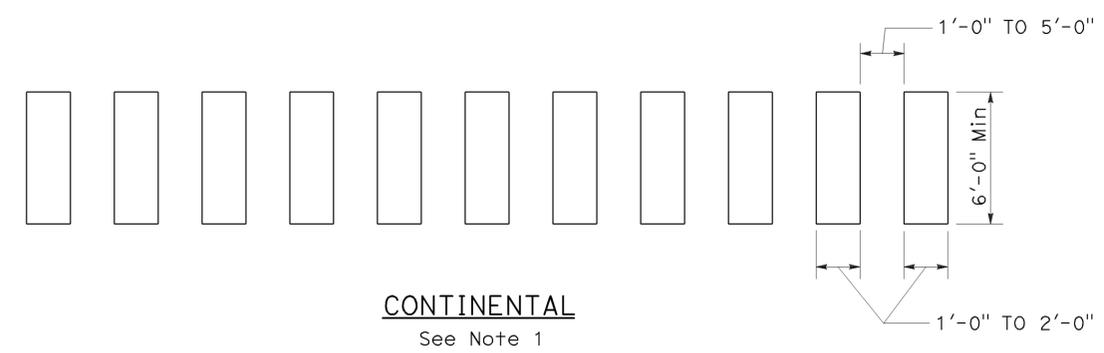

**HIGHER VISIBILITY CROSSWALKS**

**NOTES:**

1. Spaces between markings should be placed in wheel tracks of each lane.
2. Spacings not to exceed 2.5 times width of longitudinal line.
3. All crosswalk markings must be white except for those near schools must be yellow.

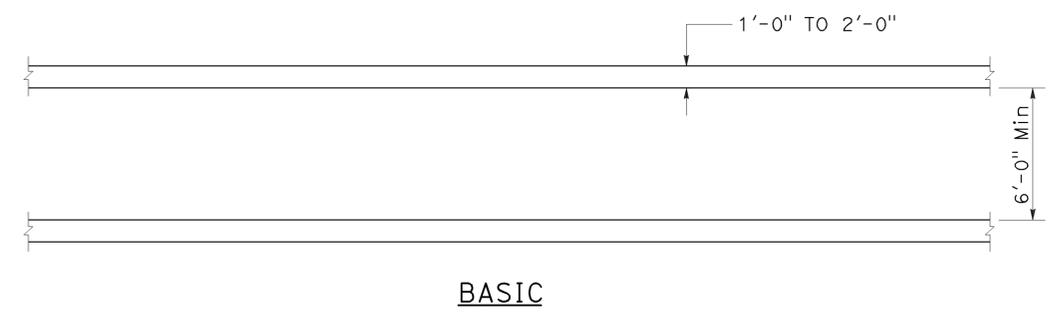

**BASIC**

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION  
**PAVEMENT MARKINGS  
CROSSWALKS**

NO SCALE  
RSP A24F DATED JULY 20, 2012 SUPPLEMENTS THE  
STANDARD PLANS BOOK DATED 2010.


Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
11	SD	78	0.0/R16.5	105	144

**Randell D. Hiatt**  
REGISTERED CIVIL ENGINEER


October 30, 2015  
PLANS APPROVAL DATE

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.


TO ACCOMPANY PLANS DATED 08-01-16

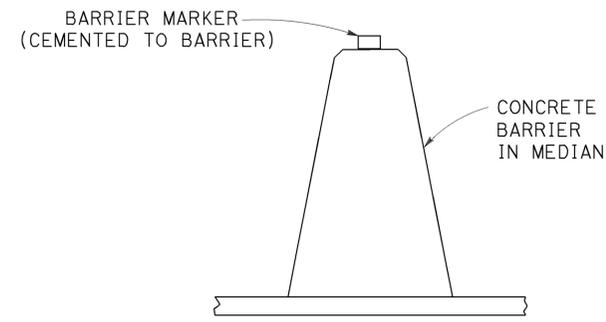

**CONCRETE BARRIER TYPE 60 DELINEATION**  
See Note 5

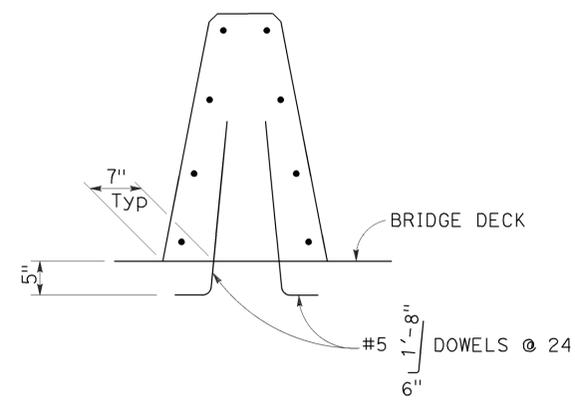


**CONCRETE BARRIER TYPE 60A**  
Details similar to Type 60 except as noted.

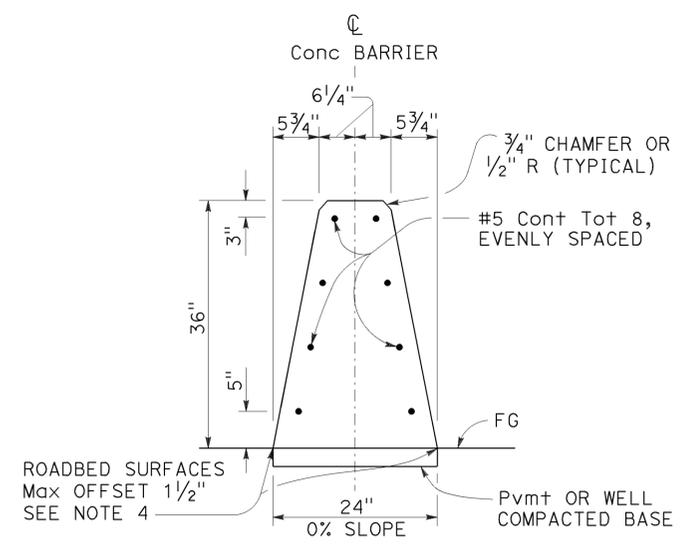


**CONCRETE BARRIER TYPE 60**

**NOTES:**

- See Standard Plan A76B for details of Concrete Barrier Type 60 end anchors, connection to structures and transitions to Concrete Barrier Type 50 and Concrete Barrier Type 60S.
- See Revised Standard Plan RSP A76C for Concrete Barrier Type 60 transitions at bridge column and sign pedestals.
- Where glare screen is required on Concrete Barrier Type 60, use Concrete Barrier Type 60G.
- Where roadbed offset is greater than 1 1/2", see Concrete Barrier Type 60C.
- See Project Plans for barrier delineation locations.
- Reinforcing stirrup not required for roadbed offsets less than 1'-0".
- For roadbed surfaces offset greater than 1 1/2" and less than or equal to 3", no reinforcement required. For roadbed surfaces offset greater than 3" and less than or equal to 8", use two #4 Reinf at 3" above the lower roadbed surface. For roadbed surfaces offset greater than 8" and less than or equal to 12", use two #4 Reinf at 3" above the lower roadbed surface and two #4 Reinf at 8" above the lower roadbed surface. For roadbed surfaces offset greater than 12" and less than or equal to 36", use two #4 Reinf at 3" above the lower roadbed surface and two #4 Reinf at every 8" increment vertical spacing above the first two #4 Reinf.

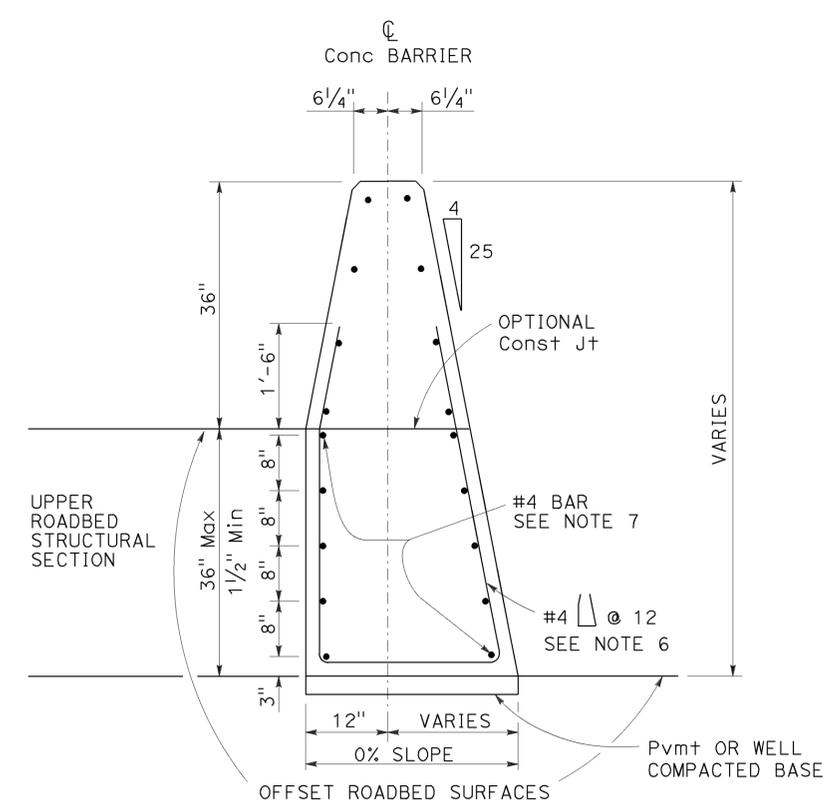

**CONCRETE BARRIER TYPE 60C**  
Details similar to Type 60 except as noted.  
Use concrete barrier end anchor when necessary.  
36" roadbed surfaces offset shown.

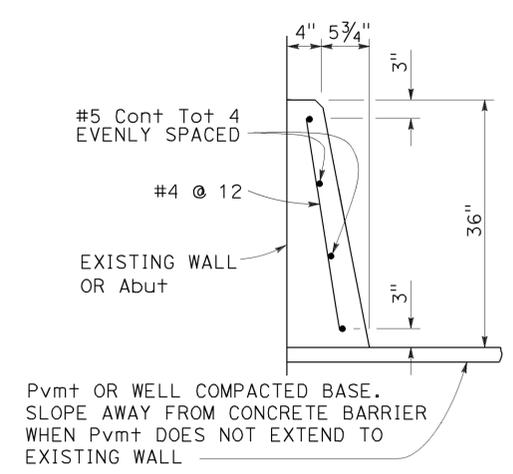

**CONCRETE BARRIER TYPE 60D**

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION  
**CONCRETE BARRIER TYPE 60**  
NO SCALE

RSP A76A DATED OCTOBER 30, 2015 SUPERSEDES STANDARD PLAN A76A DATED MAY 20, 2011 - PAGE 34 OF THE STANDARD PLANS BOOK DATED 2010.

2010 REVISED STANDARD PLAN RSP A76A



Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
11	SD	78	0.0/R16.5	106	144

*Randell D. Hiatt*  
REGISTERED CIVIL ENGINEER


July 19, 2013  
PLANS APPROVAL DATE

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.


TO ACCOMPANY PLANS DATED 08-01-16

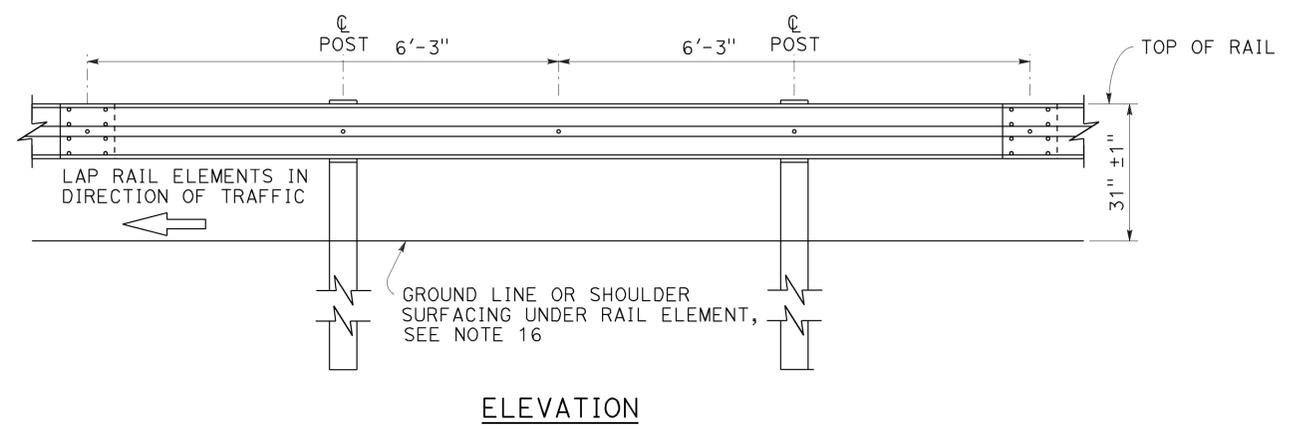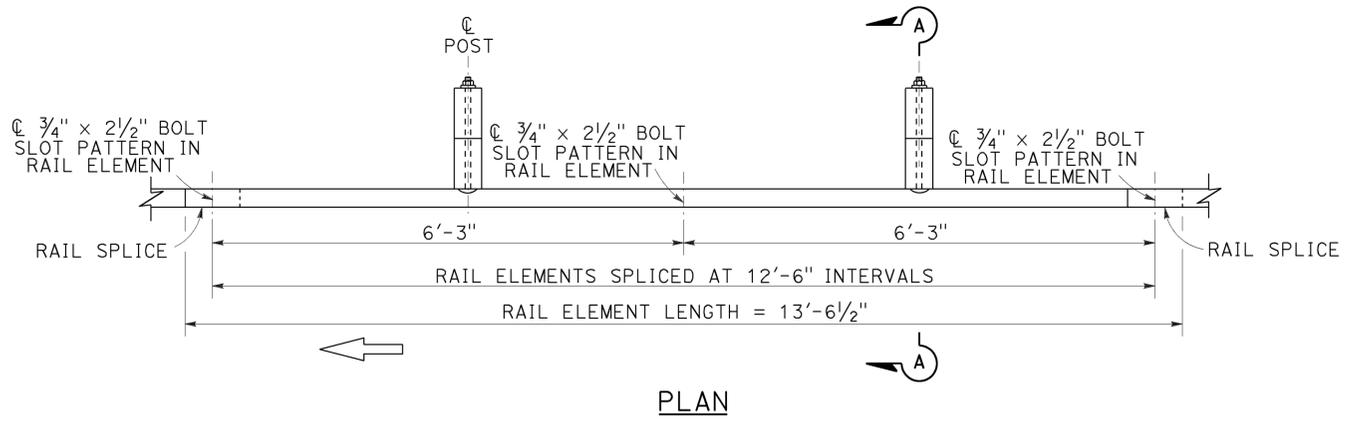

**MIDWEST GUARDRAIL SYSTEM WITH WOOD POST AND BLOCKS**

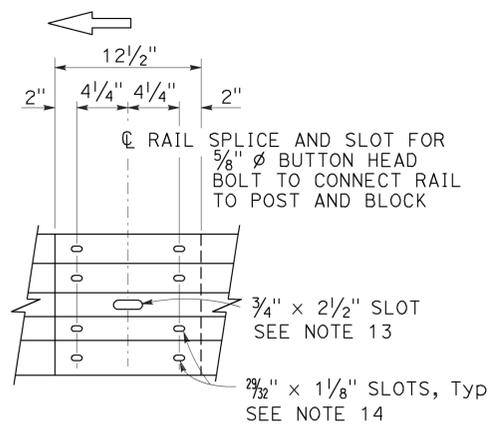


- Connect the over lapped end of the rail elements with  $\frac{5}{8}$ "  $\phi$  x  $1\frac{3}{8}$ " button head oval shoulder splice bolts inserted into the  $\frac{7}{32}$ " x  $1\frac{1}{8}$ " slots and bolted together with  $\frac{5}{8}$ "  $\phi$  recessed hex nuts. Recess of hex nut points toward rail element. A total of 8 bolts and nuts are to be used at each rail splice connection.
- The ends of the rail elements are to be overlapped in the direction of traffic (see details).
- Where end cap is to be attached to the end of a rail element, a total of 4 of the above described splice bolts and nuts are to be used.

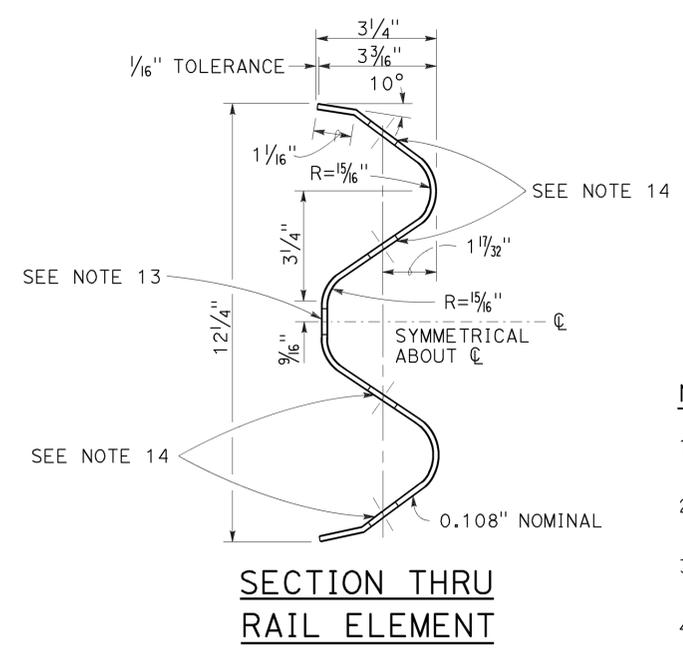

**NOTES:**

- For details of steel post installations, see Revised Standard Plan RSP A77L2.
- For details of standard hardware used to construct MGS, see Revised Standard Plan RSP A77M1.
- For details of wood posts and wood blocks used to construct MGS, see Revised Standard Plan RSP A77N1.
- For additional installation details, see Revised Standard Plan RSP A77N3.
- MGS post spacing to be 6'-3" center to center, except as otherwise noted.
- For MGS typical layouts, see the A77P, A77Q and A77R Series of Standard Plans.
- If railing is connected to terminal system end treatment, use 31" height terminal system end treatment.
- For MGS end anchor details, see Revised Standard Plans RSP A77S1 and RSP A77T2.
- For details of MGS transition to bridge railing, see Revised Standard Plan RSP A77U4.
- For additional details of MGS connection to bridge railing, see Revised Standard Plans RSP A77U1, RSP A77U2 and RSP A77V1.
- For MGS connection details to abutments and walls, see Revised Standard Plan RSP A77U3.
- For typical MGS delineation and dike positioning details, see Revised Standard Plan RSP A77N4.
- Slotted hole for bolted connection of rail element to block and post. See "Section Thru Rail Element".
- Slotted holes for splice bolts to overlap ends of rail element. See "Section Thru Rail Element".
- Additional hole in uppermost portion of line post is for potential future adjustments of railing height. See Revised Standard Plan RSP A77N1.
- Install posts in soil.

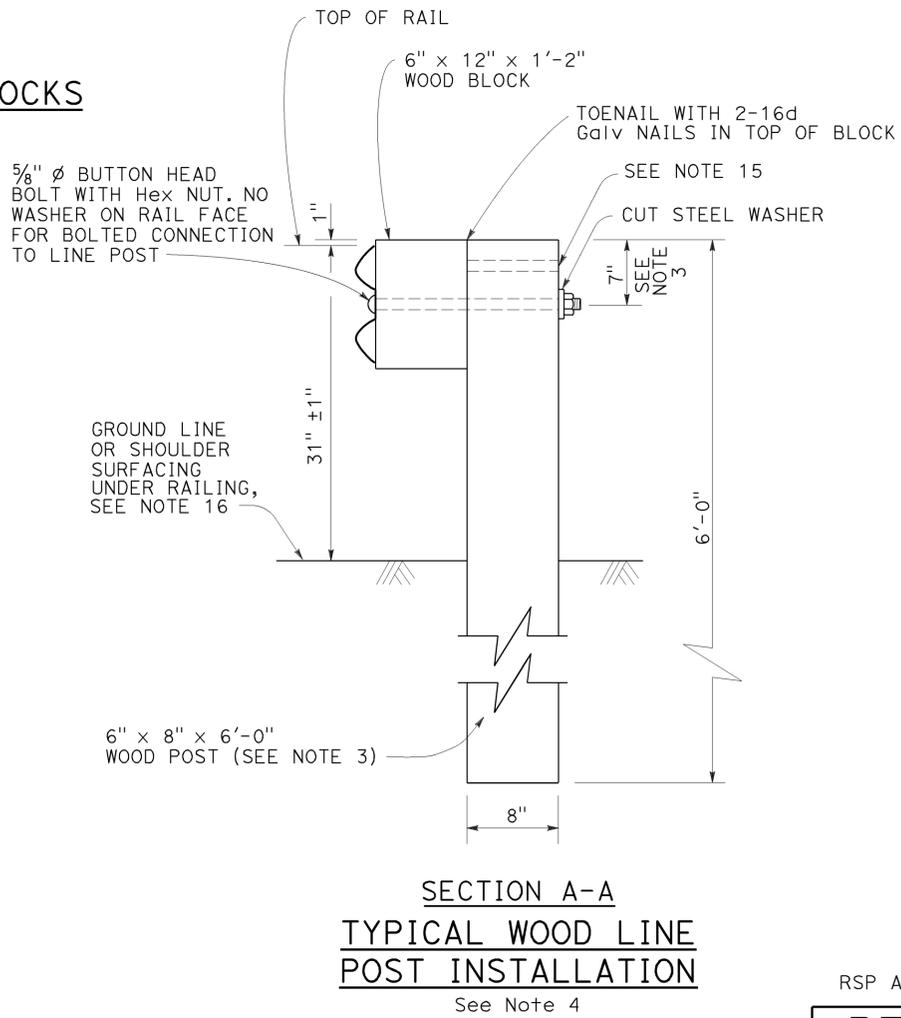

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION


**MIDWEST GUARDRAIL SYSTEM  
STANDARD RAILING SECTION  
(WOOD POST WITH  
WOOD BLOCK)**

NO SCALE


RSP A77L1 DATED JULY 19, 2013 SUPPLEMENTS STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP A77L1**

2010 REVISED STANDARD PLAN RSP A77L1




TO ACCOMPANY PLANS DATED 08-01-16

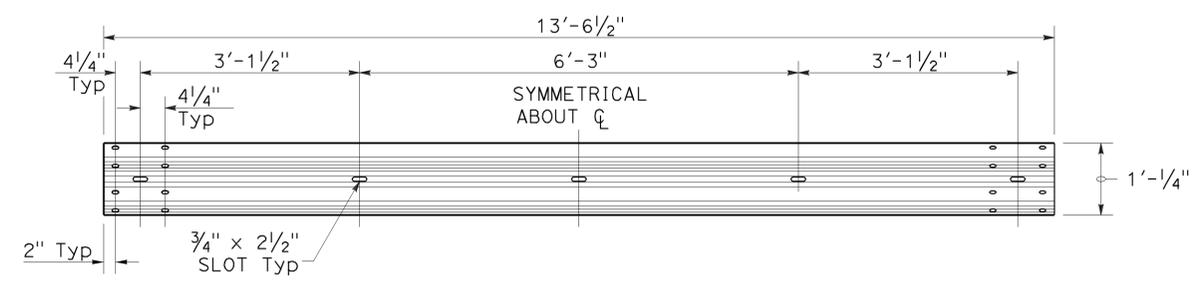


**TYPICAL RAIL ELEMENT**

**NOTE:**

1. Slotted holes for splice bolts to overlap ends of rail element.

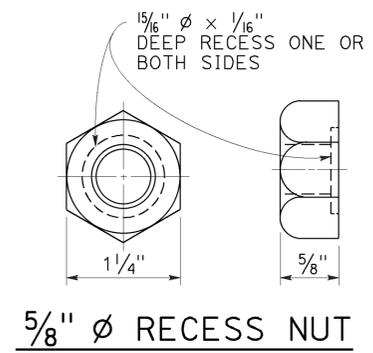

**5/8" Ø RECESS NUT**

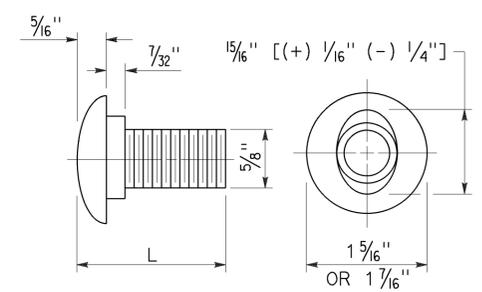


**5/8" Ø BUTTON HEAD BOLT**


**BUTTON HEAD BOLT**

L	THREAD LENGTH
1 3/8"	FULL THREAD LENGTH
2"	FULL THREAD LENGTH
10"	4" Min THREAD LENGTH
18"	4" Min THREAD LENGTH
20"	4" Min THREAD LENGTH
22"	4" Min THREAD LENGTH
26"	4" Min THREAD LENGTH
36"	4" Min THREAD LENGTH
** 2 3/4"	2" Min THREAD LENGTH
** 19"	4" Min THREAD LENGTH

\*\* For nested rail applications.

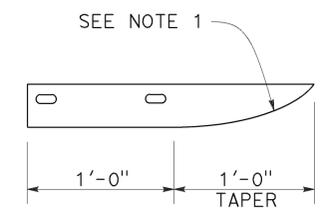

**PLAN**

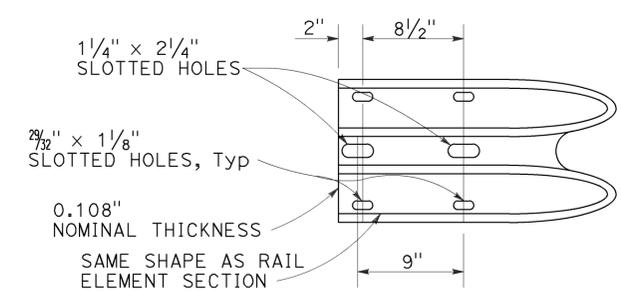

**ELEVATION  
END CAP  
(TYPE A)**

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**MIDWEST GUARDRAIL SYSTEM  
STANDARD HARDWARE**

NO SCALE

RSP A77M1 DATED JULY 19, 2013 SUPPLEMENTS THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP A77M1**

2010 REVISED STANDARD PLAN RSP A77M1

DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
11	SD	78	0.0/R16.5	108	144




**Randell D. Hiatt**  
REGISTERED CIVIL ENGINEER

July 19, 2013  
PLANS APPROVAL DATE

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.





REGISTERED PROFESSIONAL ENGINEER  
Randell D. Hiatt  
No. C50200  
Exp. 6-30-15  
CIVIL  
STATE OF CALIFORNIA

TO ACCOMPANY PLANS DATED 08-01-16

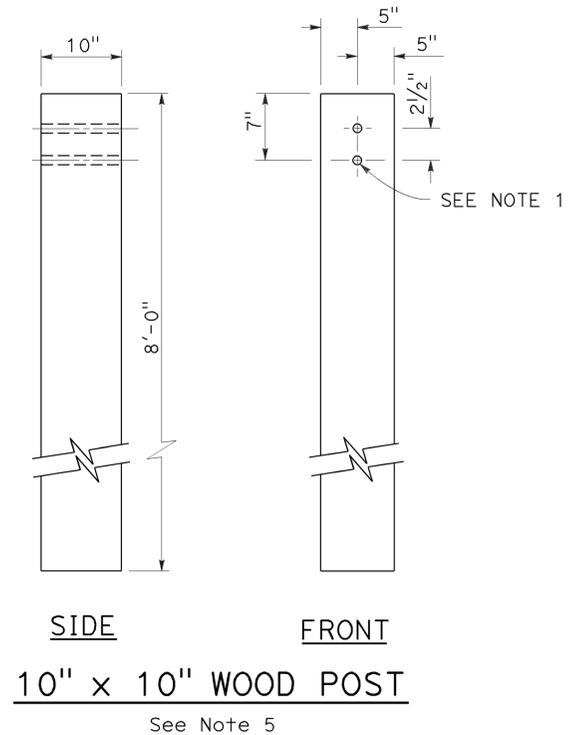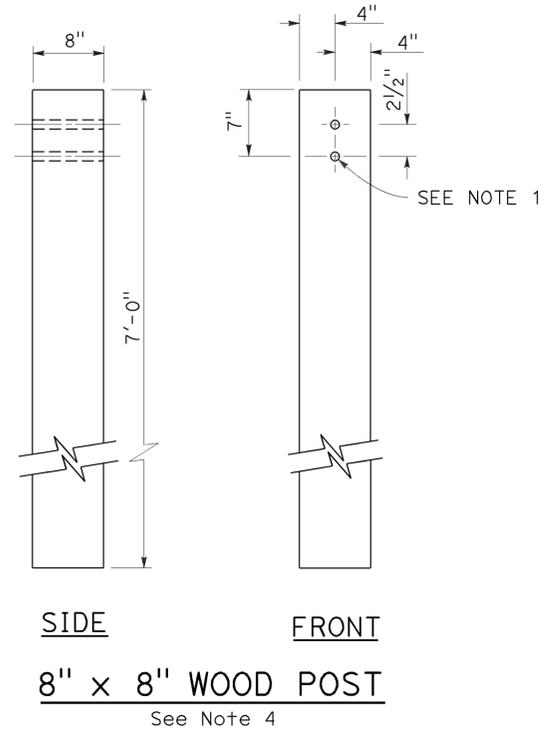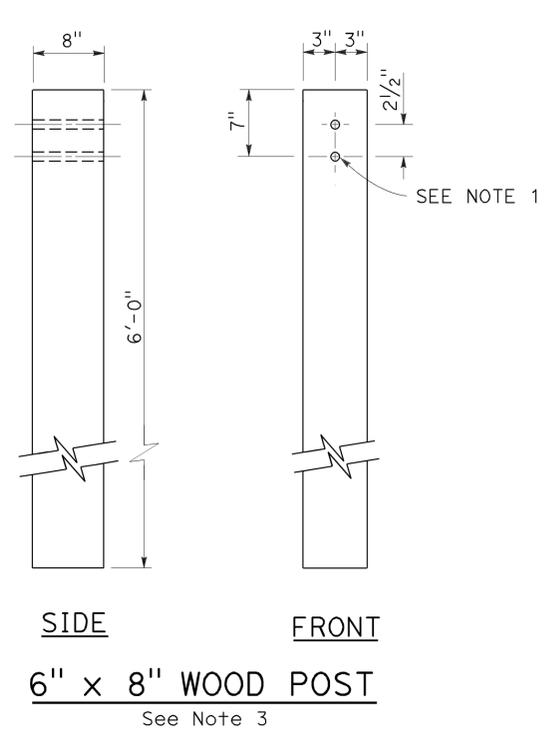

**NOTES:**

1. All holes in wood posts and blocks shall be 3/4" Dia ± 1/16".
2. Dimensions shown for wood post are nominal.
3. This post and block combination used for standard line post sections of MGS.
4. This post and 8" x 12" block combination used for line post sections of MGS on narrow roadways.
5. This post and 8" x 12" block combination is typically used where strengthened line post sections of MGS are warranted to shield fixed objects.
6. See Revised Standard Plan RSP A77L3 for use of 6" x 8" and 8" x 8" wood blocks.

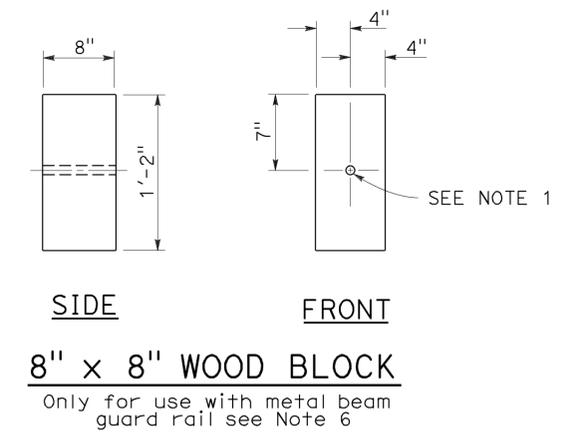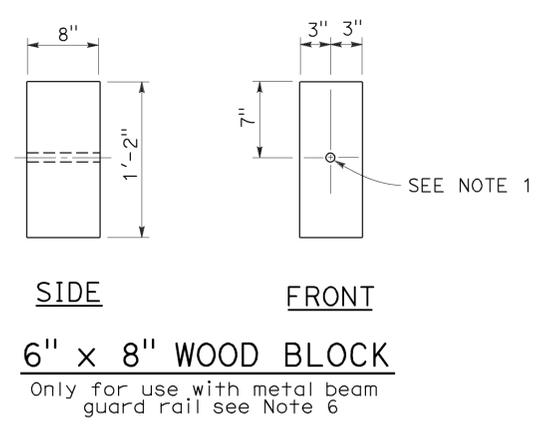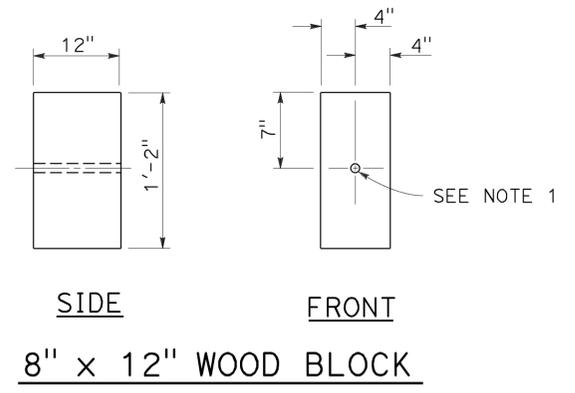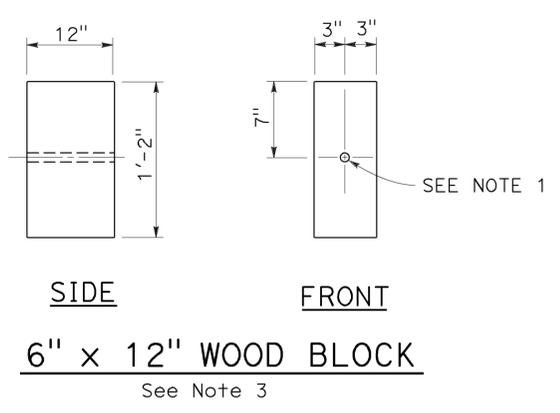

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**MIDWEST GUARDRAIL SYSTEM  
WOOD POST AND  
WOOD BLOCK DETAILS**

NO SCALE

RSP A77N1 DATED JULY 19, 2013 SUPPLEMENTS THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP A77N1**

2010 REVISED STANDARD PLAN RSP A77N1


Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
11	SD	78	0.0/R16.5	109	144

*Randell D. Hiatt*  
REGISTERED CIVIL ENGINEER


November 15, 2013  
PLANS APPROVAL DATE

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.


TO ACCOMPANY PLANS DATED 08-01-16

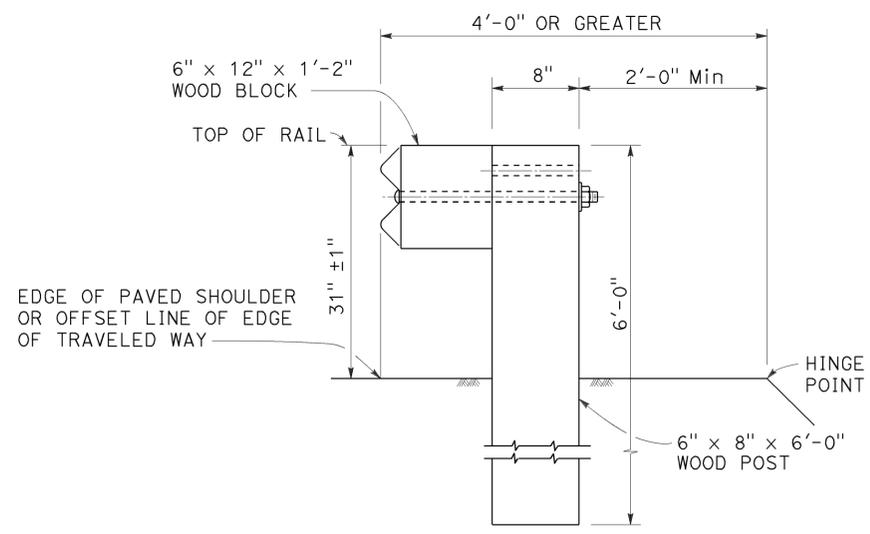


**DETAIL A**  
**TYPICAL ROADWAY**  
**INSTALLATION**  
See Note 1

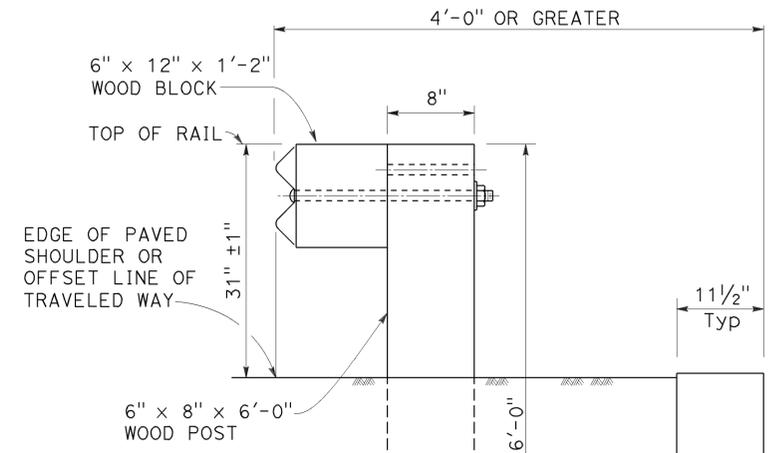

**DETAIL C**  
**INSTALLATION AT EARTH RETAINING WALLS**

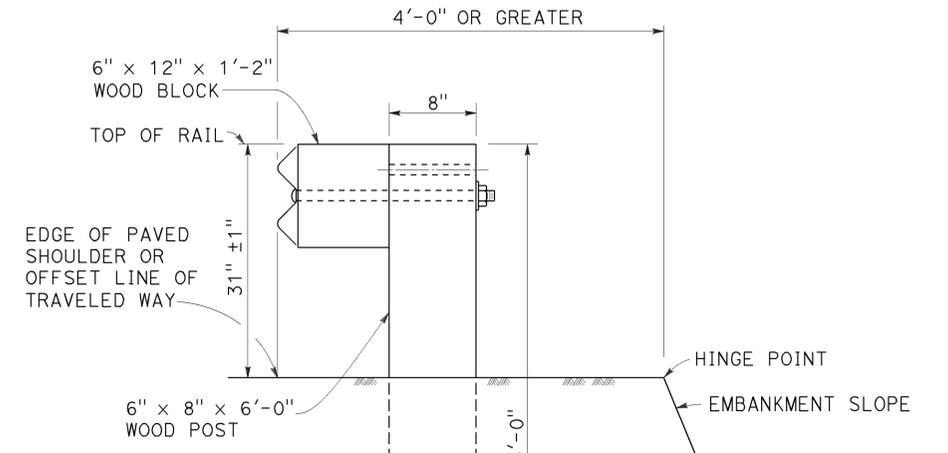

**DETAIL D**  
**INSTALLATION AT EARTH RETAINING WALLS**

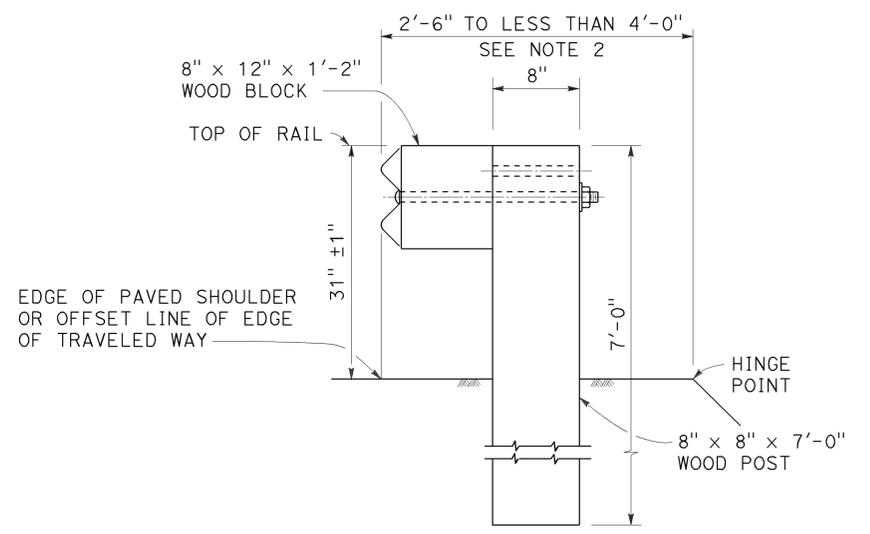

**DETAIL B**  
**NARROW ROADWAY**  
**INSTALLATION**  
See Note 1

**POST EMBEDMENT**

**NOTES:**

1. These installation details also applicable to steel line post installations. For Detail A, C, and D, where steel line post installations are constructed, W6 x 8.5 or W6 x 9 steel post, 6'-0" in length, with 6" x 12" x 1'-2" notched wood blocks or notched recycled plastic blocks are to be used in place of the size of wood post and wood block shown. For Detail B, where steel line post installations are constructed, W6 x 15 steel post, 8'-0" in length, with 8" x 12" x 1'-2" notched wood blocks or notched recycled plastic blocks are to be used in place of the size of wood post and wood block shown. For additional installation details, see Revised Standard Plan RSP A77L1 and RSP A77L2.
2. Where the distance between the face of the rail and the hinge point is less than 2'-6", see the Project Plans for special details.
3. For dike positioning with MGS installations, see Revised Standard Plan RSP A77N4.

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**MIDWEST GUARDRAIL SYSTEM**  
**TYPICAL LINE POST**  
**EMBEDMENT AND**  
**HINGE POINT OFFSET DETAILS**

NO SCALE

RSP A77N3 DATED NOVEMBER 15, 2013 SUPERSEDES RSP A77N3  
DATED JULY 19, 2013 THAT SUPPLEMENTS THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP A77N3**


2010 REVISED STANDARD PLAN RSP A77N3

DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
11	SD	78	0.0/R16.5	110	144

*Randell D. Hiatt*  
REGISTERED CIVIL ENGINEER

July 19, 2013  
PLANS APPROVAL DATE


THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.




TO ACCOMPANY PLANS DATED 08-01-16

**NOTES:**

1. When necessary to place dike more than 7" in front of face of MGS, only Type C dike may be used. For dike details, see Revised Standard Plan RSP A87B.
2. For standard railing post embedment, see Revised Standard Plan RSP A77N3.
3. MGS delineation to be used where shown on the Project Plans.
4. When dike or curb is placed under MGS, the maximum height of the dike or curb shall be 6". Mountable dike should not be used. For dike and curb details, see Revised Standard Plans RSP A87A and RSP A87B.
5. For details of typical distance between the face of rail and hinge point, see Revised Standard Plan RSP A77N3.
6. For steel line posts, use 1/4" - 20 self-tapping screws in 0.22" diameter holes or 1/4" bolts in 3/32" diameter holes.

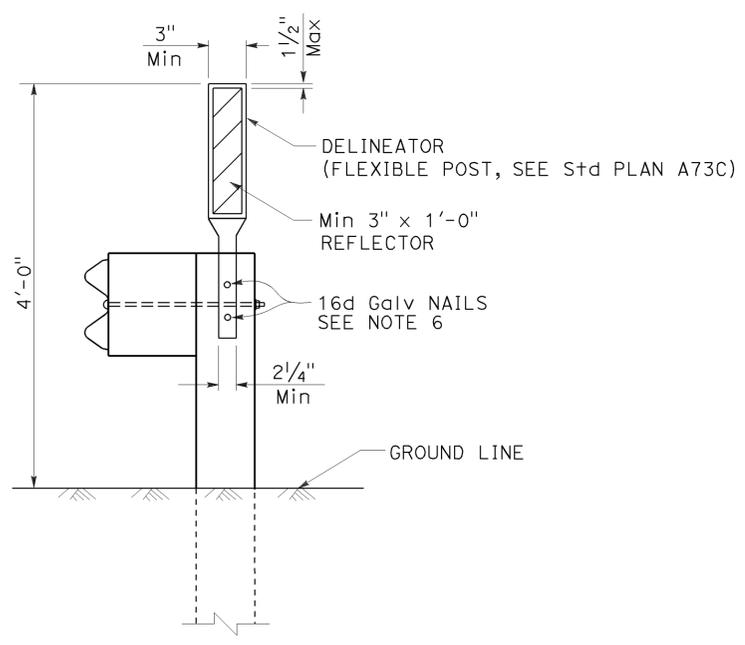

**MGS DELINEATION**  
See Note 3

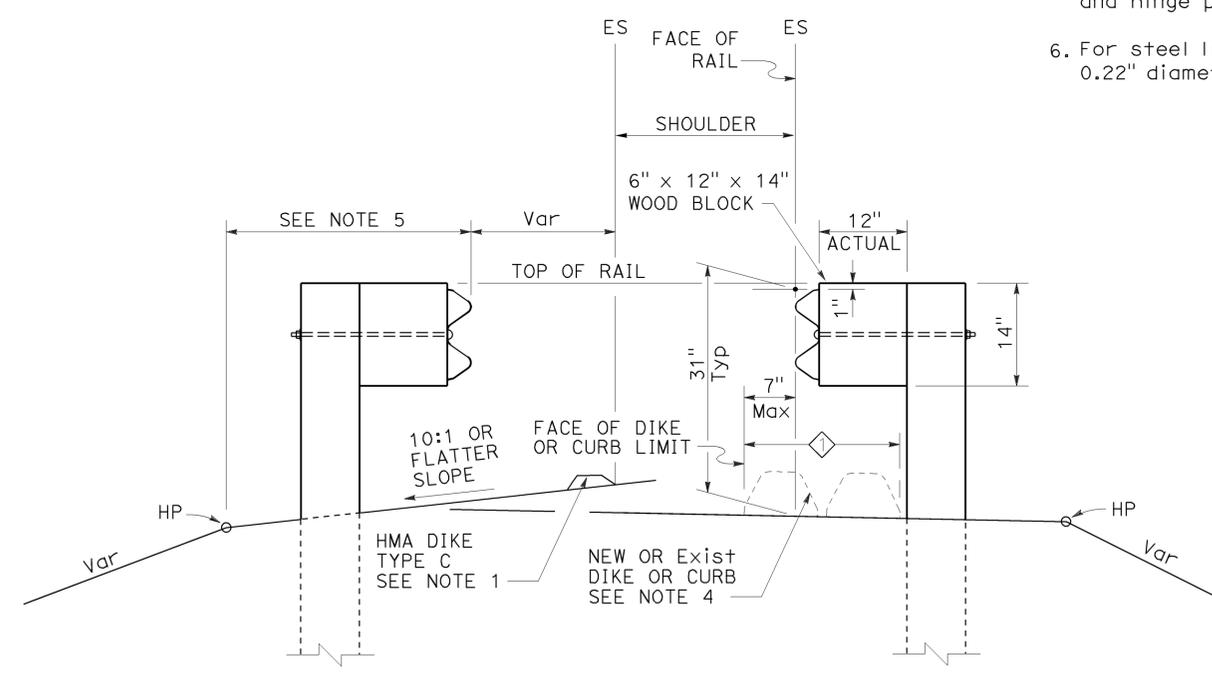

**DIKE POSITIONING**  
See Note 1

◇ PERMISSIBLE DIKE OR CURB PLACEMENT AREA

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**MIDWEST GUARDRAIL SYSTEM  
TYPICAL RAILING DELINEATION  
AND DIKE POSITIONING DETAILS**  
NO SCALE

RSP A77N4 DATED JULY 19, 2013 SUPPLEMENTS THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP A77N4**

2010 REVISED STANDARD PLAN RSP A77N4



Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
11	SD	78	0.0/R16.5	111	144

*Randell D. Hiatt*  
REGISTERED CIVIL ENGINEER

July 19, 2013  
PLANS APPROVAL DATE

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.


TO ACCOMPANY PLANS DATED 08-01-16

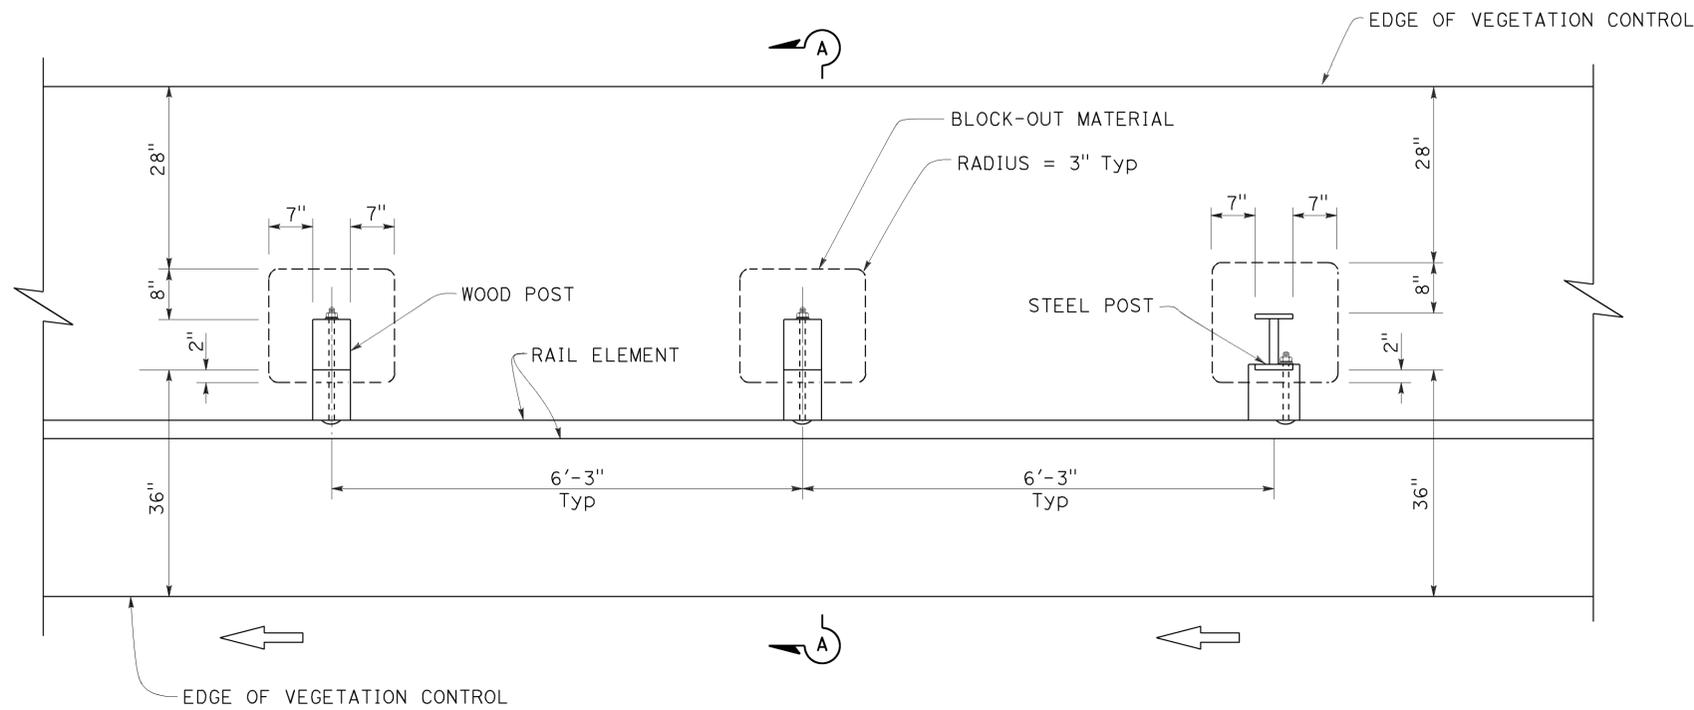

**PLAN**

**NOTES:**

1. Where the distance between back of post and hinge point is less than 42", construct vegetation control to 6" from hinge point while maintaining the 8" block-out at back of post. If the 8" block-out at back of post can not be maintained, construct vegetation control flush with the back edge of post.
2. Where dike is constructed under railing, construct vegetation control to back edge of dike. Where paved shoulder is constructed within 36" in front of the post, construct vegetation control to the edge of paved shoulder.
3. For wood post sizes, see Revised Standard Plan RSP A77N1.
4. For steel post sizes, see Revised Standard Plan RSP A77N2.
5. For details not shown, see Revised Standard Plans RSP A77L1 and RSP A77L2.

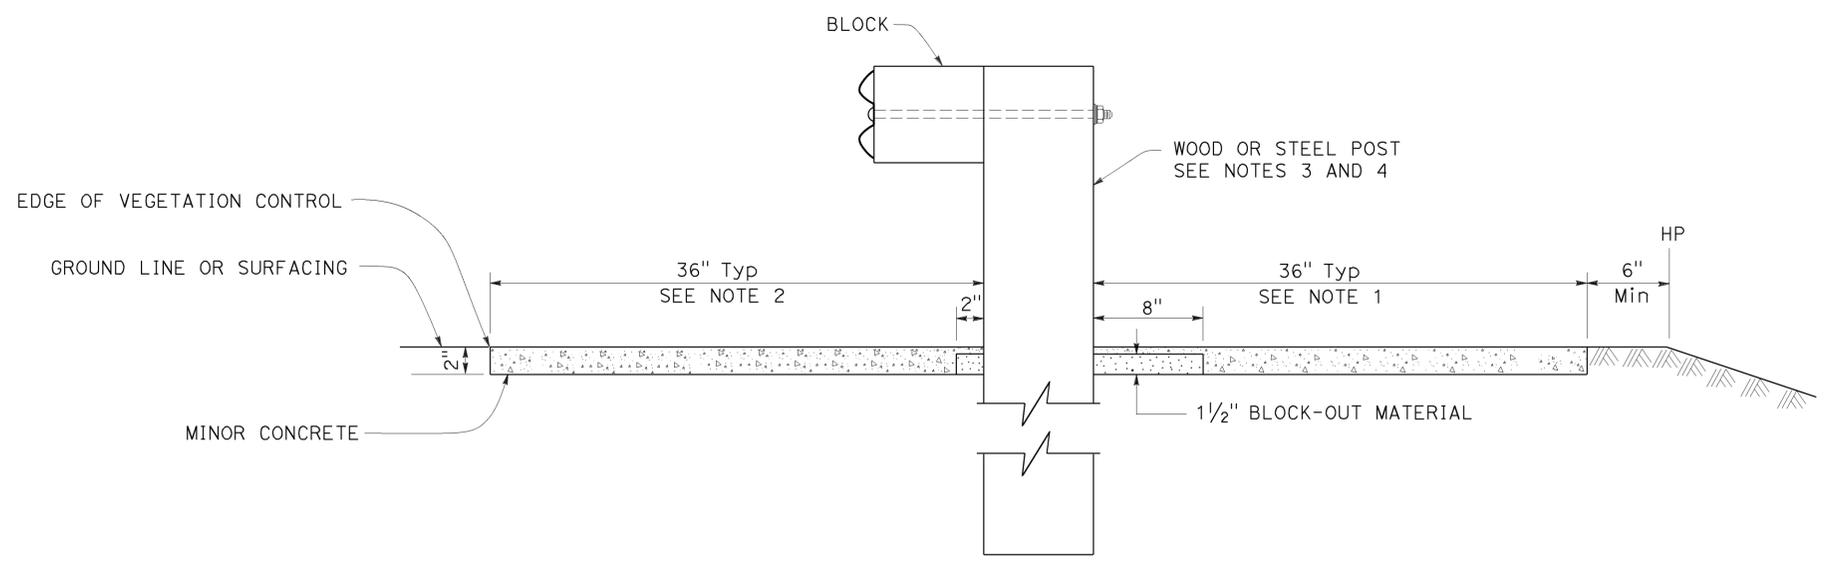

**SECTION A-A**

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**MIDWEST GUARDRAIL SYSTEM  
TYPICAL VEGETATION CONTROL  
STANDARD RAILING SECTION**

NO SCALE

RSP A77N5 DATED JULY 19, 2013 SUPPLEMENTS THE STANDARD PLANS BOOK DATED 2010.


**REVISED STANDARD PLAN RSP A77N5**

2010 REVISED STANDARD PLAN RSP A77N5


Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
11	SD	78	0.0/R16.5	112	144

RANDALL D. HIATT  
 REGISTERED CIVIL ENGINEER  
 July 19, 2013  
 PLANS APPROVAL DATE

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.




TO ACCOMPANY PLANS DATED 08-01-16

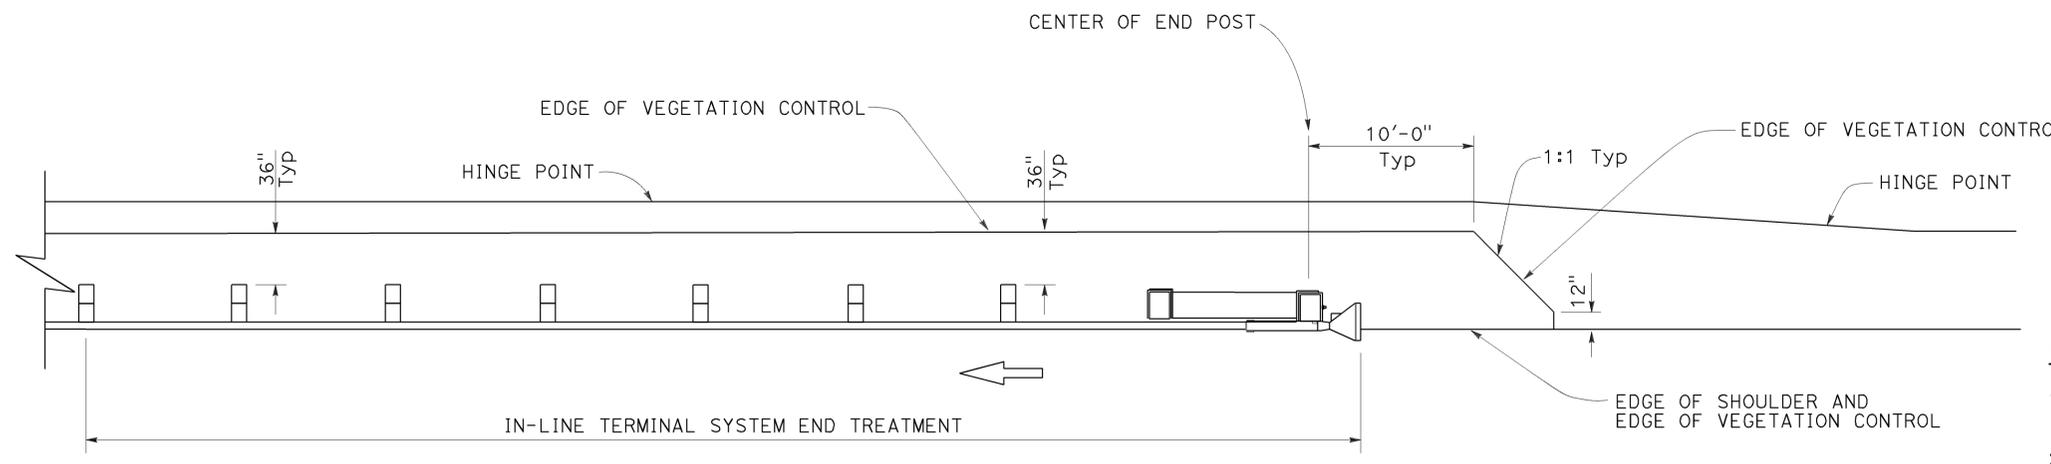


PLAN

**NOTES:**

1. See Revised Standard Plan RSP A77N5 for additional vegetation control details.
2. Where the distance between back of post and hinge point is less than 42", construct vegetation control to 6" from hinge point while maintaining the 8" block-out at back of post. If the 8" block-out at back of post can not be maintained, construct vegetation control flush with the back edge of post.
3. Where dike is constructed under railing, construct vegetation control to back edge of dike. Where paved shoulder is constructed within 36" in front of the post, construct vegetation control to the edge of paved shoulder.

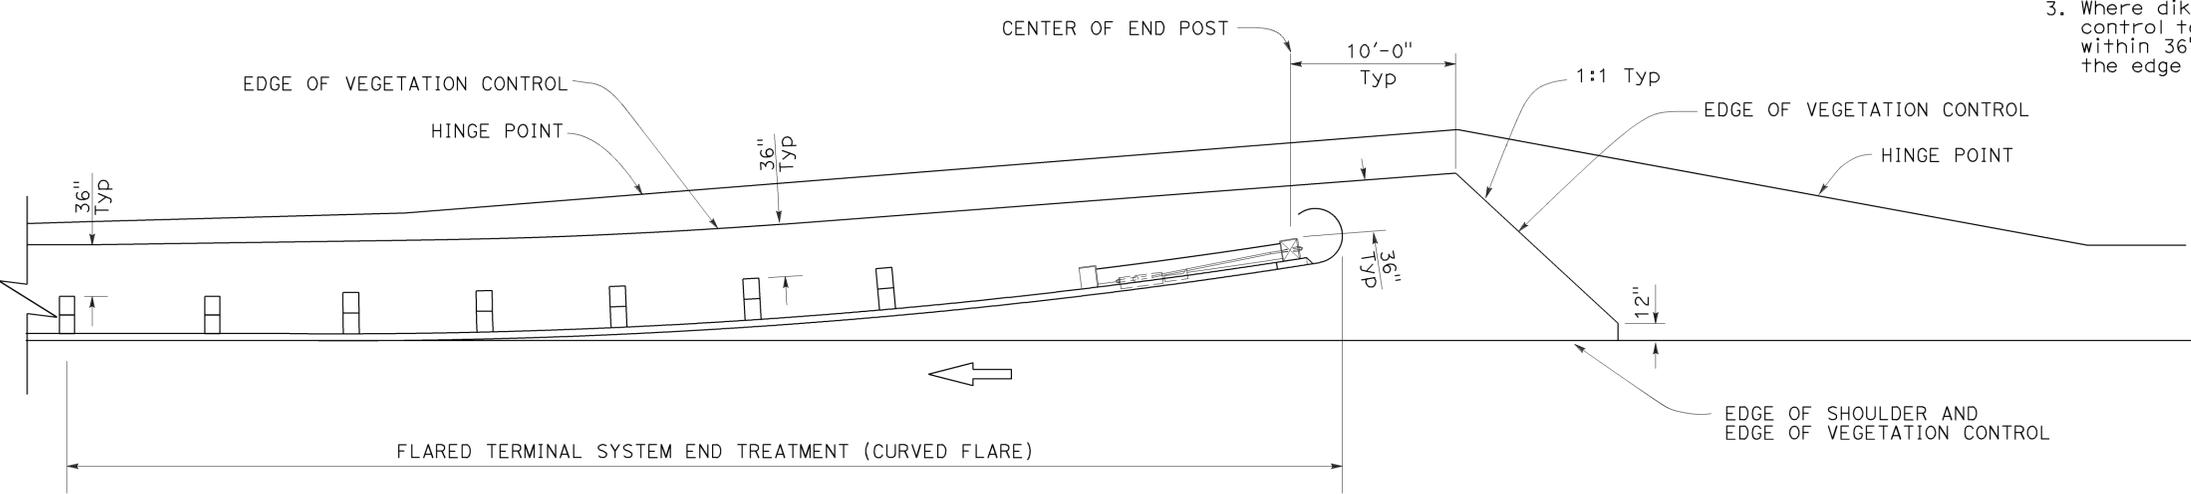

PLAN

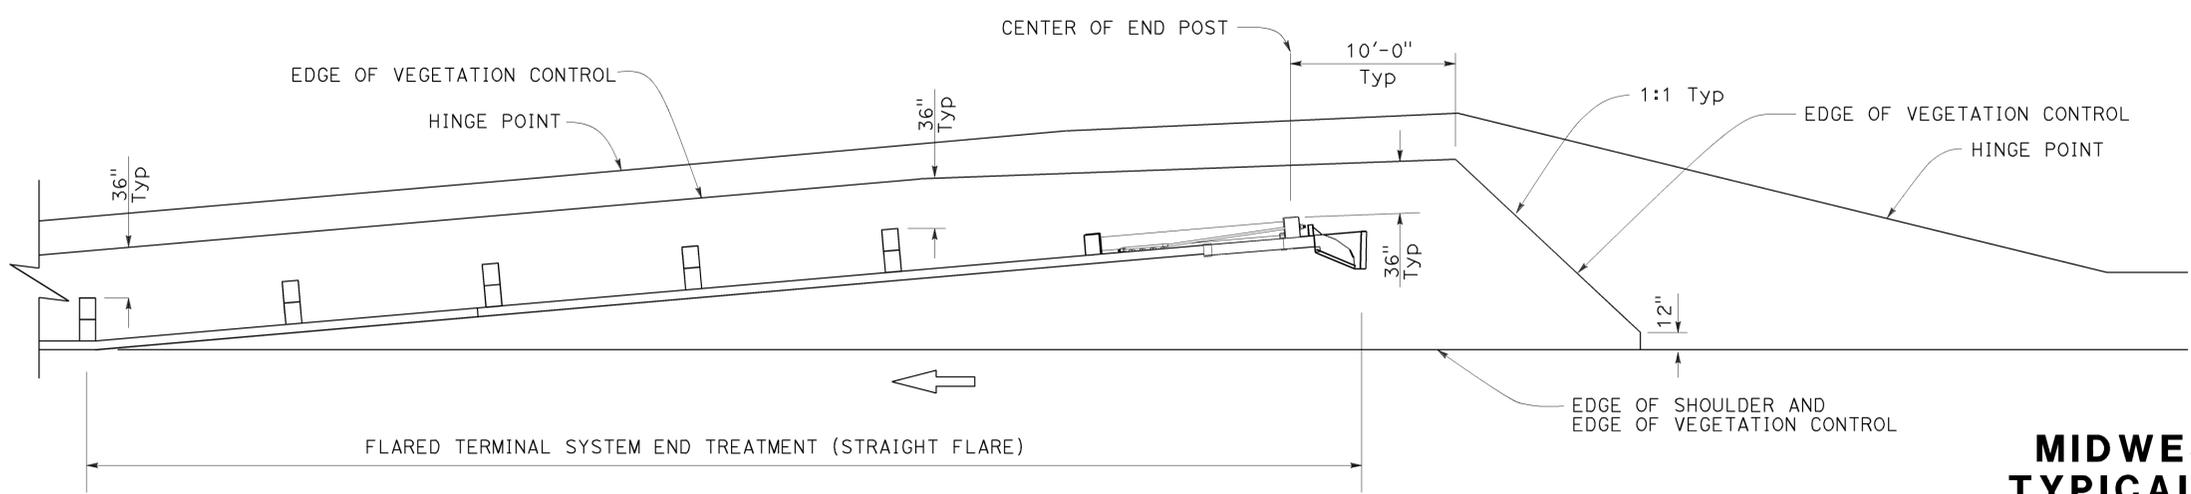

PLAN

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**MIDWEST GUARDRAIL SYSTEM  
TYPICAL VEGETATION CONTROL  
FOR TERMINAL SYSTEM END TREATMENTS**

NO SCALE

RSP A77N6 DATED JULY 19, 2013 SUPPLEMENTS THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP A77N6**

2010 REVISED STANDARD PLAN RSP A77N6

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
11	SD	78	0.0/R16.5	113	144



*Randell D. Hiatt*  
REGISTERED CIVIL ENGINEER

July 19, 2013  
PLANS APPROVAL DATE

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.


TO ACCOMPANY PLANS DATED 08-01-16

2010 REVISED STANDARD PLAN RSP A77N7

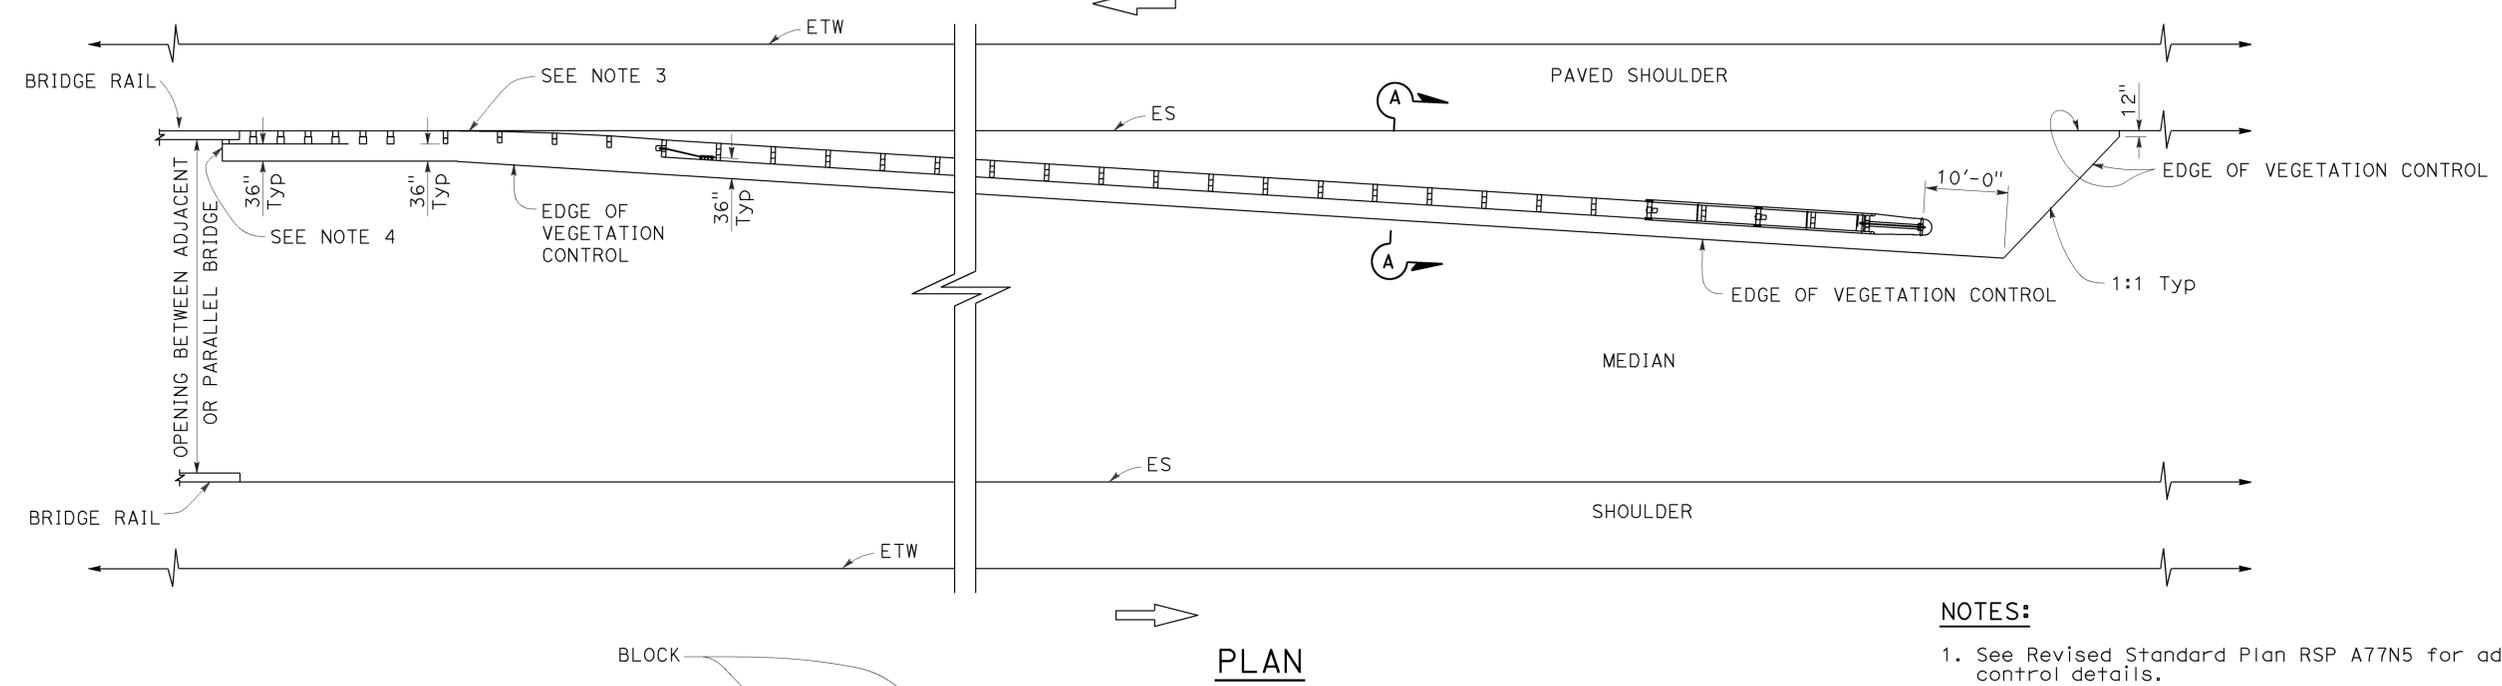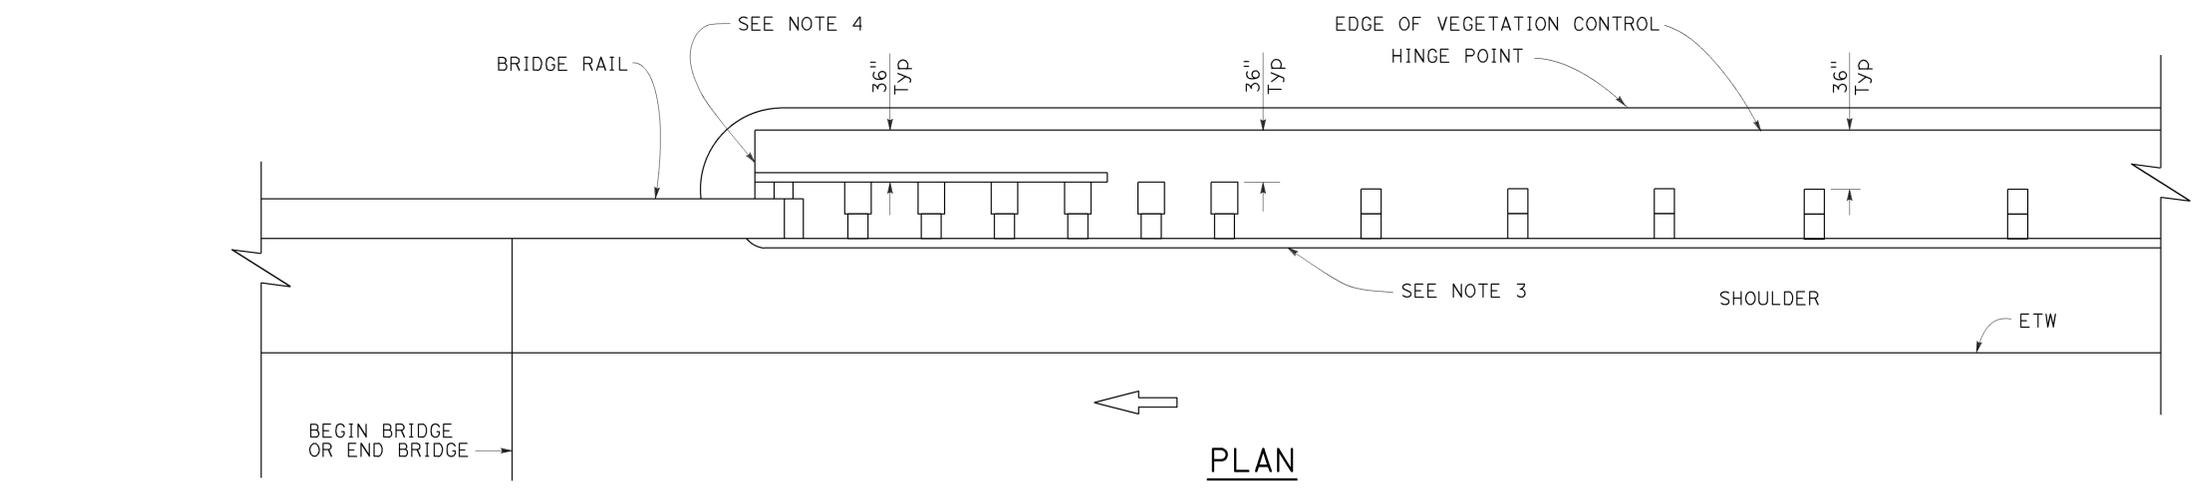

**NOTES:**

1. See Revised Standard Plan RSP A77N5 for additional vegetation control details.
2. Where the distance between back of post and hinge point is less than 42", construct vegetation control to 6" from hinge point while maintaining the 8" block-out at back of post. If the 8" block-out at back of post can not be maintained, construct vegetation control flush with the back edge of post.
3. Where dike is constructed under railing, construct vegetation control to back edge of dike. Where paved shoulder is constructed within 36" in front of the post, construct vegetation control to the edge of paved shoulder.
4. End vegetation control at end of backside rail element.

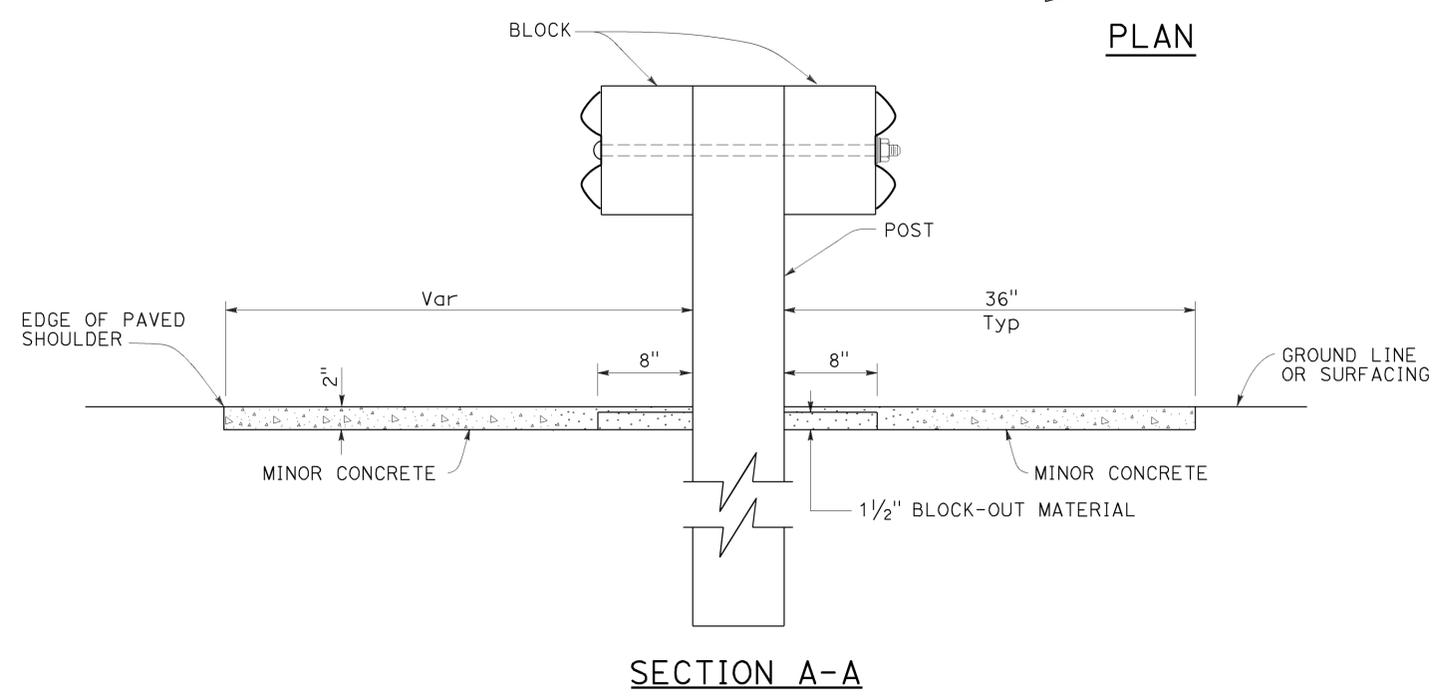

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**MIDWEST GUARDRAIL SYSTEM  
TYPICAL VEGETATION CONTROL  
AT STRUCTURE APPROACH**

NO SCALE

RSP A77N7 DATED JULY 19, 2013 SUPPLEMENTS THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP A77N7**

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
11	SD	78	0.0/R16.5	114	144

*Randell D. Hiatt*  
REGISTERED CIVIL ENGINEER

July 19, 2013  
PLANS APPROVAL DATE


THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.



TO ACCOMPANY PLANS DATED 08-01-16

**NOTES:**

1. See Revised Standard Plan RSP A77N5 for additional vegetation control details.
2. Where the distance between back of post and hinge point is less than 42", construct vegetation control to 6" from hinge point while maintaining the 8" block-out at back of post. If the 8" block-out at back of post can not be maintained, construct vegetation control flush with the back edge of post.
3. Where dike is constructed under railing, construct vegetation control to back edge of dike. Where paved shoulder is constructed within 36" in front of the post, construct vegetation control to the edge of paved shoulder.

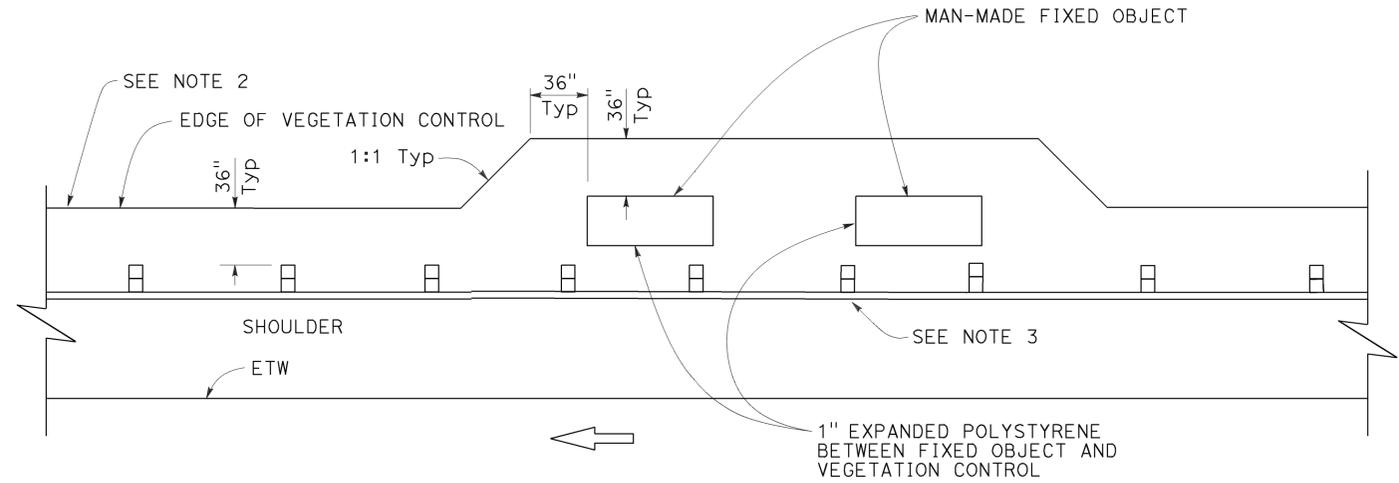

**PLAN**

Fixed object(s) on shoulder

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION  
**MIDWEST GUARDRAIL SYSTEM  
TYPICAL VEGETATION CONTROL  
AT FIXED OBJECT**

NO SCALE

RSP A77N8 DATED JULY 19, 2013 SUPPLEMENTS THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP A77N8**

2010 REVISED STANDARD PLAN RSP A77N8




Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
11	SD	78	0.0/R16.5	116	144

*Randell D. Hiatt*  
REGISTERED CIVIL ENGINEER


August 14, 2015  
PLANS APPROVAL DATE

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

TO ACCOMPANY PLANS DATED 08-01-16




2010 REVISED STANDARD PLAN RSP A77Q1

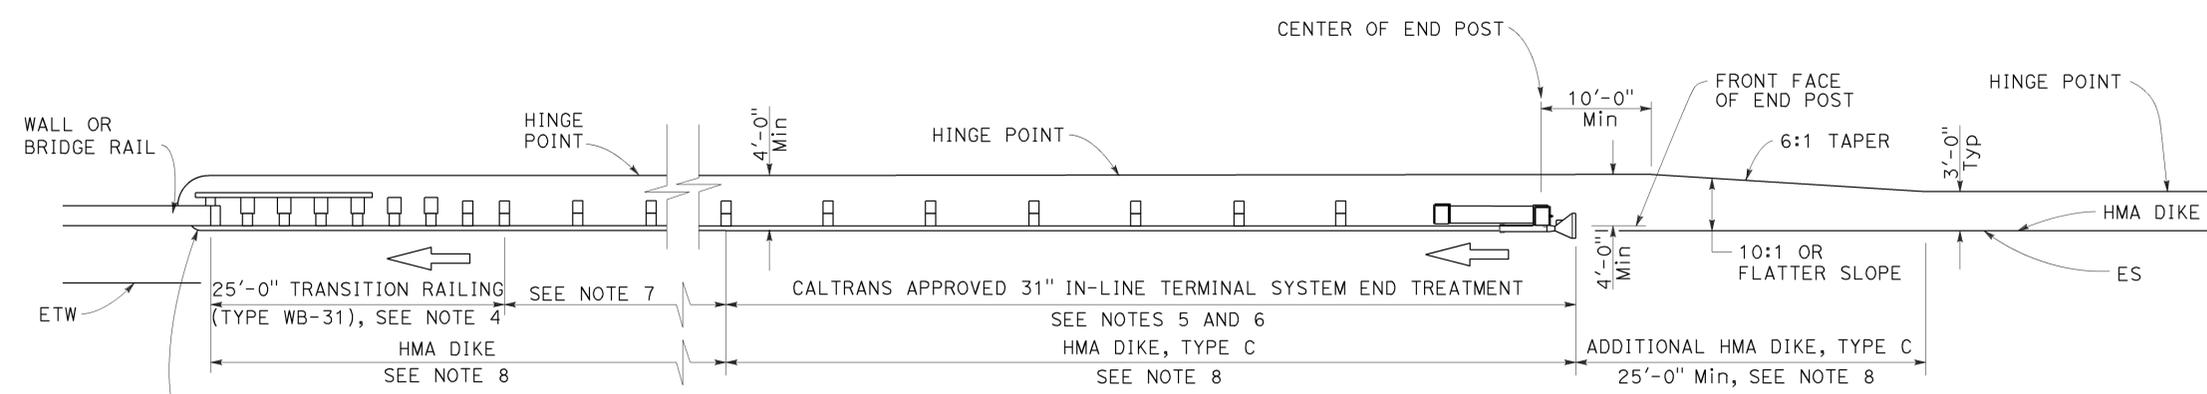

**TYPE 12A LAYOUT**

(MGS installation at structure approach with 31" in-line end treatment at traffic approach end of railing)  
See Note 9

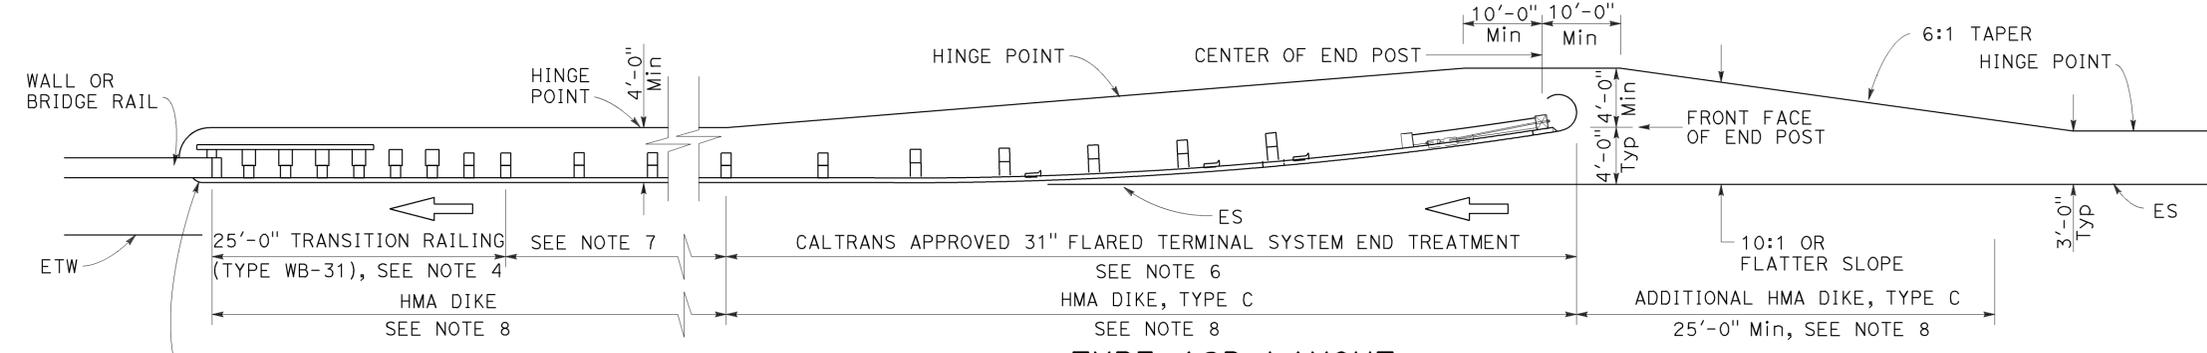

**TYPE 12B LAYOUT**

(MGS installation at structure approach with 31" Flared end treatment at traffic approach end of railing)  
See Note 9

**NOTES:**

- Line post, blocks and hardware to be used are shown on Revised Standard Plans RSP A77L1, RSP A77L2, RSP A77M1, RSP A77N1 and RSP A77N2.
- MGS post spacing to be 6'-3" center to center, except as otherwise noted.
- Except as noted, line posts are 6" x 8" x 6'-0" wood with 6" x 12" x 1'-2" wood blocks. W6 x 8.5 or W6 x 9 steel posts, 6'-0" in length, with 6" x 12" x 1'-2" notched wood blocks or plastic blocks may be used for 6" x 8" x 6'-0" wood posts with 6" x 12" x 1'-2" wood blocks where applicable and when specified.
- For Transition Railing (Type WB-31) details for Types 12A and 12B Layouts, see Revised Standard Plan RSP A77U4.
- 31" in-line terminal system end treatments are used where site conditions will not accommodate a 31" flared end treatment.
- The type of 31" terminal system end treatment to be used will be shown on the Project Plans.
- Dependent on site conditions (embankment height, side slopes, or other fixed objects), it may be advisable to construct additional guard railing (a length equal to multiples of 12'-6" with 6'-3" post spacing) between the transition railing and end treatment. A 12.5 degree angle of departure can be drawn on the Project Plans from the edge of traveled way through the outer most point of the fixed object to determine the additional length of railing needed.
- Where placement of dike is required with guard railing installations, see Revised Standard Plan RSP A77N4 for dike positioning details.
- Type 12A or Type 12B Layouts are typically used:
  - To the right of approaching traffic, at the end of a structure, on two-lane conventional highway where the roadbed width across the structure is less than 40 feet.
  - To the left of approaching traffic, at the end of a structure, on two-lane conventional highway where the roadbed width across the structure is less than 40 feet.
  - To the right of approaching traffic at the end of each structure on multilane freeways or expressways with separate adjacent or parallel bridges.
  - To the right of approaching traffic at the end of the structure on multilane freeways or expressways with decked median on the bridge.
- See Revised Standard Plan RSP A77Q3 for typical layout used left of approaching traffic at the ends of each structure on multilane freeways or expressways with separate adjacent or parallel bridges.
- For additional details of typical connections to bridge rail, see Connection Detail AA on Revised Standard Plans RSP A77U1 and RSP A77U2 and Connection Detail FF on Revised Standard Plans RSP A77V1 and RSP A77V2.
- For additional details of a typical connection to walls or abutments, see Revised Standard Plan RSP A77U3.

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**MIDWEST GUARDRAIL SYSTEM  
TYPICAL LAYOUTS FOR  
STRUCTURE APPROACH**

NO SCALE

RSP A77Q1 DATED AUGUST 14, 2015 SUPERSEDES RSP A77Q1 DATED JULY 19, 2013 THAT SUPPLEMENTS THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP A77Q1**


Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
11	SD	78	0.0/R16.5	117	144

**Randell D. Hiatt**  
REGISTERED CIVIL ENGINEER


July 19, 2013  
PLANS APPROVAL DATE

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.


NO. C50200  
Exp. 6-30-15  
CIVIL  
STATE OF CALIFORNIA

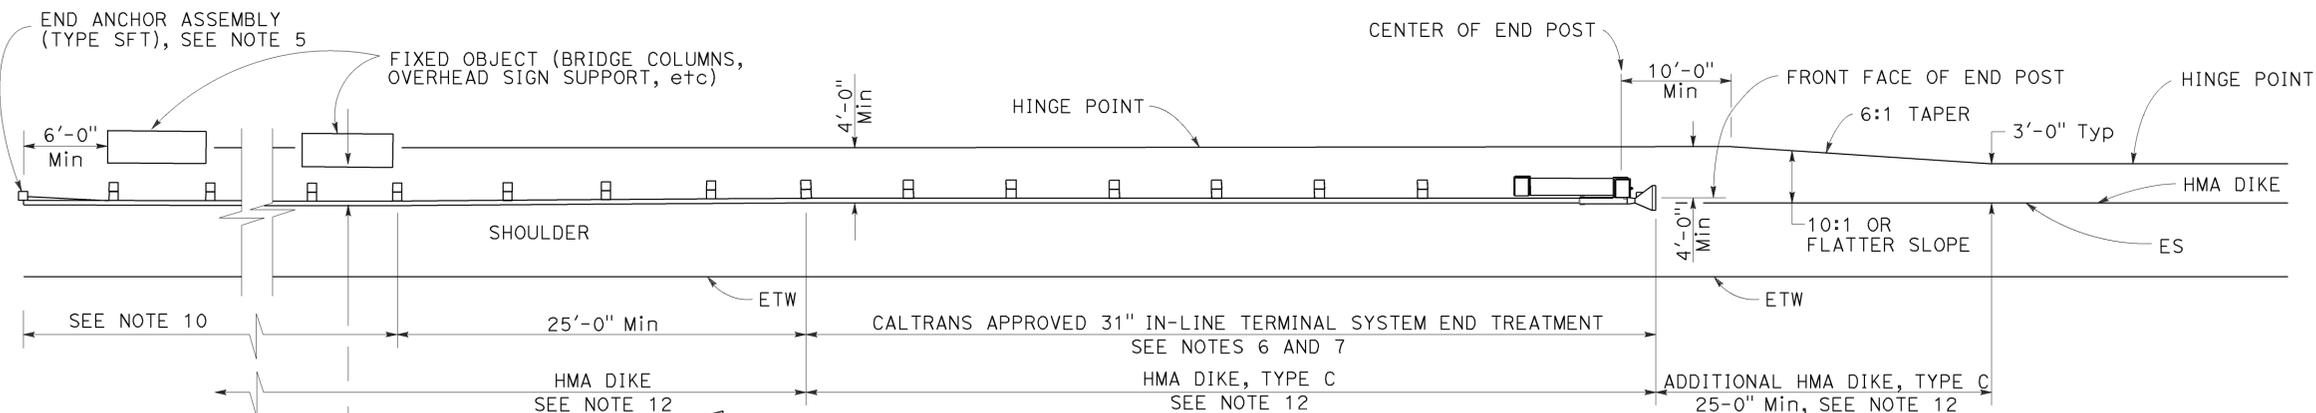


**TYPE 16A LAYOUT**

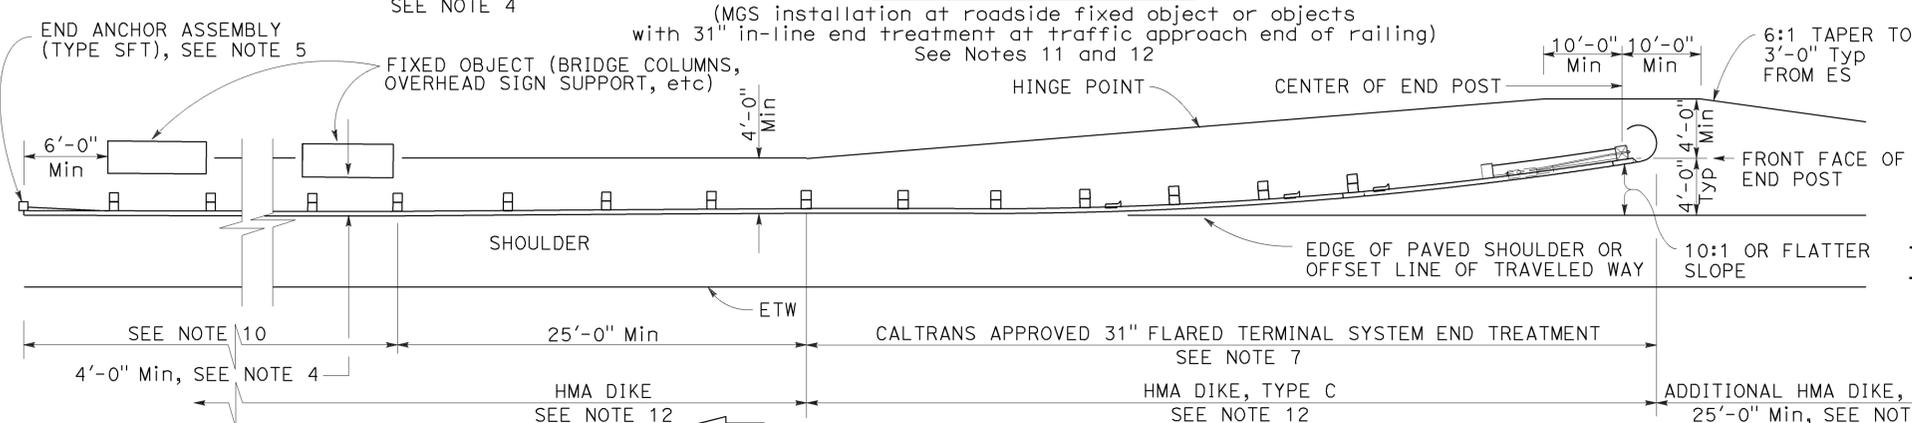

**TYPE 16B LAYOUT**

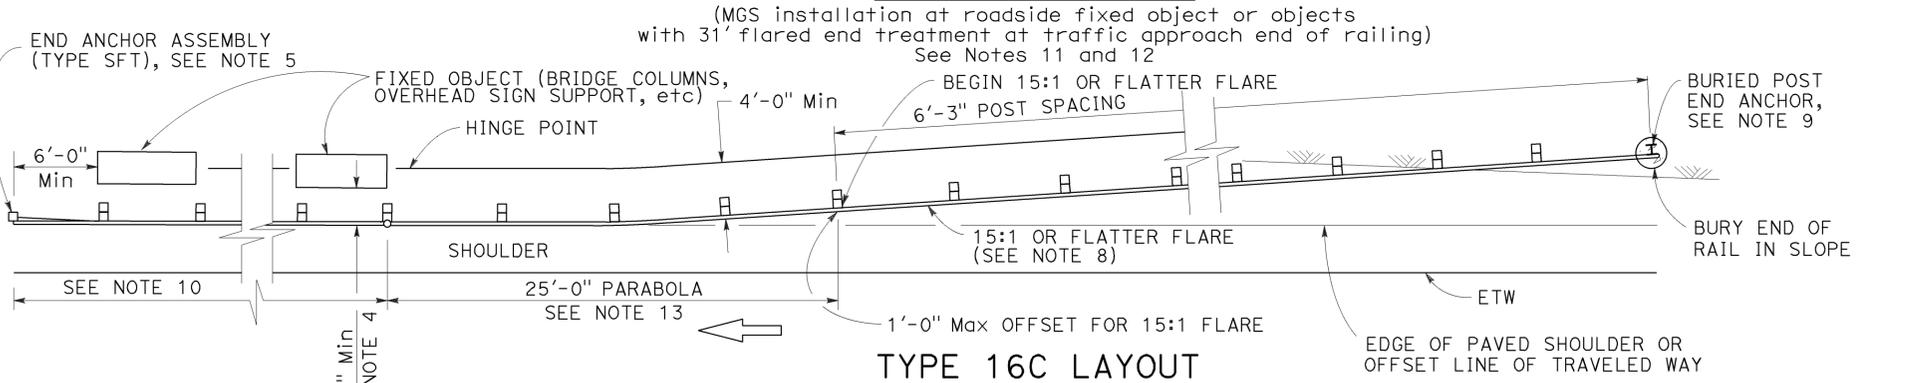

**TYPE 16C LAYOUT**

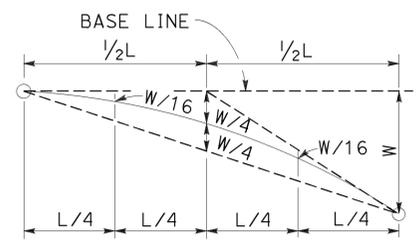

**TYPICAL PARABOLIC LAYOUT**




BASE LINE (EDGE OF PAVED SHOULDER OR OFFSET LINE OF EDGE OF TRAVELED WAY)

Y = OFFSET FROM BASE LINE  
W = MAXIMUM OFFSET  
X = DISTANCE ALONG BASE LINE  
L = LENGTH OF FLARE

$$Y = \frac{WX^2}{L^2}$$

**PARABOLIC FLARE OFFSETS**

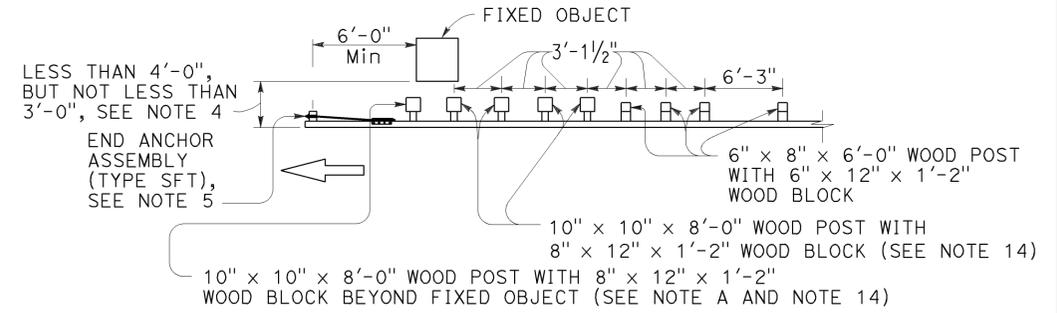

**NOTE A:** For a series of fixed objects (bridge columns, overhead sign supports, etc.) additional 10" x 10" x 8'-0" wood post with 8" x 12" x 1'-2" wood blocks at 3'-1/2" center to center spacing are to be used between fixed objects.

**STRENGTHENED MIDWEST GUARDRAIL SYSTEM SECTIONS FOR FIXED OBJECT**

**NOTES:**

- Line post, blocks and hardware to be used are shown on Revised Standard Plans RSP A77L1, RSP A77L2, RSP A77M1, RSP A77N1 and RSP A77N2.
- MGS post spacing to be 6'-3" center to center, except as otherwise noted.
- Except as noted, line posts are 6" x 8" x 6'-0" wood with 6" x 12" x 1'-2" wood blocks. W6 x 8.5 or W6 x 9 steel posts, 6'-0" in length, with 6" x 12" x 1'-2" notched wood blocks or notched recycled plastic blocks may be used for 6" x 8" x 6'-0" wood line posts with 6" x 12" x 1'-2" wood blocks where applicable and when specified.
- A 4'-0" minimum clearance is required between the face of the railing and the face of a fixed object located directly behind MGS sections with post spacing of 6'-3". Construct MGS as shown in the detail "Strengthened Midwest Guardrail System Sections for Fixed Object" on this plan, where the clearance between the face of the railing and the face of a fixed object is less than 4'-0", but not less than 3'-0". Where the clearance is less than 3'-0", a concrete wall or barrier should be constructed to shield the fixed object(s).
- For End Anchor Assembly (Type SFT) details, see Revised Standard Plan RSP A77S1.
- 31" in-line terminal system end treatments are used where site conditions will not accommodate a 31" flared end treatment.
- The type of 31" terminal system to be used will be shown on the Project Plans.
- The 15:1 or flatter flare used with Type 16C Layout is based on the edge of the paved shoulder or offset line of edge of the traveled way. The length of MGS within the 15:1 or flatter flare is based on site conditions and should be a length equal to multiples of 12'-6".
- For details of the Buried Post End Anchor used with Type 16C Layout, see Revised Standard Plan RSP A77T2.
- As site conditions dictate, construct additional MGS to shield fixed object(s). Additional MGS length equal to multiples of 12'-6". Post spacing at 6'-3" except as specified in Note 4.
- Layout Types 16A, 16B or 16C are typically used where MGS is recommended to shield roadside fixed object(s) and a crashworthy 31" end treatment is required for only one direction of traffic.
- Where placement of dike is required with MGS, see Revised Standard Plan RSP A77N4 for dike positioning details.
- For typical flare offsets for 25'-0" length parabola with maximum offset of 1'-0", see Revised Standard Plan RSP A77P1.
- W6 x 15 steel post, 8'-0" in length, with 8" x 12" x 1'-2" notched wood block or notched recycled plastic blocks may be used in place of the 10" x 10" x 8'-0" wood post with 8" x 12" x 1'-2" wood block shown in the detail "Strengthened Midwest Guardrail System Sections for Fixed Object".

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**MIDWEST GUARDRAIL SYSTEM  
TYPICAL LAYOUTS FOR  
ROADSIDE FIXED OBJECTS**

NO SCALE

RSP A77R3 DATED JULY 19, 2013 SUPPLEMENTS THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP A77R3**



2010 REVISED STANDARD PLAN RSP A77R3

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
11	SD	78	0.0/R16.5	118	144


**Randell D. Hiatt**  
REGISTERED CIVIL ENGINEER  
November 15, 2013  
PLANS APPROVAL DATE

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.


TO ACCOMPANY PLANS DATED 08-01-16

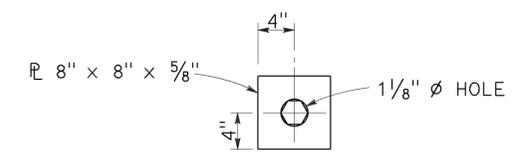


**DETAIL "A"**  
**CABLE CONNECTION**  
**END PLATE**

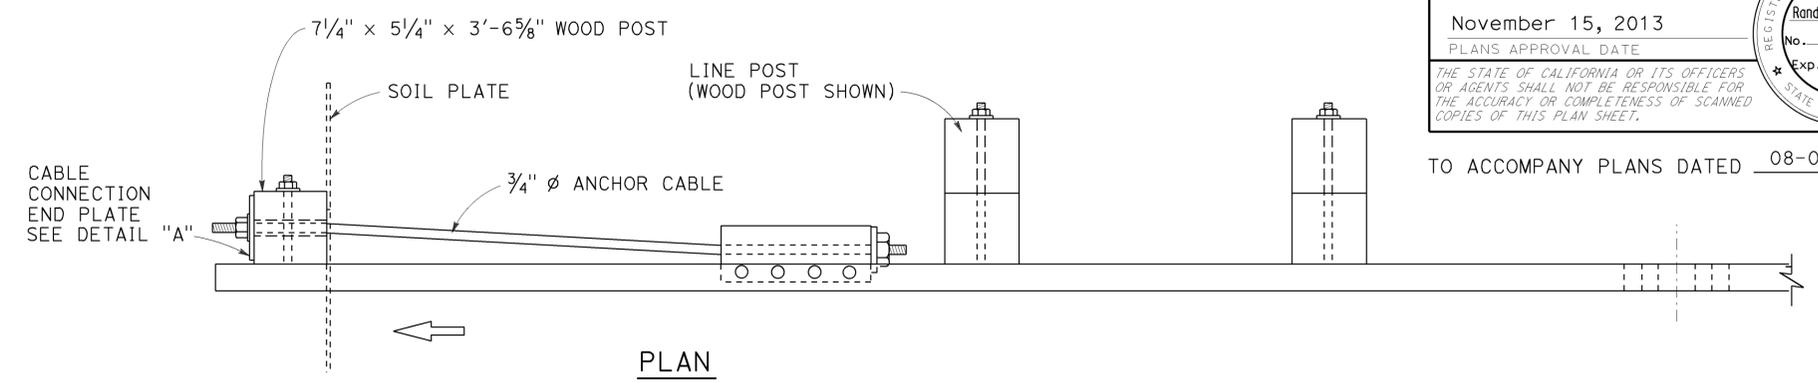

**PLAN**

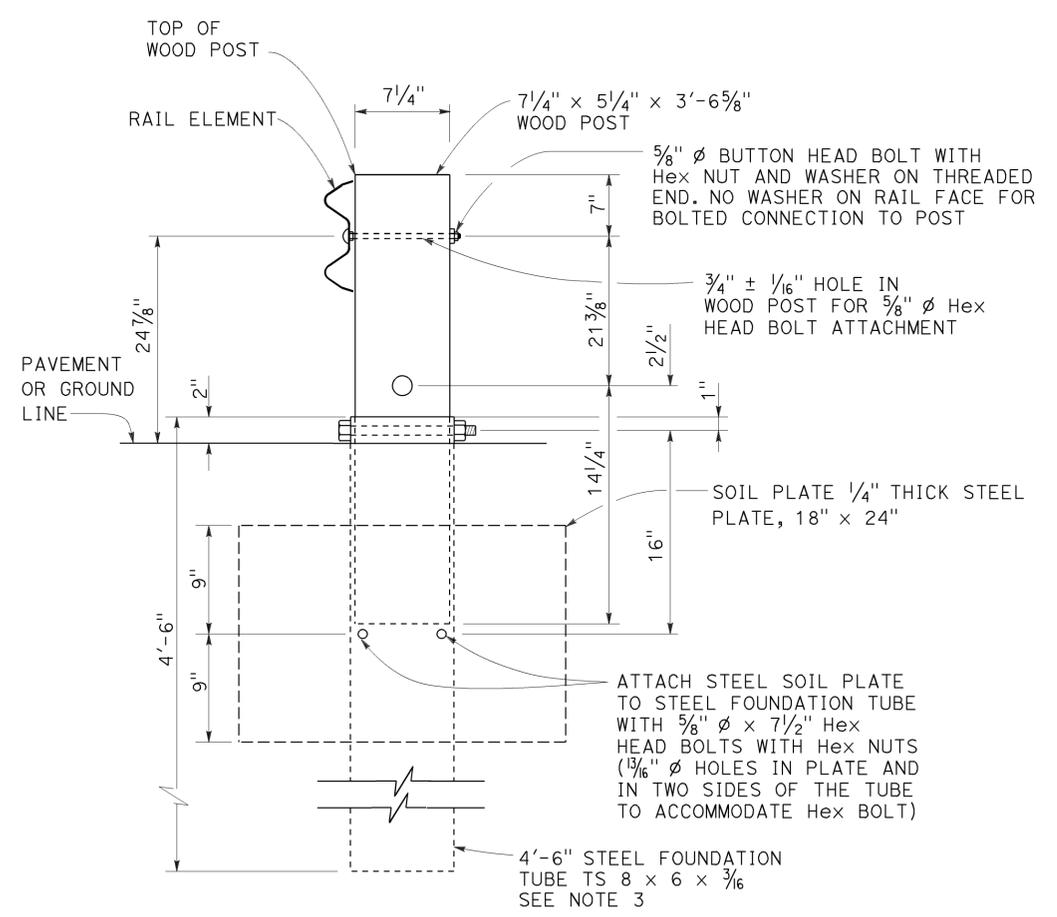

**SECTION A-A**

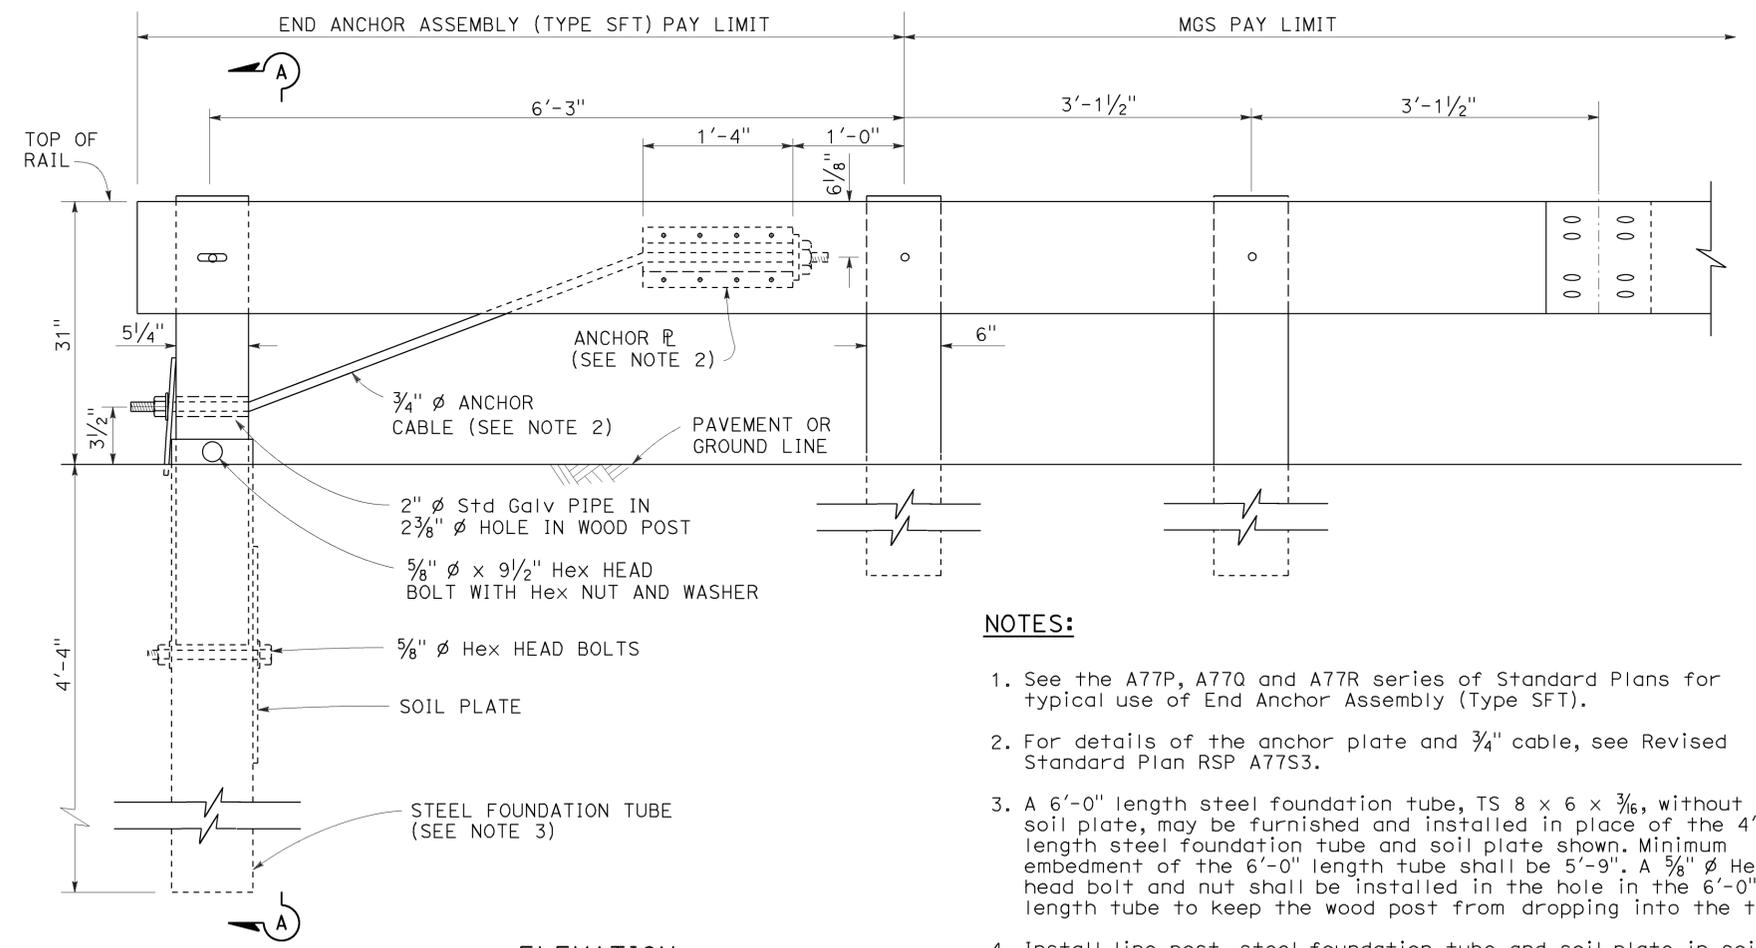

**ELEVATION**

**END ANCHOR**  
**ASSEMBLY (TYPE SFT)**  
See Note 1

**NOTES:**

1. See the A77P, A77Q and A77R series of Standard Plans for typical use of End Anchor Assembly (Type SFT).
2. For details of the anchor plate and 3/4" cable, see Revised Standard Plan RSP A77S3.
3. A 6'-0" length steel foundation tube, TS 8 x 6 x 3/16, without a soil plate, may be furnished and installed in place of the 4'-6" length steel foundation tube and soil plate shown. Minimum embedment of the 6'-0" length tube shall be 5'-9". A 5/8" diameter hex head bolt and nut shall be installed in the hole in the 6'-0" length tube to keep the wood post from dropping into the tube.
4. Install line post, steel foundation tube and soil plate in soil.

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION  
**MIDWEST GUARDRAIL SYSTEM**  
**END ANCHOR ASSEMBLY**  
**(TYPE SFT)**

NO SCALE

RSP A77S1 DATED NOVEMBER 15, 2013 SUPERSEDES RSP A77S1 DATED JULY 19, 2013 THAT SUPPLEMENTS THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP A77S1**

2010 REVISED STANDARD PLAN RSP A77S1

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
11	SD	78	0.0/R16.5	119	144

*Randell D. Hiatt*  
REGISTERED CIVIL ENGINEER


November 15, 2013  
PLANS APPROVAL DATE

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.


TO ACCOMPANY PLANS DATED 08-01-16



**NOTE:**  
See Revised Standard Plans RSP A77S1, RSP A77S2 and RSP A77T1 for typical use of anchor cable and anchor plate.

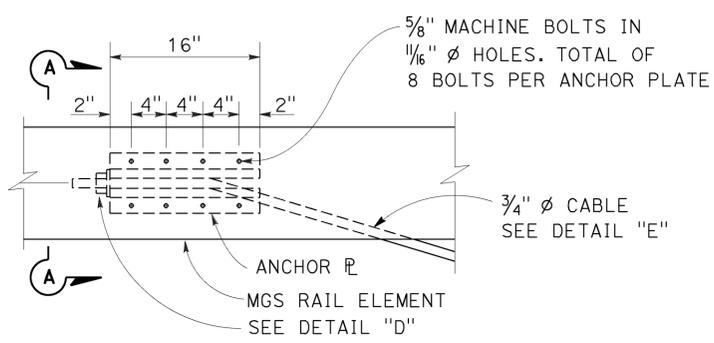


**ANCHOR PLATE DETAIL**  
(MGS shown, TBB similar)

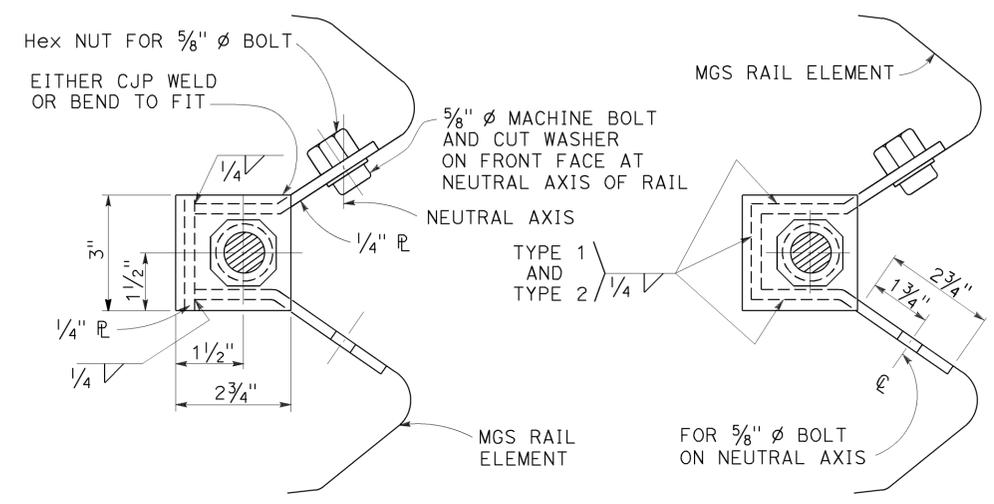


**NOTE:**  
Dimensioning applies to both types.

**SECTION A-A (ALTERNATIVE TYPE 1)**      **SECTION A-A (ALTERNATIVE TYPE 2)**

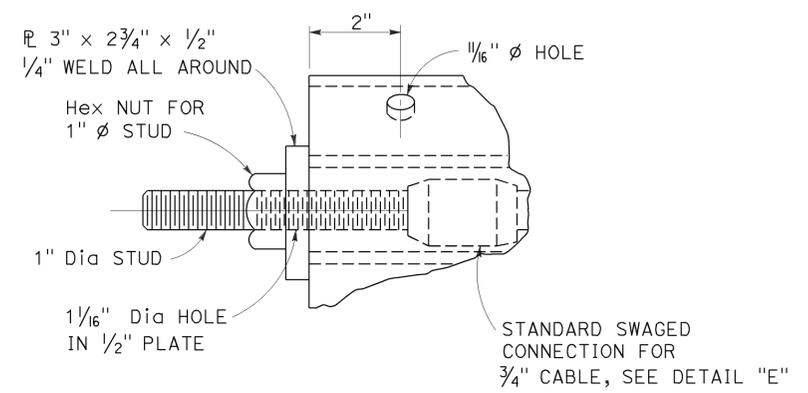

**DETAIL "D"**

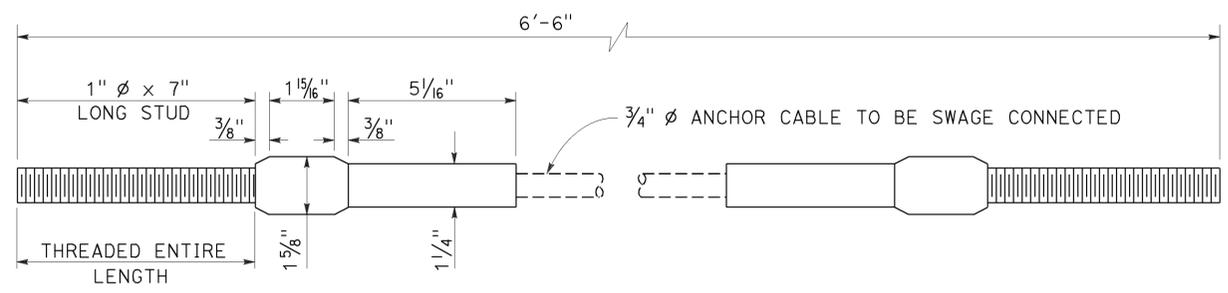

**ANCHOR CABLE WITH SWAGED FITTING AND STUD**  
**DETAIL "E"**

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**METAL RAILING  
ANCHOR CABLE AND  
ANCHOR PLATE DETAILS**

NO SCALE  
RSP A77S3 DATED NOVEMBER 15, 2013 SUPERSEDES RSP A77S3  
DATED JULY 19, 2013 THAT SUPPLEMENTS THE STANDARD PLANS BOOK DATED 2010.

2010 REVISED STANDARD PLAN RSP A77S3



Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
11	SD	78	0.0/R16.5	120	144

**Randell D. Hiatt**  
REGISTERED CIVIL ENGINEER

November 15, 2013  
PLANS APPROVAL DATE

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.


TO ACCOMPANY PLANS DATED 08-01-16

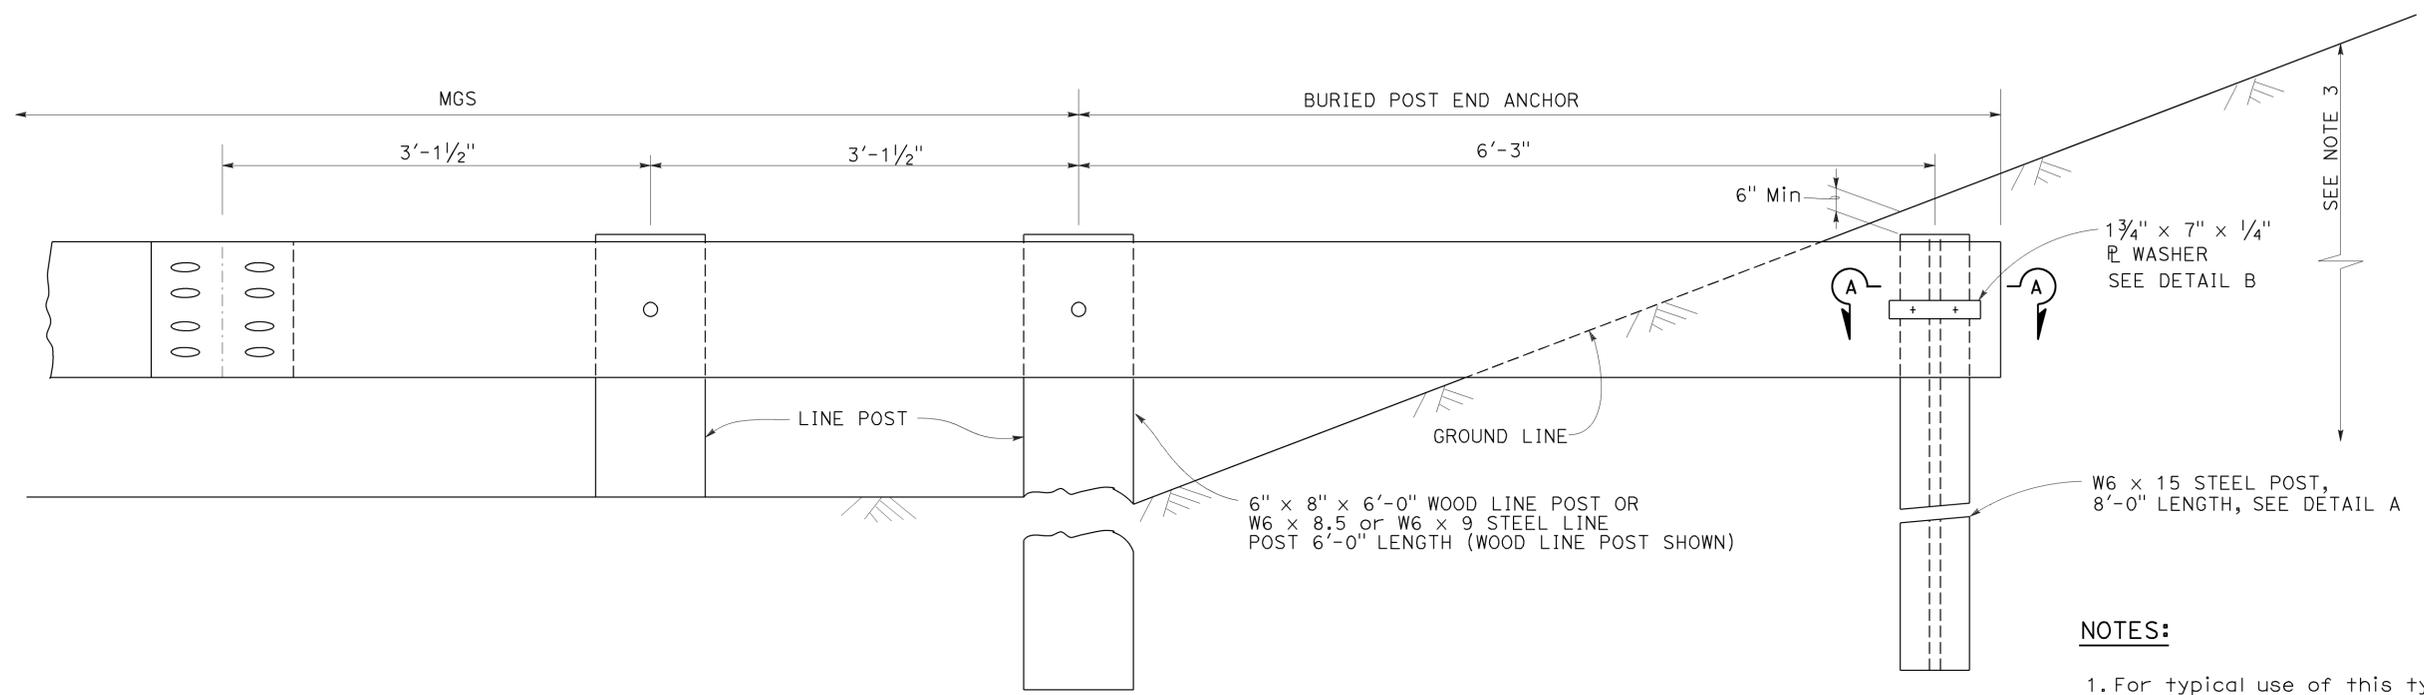


**BURIED POST END ANCHOR**  
See Note 3

**NOTES:**


1. For typical use of this type of end anchor with MGS see the A77P, A77Q and A77R Series of the Standard Plans.
2. Holes excavation in the slope to construct the buried post end anchor shall be backfilled with selected earth, placed in layers approximately 1'-0" thick. Each layer shall be moistened and thoroughly compacted.
3. The buried post end anchor shall only be constructed at those locations where the slope perpendicular to the roadway is non-traversable.

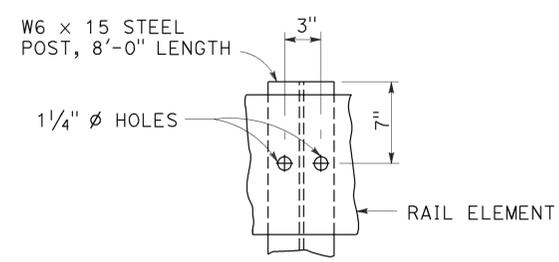

**DETAIL A**

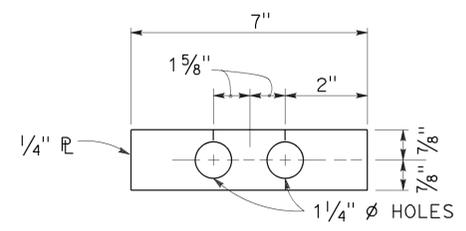

**DETAIL B**

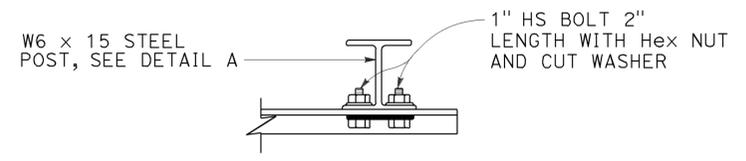

**SECTION A-A**

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**MIDWEST GUARDRAIL SYSTEM  
BURIED POST END ANCHOR**

NO SCALE

RSP A77T2 DATED NOVEMBER 15, 2013 SUPERSEDES RSP A77T2  
DATED JULY 19, 2013 THAT SUPPLEMENTS THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP A77T2**

2010 REVISED STANDARD PLAN RSP A77T2






Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
11	SD	78	0.0/R16.5	121	144

**Randell D. Hiatt**  
REGISTERED CIVIL ENGINEER



January 23, 2015  
PLANS APPROVAL DATE

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

REGISTERED PROFESSIONAL ENGINEER  
No. C50200  
Exp. 6-30-15  
CIVIL  
STATE OF CALIFORNIA

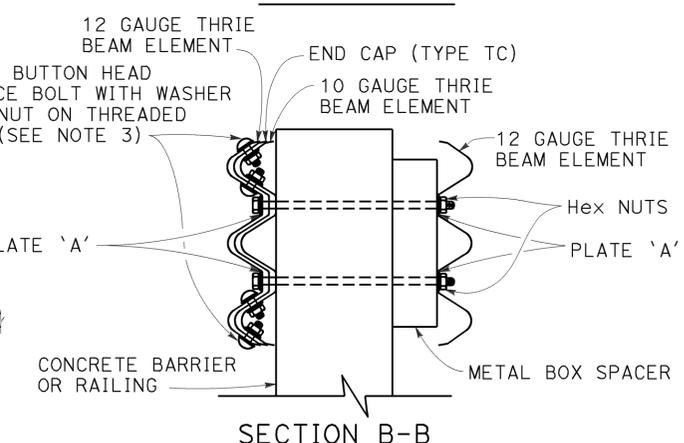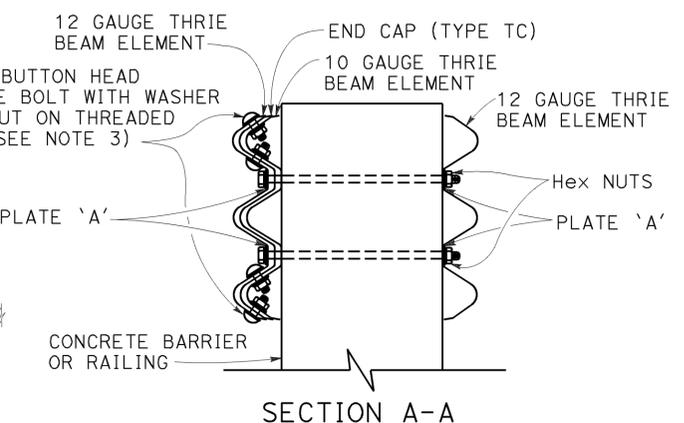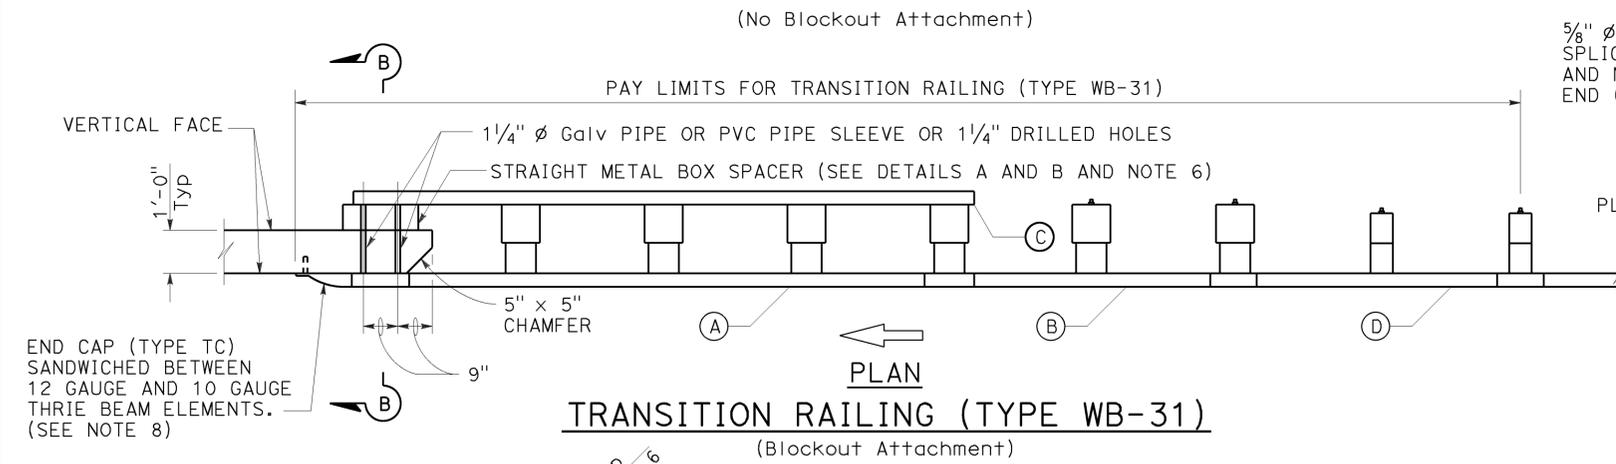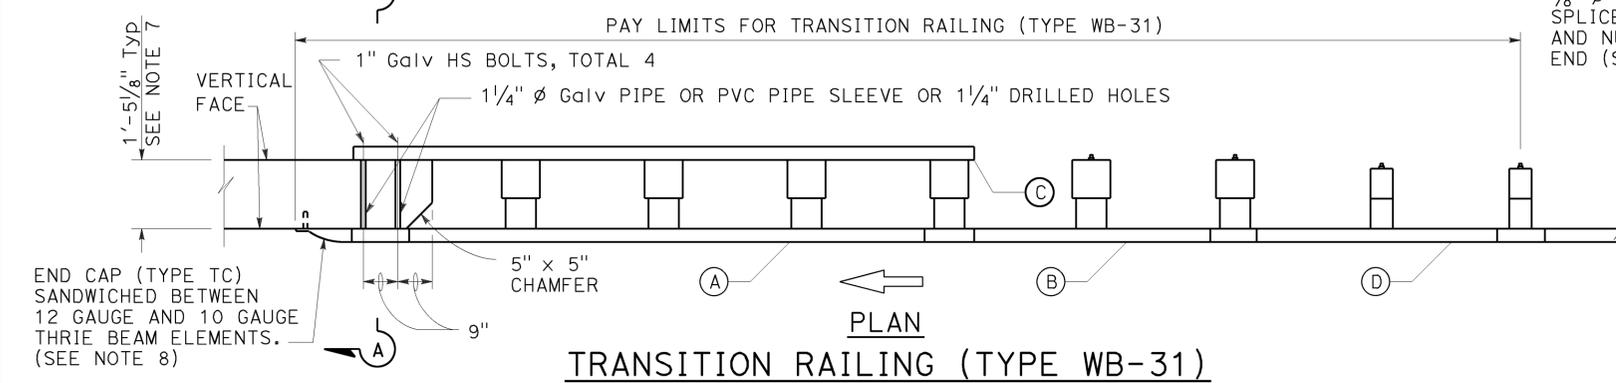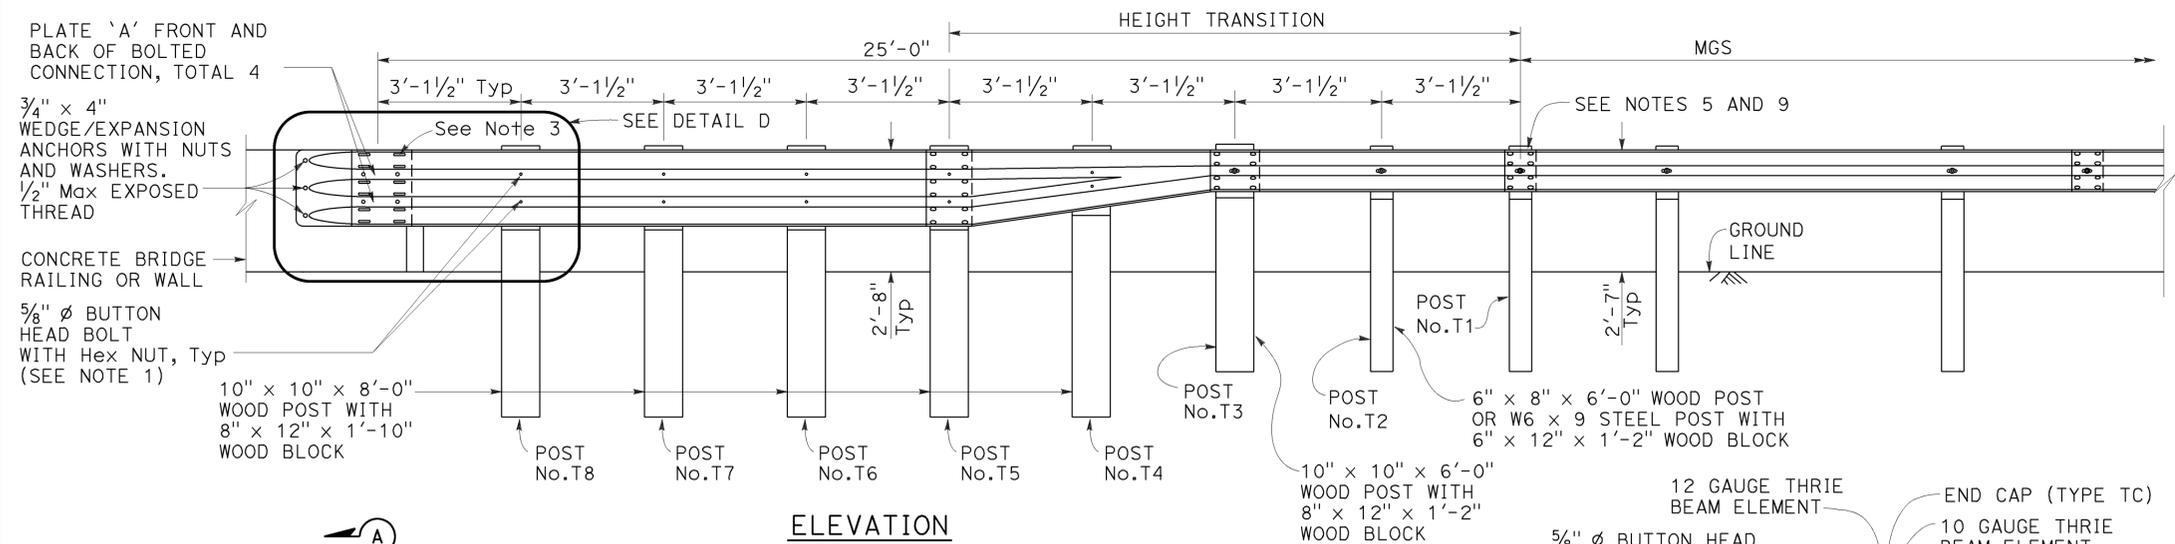

- LEGEND:**
- (A) NESTED THRIE BEAM ELEMENTS (ONE 12 GAUGE ELEMENT NESTED OVER ONE 10 GAUGE ELEMENT).
  - (B) ONE ASYMMETRICAL 10 GAUGE "W" BEAM TO THRIE BEAM ELEMENT.
  - (C) ONE 12 GAUGE THRIE BEAM ELEMENT.
  - (D) ONE 10 GAUGE "W" BEAM RAIL ELEMENT (7'-3/2" LENGTH)
- 10 GAUGE = 0.138" THICK  
12 GAUGE = 0.108" THICK

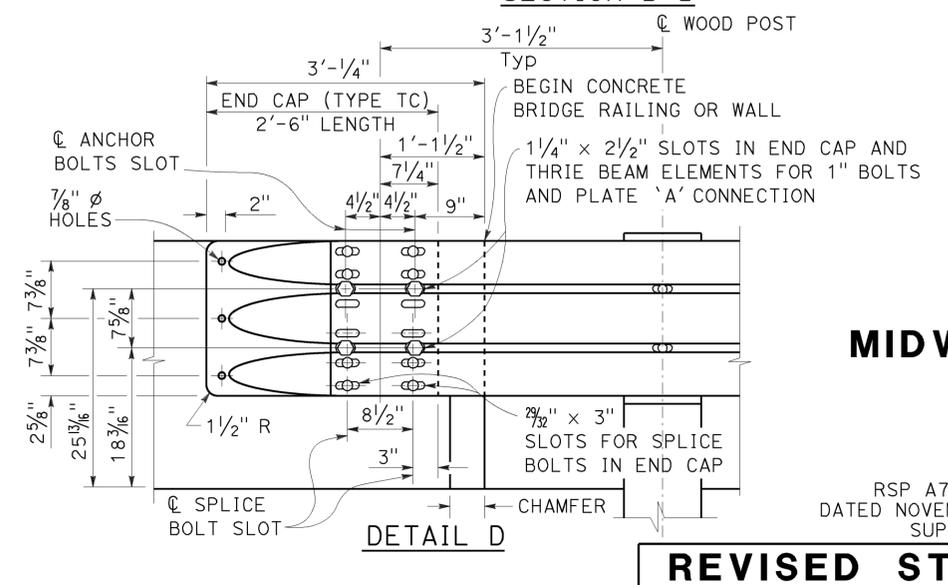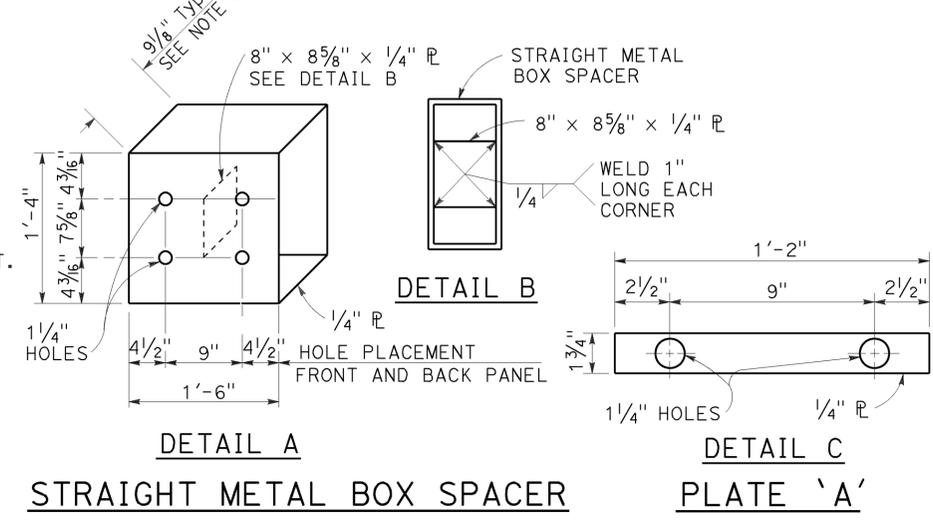

- NOTES:** TO ACCOMPANY PLANS DATED 08-01-16
1. Use 5/8"  $\phi$  Button head bolts and hex nuts for connections to posts. No washer on rail face for bolted connections to post.
  2. The nested rail elements, end cap, and "W" beam to thrie beam element may be spliced together prior to bolting the elements to the wood post and concrete barrier or railing.
  3. Exterior splice bolt holes for rail element splices at Post No. T5 and the connection to the concrete barrier or railing shall be the standard 29/32" x 1 1/8" slot size. Interior splice bolt holes at these locations may be increased up to 1 1/4"  $\phi$ . Only the top 4 and the bottom 4 splice bolts with washers and nuts are required for rail splices at Post No. T5 and the connection to the concrete barrier or railing.
  4. The top elevation of Posts No. T2 through No. T7 shall not project more than 1" above the top elevation of the rail element.
  5. Typically, the railing connected to Transition Railing (Type WB-31) will be either standard railing section of MGS with height transition ratio of 150:1 or a Caltrans approved 31" end treatment attached to Post No. T1.
  6. The depth of the metal box spacer varies from the 9/8" to 1 1/2" and is dependent on the width of the concrete railing or wall. The combined dimension for the depth of the metal box spacer plus the width of railing or wall is typically 21 1/8". Where the space between the backside of the concrete railing or wall and the rear thrie beam element is less than 1 1/2", metal plates similar to Plate 'A' are to be used as spacers.
  7. Where the width of the concrete railing or wall is greater than 17 1/8", wood blocks are to be used to fill the space created between the backside of Posts No. T5 through No. T8 and the rear thrie beam element. These wood blocks shall be 8" in width and 1'-2" in length. The dimension between the front thrie beam element and the rear thrie beam element is to match the width of the concrete railing or wall.
  8. End cap may be installed over 12 gauge and 10 gauge thrie beam elements where transition railing is installed on the departure end of bridge railing.
  9. Conform standard railing section height to 31" at Post No. T1 using height transition ratio of 150:1.

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION


**MIDWEST GUARDRAIL SYSTEM  
TRANSITION RAILING  
(TYPE WB-31)**

NO SCALE


RSP A77U4 DATED JANUARY 23, 2015 SUPERSEDES RSP A77U4 DATED NOVEMBER 15, 2013 AND RSP A77U4 DATED JULY 19, 2013 THAT SUPPLEMENTS THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP A77U4**


2010 REVISED STANDARD PLAN RSP A77U4

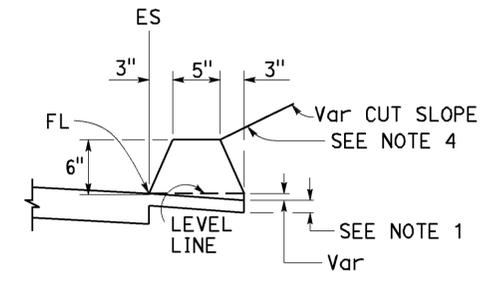


**TYPE A**  
See Notes 3 and 5

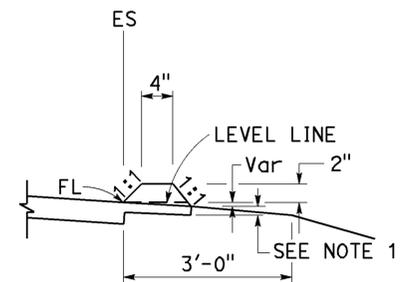


**TYPE C**

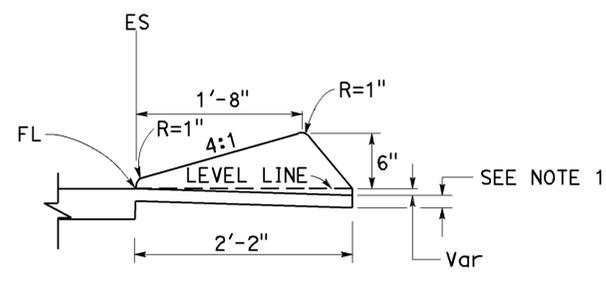

**TYPE D**

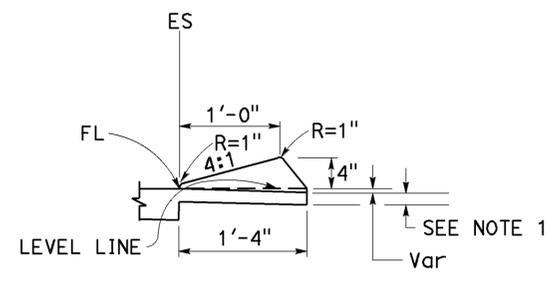


**TYPE E**

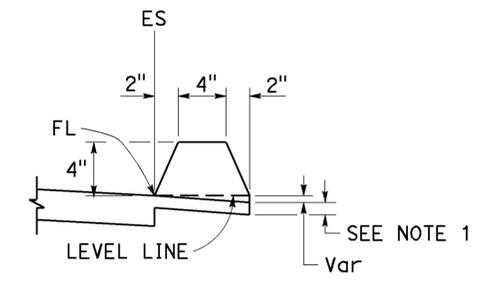


**TYPE F**  
See Note 5


**DIKES**

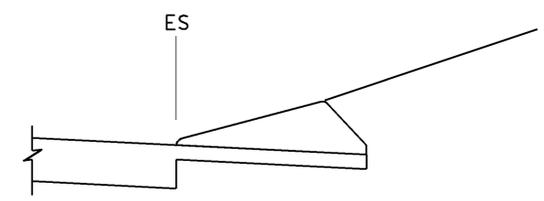


**CASE C-1**  
Cut Slope

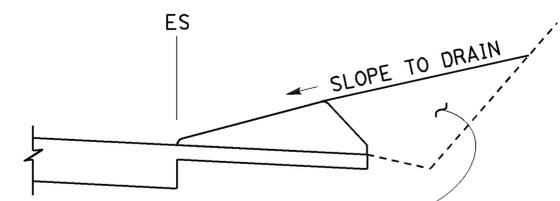

**CASE C-2**  
Cut Slope

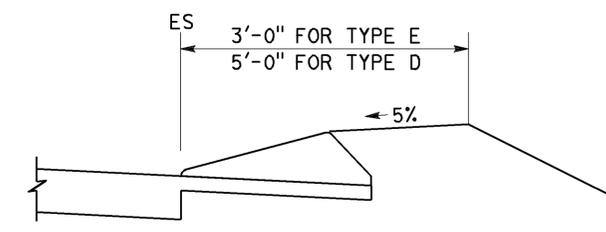

**CASE F**

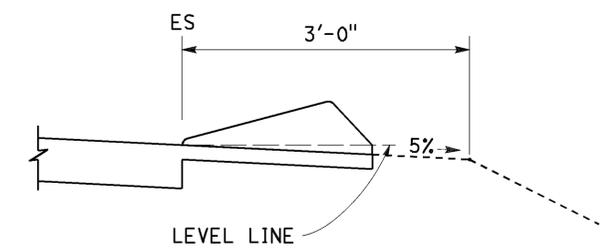

**CASE R**  
See Note 2

**TYPE D AND E BACKFILL DETAILS**

**NOTES:**

- For HMA shoulders only, extend top layer of HMA placed on the shoulder under dike with no joint at the ES. For projects with OGFC shoulders, do not extend OGFC under dike. See project plans for modified dike detail.
- Case R applies to retrofit only projects where restrictive conditions do not provide enough width for Case F backfill.
- Type A dike only to be used where restrictive slope conditions do not provide enough width to use Type D or Type E dike.
- Fill and compact with excavated material to top of dike.
- Use Type A or F dike, where dike is required with guardrail installations. See Revised Standard Plan RSP A77N4 for dike positioning details. See Revised Standard Plan RSP A77N3 for hinge point offsets with guardrail.

**DIKE QUANTITIES**

TYPE	CUBIC YARDS PER LINEAR FOOT
A	0.0135
C	0.0038
D	0.0293
E	0.0130
F	0.0066

Quantities based on 5% cross slope.

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**HOT MIX ASPHALT DIKES**

NO SCALE

RSP A87B DATED JANUARY 15, 2016 SUPERSEDES RSP A87B DATED JULY 19, 2013 AND STANDARD PLAN A87B DATED MAY 20, 2011 - PAGE 120 OF THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP A87B**

2010 REVISED STANDARD PLAN RSP A87B

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
11	SD	78	0.0/R16.5	123	144

*Gregory A. Balzer*  
LICENSED LANDSCAPE ARCHITECT

July 19, 2013  
PLANS APPROVAL DATE

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

TO ACCOMPANY PLANS DATED 08-01-16

2010 REVISED STANDARD PLAN RSP H1

**A**

AB AGGREGATE BASE  
 ABS ACRYLONITRILE-BUTADIENE-STYRENE  
 AC ASPHALT CONCRETE  
 ACC ARMOR-CLAD CONDUCTORS  
 Adj ADJACENT/ADJUSTABLE  
 AIC AUXILIARY IRRIGATION CONTROLLER  
 Alt ALTERNATIVE  
 AMEND AMENDMENT  
 ARV AIR RELEASE VALVE  
 AUTO AUTOMATIC  
 AUX AUXILIARY  
 AVB ATMOSPHERIC VACUUM BREAKER

**B**

B&B BALLED AND BURLAPPED  
 B/B BRASS/BRONZE  
 B/B/PL BRASS/BRONZE/PLASTIC  
 B/PL BRASS/PLASTIC  
 BFM BONDED FIBER MATRIX  
 Bit Ctd BITUMINOUS COATED  
 BP BOOSTER PUMP  
 BPA BACKFLOW PREVENTER ASSEMBLY  
 BPE BACKFLOW PREVENTER ENCLOSURE  
 BV BALL VALVE

**C**

C CONDUIT  
 CAP CORRUGATED ALUMINUM PIPE  
 CARV COMBINATION AIR RELEASE VALVE  
 CB COUPLING BAND  
 CCA CAM COUPLER ASSEMBLY  
 CEC CONTROLLER ENCLOSURE CABINET  
 CHDPE CORRUGATED HIGH DENSITY POLYETHYLENE  
 CL CHAIN LINK  
 CNC CONTROL AND NEUTRAL CONDUCTORS  
 Conc CONCRETE  
 CP COPPER PIPE  
 CS COMPOST SOCK  
 CSP CORRUGATED STEEL PIPE  
 CST CENTER STRIP  
 CV CHECK VALVE

**D**

Dia DIAMETER  
 DIP DUCTILE IRON PIPE  
 DIT DRIP IRRIGATION TUBING  
 DG DECOMPOSED GRANITE  
 DN DIAMETER NOMINAL  
 DVA DRIP VALVE ASSEMBLY

**E**

EC EROSION CONTROL  
 ECTC EROSION CONTROL TECHNOLOGY COUNCIL  
 ElecT ELECTRIC/ELECTRICAL  
 Elev ELEVATION  
 ELL ELBOW  
 ENCL ENCLOSURE  
 EP EDGE OF PAVEMENT  
 ES EDGE OF SHOULDER  
 EST END STRIP  
 ESTB ESTABLISHMENT  
 ETW EDGE OF TRAVELED WAY

**F**

F FULL CIRCLE  
 F/P FULL/PART CIRCLE  
 FCV FLOW CONTROL VALVE  
 FERT FERTILIZER  
 FG FINISHED GRADE  
 FH FLEXIBLE HOSE  
 FIPT FEMALE IRON PIPE THREAD  
 FIS FERTILIZER INJECTOR SYSTEM  
 FL FLOW LINE  
 FR FIBER ROLL  
 FS FLOW SENSOR  
 FSC FLOW SENSOR CABLE  
 FV FLUSH VALVE

**G**

Galv GALVANIZED  
 GARV GARDEN VALVE  
 GARVA GARDEN VALVE ASSEMBLY  
 GM GRAVEL MULCH  
 GPH GALLONS PER HOUR  
 GPM GALLONS PER MINUTE  
 GSP GALVANIZED STEEL PIPE  
 GV GATE VALVE

**H**

H HALF CIRCLE  
 HDPE HIGH DENSITY POLYETHYLENE  
 HP HORSEPOWER/HINGE POINT  
 HPL HIGH PRESSURE LINE  
 Hwy HIGHWAY

**I**

IC IRRIGATION CONTROLLER  
 ICC IRRIGATION CONTROLLER(S)  
 IN CONTROLLER ENCLOSURE CABINET  
 ID INSIDE DIAMETER  
 IFS IRRIGATION FILTRATION SYSTEM  
 IPS IRON PIPE SIZE  
 IPT IRON PIPE THREAD  
 Irr IRRIGATION

**L**

L LENGTH

**M**

Max MAXIMUM  
 MBGR METAL BEAM GUARD RAILING  
 MCV MANUAL CONTROL VALVE  
 MIC MASTER IRRIGATION CONTROLLER  
 Min MINIMUM  
 MIPT MALE IRON PIPE THREAD  
 Misc MISCELLANEOUS  
 MtI MATERIAL  
 MVP MAINTENANCE VEHICLE PULLOUT

**N**

NCN NO COMMON NAME  
 NL NOZZLE LINE  
 No. NUMBER  
 NPT NATIONAL PIPE THREAD

**O**

O/C ON CENTER  
 OD OUTSIDE DIAMETER  
 OL OVERLAP

**P**

P PART CIRCLE  
 PB PULL BOX  
 PCC PORTLAND CEMENT CONCRETE  
 PE POLYETHYLENE  
 Pkt+ PACKET  
 PL PLASTIC  
 PLS PURE LIVE SEED  
 PLT PLANT/PLANTING  
 PLT ESTB PLANT ESTABLISHMENT  
 PM POST MILE  
 PR PRESSURE RATED  
 PRLV PRESSURE RELIEF VALVE  
 PRV PRESSURE REGULATING VALVE  
 PVC POLYVINYL CHLORIDE  
 Pvm+ PAVEMENT

**Q**

Q QUARTER CIRCLE  
 QCV QUICK COUPLING VALVE

**NOTE:**  
 For additional abbreviations,  
 see Standard Plans A10A and A10B.

**R**

R RADIUS  
 RCP REINFORCED CONCRETE PIPE  
 RCV REMOTE CONTROL VALVE  
 RCVM REMOTE CONTROL VALVE (MASTER)  
 RCVMF REMOTE CONTROL VALVE (MASTER) W/FLOW SENSOR  
 RCVP REMOTE CONTROL VALVE W/PRESSURE REGULATOR  
 RCW RECYCLED WATER  
 RECP ROLLED EROSION CONTROL PRODUCT  
 REQ REQUIRED  
 RICS REMOTE IRRIGATION CONTROL SYSTEM  
 R/W RIGHT OF WAY

**S**

S SLIP  
 SCH SCHEDULE  
 SF STATE-FURNISHED  
 Shld SHOULDER  
 Sq SQUARE  
 SST SIDE STRIP  
 Sta STATION  
 Std STANDARD  
 SW SIDEWALK/SOUND WALL

**T**

T THIRD CIRCLE/THREAD  
 TLS TRUCK LOADING STANDPIPE  
 TQ THREE QUARTER CIRCLE  
 TRM TURF REINFORCEMENT MAT  
 TT TWO-THIRDS CIRCLE  
 TWSA TREE WELL SPRINKLER ASSEMBLY  
 Typ TYPICAL

**U**

UG UNDERGROUND

**W**

W WIDTH  
 W/ WITH  
 WM WATER METER  
 WS WYE STRAINER  
 WSA WYE STRAINER ASSEMBLY  
 WSP WELDED STEEL PIPE  
 WWM WELDED WIRE MESH


STATE OF CALIFORNIA  
 DEPARTMENT OF TRANSPORTATION  
**LANDSCAPE AND  
 EROSION CONTROL ABBREVIATIONS**  
 NO SCALE

RSP H1 DATED JULY 19, 2013 SUPERSEDES STANDARD PLAN H1  
 DATED MAY 20, 2011 - PAGE 218 OF THE STANDARD PLANS BOOK DATED 2010.





















**REVISED STANDARD PLAN RSP H1**









Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
11	SD	78	0.0/R16.5	124	144


  
 LICENSED LANDSCAPE ARCHITECT  
 July 15, 2016  
 PLANS APPROVAL DATE  
THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.



TO ACCOMPANY PLANS DATED 08-01-16

EXISTING	NEW	ITEM DESCRIPTION
		WATER METER (WM)
		BACKFLOW PREVENTER ASSEMBLY (BPA)
		BACKFLOW PREVENTER ENCLOSURE (BPE)
		BOOSTER PUMP (BP)
		TRUCK LOADING STANDPIPE (TLS)
		FLOW SENSOR (FS)
		MASTER IRRIGATION CONTROLLER (MIC)
		AUXILIARY IRRIGATION CONTROLLER (AIC)
		IRRIGATION CONTROLLER (IC) IRRIGATION CONTROLLER (IC) (BATTERY) IRRIGATION CONTROLLER (IC) (SOLAR) IRRIGATION CONTROLLER (IC) (TWO WIRE)
		IRRIGATION CONTROLLER(S) IN CONTROLLER ENCLOSURE CABINET (ICC)
		ARMOR-CLAD CONDUCTORS (ACC)
		CONTROL AND NEUTRAL CONDUCTORS (CNC)
		IRRIGATION CONDUIT
		IRRIGATION SLEEVE
		DUCTILE IRON PIPE (SUPPLY LINE) (MAIN) (DIP)
		GALVANIZED STEEL PIPE (SUPPLY LINE) (MAIN) (GSP)
		GALVANIZED STEEL PIPE (SUPPLY LINE) (LATERAL) (GSP)
		PLASTIC PIPE (SUPPLY LINE) (MAIN)
		PLASTIC PIPE (SUPPLY LINE) (LATERAL)
		COPPER PIPE (SUPPLY LINE)
		DRIP IRRIGATION TUBING
		REMOTE CONTROL VALVE (RCV) REMOTE CONTROL VALVE (MASTER) (RCVM) REMOTE CONTROL VALVE (MASTER) W/FLOW METER (RCVMF)
		REMOTE CONTROL VALVE W/PRESSURE REGULATOR (RCVP)
		EXISTING MANUAL CONTROL VALVE (MCV)
		DRIP VALVE ASSEMBLY (DVA)
		WYE STRAINER ASSEMBLY (WSA)

EXISTING	NEW	ITEM DESCRIPTION
		GATE VALVE (GV)
		BALL VALVE (BV)
		QUICK COUPLING VALVE (QCV)
		CAM COUPLER ASSEMBLY (CCA)
		GARDEN VALVE ASSEMBLY (GARVA)
		PRESSURE REGULATING VALVE (PRV)
		PRESSURE RELIEF VALVE (PRLV)
		FLOW CONTROL VALVE (FCV)
		COMBINATION AIR RELEASE VALVE (CARV)
		CHECK VALVE (CV)
		FLUSH VALVE (FV)
		EXISTING NOZZLE LINE W/TURNING UNION
		EXISTING IRRIGATION SYSTEM
		EXISTING IRRIGATION SYSTEM TO BE REMOVED
		CHAIN LINK GATE
		QUICK COUPLING VALVE W/SPRINKLER PROTECTOR
		SPRINKLER W/SPRINKLER PROTECTOR
		CONNECT TO EXISTING SYSTEM
		CAP
		CAP EXISTING
		FIBER ROLL
		COMPOST SOCK

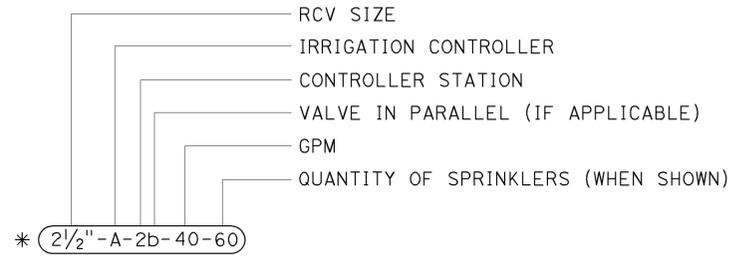

\* 2 1/2" - A - 2b - 40 - 60

**VALVE CODE**

\* VALVE CODES FOR EXISTING VALVES ARE SHOWN IN A DASHED ENCLOSURE.


STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION  
**LANDSCAPE AND EROSION  
CONTROL SYMBOLS**  
NO SCALE

RSP H2 DATED JULY 15, 2016 SUPERSEDES RSP H2 DATED NOVEMBER 15, 2013 AND RSP H2 DATED JULY 19, 2013 AND STANDARD PLAN H2 DATED MAY 20, 2011 - PAGE 219 OF THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP H2**

2010 REVISED STANDARD PLAN RSP H2

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
11	SD	78	0.0/R16.5	125	144

  
 REGISTERED CIVIL ENGINEER  
 July 19, 2013  
 PLANS APPROVAL DATE



THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

TO ACCOMPANY PLANS DATED 08-01-16

TABLE 1

TAPER LENGTH CRITERIA AND CHANNELIZING DEVICE SPACING							
SPEED (S)	MINIMUM TAPER LENGTH * FOR WIDTH OF OFFSET 12 FEET (W)				MAXIMUM CHANNELIZING DEVICE SPACING		
	TANGENT 2L	MERGING L	SHIFTING L/2	SHOULDER L/3	X	Y	Z **
					TAPER	TANGENT	CONFLICT
mph	ft	ft	ft	ft	ft	ft	ft
20	160	80	40	27	20	40	10
25	250	125	63	42	25	50	12
30	360	180	90	60	30	60	15
35	490	245	123	82	35	70	17
40	640	320	160	107	40	80	20
45	1080	540	270	180	45	90	22
50	1200	600	300	200	50	100	25
55	1320	660	330	220	55	110	27
60	1440	720	360	240	60	120	30
65	1560	780	390	260	65	130	32
70	1680	840	420	280	70	140	35

\* - For other offsets, use the following merging taper length formula for L:  
 For speed of 40 mph or less,  $L = WS^2/60$   
 For speed of 45 mph or more,  $L = WS$

Where: L = Taper length in feet  
 W = Width of offset in feet  
 S = Posted speed limit, off-peak 85th-percentile speed prior to work starting, or the anticipated operating speed in mph

\*\* - Use for taper and tangent sections where there are no pavement markings or where there is a conflict between existing pavement markings and channelizers (CA).

TABLE 2

LONGITUDINAL BUFFER SPACE AND FLAGGER STATION SPACING				
SPEED *	Min D **	DOWNGRADE Min D ***		
		-3%	-6%	-9%
		ft	ft	ft
20	115	116	120	126
25	155	158	165	173
30	200	205	215	227
35	250	257	271	287
40	305	315	333	354
45	360	378	400	427
50	425	446	474	507
55	495	520	553	593
60	570	598	638	686
65	645	682	728	785
70	730	771	825	891

\* - Speed is posted speed limit, off-peak 85th-percentile speed prior to work starting, or the anticipated operating speed in mph  
 \*\* - Longitudinal buffer space or flagger station spacing  
 \*\*\* - Use on sustained downgrade steeper than -3 percent and longer than 1 mile.

TABLE 3

ADVANCE WARNING SIGN SPACING			
ROAD TYPE	DISTANCE BETWEEN SIGNS *		
	A	B	C
	ft	ft	ft
URBAN - 25 mph OR LESS	100	100	100
URBAN - MORE THAN 25 mph TO 40 mph	250	250	250
URBAN - MORE THAN 40 mph	350	350	350
RURAL	500	500	500
EXPRESSWAY / FREEWAY	1000	1500	2640

\* - The distances are approximate, are intended for guidance purposes only, and should be applied with engineering judgment. These distances should be adjusted by the Engineer for field conditions, if necessary, by increasing or decreasing the recommended distances.

STATE OF CALIFORNIA  
 DEPARTMENT OF TRANSPORTATION

## TRAFFIC CONTROL SYSTEM TABLES FOR LANE AND RAMP CLOSURES

NO SCALE


RSP T9 DATED JULY 19, 2013 SUPERSEDES RSP T9 DATED APRIL 19, 2013 THAT SUPPLEMENTS THE STANDARD PLANS BOOK DATED 2010.

2010 REVISED STANDARD PLAN RSP T9

DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
11	SD	78	0.0/R16.5	126	144

REGISTERED CIVIL ENGINEER  
 April 19, 2013  
 PLANS APPROVAL DATE  
 THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

**Gurinderpal Bhullar**  
 No. C48815  
 Exp. 9-30-14  
 CIVIL ENGINEER  
 STATE OF CALIFORNIA

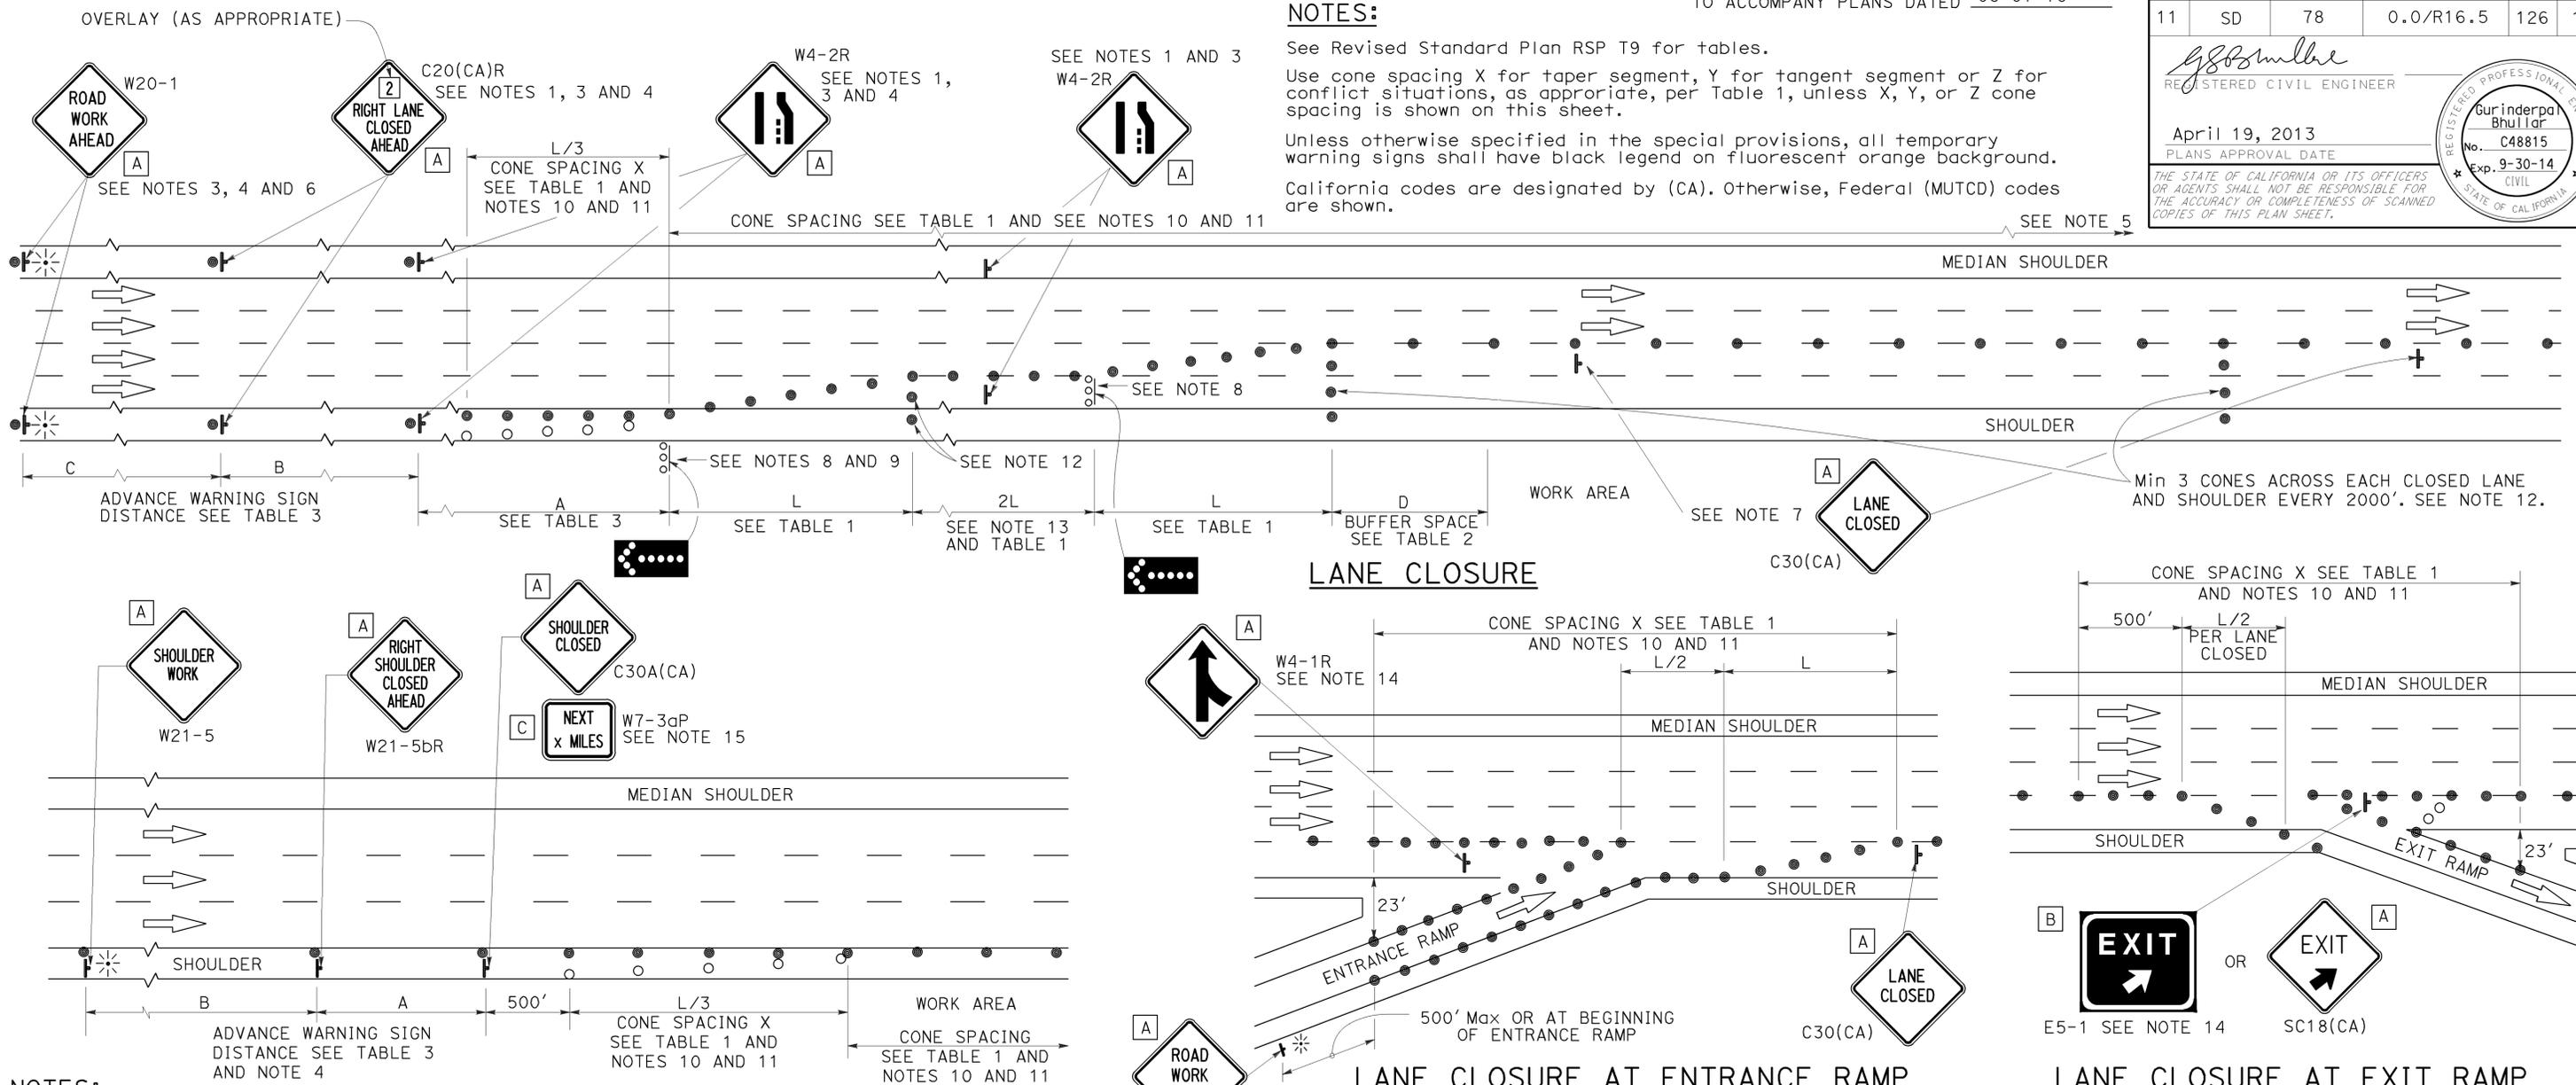

**NOTES:**

1. Median lane closures shall conform to the details as shown except that C20(CA)L and W4-2L signs shall be used.
2. At least one person shall be assigned to provide full time maintenance of traffic control devices for lane closures.
3. Duplicate sign installations are not required:
  - a) On opposite shoulder if at least one-half of the available lanes remain open to traffic.
  - b) In the median if the width of the median shoulder is less than 8' and the outside lanes are to be closed.
4. Each advance warning sign on each side of the roadway shall be equipped with at least two flags for daytime closure. Each flag shall be at least 16" x 16" in size and shall be orange or fluorescent red-orange in color. Flashing beacons shall be placed at the locations indicated for lane closure during hours of darkness.
5. A G20-2 "END ROAD WORK" sign, with minimum size of 48" x 24" as appropriate, shall be placed at the end of the lane closure unless the end of work area is obvious or ends within a larger project's limits.

**SHOULDER CLOSURE**


6. If the W20-1 sign would follow within 2000' of a stationary W20-1 or G20-1 "ROAD WORK NEXT x MILES", use a C20(CA)L and W4-2L signs shall be used.
7. Place a C30(CA) sign every 2000' throughout length of lane closure.
8. One flashing arrow sign for each lane closed. The flashing arrow signs shall be Type I.
9. A minimum 1500' of sight distance shall be provided where possible for vehicles approaching the first flashing arrow sign. Lane closures shall not begin at top of crest vertical curve or on a horizontal curve.
10. All cones used for lane closures during the hours of darkness shall be fitted with retroreflective bands (or sleeves) as specified in the specifications.
11. Portable delineators, placed at one-half the spacing indicated for traffic cones may be used instead of cones for daytime closures only.

W20-1 SEE NOTE 4

**NOTES:**

See Revised Standard Plan RSP T9 for tables.  
 Use cone spacing X for taper segment, Y for tangent segment or Z for conflict situations, as appropriate, per Table 1, unless X, Y, or Z cone spacing is shown on this sheet.  
 Unless otherwise specified in the special provisions, all temporary warning signs shall have black legend on fluorescent orange background.  
 California codes are designated by (CA). Otherwise, Federal (MUTCD) codes are shown.

**LANE CLOSURE**

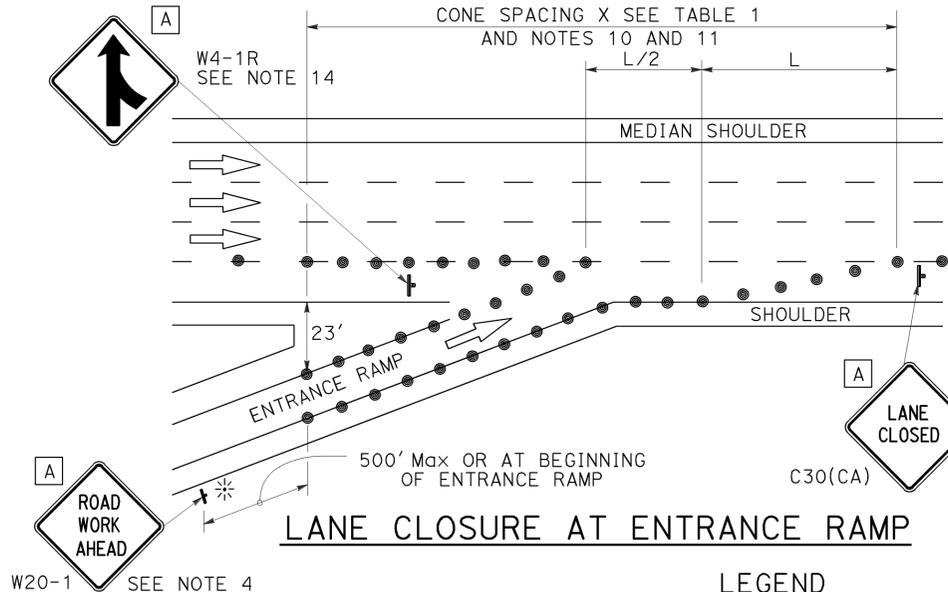

**LANE CLOSURE AT ENTRANCE RAMP**

**LANE CLOSURE AT EXIT RAMP**

**LEGEND**

- TRAFFIC CONE
- TRAFFIC CONE (OPTIONAL TAPER)
- † TEMPORARY TRAFFIC CONTROL SIGN
- ⬢ FLASHING ARROW SIGN (FAS)
- ⬢ FAS SUPPORT OR TRAILER
- ⚡ PORTABLE FLASHING BEACON

**SIGN PANEL SIZE (Min)**

- A 48" x 48"
- B 72" x 60"
- C 36" x 30"

STATE OF CALIFORNIA  
 DEPARTMENT OF TRANSPORTATION  
**TRAFFIC CONTROL SYSTEM  
 FOR LANE CLOSURE ON  
 FREEWAYS AND EXPRESSWAYS**  
 NO SCALE

RSP T10 DATED APRIL 19, 2013 SUPERSEDES STANDARD PLAN T10 DATED MAY 20, 2011 - PAGE 237 OF THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP T10**

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
11	SD	78	0.0/R16.5	127	144

*Gurinderpal Bhullar*  
REGISTERED CIVIL ENGINEER


April 19, 2013  
PLANS APPROVAL DATE

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.


REGISTERED PROFESSIONAL ENGINEER  
Gurinderpal Bhullar  
No. C48815  
Exp. 9-30-14  
CIVIL  
STATE OF CALIFORNIA

**NOTES:** See Revised Standard Plan RSP T9 for tables.  
Use cone spacing X for taper segment, Y for tangent segment or Z for conflict situations, as appropriate, per Table 1, unless X, Y, or Z cone spacing is shown on this sheet.

Unless otherwise specified in the special provisions, all temporary warning signs shall have black legend on fluorescent orange background.  
California codes are designated by (CA). Otherwise, Federal (MUTCD) codes are shown.

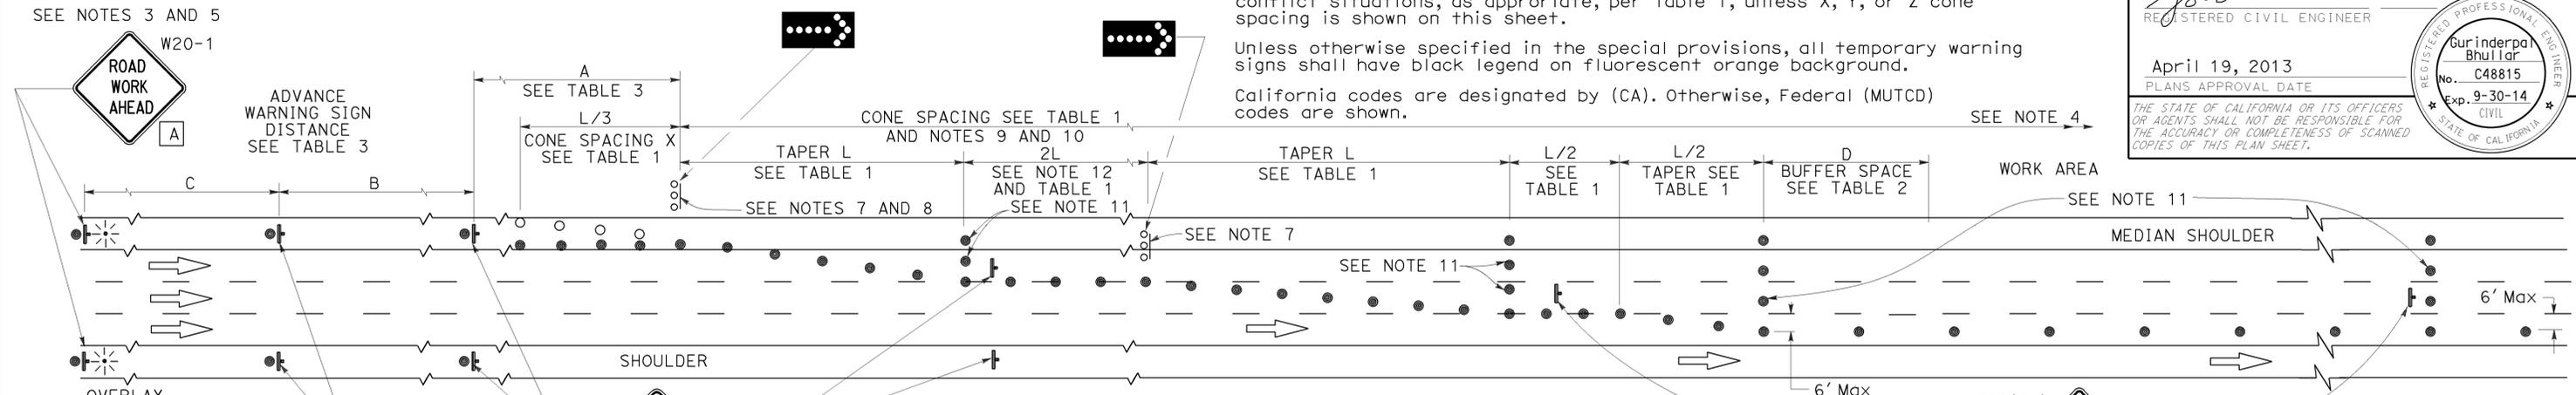

**LANE CLOSURE WITH PARTIAL SHOULDER USE**

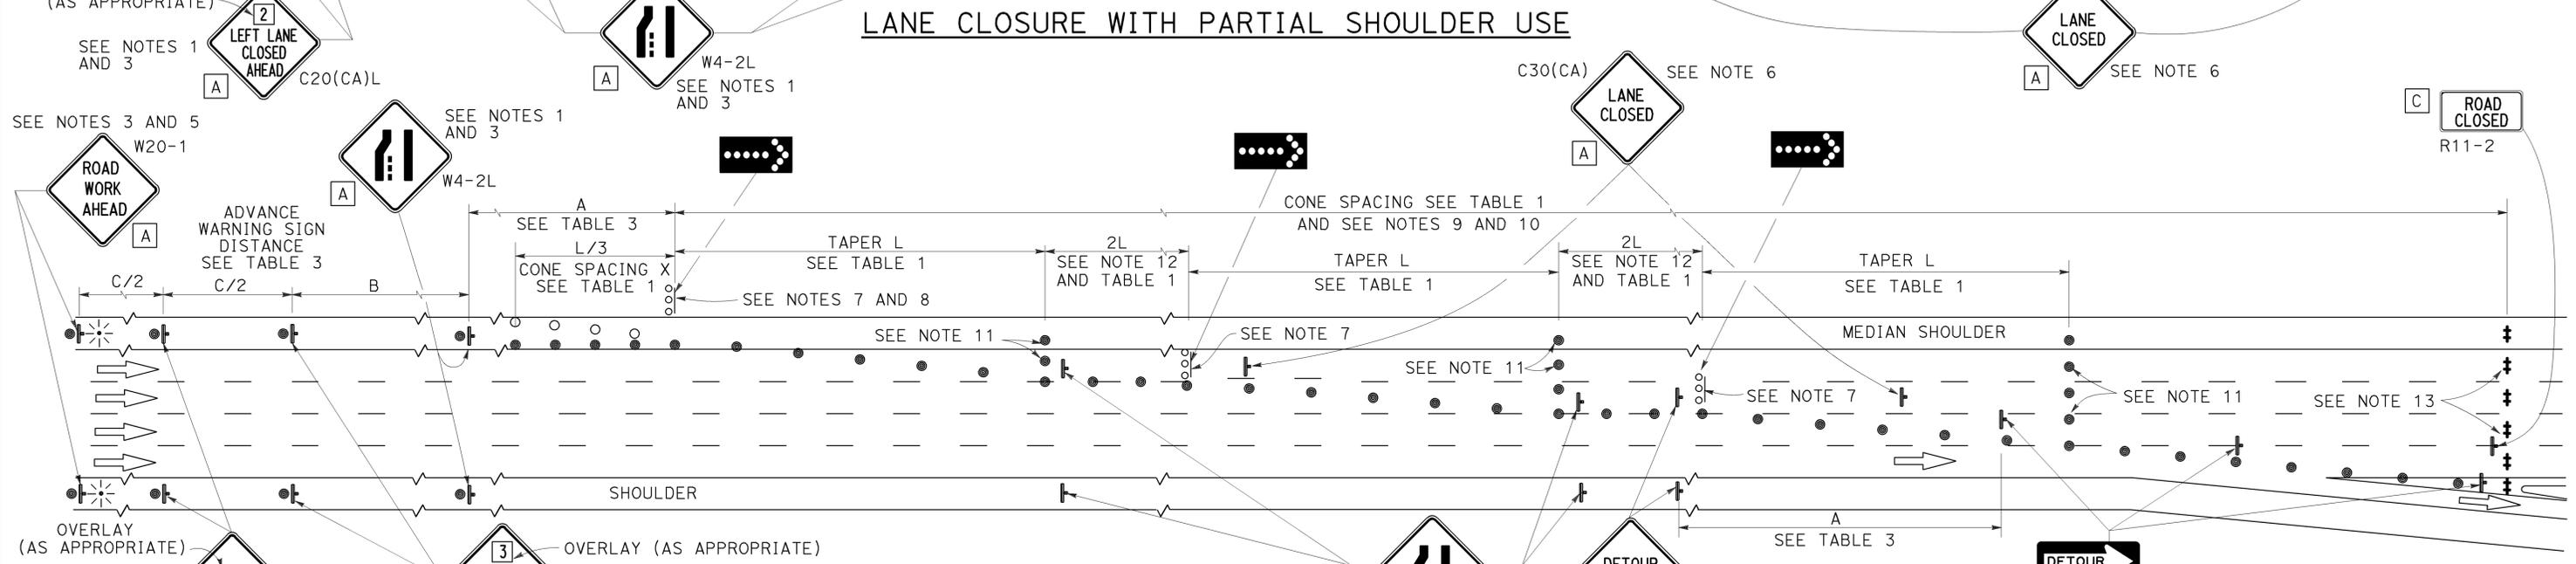

**COMPLETE CLOSURE**

- NOTES:**
- Lane closures on the right side using partial median shoulder as a traffic lane shall conform to the details as shown except that C20(CA)R and W4-2R signs shall be used.
  - At least one person shall be assigned to provide full time maintenance of traffic control devices for lane closures.
  - Each advance warning sign on each side of the roadway shall be equipped with at least two flags for daytime closure. Each flag shall be at least 16" X 16" in size and shall be orange or fluorescent red-orange in color. Flashing beacons shall be placed at the locations indicated for lane closure during hours of darkness.
  - A G20-2 "END ROAD WORK" sign, with minimum size of 48" x 24" as appropriate, shall be placed at the end of the lane closure unless the end of work area is obvious or ends within a larger project's limits.
  - If the W20-1 sign would follow within 2000' of a stationary W20-1 or G20-1 "ROAD WORK NEXT \_\_\_ MILES", use a C20(CA) sign for the first advance warning sign.
  - Place a C30(CA) sign every 2000' throughout length of lane closure.
  - One flashing arrow sign for each lane closed. The flashing arrow signs shall be Type I.
  - A minimum 1500' of sight distance shall be provided where possible for vehicles approaching the first flashing arrow sign. Lane closures shall not begin at the top of crest vertical curve or on a horizontal curve.
  - All cones used for lane closures during the hours of darkness shall be fitted with retroreflective bands (or sleeves) as specified in the specifications.
  - Portable delineators, placed at one-half the spacing indicated for traffic cones, may be used instead of cones for daytime closures only.
  - Unless otherwise specified in the special provisions, a minimum of 3 cones shall be placed transversely across each closed lane and shoulder at each location where a taper across a traffic lane ends and every 2000' as shown on the "Lane Closure With Partial Shoulder Use" detail. Two Type II barricades may be used instead of the 3 cones. The transverse alignment of the cones or barricades on the closed shoulder may be shifted from the transverse alignment to provide access to the work.
  - Unless otherwise specified in the special provisions, the 2L tangent shown along lane lines shall be used between the L tapers required for each closed traffic lane.
  - A minimum of Two Type II or III barricades shall be placed across each closed lane and shoulder at the location shown and every 2000' within the complete closure area. Within the complete closure area, the transverse alignment of the barricades on the closed shoulder may be shifted from the transverse alignment to provide access to the work.
  - When specified in the special provisions, a W20-2 "DETOUR AHEAD" sign is to be used in place of the W20-3 "FREEWAY CLOSED AHEAD" sign.

**SIGN PANEL SIZE (Min)**

A	48" x 48"
B	48" x 18"
C	48" x 30"

**LEGEND**

- TRAFFIC CONE
- TRAFFIC CONE (OPTIONAL TAPER)
- † TEMPORARY TRAFFIC CONTROL SIGN
- FLASHING ARROW SIGN (FAS)
- FAS SUPPORT OR TRAILER
- ⊛ PORTABLE FLASHING BEACON

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**TRAFFIC CONTROL SYSTEM  
FOR LANE CLOSURES ON  
FREEWAYS AND EXPRESSWAYS**

NO SCALE

RSP T10A DATED APRIL 19, 2013 SUPERSEDES STANDARD PLAN T10A DATED MAY 20, 2011 - PAGE 238 OF THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP T10A**

2010 REVISED STANDARD PLAN RSP T10A

# TYPICAL RAMP CLOSURES

## SIGN PANEL SIZE (Min)

- A 48" x 48"
- B 48" x 30"
- C 36" x 36"
- D 48" x 36"

## LEGEND

- TRAFFIC CONE
- † TEMPORARY TRAFFIC CONTROL SIGN
- ‡ BARRICADES
- ⚡ PORTABLE FLASHING BEACON

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
11	SD	78	0.0/R16.5	128	144


*Gurinderpal Bhullar*  
 REGISTERED CIVIL ENGINEER  
 April 19, 2013  
 PLANS APPROVAL DATE  
THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

REGISTERED PROFESSIONAL ENGINEER  
**Gurinderpal Bhullar**  
 No. C48815  
 Exp. 9-30-14  
 CIVIL  
 STATE OF CALIFORNIA


TO ACCOMPANY PLANS DATED 08-01-16

## NOTES:


- Barricades shall be Type I, II, or III for closures lasting one week or less and Type III for closures lasting longer than one week.
- In addition to placing the C19(CA) "RAMP CLOSED AHEAD" and C30(CA) "RAMP CLOSED" signs, black on orange overlay plates with the word "CLOSED" may be mounted, as directed by the Engineer, on all guide signs that refer to the closed ramp. The letter size on the overlay shall be the same as the guide sign.
- Each advance C19(CA) "RAMP CLOSED AHEAD" sign shall be equipped with at least two flags for daytime closure. Each flag shall be at least 16" x 16" in size and shall be orange or fluorescent red-orange in color. A flashing beacon shall be placed on top of the first C19(CA) sign during hours of darkness.
- All cones used for ramp closures during the hours of darkness shall be fitted with retroreflective bands (or sleeves) as specified in the specifications.
- Portable delineators, placed at one-half the spacing indicated for traffic cones, may be used instead of cones for daytime ramp closures only.
- At least one person shall be assigned to provide full time maintenance of traffic control devices, unless otherwise directed by the Engineer.
- The existing "EXIT" signs shall be covered during ramp closures.
- A minimum of 3 cones shall be placed transversely across each closed lane and shoulder.

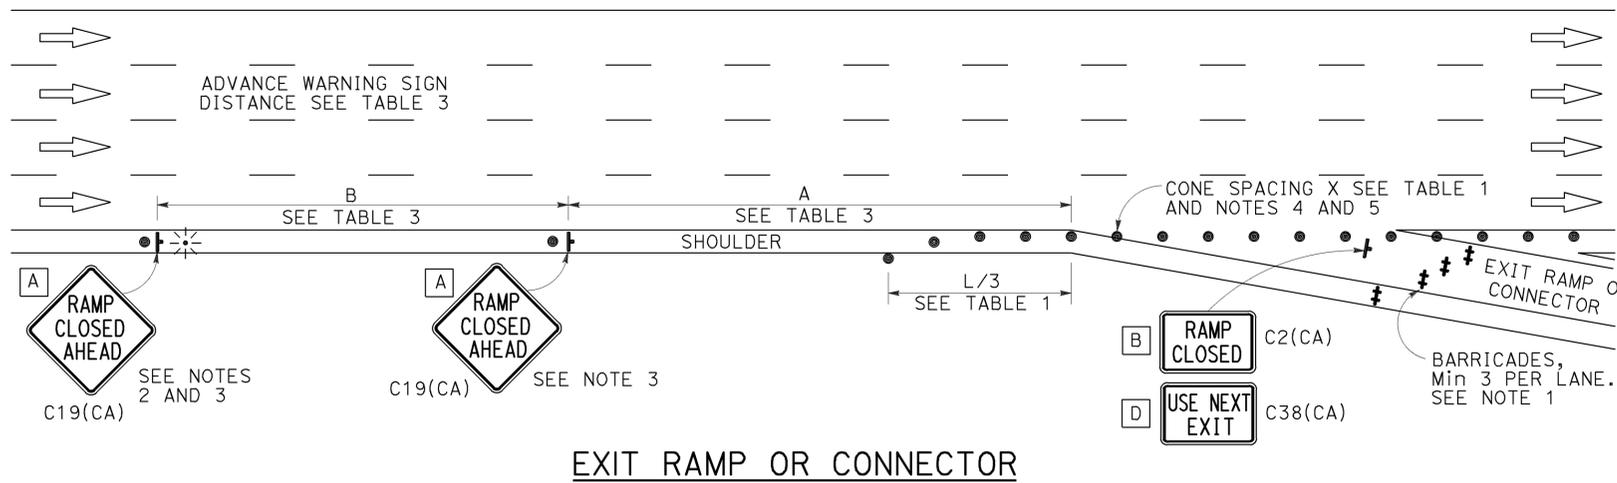


EXIT RAMP OR CONNECTOR

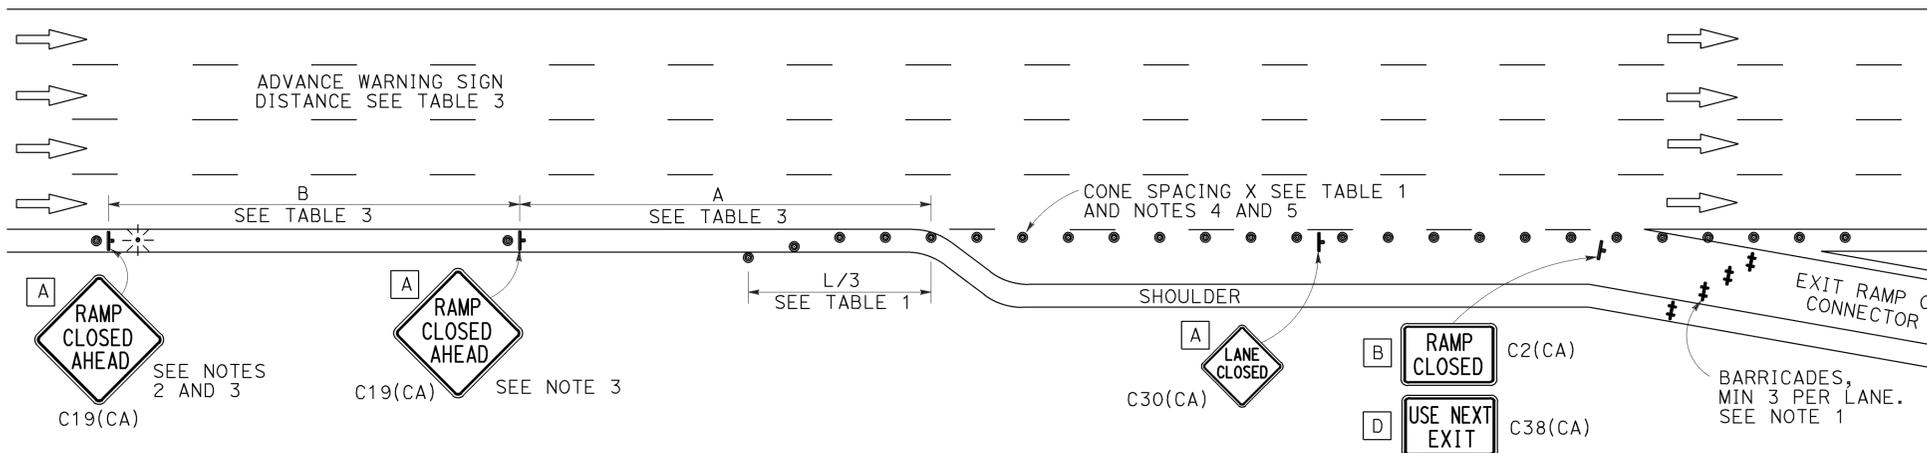

EXIT RAMP OR CONNECTOR WITH ADDITIONAL LANE

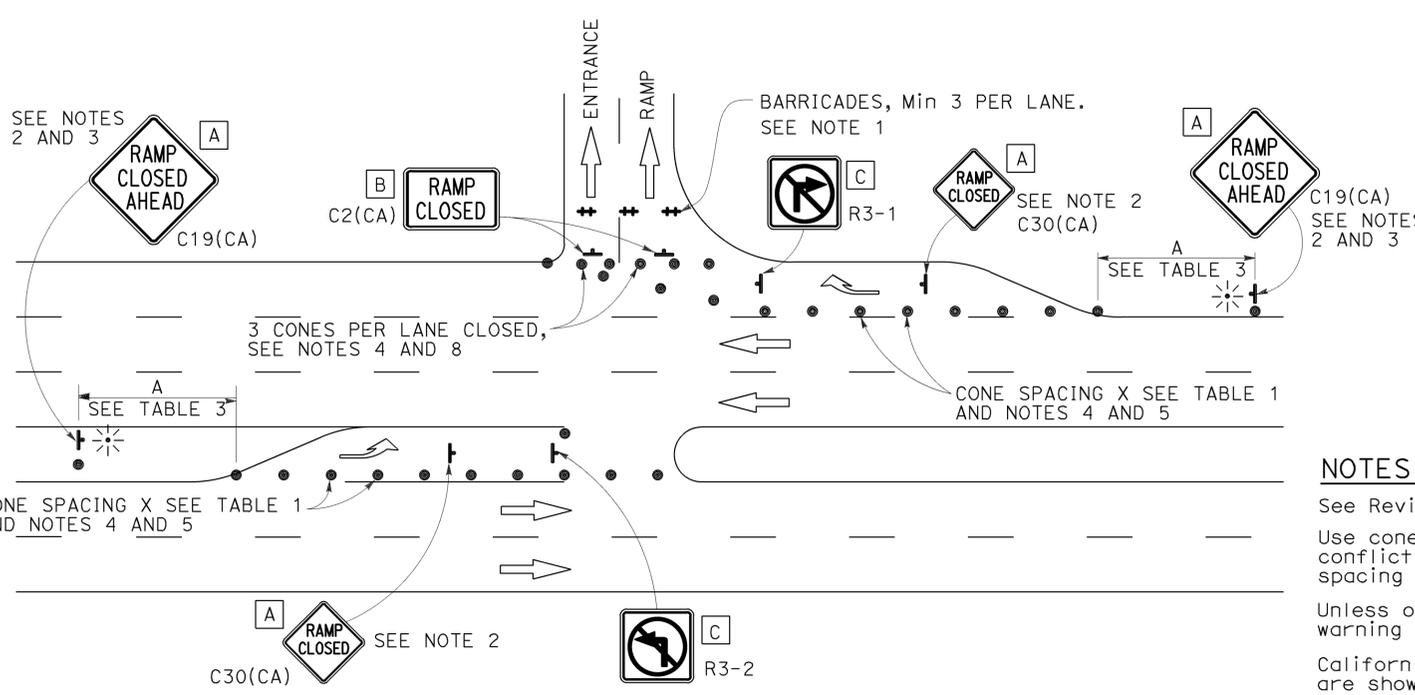

ENTRANCE RAMP WITH TURNING POCKETS

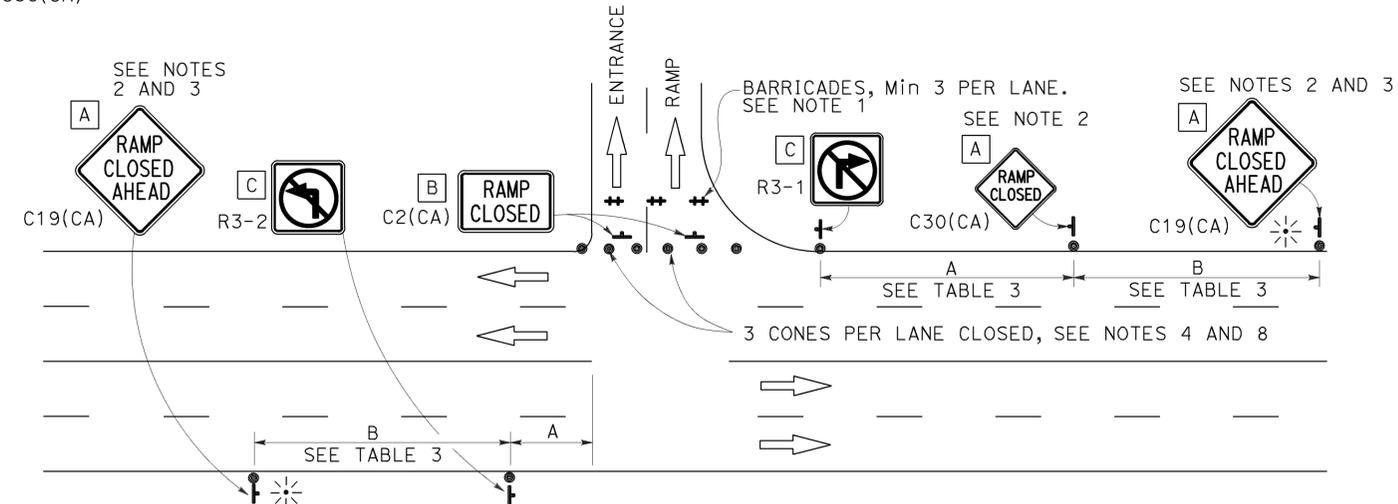

ENTRANCE RAMP WITHOUT TURNING POCKETS

## NOTES:

- See Revised Standard Plan RSP T9 for tables.
- Use cone spacing X for taper segment, Y for tangent segment or Z for conflict situations, as appropriate, per Table 1, unless X, Y, or Z cone spacing is shown on this sheet.
- Unless otherwise specified in the special provisions, all temporary warning signs shall have black legend on fluorescent orange background.
- California codes are designated by (CA). Otherwise, Federal (MUTCD) codes are shown.


STATE OF CALIFORNIA  
 DEPARTMENT OF TRANSPORTATION  
**TRAFFIC CONTROL SYSTEM  
 FOR RAMP CLOSURE**  
 NO SCALE

RSP T14 DATED APRIL 19, 2013 SUPERSEDES STANDARD PLAN T14  
 DATED MAY 20, 2011 - PAGE 242 OF THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP T14**


2010 REVISED STANDARD PLAN RSP T14

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
11	SD	78	0.0/R16.5	129	144

  
 REGISTERED CIVIL ENGINEER  
 April 19, 2013  
 PLANS APPROVAL DATE  
THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.



TO ACCOMPANY PLANS DATED 08-01-16

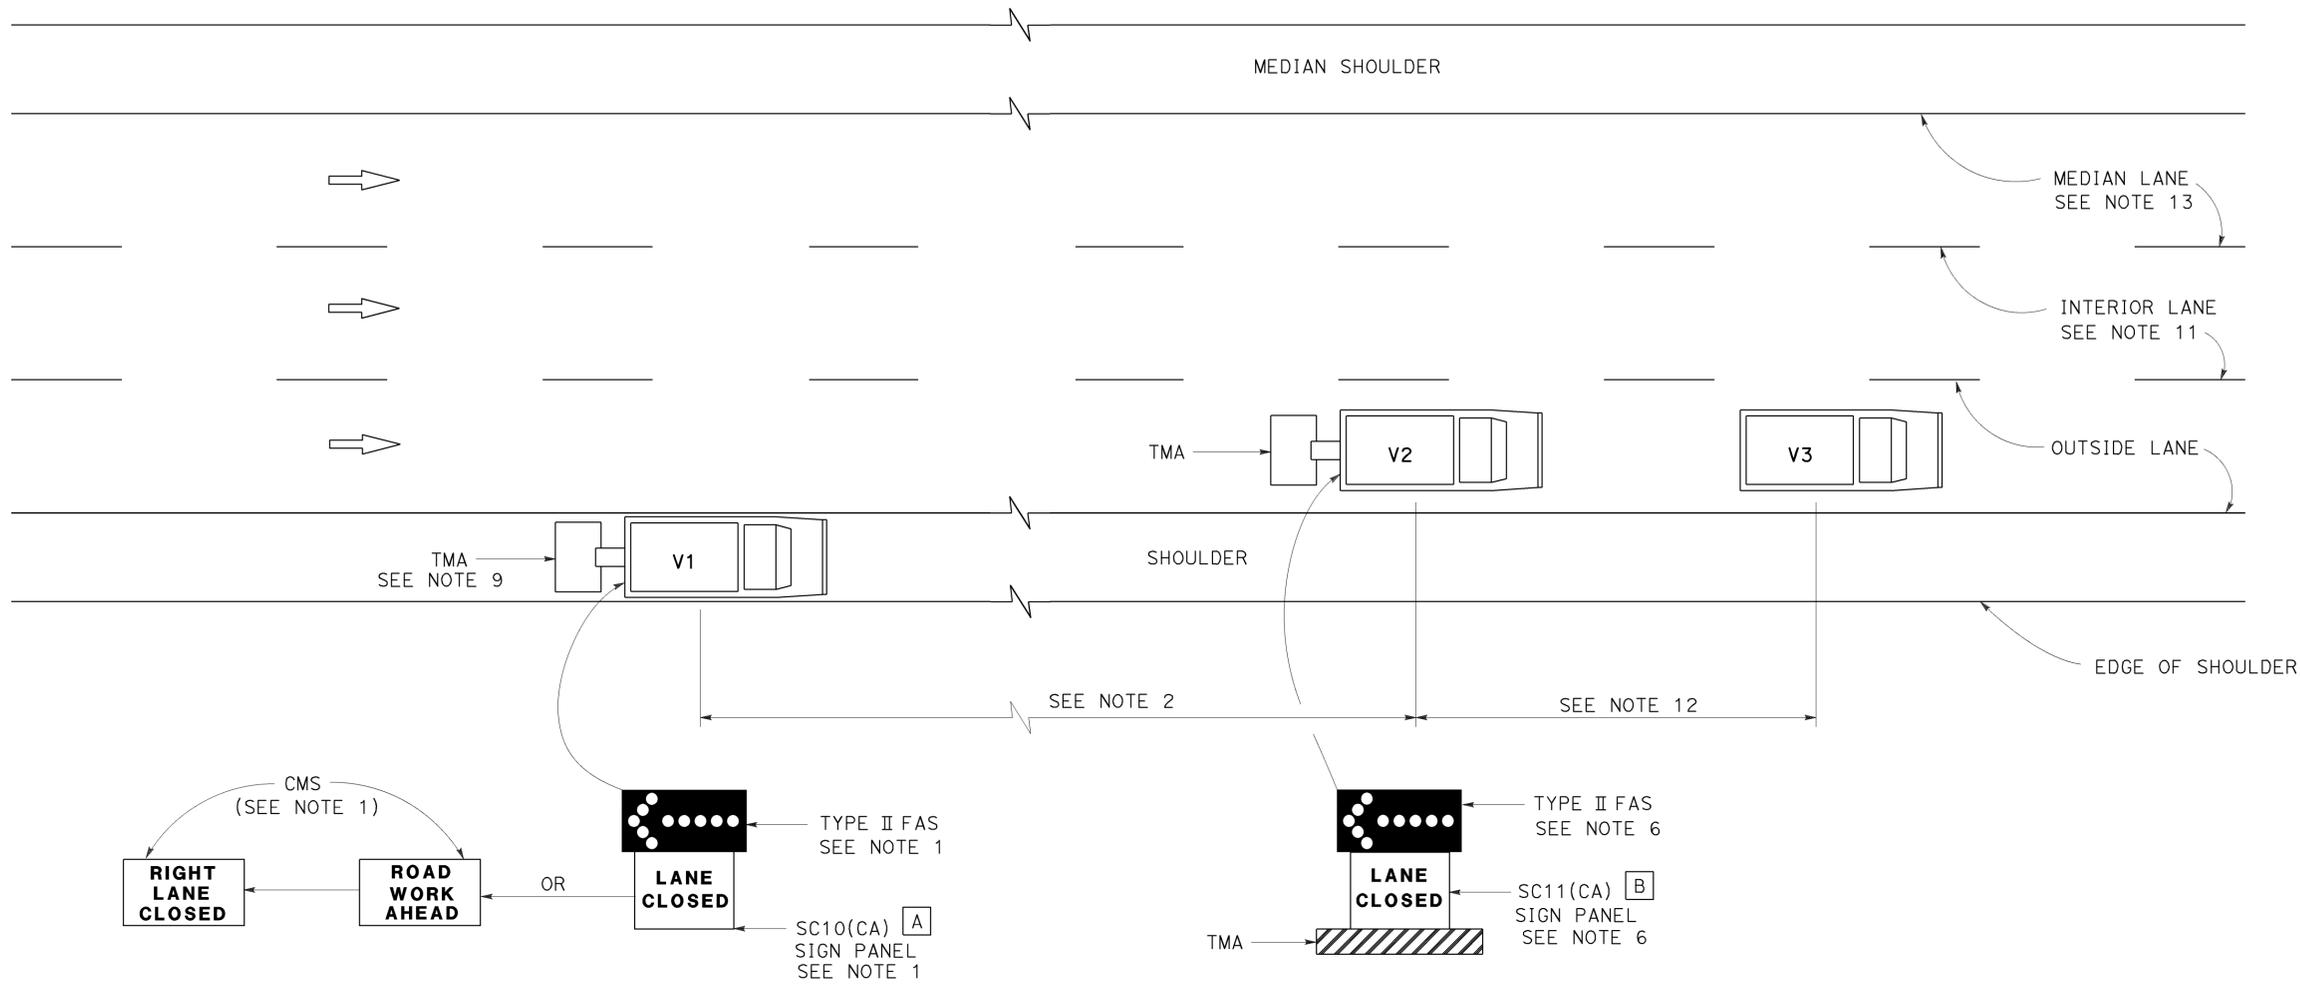

**SIGN PANEL SIZE (Min)**

- A 66" x 36"
- B 54" x 42"

**LEGEND**

- V1 SIGN VEHICLE
- V2 SHADOW VEHICLE
- V3 WORK/APPLICATION VEHICLE
-  FLASHING ARROW SIGN (FAS)
- CMS CHANGEABLE MESSAGE SIGN
- TMA TRUCK-MOUNTED ATTENUATOR

**MOVING LANE CLOSURE ON MEDIAN LANE OR OUTSIDE LANE OF MULTILANE HIGHWAYS**

**NOTES:**

1. Either a changeable message sign or a SC10(CA) sign panel and a Type II flashing arrow sign shall be mounted on the rear of sign vehicle V1. The changeable message sign shall be sequenced to show the "ROAD WORK AHEAD" message first, followed by the "RIGHT LANE CLOSED" message. For median lane closure, the flashing arrow symbol shall be reversed with the arrowhead on the right and the changeable message sign shall show "LEFT LANE CLOSED".
2. If traffic queues develop, sign vehicle V1 should be positioned upstream from the end of queue. Sign vehicle V1 shall be positioned where highly visible when shoulders are not available.
3. A minimum sight distance of 1500' should be provided in advance of sign vehicle V1.
4. Sign vehicle V1 should remain at the beginning of horizontal or vertical curves until the other vehicles (V2 and V3) are far enough beyond the curve to resume the minimum sight distance of 1500'.
5. Vehicle-mounted sign panels shall have Type III or above retroreflective sheeting, black on white, or black on fluorescent orange, with 6" minimum series D letters per Caltrans sign specifications.
6. Shadow vehicle V2 shall be equipped with a truck-mounted attenuator. The sign panel shown and a Type II flashing arrow sign shall be mounted on the rear of shadow vehicle V2. For median lane closure the flashing arrow sign symbol shall be displayed with the arrowhead on the right.
7. All vehicles used for lane closures shall be equipped with two-way radios, and the vehicle operators shall maintain communication during the work or application operation.
8. All vehicles shall be equipped with flashing or rotating amber lights.
9. If sign vehicle V1 encroaches into the traffic lane due to insufficient shoulder width, sign vehicle V1 shall be equipped with a truck-mounted attenuator. Sign vehicle V1 shall stay as close to the edge of shoulder as practicable.
10. Where workers would be on foot in the work area, a stationary type lane closure (Revised Standard Plan T10, T11, etc., as applicable) shall be used instead of this plan.
11. For moving lane closure on interior lane of multilane highways, use Revised Standard Plan T16.
12. The spacing between work vehicle(s) and the shadow vehicles, and between each shadow vehicle should be minimized to deter road users from driving in between.
13. When the work/application vehicle V3 occupies the median lane, sign vehicle V1 should drive in the median shoulder and indicate left lane closed ahead.

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**TRAFFIC CONTROL SYSTEM FOR MOVING LANE CLOSURE ON MULTILANE HIGHWAYS**

NO SCALE

RSP T15 DATED APRIL 19, 2013 SUPERSEDES STANDARD PLAN T15 DATED MAY 20, 2011 - PAGE 243 OF THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP T15**


2010 REVISED STANDARD PLAN RSP T15

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
11	SD	78	0.0/R16.5	130	144

Registered Civil Engineer  
 April 19, 2013  
 PLANS APPROVAL DATE  
 THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

REGISTERED PROFESSIONAL ENGINEER  
 Gurinderpal Bhullar  
 No. C48815  
 Exp. 9-30-14  
 CIVIL  
 STATE OF CALIFORNIA

TO ACCOMPANY PLANS DATED 08-01-16

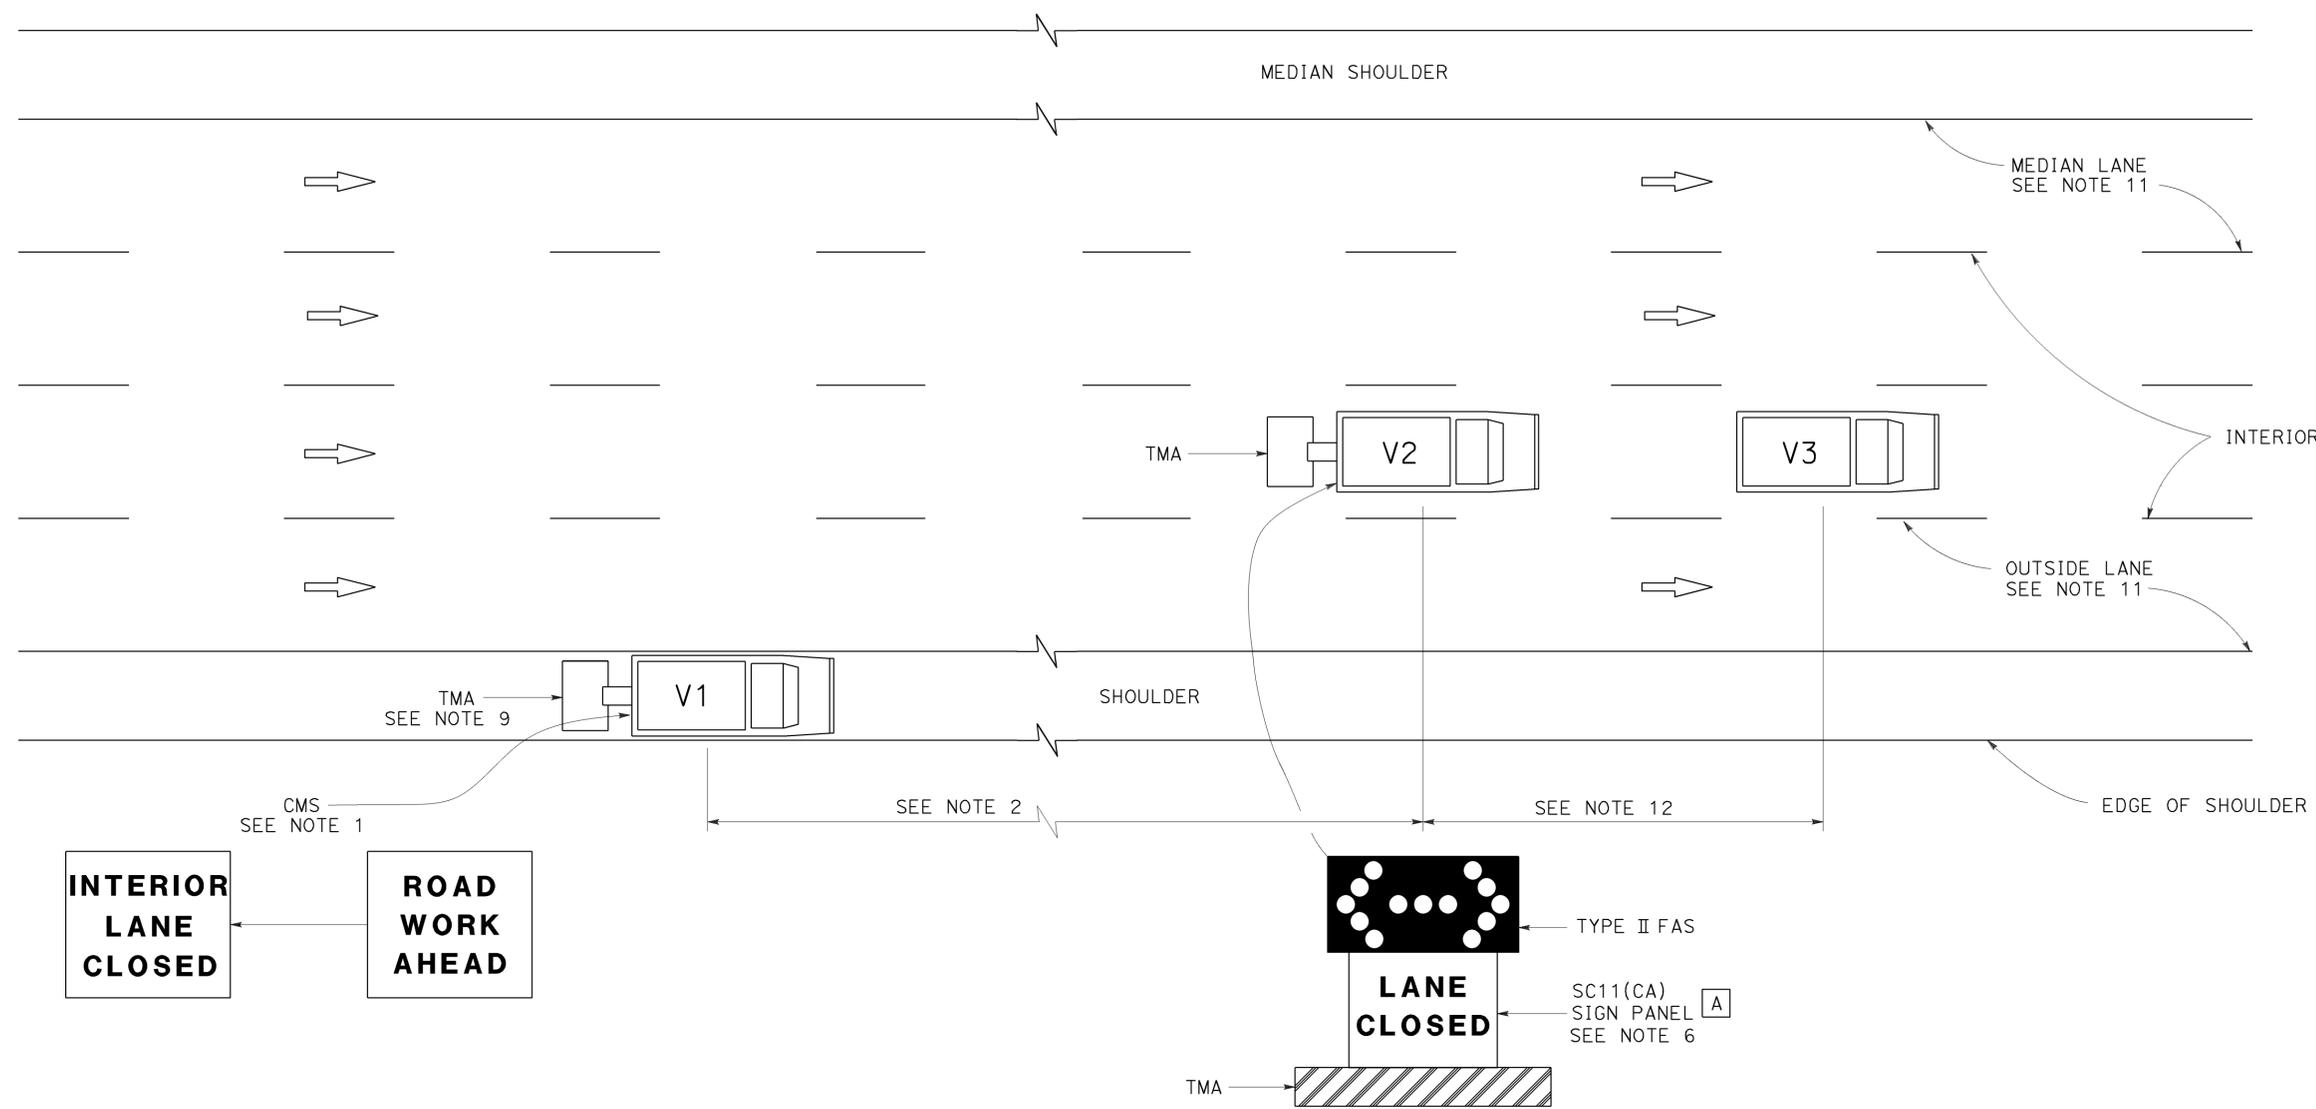

SIGN PANEL SIZE (Min)

A 54" x 42"

LEGEND

- V1 SIGN VEHICLE
- V2 SHADOW VEHICLE
- V3 WORK/APPLICATION VEHICLE
- FLASHING ARROW SIGN (FAS) IN FLASHING DOUBLE ARROW MODE
- CMS CHANGEABLE MESSAGE SIGN
- TMA TRUCK-MOUNTED ATTENUATOR

MOVING LANE CLOSURE ON INTERIOR LANE OF MULTILANE HIGHWAYS

NOTES:

1. A changeable message sign shall be mounted on the rear of sign vehicle V1. The changeable message sign shall be sequenced to show the "ROAD WORK AHEAD" message first, followed by the "INTERIOR LANE CLOSED" message. The message "CENTER LANE CLOSED" may be used in place of the "INTERIOR LANE CLOSED" message.
2. If traffic queues develop, sign vehicle V1 should be positioned upstream from the end of queue. Sign vehicle V1 shall be positioned where highly visible when shoulders are not available.
3. A minimum sight distance of 1500' should be provided in advance of sign vehicle V1.
4. Sign vehicle V1 should remain at the beginning of horizontal or vertical curves until the other vehicles (V2 and V3) are far enough beyond the curve to resume the minimum sight distance of 1500'.
5. Vehicle-mounted sign panels shall have Type III or above retroreflective sheeting, black on white, or black on fluorescent orange, with 6" minimum series D letters per Caltrans sign specifications.
6. Shadow vehicle V2 shall be equipped with a truck-mounted attenuator. The sign panel shown and a Type II flashing arrow sign shall be mounted on the rear of shadow vehicle V2.
7. All vehicles used for lane closures shall be equipped with two-way radios, and the vehicle operators shall maintain communication during the work or application operation.
8. All vehicles shall be equipped with flashing or rotating amber lights.
9. If sign vehicle V1 encroaches into the traffic lane due to insufficient shoulder width, sign vehicle V1 shall be equipped with a truck-mounted attenuator. Sign vehicle V1 shall stay as close to the edge of shoulder as practicable.
10. Where workers would be on foot in the work area, a stationary type lane closure (Revised Standard Plan T10, T11 etc., as applicable) shall be used instead of this plan.
11. For moving lane closure on median lane or outside lane of multilane highways, use Revised Standard Plan T15.
12. The spacing between work vehicle(s) and the shadow vehicles, and between each shadow vehicle should be minimized to deter road users from driving in between.

STATE OF CALIFORNIA  
 DEPARTMENT OF TRANSPORTATION  
**TRAFFIC CONTROL SYSTEM  
 FOR MOVING LANE CLOSURE  
 ON MULTILANE HIGHWAYS**  
 NO SCALE

RSP T16 DATED APRIL 19, 2013 SUPERSEDES STANDARD PLAN T16 DATED MAY 20, 2011 - PAGE 244 OF THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP T16**

2010 REVISED STANDARD PLAN RSP T16

**LEGEND:**

<b>AB</b>	ABANDON. IF APPLIED TO CONDUIT, REMOVE CONDUCTORS
<b>BC</b>	INSTALL PULL BOX IN EXISTING CONDUIT RUN
<b>BP</b>	PEDESTRIAN BARRICADE, TYPE AS INDICATED ON PLAN
<b>CB</b>	INSTALL CONDUIT INTO EXISTING PULL BOX
<b>CC</b>	CONNECT NEW AND EXISTING CONDUIT. REMOVE EXISTING CONDUCTORS AND INSTALL CONDUCTORS AS INDICATED
<b>CF</b>	CONDUIT TO REMAIN FOR FUTURE USE. REMOVE CONDUCTORS. INSTALL PULL TAPE
<b>DH</b>	DETECTOR HANDHOLE
<b>FA</b>	FOUNDATION TO BE ABANDONED
<b>IS</b>	INSTALL SIGN ON SIGNAL MAST ARM
<b>NS</b>	NO SLIP BASE ON STANDARD
<b>PEC</b>	PHOTOELECTRIC CONTROL
<b>PEU</b>	PHOTOELECTRIC UNIT
<b>RC</b>	EQUIPMENT OR MATERIAL TO BE REMOVED AND BECOME THE PROPERTY OF THE CONTRACTOR
<b>RE</b>	REMOVE ELECTROLIER, FUSES AND BALLAST. TAPE ENDS OF CONDUCTORS
<b>RL</b>	RELOCATE EQUIPMENT
<b>RR</b>	REMOVE AND REUSE EQUIPMENT
<b>RS</b>	REMOVE AND SALVAGE EQUIPMENT
<b>SC</b>	SPLICE NEW TO EXISTING CONDUCTORS
<b>SD</b>	SERVICE DISCONNECT
<b>TSP</b>	TELEPHONE SERVICE POINT

**ABBREVIATIONS**

AC+	UNDERGROUNDED CONDUCTOR	MAT	MAST ARM MOUNTING TOP ATTACHMENT
APS	ACCESSIBLE PEDESTRIAN SIGNAL	MAS	MAST ARM MOUNTING SIDE ATTACHMENT
Batt+	BATTERY	MBPS	MANUAL BYPASS SWITCH
BBS	BATTERY BACKUP SYSTEM	M/M	MULTIPLE TO MULTIPLE TRANSFORMER
BC	BOLT CIRCLE	Mtg	MOUNTING
BIK	BLACK	MV	MERCURY VAPOR LIGHTING FIXTURE
BP	BYPASS	MVDS	MICROWAVE VEHICLE DETECTION SYSTEM
BPB	BICYCLE PUSH BUTTON	N	NEUTRAL (GROUNDED CONDUCTOR)
C	CONDUIT	NB	NEUTRAL BUS
CB	CIRCUIT BREAKER	NC	NORMALLY CLOSE
CCTV	CLOSED CIRCUIT TELEVISION	NO	NORMALLY OPEN
Ckt	CIRCUIT	P	CIRCUIT BREAKER'S POLE
CMS	CHANGEABLE MESSAGE SIGN	PB	PULL BOX
Ctid	CALTRANS IDENTIFICATION	PBA	PUSH BUTTON ASSEMBLY
Comm	COMMUNICATION	PEC	PHOTOELECTRIC CONTROL
CntI	CONTROL	Ped	PEDESTRIAN
DF	DEPARTMENT-FURNISHED	PEU	PHOTOELECTRIC UNIT
DLC	LOOP DETECTOR LEAD-IN CABLE	PT	CONDUIT WITH PULL TAPE
EMS	EXTINGUISHABLE MESSAGE SIGN	PTR	POWER TRANSFER RELAY
EVUC	EMERGENCY VEHICLE UNIT CABLE	RE	RELOCATED EQUIPMENT
EVUD	EMERGENCY VEHICLE UNIT DETECTOR	RM	RAMP METERING
FB	FLASHING BEACON	RWIS	ROADSIDE WEATHER INFORMATION SYSTEM
FBCA	FLASHING BEACON CONTROL ASSEMBLY	SB	SLIP BASE
FBS	FLASHING BEACON WITH SLIP BASE	SIC	SIGNAL INTERCONNECT CABLE
FO	FIBER OPTIC	Sig	SIGNAL
G	EQUIPMENT GROUNDING CONDUCTOR	SMA	SIGNAL MAST ARM
GB	GROUND BUS	SNS	STREET NAME SIGN
GFCI	GROUND FAULT CIRCUIT INTERRUPTER	SP	SERVICE POINT
Grn	GREEN	TB	TERMINAL BOARD
HAR	HIGHWAY ADVISORY RADIO	TDC	TELEPHONE DEMARCATION CABINET
Hex	HEXAGONAL	Temp	TEMPERATURE
HPS	HIGH PRESSURE SODIUM	TMS	TRAFFIC MONITORING STATION
IISNS	INTERNALLY ILLUMINATED STREET NAME SIGN	TOS	TRAFFIC OPERATIONS SYSTEM
ISL	INDUCTION SIGN LIGHTING	UPS	UNINTERRUPTABLE POWER SUPPLY
LED	LIGHT EMITTING DIODE	UPSC	UNINTERRUPTABLE POWER SUPPLY CONTROLLER
LMA	LUMINAIRE MAST ARM	Veh	VEHICLE
LPS	LOW PRESSURE SODIUM	VIVDS	VIDEO IMAGE VEHICLE DETECTION SYSTEM
Ltg	LIGHTING	Wht	WHITE
Lum	LUMINAIRE	WIM	WEIGH-IN-MOTION
M	METERED	Xfmr	TRANSFORMER

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
11	SD	78	0.0/R16.5	131	144

*Theresa Gabriel*  
REGISTERED ELECTRICAL ENGINEER

October 30, 2015  
PLANS APPROVAL DATE

Theresa  
Aziz Gabriel  
No. E15129  
Exp. 6-30-16  
ELECTRICAL

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

TO ACCOMPANY PLANS DATED 08-01-16

**SOFFIT AND WALL-MOUNTED LUMINAIRES**

- PENDANT SOFFIT LUMINAIRE, 70 W HPS UNLESS OTHERWISE SPECIFIED
- FLUSH-MOUNTED SOFFIT LUMINAIRE, 70 W HPS UNLESS OTHERWISE SPECIFIED
- WALL-MOUNTED LUMINAIRE, 70 W HPS UNLESS OTHERWISE SPECIFIED
- EXISTING SOFFIT OR WALL-MOUNTED LUMINAIRE TO REMAIN UNMODIFIED
- EXISTING SOFFIT OR WALL-MOUNTED LUMINAIRE TO BE MODIFIED AS SPECIFIED

**NOTE:**  
Arrow indicates "street side" of luminaire.

COMMONLY USED SYMBOLS FOR UNITED STATES CUSTOMARY UNITS OF MEASUREMENT:

SYMBOL	DEFINITIONS
Ω	OHMS
min	MINUTE
s	SECOND
bps	BITS PER SECOND
Bps	BYTES PER SECOND
A	AMPERE
V	VOLT
V(dc)	VOLT (DIRECT CURRENT)
V(ac)	VOLT (ALTERNATING CURRENT)
FC	FOOT - CANDLE
W	WATTS
VA	VOLT-AMPERE
M	MEGA
k	KILO
m	MILLI
μ	MICRO
P	PICO
Hz	HERTZ

**MISCELLANEOUS ELECTROLIERS**

NEW	EXISTING	
		LUMINAIRE ON WOOD POLE
		NON-STANDARD ELECTROLIER (SEE PROJECT LEGEND)
		CITY ELECTROLIER
		ELECTROLIER FOUNDATION (FUTURE INSTALLATION)

- NOTES:**
- LED luminaires shall be 235 W when installed on Type 21, 21D, 30, 31 and 32 Standards, unless otherwise specified. LED luminaires shall be 165 W when installed on other type standards or poles, unless otherwise specified.
  - Luminaires shall be the cutoff type, ANSI Type III medium cutoff lighting distribution, unless otherwise specified.

**STANDARD ELECTROLIER**

NEW	EXISTING	STANDARD TYPE
		15
		15D
		15 STRUCTURE
		15D STRUCTURE
		21
		21D
		21 STRUCTURE
		21D STRUCTURE
		30
		31
		32

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**ELECTRICAL SYSTEMS (LEGEND AND ABBREVIATIONS)**

NO SCALE

RSP ES-1A DATED OCTOBER 30, 2015 SUPERSEDES RSP ES-1A DATED JULY 19, 2013 AND STANDARD PLAN ES-1A DATED MAY 20, 2011 - PAGE 425 OF THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP ES-1A**

2010 REVISED STANDARD PLAN RSP ES-1A

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
11	SD	78	0.0/R16.5	132	144

*Theresa Gabriel*  
 REGISTERED ELECTRICAL ENGINEER  
 October 30, 2015  
 PLANS APPROVAL DATE

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

TO ACCOMPANY PLANS DATED 08-01-16

**CONDUIT**

**SIGNAL EQUIPMENT**

NEW	EXISTING	
---	---	LIGHTING CONDUIT, UNLESS OTHERWISE INDICATED OR NOTED
---	---	TRAFFIC SIGNAL CONDUIT
---C---	---c---	COMMUNICATION CONDUIT
---T---	---t---	TELEPHONE CONDUIT
---F---	---f---	FIRE ALARM CONDUIT
---FO---	---fo---	FIBER OPTIC CONDUIT
---	---	CONDUIT TERMINATION
		CONDUIT RISER ATTACHED TO THE STRUCTURE OR SERVICE POLE

NEW	EXISTING	
		PEDESTRIAN SIGNAL HEAD
		PUSH BUTTON ASSEMBLY POST
		PEDESTRIAN BARRICADE
		VEHICLE SIGNAL HEAD (WITH BACKPLATE AND 3-SECTIONS: RED, YELLOW AND GREEN)
		VEHICLE SIGNAL HEAD WITH ANGLE VISOR
		MODIFICATIONS OF BASIC SYMBOL: "L" INDICATES ALL NON-ARROW SECTIONS LOUVERED "LG" INDICATES LOUVERED GREEN SECTION ONLY "PV" INDICATES ALL 12" SECTIONS PROGRAMMED VISIBILITY "8" INDICATES ALL 8" SECTIONS (ONLY WHEN SPECIFIED)

**SIGNAL EQUIPMENT Cont**

NEW	EXISTING	
		GUARD POST
		TYPE 1 STANDARD WITH RAMP METERING SIGN
		OPTICAL DETECTOR FOR THE EMERGENCY VEHICLE DETECTION

**SERVICE EQUIPMENT**

NEW	EXISTING	
---OH---	---oh---	OVERHEAD LINES
		WOOD POLE, "U" INDICATES UTILITY OWNED
		POLE GUY WITH ANCHOR
		UTILITY TRANSFORMER - GROUND MOUNTED
		SERVICE EQUIPMENT ENCLOSURE TYPE. DOOR INDICATES FRONT OF ENCLOSURE
		TELEPHONE DEMARCATION CABINET

**POLE-MOUNTED SERVICE DESIGNATION**

	TYPE H SERVICE, 28'-10"	TYPE OF INSTALLATION AND POLE HEIGHT ABOVE GRADE
--	-------------------------	--

**FLASHING BEACON**

NEW	EXISTING	
		FLASHING BEACON (ONE VEHICLE SIGNAL HEAD WITH BACKPLATE AND VISOR) "R" INDICATES RED INDICATION, "Y" INDICATES YELLOW INDICATION
		FLASHING BEACON WITH TYPE 15-FBS STANDARD AND A SIGN.
		FLASHING BEACON WITH TYPES 9, 9A OR 9B SIGN UNLESS OTHERWISE SPECIFIED OR INDICATED

		VEHICLE SIGNAL HEAD CONSISTING OF RED, YELLOW AND GREEN LEFT ARROW SECTIONS
		VEHICLE SIGNAL HEAD CONSISTING OF RED AND YELLOW SECTIONS WITH AN UP GREEN ARROW SECTION
		VEHICLE SIGNAL HEAD (5 SECTION) CONSISTING OF RED, YELLOW AND GREEN SECTIONS WITH YELLOW AND GREEN RIGHT ARROW SECTIONS
		TYPE 15TS STANDARD WITH VEHICLE SIGNAL HEAD AND LUMINAIRE
		TYPE 21TS STANDARD WITH VEHICLE SIGNAL HEAD AND LUMINAIRE
		STANDARD WITH LUMINAIRE AND SIGNAL MAST ARMS AND ATTACHED VEHICLE SIGNAL HEADS
		TYPE 1 STANDARD WITH ATTACHED VEHICLE SIGNAL HEADS
		STANDARD WITH A SIGNAL MAST ARM, ATTACHED VEHICLE SIGNAL HEADS AND INTERNALLY ILLUMINATED STREET NAME SIGN
		CONTROLLER ASSEMBLY. DOOR INDICATES FRONT OF CABINET

**NOTES:**

- All signal sections shall be 12" unless shown otherwise.
- Signal heads shall be provided with backplates unless shown otherwise.

**ILLUMINATED OVERHEAD SIGN**

NEW	EXISTING	
		SINGLE POST, SINGLE ILLUMINATED SIGN, BALANCED BUTTERFLY
		SINGLE POST, DOUBLE ILLUMINATED SIGN, BALANCED BUTTERFLY
		SINGLE POST, SINGLE ILLUMINATED SIGN, FULL CANTILEVER
		DOUBLE POST, SINGLE ILLUMINATED SIGN
		SINGLE ILLUMINATED SIGN MOUNTED ON STRUCTURE
		DOUBLE POST, SINGLE ILLUMINATED SIGN WITH ELECTROLIER

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**ELECTRICAL SYSTEMS  
(LEGEND AND ABBREVIATIONS)**

NO SCALE


RSP ES-1B DATED OCTOBER 30, 2015 SUPERSEDES RSP ES-1B DATED JULY 19, 2013 AND STANDARD PLAN ES-1B DATED MAY 20, 2011 - PAGE 426 OF THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP ES-1B**


2010 REVISED STANDARD PLAN RSP ES-1B

### EQUIPMENT IDENTIFICATION


#### ILLUMINATED SIGN IDENTIFICATION:

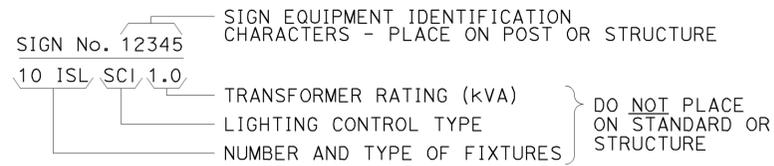


#### ELECTROLIER OR EQUIPMENT IDENTIFICATION:

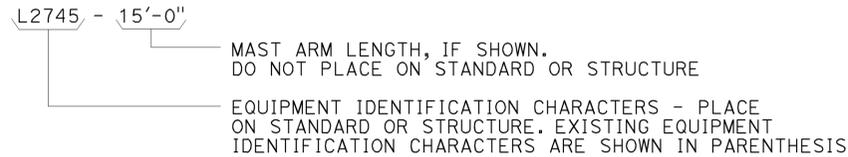


#### CONDUIT AND CONDUCTOR IDENTIFICATION:

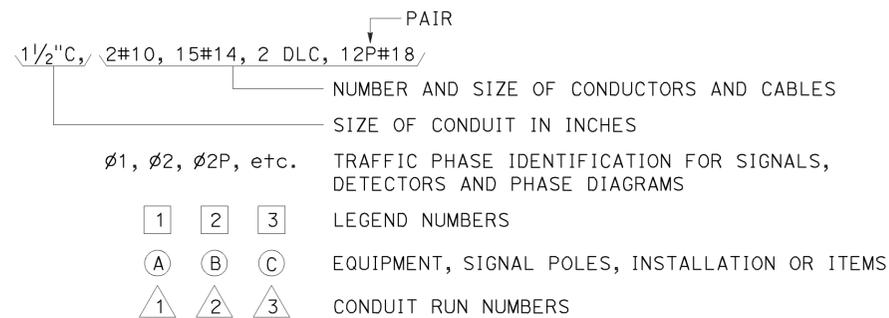


#### SIGNAL AND LIGHTING STANDARD (TYPICAL DESIGNATION):

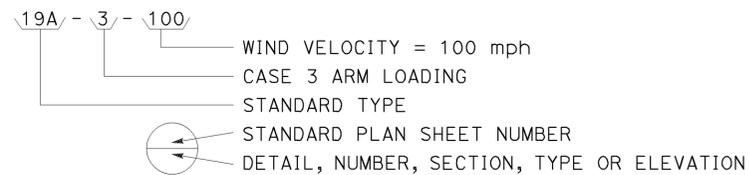


### MISCELLANEOUS EQUIPMENT

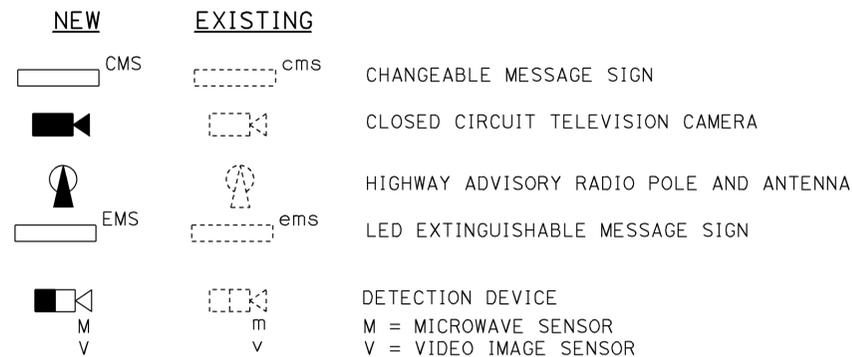



### WIRING DIAGRAM LEGEND

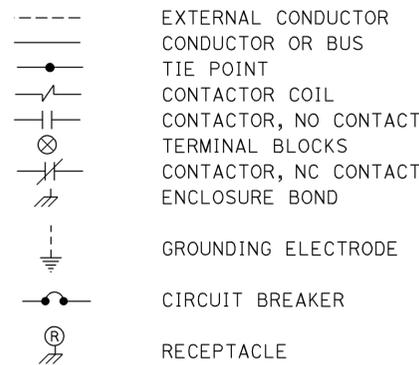

### PULL BOXES

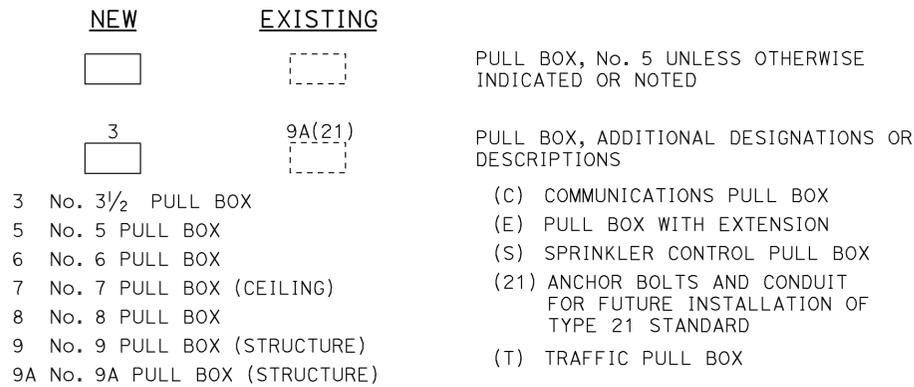

### VEHICLE DETECTORS

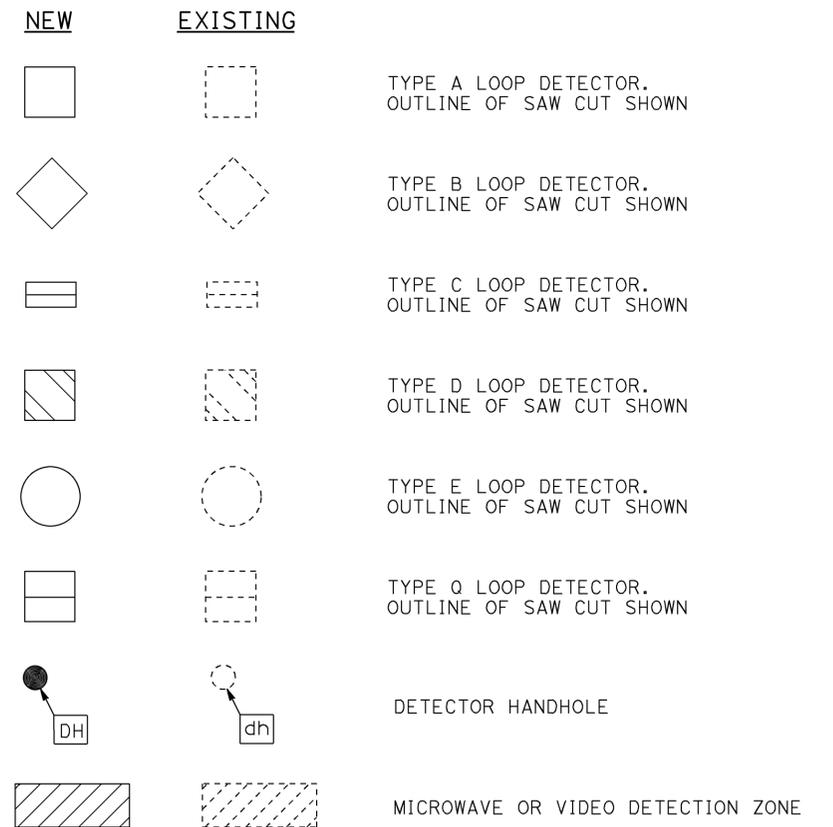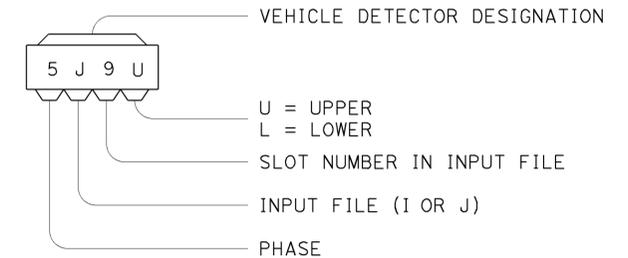

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

## ELECTRICAL SYSTEMS (LEGEND AND ABBREVIATIONS)

NO SCALE

RSP ES-1C DATED APRIL 15, 2016 SUPERSEDES RSP ES-1C DATED OCTOBER 30, 2015 AND RSP ES-1C DATED JULY 19, 2013 AND STANDARD PLAN ES-1C DATED MAY 20, 2011 - PAGE 427 OF THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP ES-1C**


2010 REVISED STANDARD PLAN RSP ES-1C

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
11	SD	78	0.0/R16.5	134	144


Stanley P. Johnson  
 REGISTERED CIVIL ENGINEER  
 July 15, 2016  
 PLANS APPROVAL DATE  
 THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

REGISTERED PROFESSIONAL ENGINEER  
 Stanley P. Johnson  
 No. C57793  
 Exp. 3-31-18  
 CIVIL  
 STATE OF CALIFORNIA


TO ACCOMPANY PLANS DATED 08-01-16

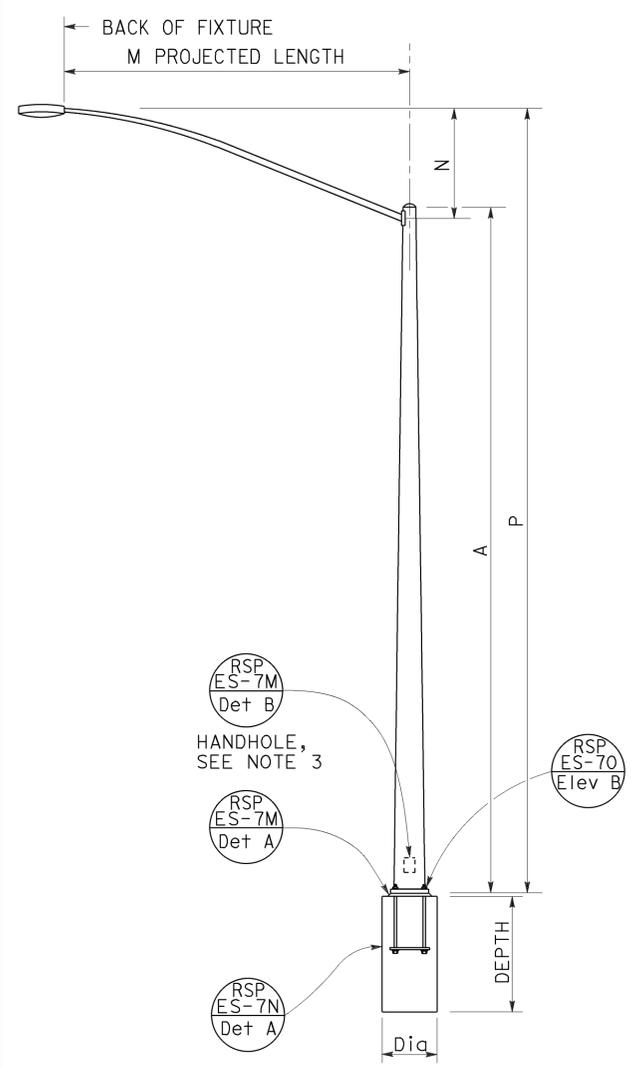


**TYPE 15 AND TYPE 21  
ELEVATION A**

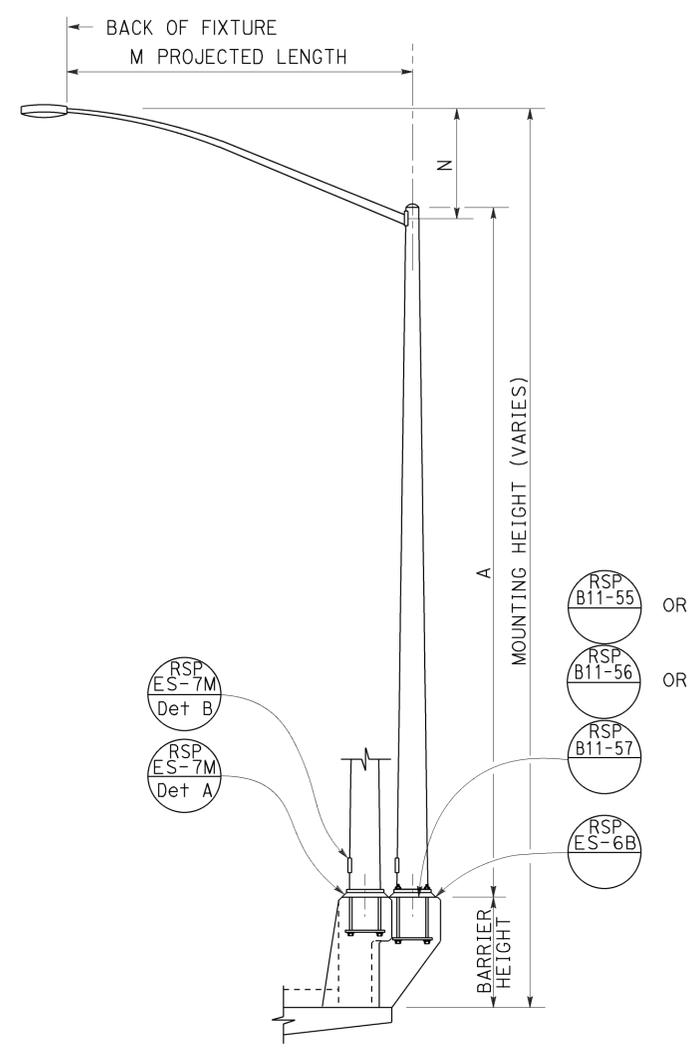

**TYPE 15 AND TYPE 21 BARRIER RAIL MOUNTED  
ELEVATION B**

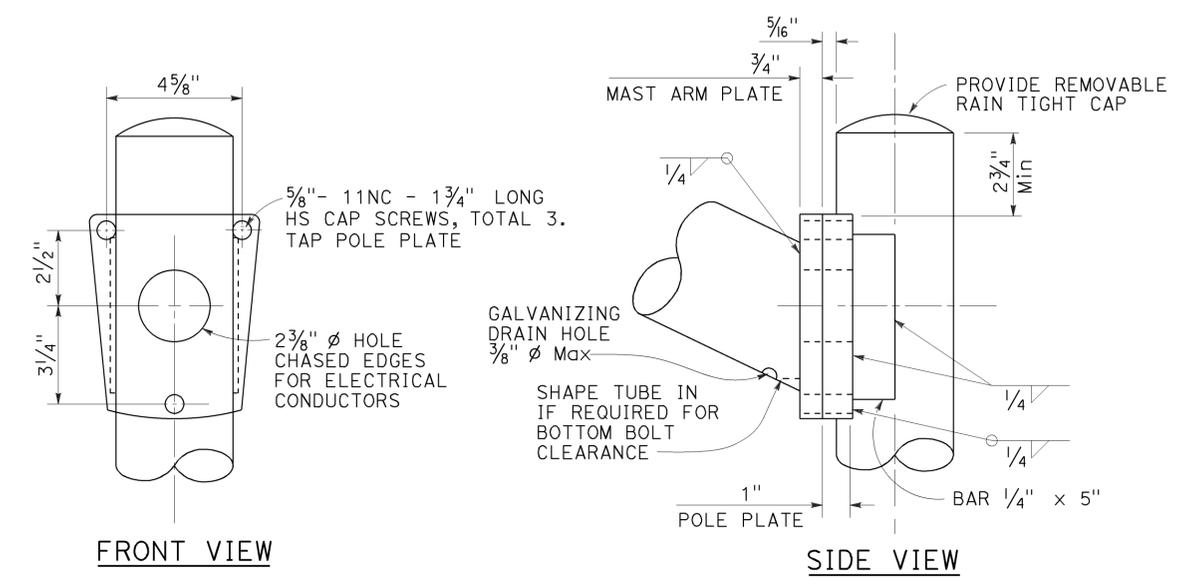

**LUMINAIRE MAST ARM CONNECTION  
DETAIL R**

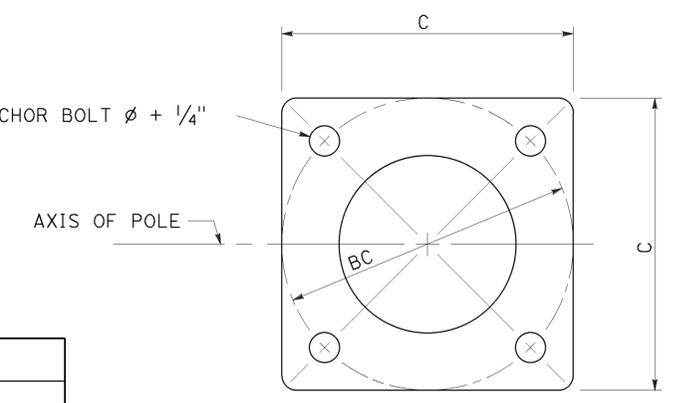

**BASE PLATE  
DETAIL A**

POLE TYPE	POLE DATA			BASE PLATE DATA			CIDH PILE FOUNDATION		
	A HEIGHT	Min OD BASE	WALL THICKNESS TOP	C	BC = BOLT CIRCLE	THICKNESS	ANCHOR BOLT SIZE	Diq	DEPTH
15	30'-0"	8"	0.1196"	1'-0"	1'-0"	1 1/2"	1" $\phi$ x 36" *	2'-6"	6'-0"
21	35'-0"	8 5/8"	0.1793"	1'-0"	1'-0"	2"	1 1/4" $\phi$ x 36" *	2'-6"	7'-0"

\* FOR BARRIER RAIL BOLTS, SEE REVISED STANDARD PLAN RSP ES-6B.

M PROJECTED LENGTH	N RISE	Min OD AT POLE	NOMINAL THICKNESS	P	
				TYPE 15	TYPE 21
6'-0"	2'-0" $\pm$	3 1/4"	0.1196"	31'-6" $\pm$	36'-6" $\pm$
8'-0"	2'-6" $\pm$	3 1/2"		32'-0" $\pm$	37'-0" $\pm$
10'-0"	3'-3" $\pm$	3 3/8"		32'-9" $\pm$	37'-9" $\pm$
12'-0"	4'-3" $\pm$	3 7/8"		33'-9" $\pm$	38'-9" $\pm$
15'-0"	4'-9" $\pm$	4 1/4"		34'-3" $\pm$	39'-3" $\pm$


**NOTES:**

- Indicates mast arm length to be used unless otherwise noted on the plans.
- For Type 15-SB, use Type 15 standard with Type 30 slip base plate details, see Revised Standard Plan RSP ES-6F.
- Handhole shall be located on the downstream side of traffic.
- For additional notes and details, see Revised Standard Plans RSP ES-7M and RSP ES-7N.


STATE OF CALIFORNIA  
 DEPARTMENT OF TRANSPORTATION  
**ELECTRICAL SYSTEMS  
 (LIGHTING STANDARD,  
 TYPES 15 AND 21)**  
 NO SCALE

RSP ES-6A DATED JULY 15, 2016 SUPERSEDES RSP ES-6A  
 DATED OCTOBER 30, 2015 AND STANDARD PLAN ES-6A DATED MAY 20, 2011 -  
 PAGE 452 OF THE STANDARD PLANS BOOK DATED 2010.

2010 REVISED STANDARD PLAN RSP ES-6A



TO ACCOMPANY PLANS DATED 08-01-16

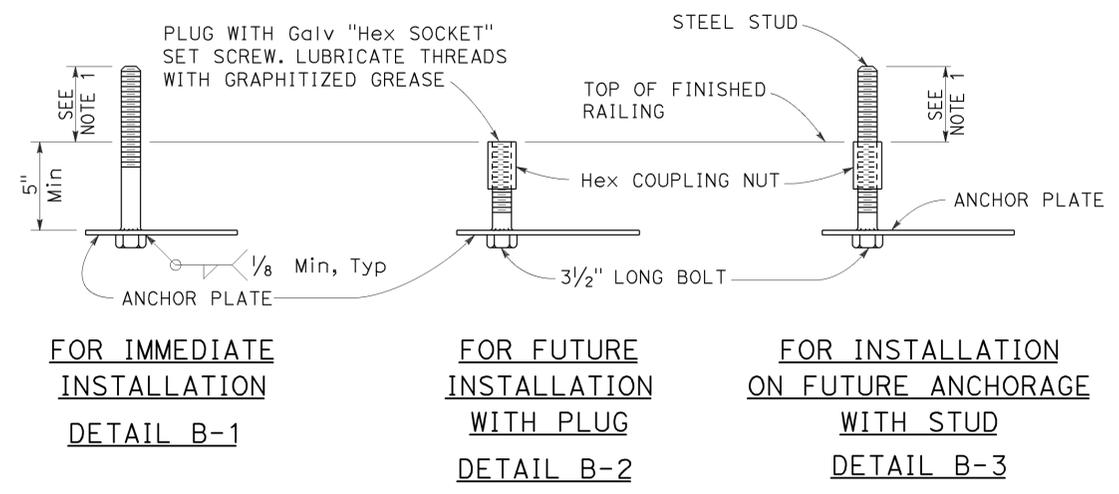

**ELECTROLIER ANCHORAGES**  
**DETAIL B**

**NOTES:**

1. Anchor bolt or stud length shall be such that thread extends 1/2" maximum above nut on level base plate after grouting. See Detail N.
2. Electrolier anchor bolts shall be held in position for pouring by means of anchor plates and suitable templates. Deviation from the true position, vertical and height shall not exceed 1/16".
3. See railing sheets for reinforcement and structural details at electroliers and pull boxes.


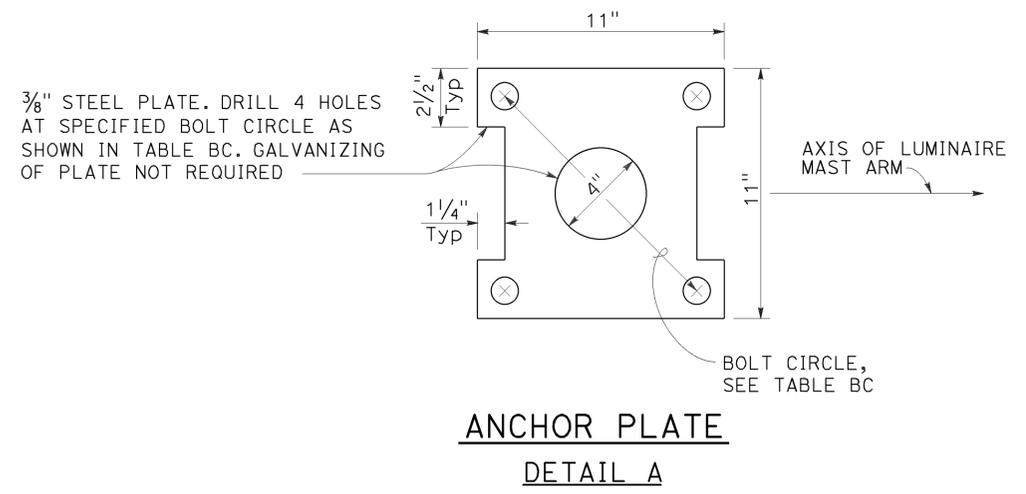


TABLE BC				
TYPE	BC = BOLT CIRCLE	ANCHOR BOLT DIAMETER	COUPLING NUT BASIC LENGTH	SET SCREW LENGTH DETAIL B-2
15	1'-0"	1"	3"	1 1/2"
21		1 1/4"	3 3/4"	1 7/8"

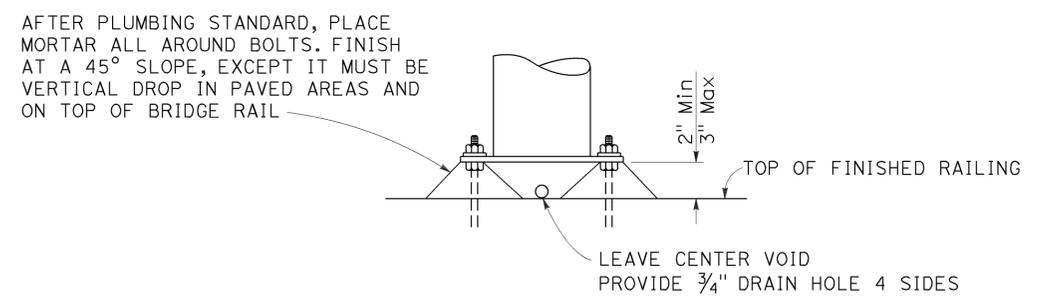

STATE OF CALIFORNIA  
 DEPARTMENT OF TRANSPORTATION  
**ELECTRICAL SYSTEMS**  
**(ELECTROLIER ANCHORAGE AND**  
**GROUTING FOR**  
**TYPE 15 AND TYPE 21**  
**BARRIER RAIL MOUNTED)**

NO SCALE

RSP ES-6B DATED JULY 15, 2016 SUPERSEDES STANDARD PLAN ES-6B DATED MAY 20, 2011 - PAGE 453 OF THE STANDARD PLANS BOOK DATED 2010.


2010 REVISED STANDARD PLAN RSP ES-6B

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
11	SD	78	0.0/R16.5	136	144


Stanley P. Johnson  
 REGISTERED CIVIL ENGINEER  
 July 15, 2016  
 PLANS APPROVAL DATE  
 THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

LUMINAIRE MAST ARM DATA			
PROJECTED LENGTH	THICKNESS	MINIMUM OD AT POLE	MOUNTING HEIGHT
* 6'-0"	0.1196"	3 1/4"	36'-9"±
* 8'-0"		3 1/2"	37'-3"±
* 10'-0"		3 7/8"	38'-0"±
* 12'-0"		4 1/4"	39'-0"±
** 20'-0"	0.1793"	5"	37'-0"±

\* TYPE 30  
 \*\* TYPE 31

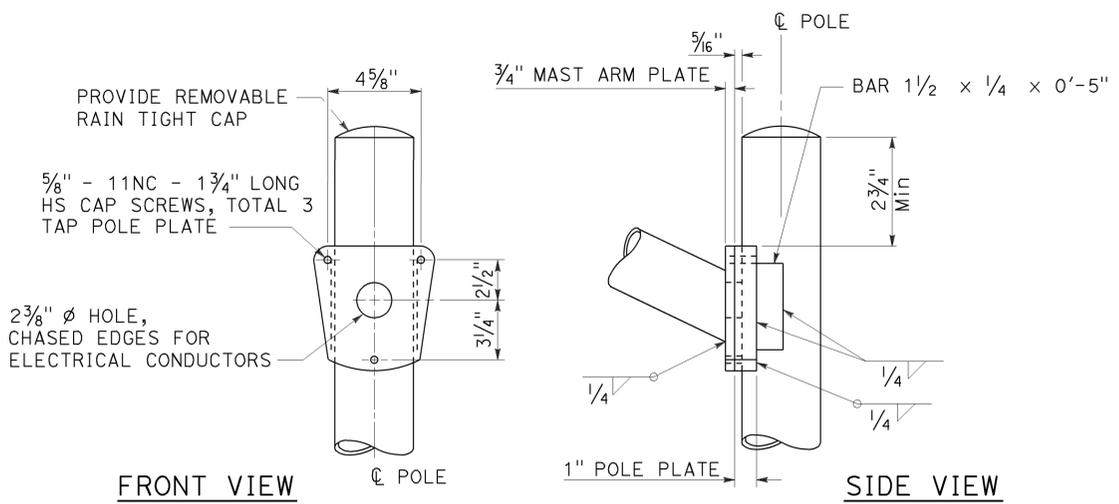


**TYPE 30  
DETAIL A**

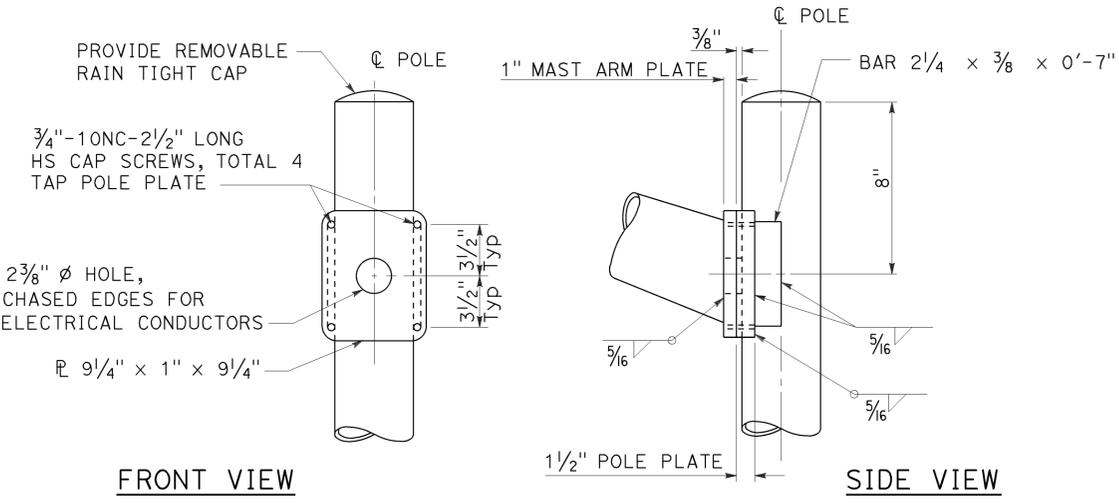


**TYPE 31  
DETAIL B**

**NOTES:**


1. For slip base plate details, see Revised Standard Plan RSP ES-6F.
2. For Type 30 fixed base use Type 15 base plate and foundation shown on Revised Standard Plan RSP ES-6A. Use 1/4" Dia x 3'-6" anchor bolts.
3. For Type 31 fixed base use Type 32 base plate, anchor bolts and foundation on Revised Standard Plan RSP ES-6G.
4. Handhole shall be located on the downstream side of traffic.
5. For additional notes and details, see Revised Standard Plans RSP ES-7M and RSP ES-7N.

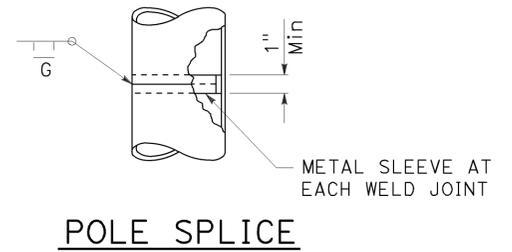

**POLE SPLICE**

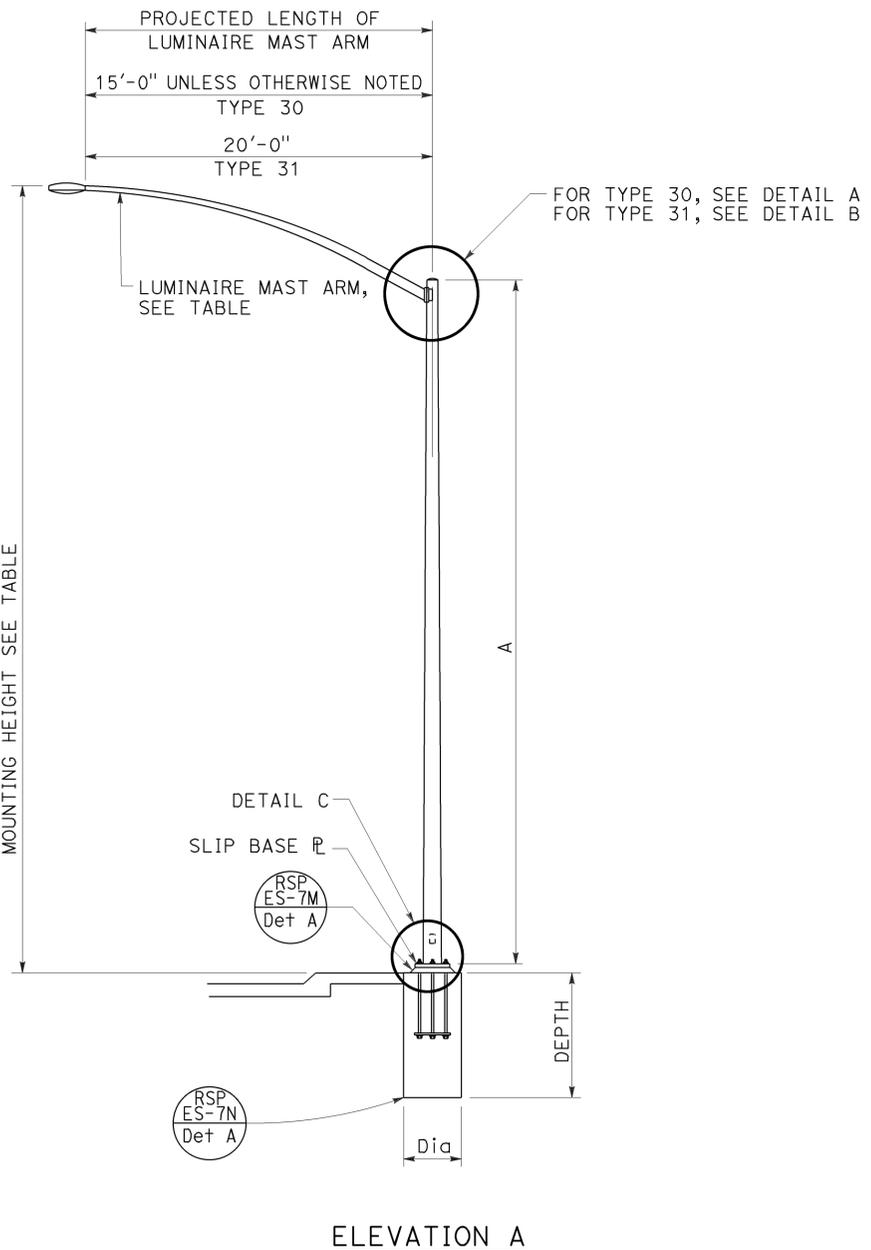

**ELEVATION A**

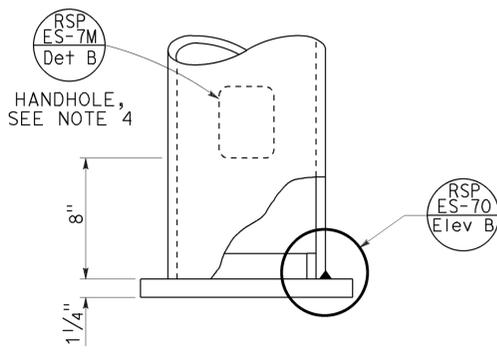

**DETAIL C**

POLE TYPE	POLE DATA			CIDH PILE FOUNDATION	
	A HEIGHT	Min OD BASE	Min OD TOP	Min THICKNESS	Di a DEPTH
30	35'-0"	8 3/4"	3 1/16"	0.1196"	2'-6" 7'-0"
31		10 3/4"	5 1/16"	0.1793"	3'-0" 8'-0"

STATE OF CALIFORNIA  
 DEPARTMENT OF TRANSPORTATION  
**ELECTRICAL SYSTEMS  
 (LIGHTING STANDARD,  
 TYPES 30 AND 31)**  
 NO SCALE

RSP ES-6E DATED JULY 15, 2016 SUPERSEDES RSP ES-6E DATED OCTOBER 30, 2015 AND STANDARD PLAN ES-6E DATED MAY 20, 2011 - PAGE 456 OF THE STANDARD PLANS BOOK DATED 2010.

2010 REVISED STANDARD PLAN RSP ES-6E



Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
11	SD	78	0.0/R16.5	137	144

Stanley P. Johnson  
 REGISTERED CIVIL ENGINEER  
 July 15, 2016  
 PLANS APPROVAL DATE  
THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.


REGISTERED PROFESSIONAL ENGINEER  
 Stanley P. Johnson  
 No. C57793  
 Exp. 3-31-18  
 CIVIL  
 STATE OF CALIFORNIA

TO ACCOMPANY PLANS DATED 08-01-16


- NOTES:**
- Handhole shall be located on the downstream side of traffic.
  - For additional notes and details, see Revised Standard Plans RSP ES-7M and RSP ES-7N.

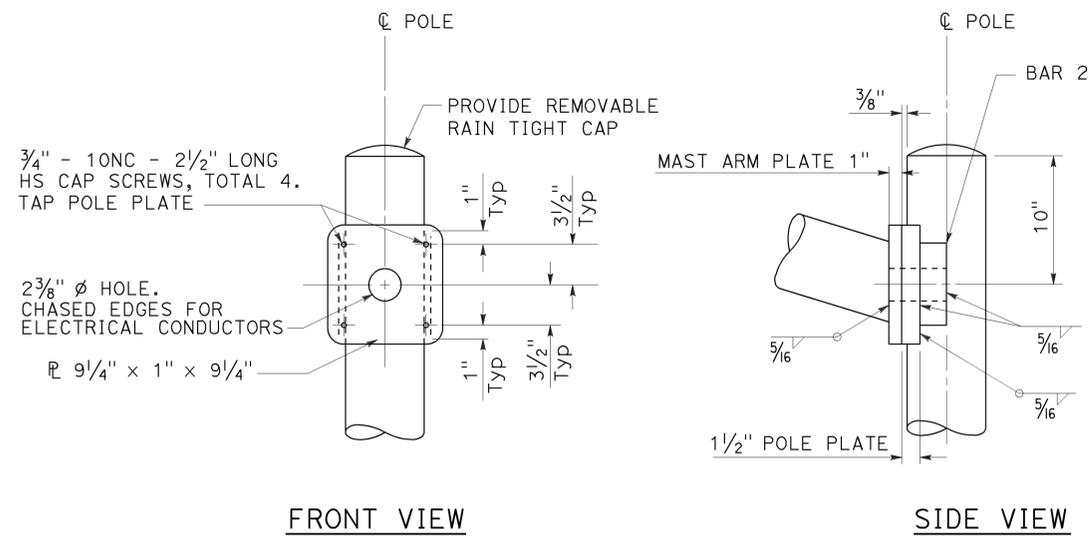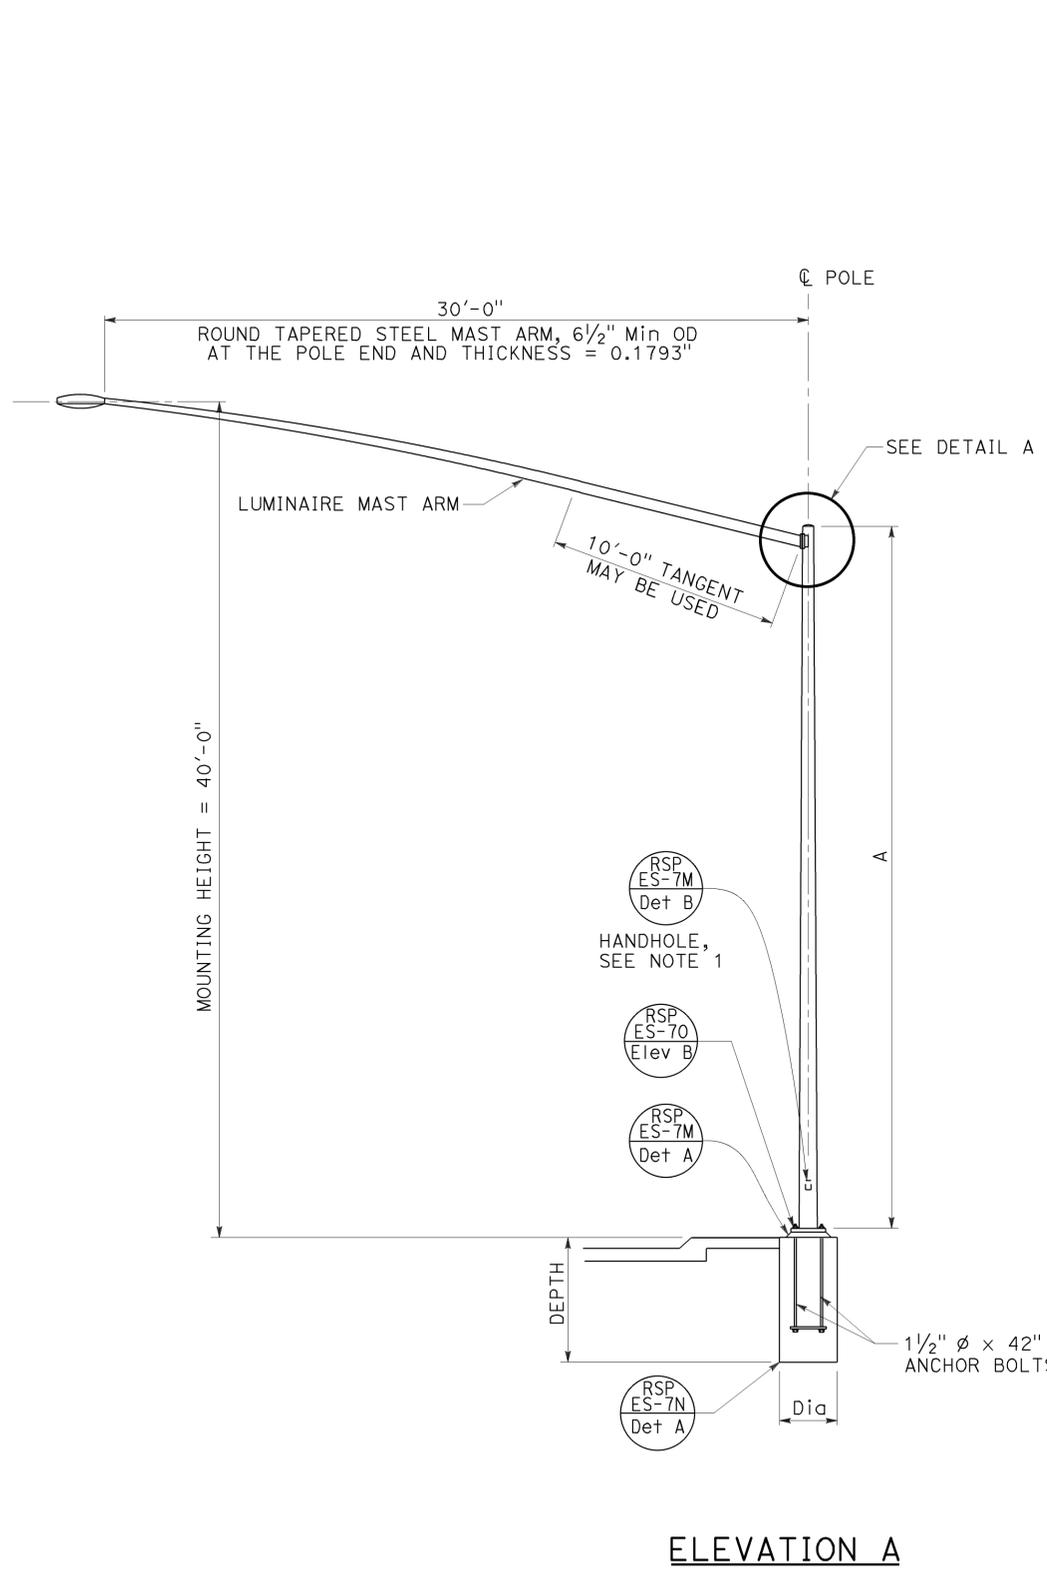

**DETAIL A**

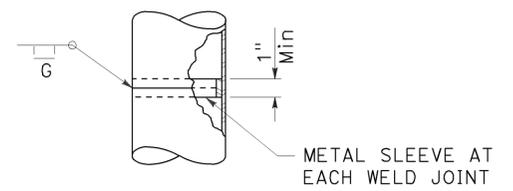

**POLE SPLICE  
DETAIL B**

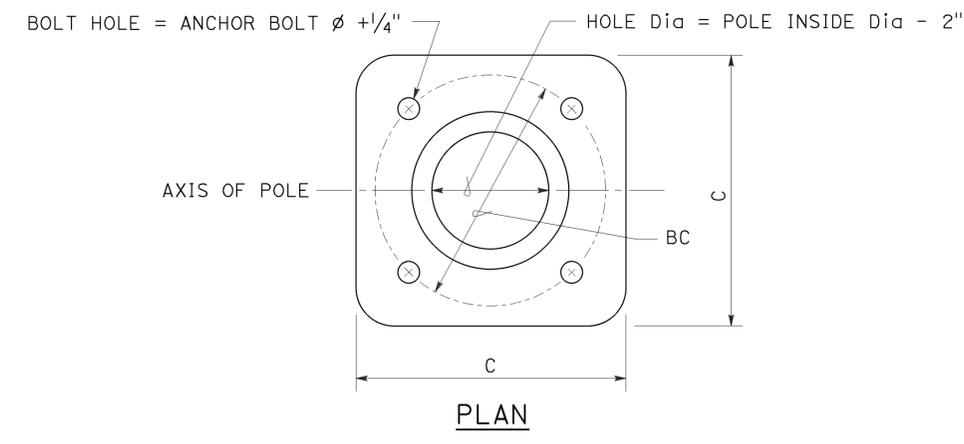

**BASE PLATE DETAIL  
DETAIL C**

POLE TYPE	POLE DATA				BASE PLATE DATA				CIDH PILE FOUNDATION	
	A HEIGHT	Min OD		Min THICKNESS	C	BC = BOLT CIRCLE	THICKNESS	ANCHOR BOLT SIZE	Dia	DEPTH
		BASE	TOP							
32	35'-0"	10 3/4"	5 1/16"	0.1793"	1'-5"	1'-3"	2"	1 1/2" $\phi$ x 42"	3'-0"	8'-0"


STATE OF CALIFORNIA  
 DEPARTMENT OF TRANSPORTATION  
**ELECTRICAL SYSTEMS  
 (LIGHTING STANDARD,  
 TYPE 32)**

NO SCALE

RSP ES-6G DATED JULY 15, 2016 SUPERSEDES RSP ES-6G  
 DATED OCTOBER 30, 2015 AND STANDARD PLAN ES-6G DATED MAY 20, 2011 -  
 PAGE 458 OF THE STANDARD PLANS BOOK DATED 2010.

2010 REVISED STANDARD PLAN RSP ES-6G


4" x 6 1/2" ROUNDED RECTANGLE HANDHOLE REINFORCED WITH RING WELDED TO OUTSIDE OF POLE. SEE NOTE 4, 1/8" COVER PLATE

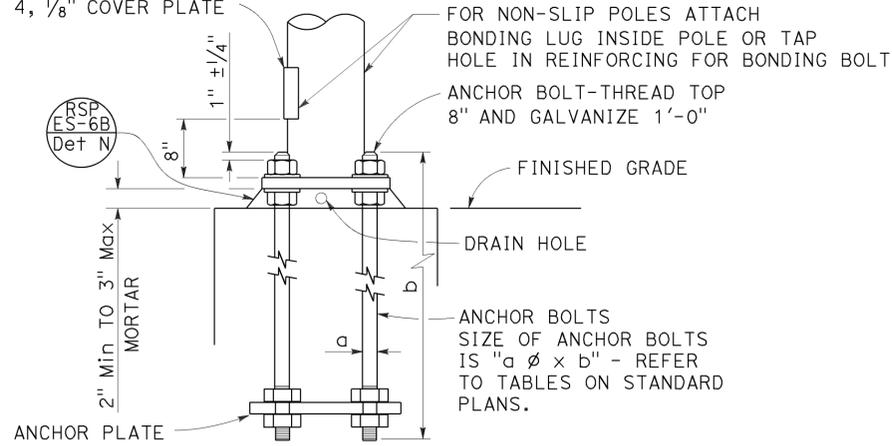


**HANDHOLE AND ANCHORAGE  
DETAIL A**

**IDENTIFICATION NUMBER**

1. Attach a stamped metal tag with pole's identification number above the handhole. 1/4" high number, minimum.
2. Attach a stamped metal tag with mast arm's identification number to the bottom of the signal mast arm near the pole plate. 1/4" high number, minimum.

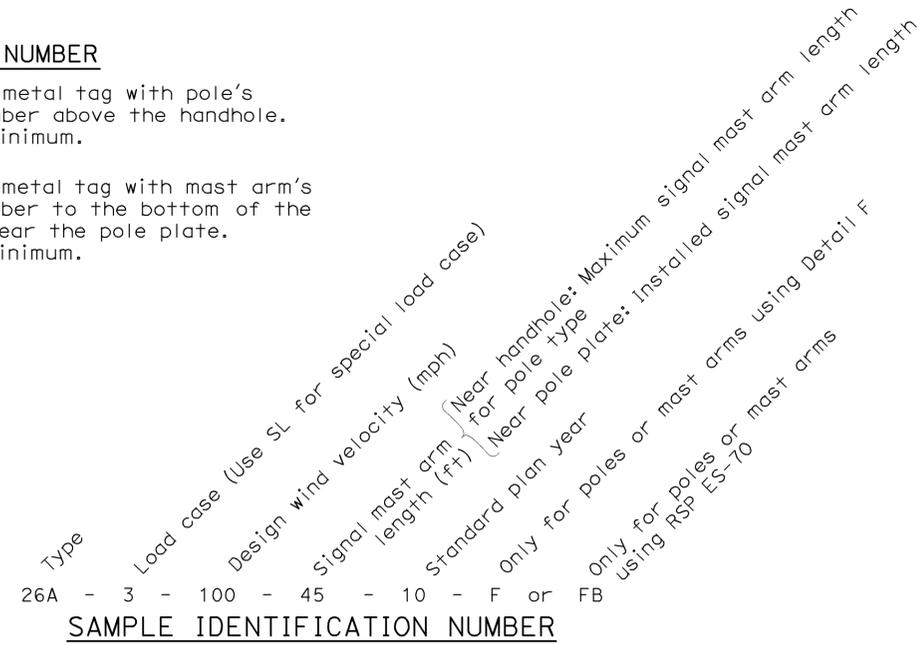


**SAMPLE IDENTIFICATION NUMBER**

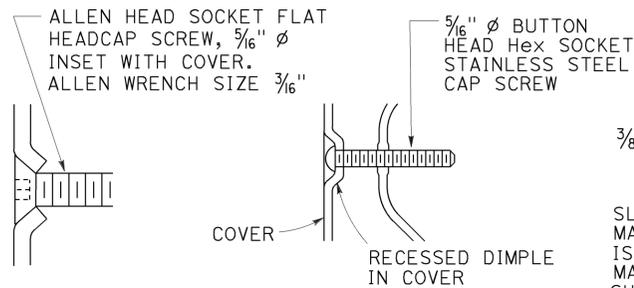


**TYPICAL DETAIL  
DETAIL B-1**

**ALTERNATIVE DETAIL  
DETAIL B-2**

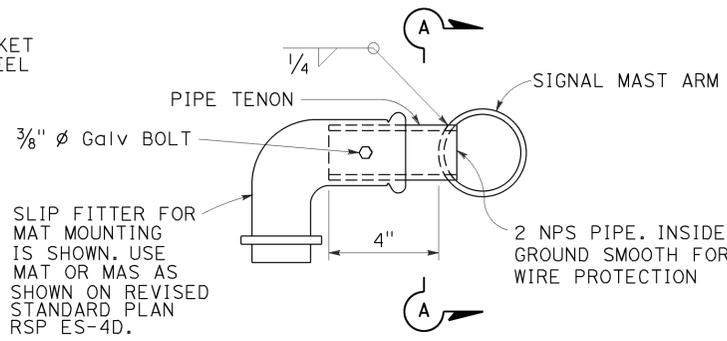

**SIDE TENON  
DETAIL S-1**

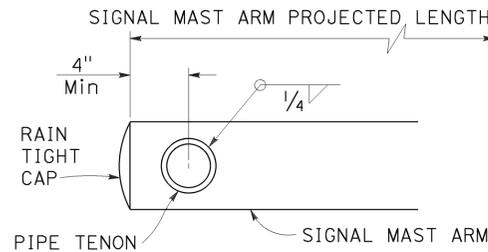


**SECTION A-A**

**NOTES:**


1. Provide a Hex nut, leveling nut and 2 washers for each bolt.
2. Luminaire mast arms shall be round, tapered steel tubes, taper of 0.1375" to 0.143-inch per foot with an end section 2 3/8" OD for mounting hardware. Extensions of 2 NPS Standard pipe and 7" long may be used at the option of the manufacturer. When low pressure sodium luminaires are required, the extension shall be 1'-3".
3. Signal mast arms shall be round, tapered steel tubes, maximum taper 0.143-inch per foot.
4. Handhole reinforcement ring shall be 1/4" x 2" for 0.1196" to 0.2391" thick poles, 3/8" x 2" for 0.3125" to 0.375" thick poles.
5. Handholes shall be located on the downstream side of traffic.
6. Detail F, fatigue resistant weld, is required at socket welded signal mast arm plate and pole base plate.
7. Cap screws shall be tightened by the turn-of-nut method 1/3 turn from a snug tight condition. No washer will be required.
8. Outside diameter, wall thickness, and corresponding section properties of poles and mast arms as shown in the Standard Plans are minimums. Unless otherwise specified, alternative sections shall require approval by the Engineer.
9. Design: AASHTO Standard Specifications for Structural Support for Highway Signs, Luminaires, and Traffic Signals, 6th Edition. Basic Wind Speed = 100 mph (3 seconds gust). Yearly Mean Wind Velocity = 15.6 mph.
10. Materials (Structural steel):  
fy = 55,000 psi (tapered steel tube and anchor bolts)  
fy = 50,000 psi (unless otherwise noted)
11. Materials (Reinforced concrete):  
f'c = 3,625 psi  
fy = 60,000 psi

WELD SIZE WALL THICKNESS

3/16"	0.1196"
1/4"	0.1793"
5/16"	0.2391"
3/8"	0.3125"
1/2"	0.375"

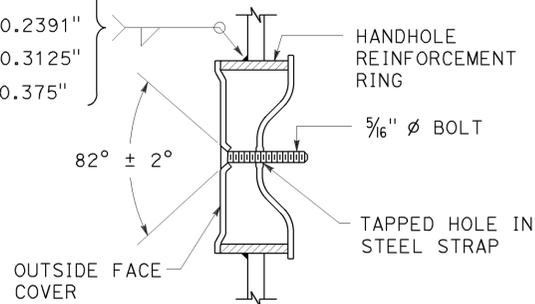

**TAMPER RESISTANT HANDHOLE COVER  
DETAIL B**

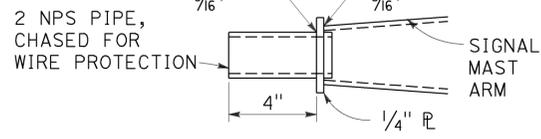


**TIP TENON  
DETAIL TL**  
This detail supersedes Detail S when so designated


**PIPE TENONS  
DETAIL S**

WELD SIZE	WALL THICKNESS
1/8"	0.1196"
3/16"	0.1793"
1/4"	0.2391"


2 NPS PIPE, CHASED FOR WIRE PROTECTION SEE NOTE 2



**TIP TENON  
DETAIL TS**

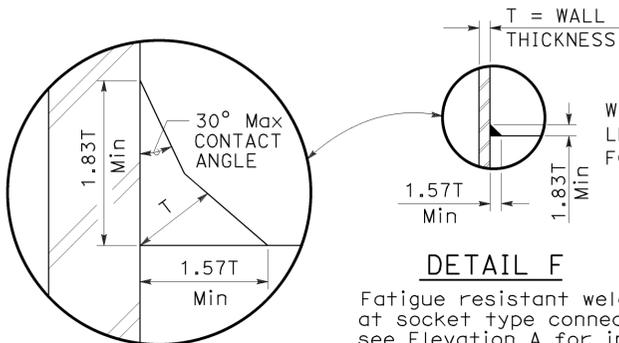

**DETAIL F**  
Fatigue resistant weld at socket type connection see Elevation A for inner weld

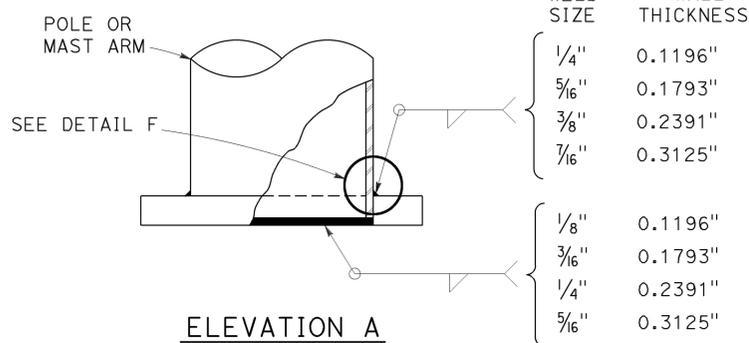

**ELEVATION A**

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION  
**ELECTRICAL SYSTEMS  
(SIGNAL AND LIGHTING STANDARD,  
DETAIL No. 1)**  
NO SCALE

RSP ES-7M DATED JULY 15, 2016 SUPERSEDES RSP ES-7M DATED OCTOBER 30, 2015 AND STANDARD PLAN ES-7M DATED MAY 20, 2011 - PAGE 474 OF THE STANDARD PLANS BOOK DATED 2010.

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
11	SD	78	0.0/R16.5	138	144

Stanley P. Johnson  
REGISTERED CIVIL ENGINEER


July 15, 2016  
PLANS APPROVAL DATE

Stanley P. Johnson  
No. C57793  
Exp. 3-31-18  
CIVIL  
STATE OF CALIFORNIA

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

TO ACCOMPANY PLANS DATED 08-01-16


2010 REVISED STANDARD PLAN RSP ES-7N

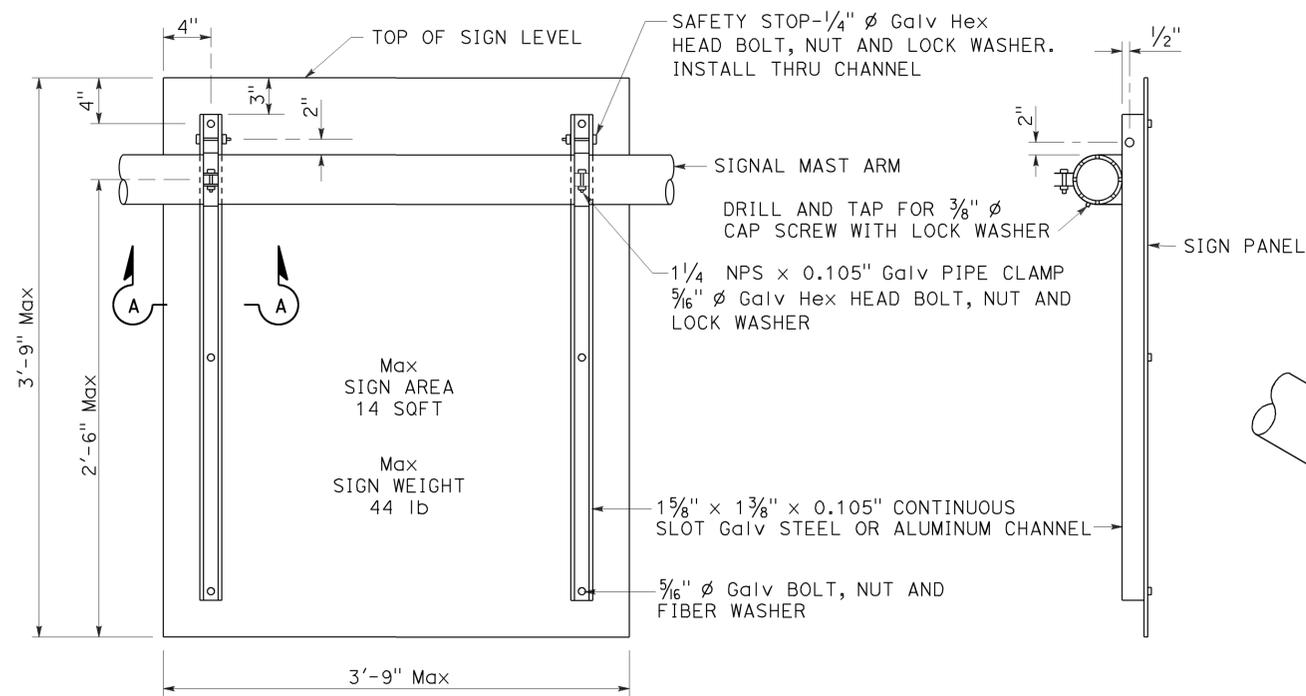


REAR VIEW

SIDE VIEW


**SIGN MOUNTING DETAILS**  
DETAIL U

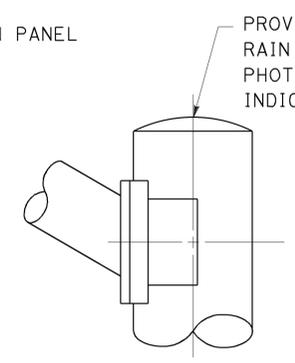

STANDARD TOP  
DETAIL B-1

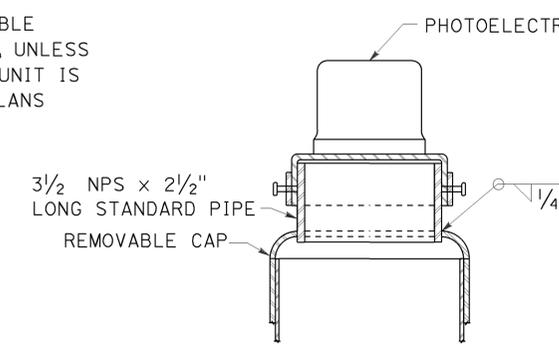


MOUNTING ADAPTER FOR  
PHOTOELECTRIC UNIT  
DETAIL B-2

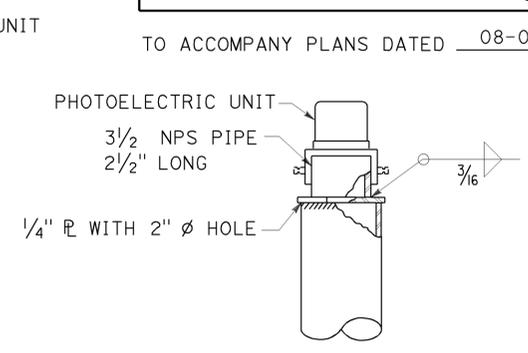


ALTERNATIVE  
MOUNTING ADAPTER  
DETAIL B-3

**POLE TOP DETAILS**  
DETAIL B

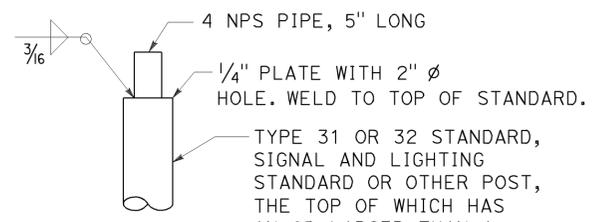

DETAIL C-1

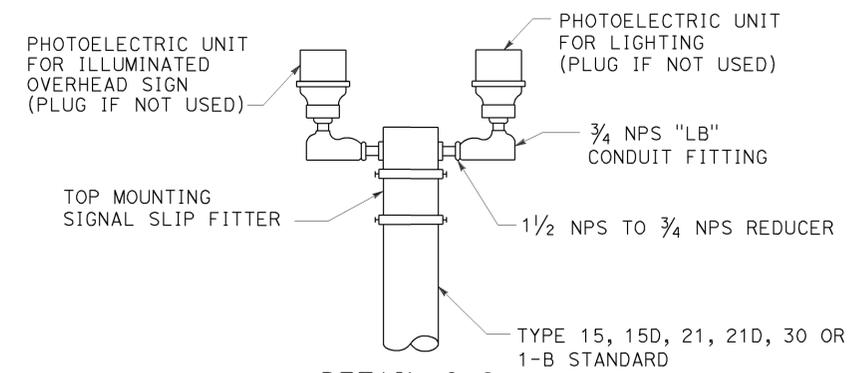


**DUAL PHOTOELECTRIC UNIT MOUNTING DETAIL**  
DETAIL C

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**ELECTRICAL SYSTEMS**  
**(SIGNAL AND LIGHTING STANDARD,**  
**DETAIL No. 2)**  
NO SCALE


RSP ES-7N DATED JULY 15, 2016 SUPERSEDES RSP ES-7N DATED OCTOBER 30, 2015 AND STANDARD PLAN ES-7N DATED MAY 20, 2011 - PAGE 475 OF THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP ES-7N**

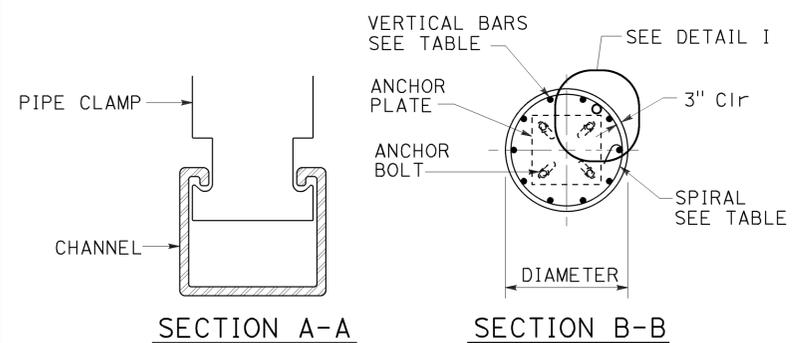

SECTION A-A


SECTION B-B

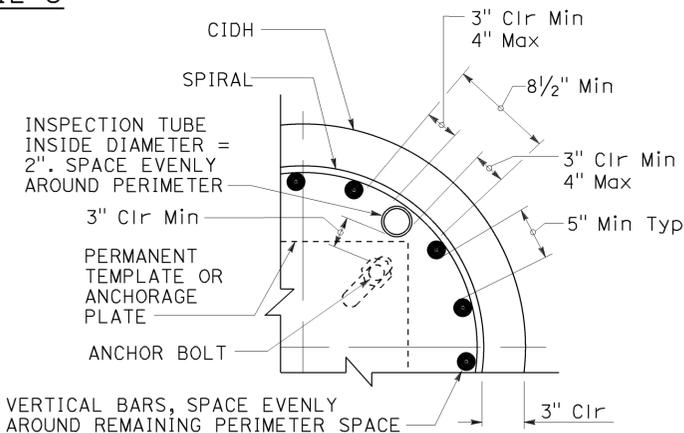


**INSPECTION TUBE PLACEMENT**  
DETAIL I

CIDH REINFORCING AND INSPECTION TUBE SCHEDULE			
CIDH DIAMETER	VERTICAL BARS	SPIRAL	INSPECTION TUBE
2 ft	8-#5	#4 AT 6	2
2.5 ft	10-#6		4*
3 ft	12-#7	#5 AT 6	4
3.5 ft	14-#8		4
4 ft	18-#9	2-#4 AT 7	5
4.5 ft	18-#9	2-#5 AT 7	5
5 ft	22-#10	2-#5 AT 7	6
6 ft	26-#11	2-#6 AT 7	7


\* FOR SLIP BASE VERSIONS WITH 3 ANCHOR BOLTS USE 3 INSPECTION TUBES.

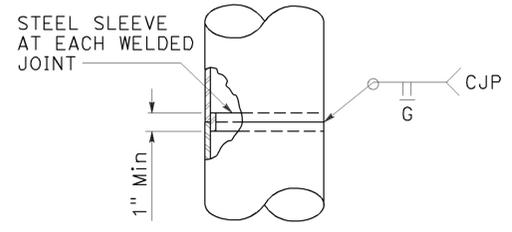

FOR UNIFORM TUBE THICKNESS  
DETAIL T-1

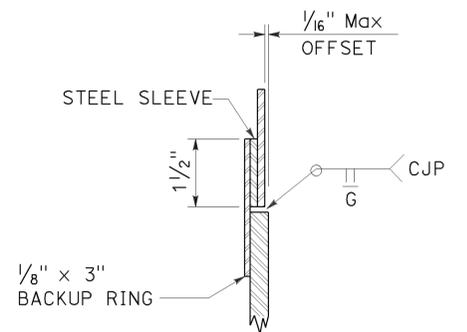

AT TUBE THICKNESS CHANGE  
DETAIL T-2

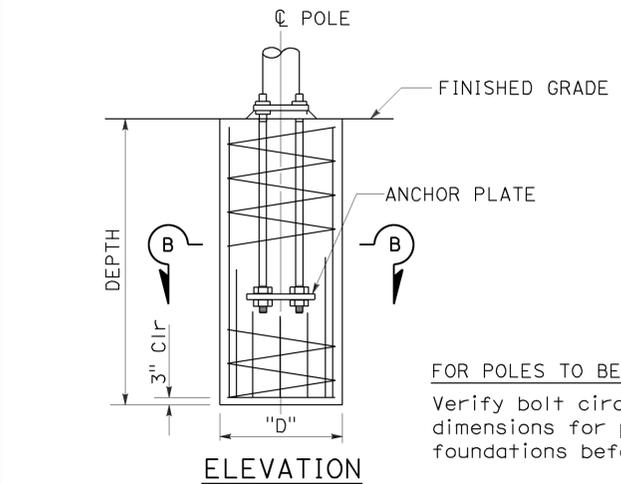


ELEVATION

**CAST-IN-DRILLED-HOLE PILE FOUNDATION,**  
**REINFORCED PILE**  
DETAIL A

FOR POLES TO BE INSTALLED ON EXISTING FOUNDATION:  
Verify bolt circles, anchor bolt sizes and dependent dimensions for poles to be installed on existing foundations before fabricating the poles.


TO ACCOMPANY PLANS DATED 08-01-16

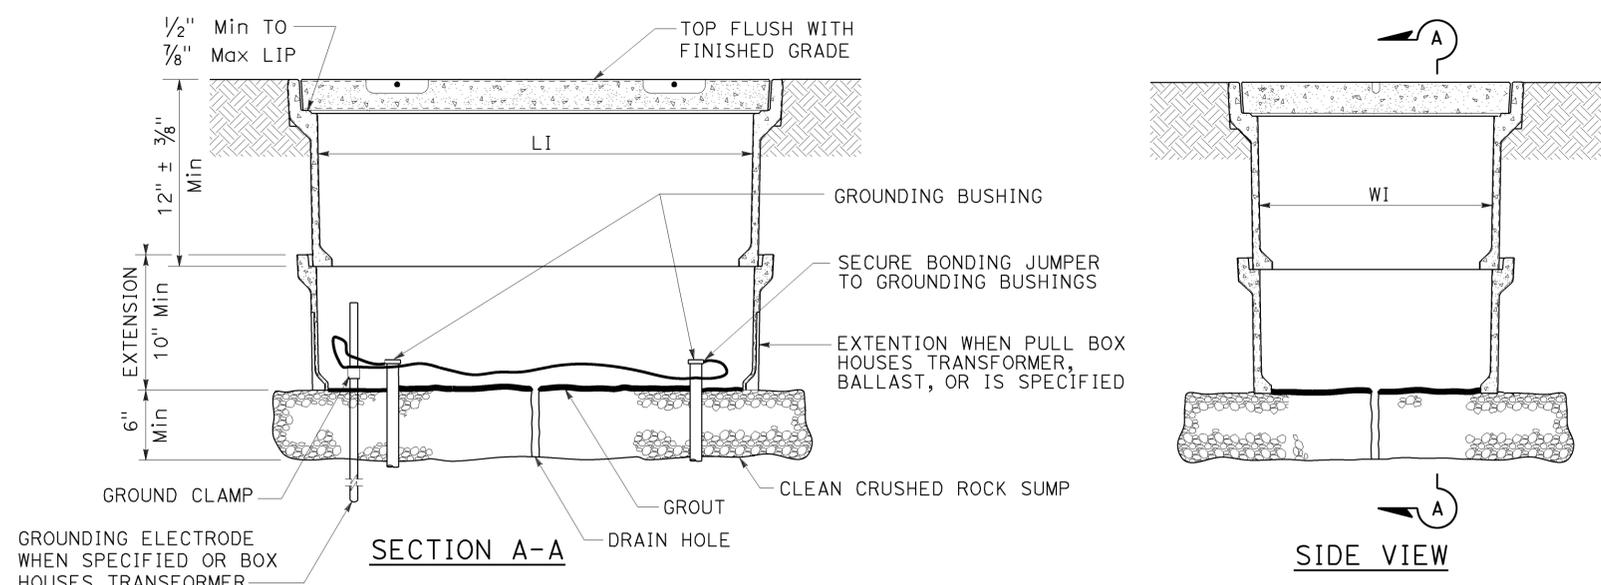


**INSTALLATION DETAILS**  
**DETAIL A**

**NOTES:**


1. The nominal dimensions of the opening in which the cover sets shall be the same as the cover dimensions except the length and width dimensions shall be 1/8" greater.
2. Covers and boxes shall be interchangeable with California standard male and female gages. When interchanged with a standard male or female gage, the top surfaces shall be flush within 1/8". Top outside radius of covers and pull boxes shall have a 1/8" radius.
3. Dimensions for the cover for non-traffic pull box are nominal values.

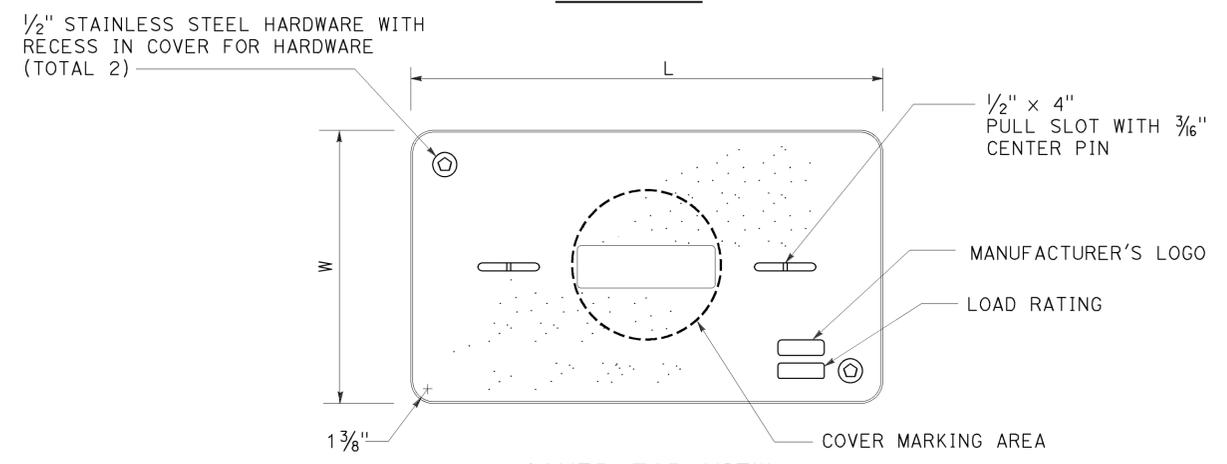

**COVER TOP VIEW**

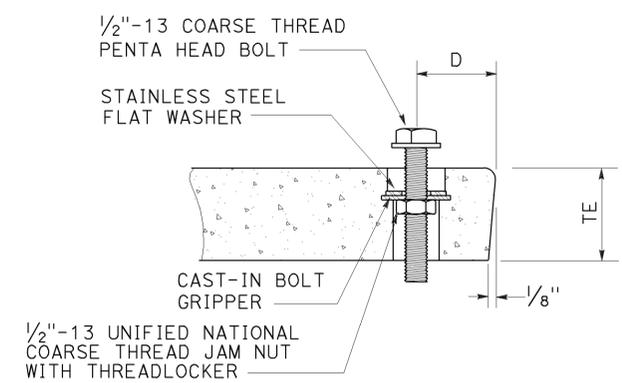

**TYPICAL COVER CAPTIVE BOLT**  
**OR SIMILAR**

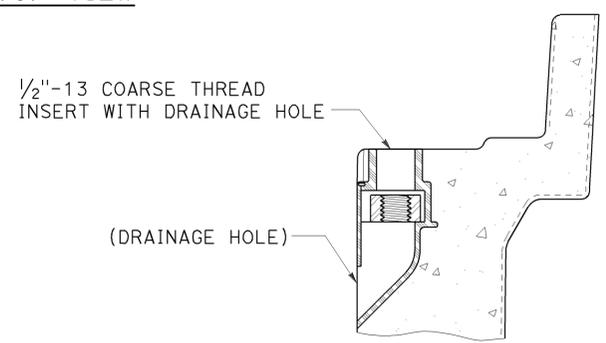

**TYPICAL THREADED INSERT**  
**OR SIMILAR**

DIMENSION TABLE										
PULL BOX	PULL BOX			COVER						
	MINIMUM DEPTH BOX	MINIMUM DEPTH EXTENSION	MINIMUM WEIGHT	LI Min	WI Min	TE	D	L	W	MINIMUM WEIGHT
No. 3 1/2	12"	N/A	40 lb	1' - 3"	9"	1 3/4"	1 3/4"	1'-3 1/4" - 1'-3 3/8"	10" - 10 1/8"	30 lb
No. 5	12"	10"	55 lb	1' - 8"	11"	2"	1 3/4"	1'-11 1/4"	1'-1 3/4"	60 lb
No. 6	12"	10"	70 lb	2' - 4 1/4"	1' - 3 1/4"	2"	2"	2'-6 1/2"	1'-5 1/2"	85 lb

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION  
**ELECTRICAL SYSTEMS**  
**(NON-TRAFFIC PULL BOX)**  
NO SCALE

RSP ES-8A DATED APRIL 15, 2016 SUPERSEDES RSP ES-8A DATED OCTOBER 30, 2015 AND RSP ES-8A DATED JULY 19, 2013 AND RSP ES-8A DATED JANUARY 20, 2012 THAT SUPPLEMENTS THE STANDARD PLANS BOOK DATED 2010.

2010 REVISED STANDARD PLAN RSP ES-8A

DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
11	SD	78	0.0/R16.5	141	144


*Theresa Gabriel*  
 REGISTERED ELECTRICAL ENGINEER  
 Theresa Aziz Gabriel  
 No. E15129  
 Exp. 6-30-16  
 ELECTRICAL  
 STATE OF CALIFORNIA

October 30, 2015  
 PLANS APPROVAL DATE


THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

TO ACCOMPANY PLANS DATED 08-01-16


**NOTE:**  
Curves represent the minimum footcandle (FC).

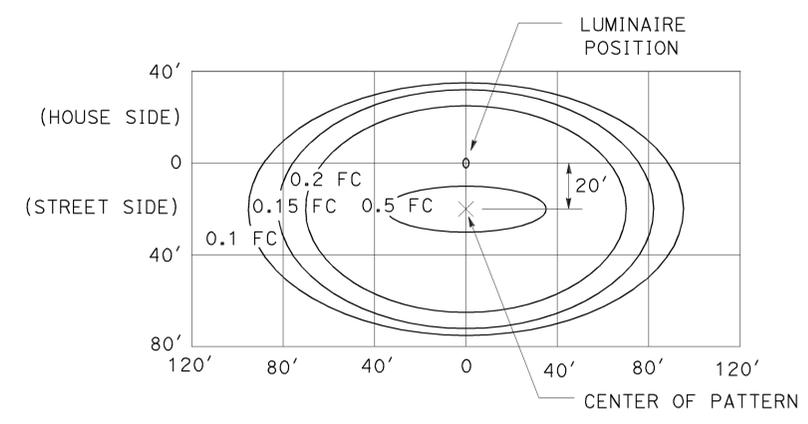


**LED LUMINAIRE 165 W**  
34' Mounting Height

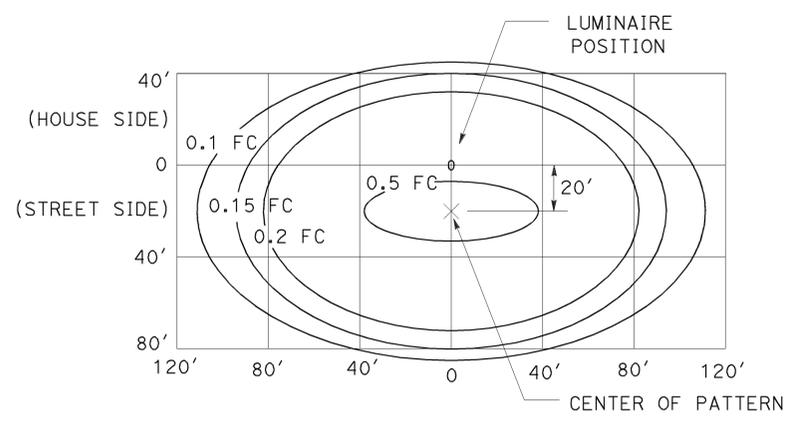


**LED LUMINAIRE 235 W**  
40' Mounting Height

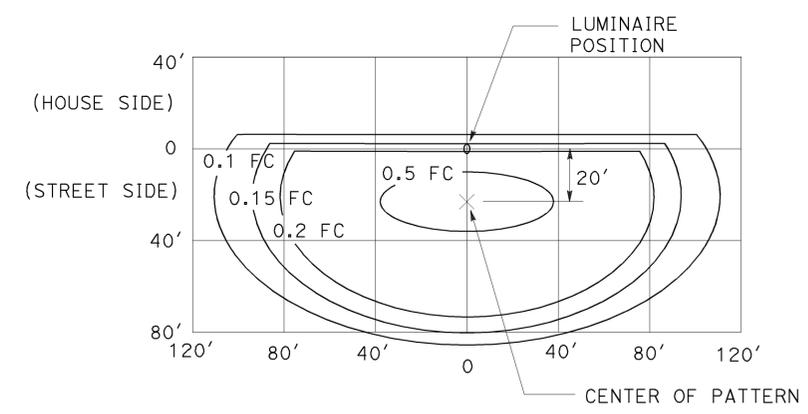

**LED LUMINAIRE 235 W**  
40' Mounting Height  
with back side control

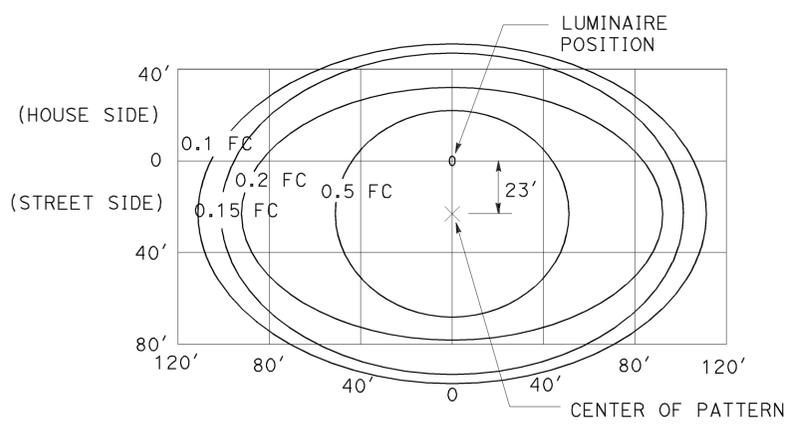

**LED LUMINAIRE 300 W**  
40' Mounting Height

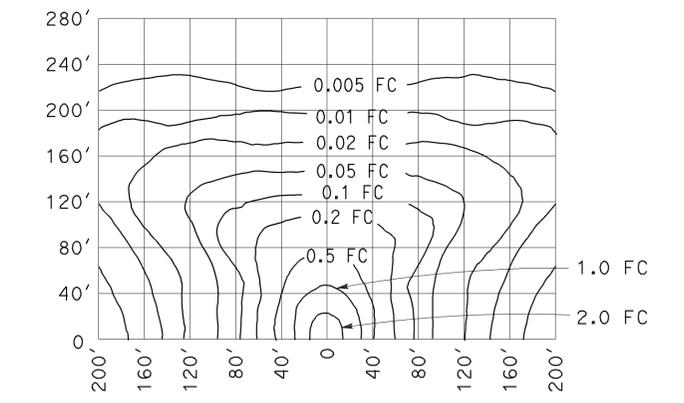

**LOW-PRESSURE SODIUM LUMINAIRE 180 W**  
40' Mounting Height  
Lamp operated at 33,000 lm

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION


**ELECTRICAL SYSTEMS  
(ISOFOOTCANDLE CURVES)**

NO SCALE


RSP ES-10A DATED OCTOBER 30, 2015 SUPERSEDES RSP ES-10A DATED JULY 19, 2013 THAT SUPPLEMENTS THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP ES-10A**


2010 REVISED STANDARD PLAN RSP ES-10A




TO ACCOMPANY PLANS DATED 08-01-16

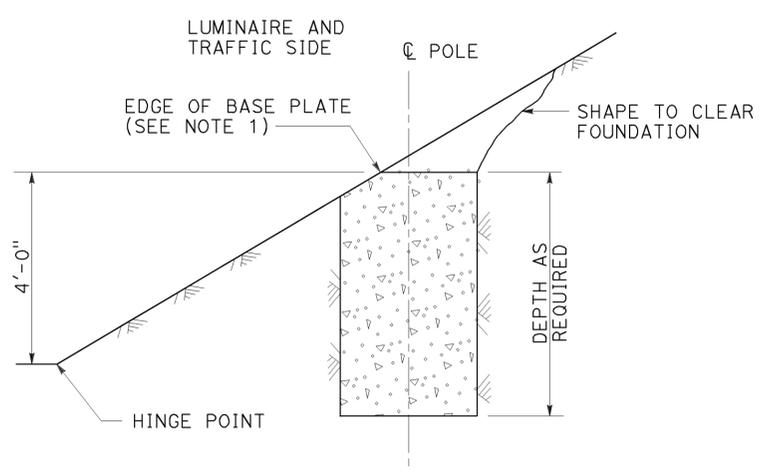

**CUT SLOPES  
STEEPER THAN 4:1,  
LESS THAN 2:1  
DETAIL A-1**  
See Note 2 and 3

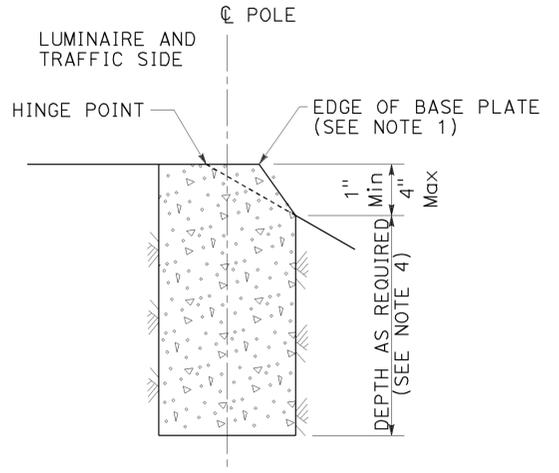

**FILL SLOPES  
STEEPER THAN 4:1,  
LESS THAN 2:1  
DETAIL A-2**  
See Note 2 and 3

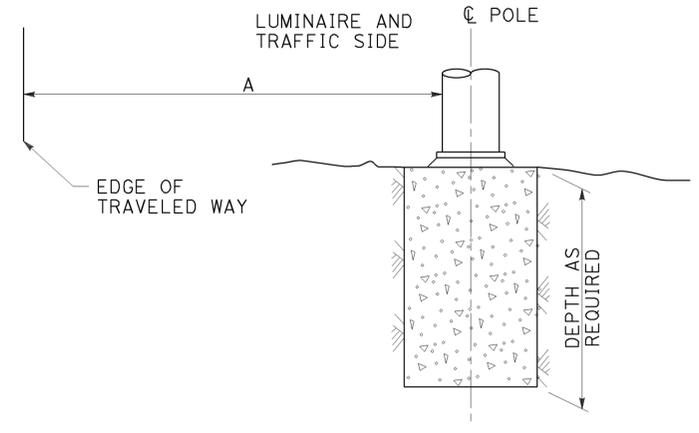


**FLAT SECTIONS, CUT OR FILL SLOPES  
4:1 OR FLATTER  
DETAIL A-3**  
See Note 2

STANDARD TYPE	SETBACK (DIMENSION A)
32	30'-0" (Min)
31	20'-0" (Min)
15, 15D, 15-SB, 21, 21D, 30	ARM LENGTH (Min)


**FOUNDATIONS ADJACENT TO ALL ROADWAYS EXCEPT  
IN SIDEWALK, MEDIAN AND ISLAND AREAS  
DETAIL A**

**NOTES:**

- Where a portion of the foundation is above grade, the top edges shall have a 1" chamfer.
- Slopes shall be horizontal to vertical ratio (Horizontal : Vertical).
- Horizontal setbacks on cut and fill slopes steeper than 4:1 shall not exceed the distance shown for flat sections.
- CIDH embedment depth shall be increased beyond standard depths by the diameter of the CIDH.

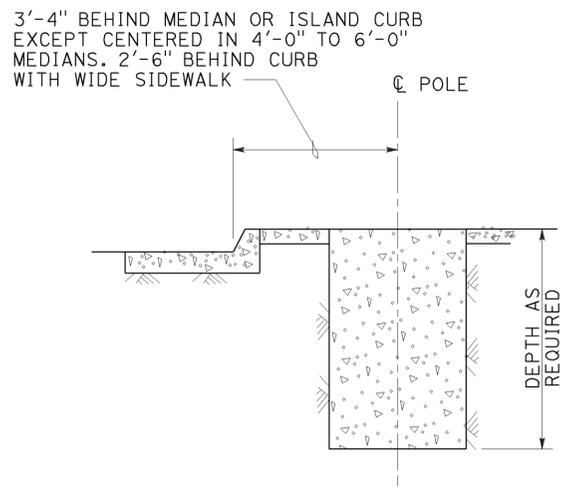

**MEDIAN, ISLAND  
OR WIDE SIDEWALK  
DETAIL B-1**  
7' Wide and wider

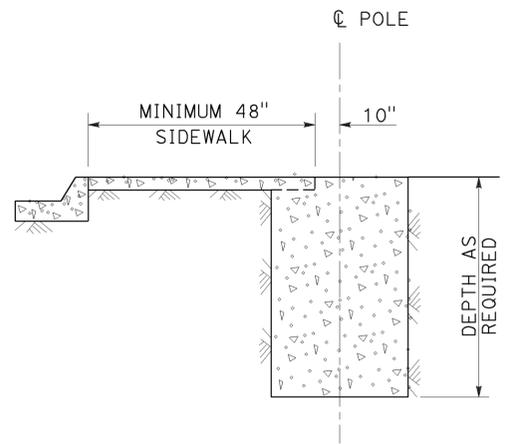

**NARROW SIDEWALK  
DETAIL B-2**  
Less than 7' wide

**FOUNDATIONS IN SIDEWALK, MEDIAN AND ISLAND AREAS  
DETAIL B**

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION  
**ELECTRICAL SYSTEMS  
(FOUNDATION INSTALLATIONS)**  
NO SCALE

RSP ES-11 DATED JULY 15, 2016 SUPERSEDES RSP ES-11 DATED JULY 19, 2013 AND STANDARD PLAN ES-11 DATED MAY 20, 2011 - PAGE 488 OF THE STANDARD PLANS BOOK DATED 2010.





2010 REVISED STANDARD PLAN RSP ES-11

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
11	SD	78	0.0/R16.5	143	144

Theresa Gabriel  
 REGISTERED ELECTRICAL ENGINEER  
 April 15, 2016  
 PLANS APPROVAL DATE  
THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.






TO ACCOMPANY PLANS DATED 08-01-16

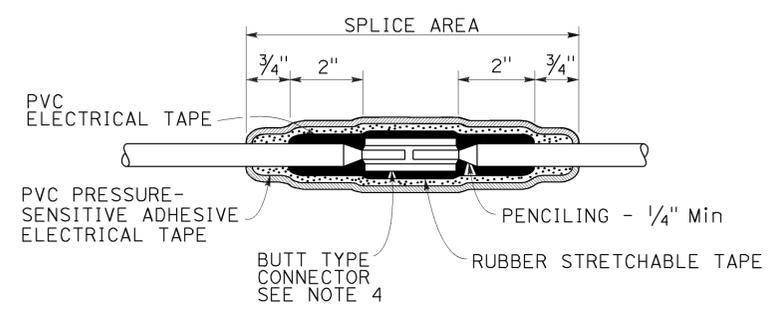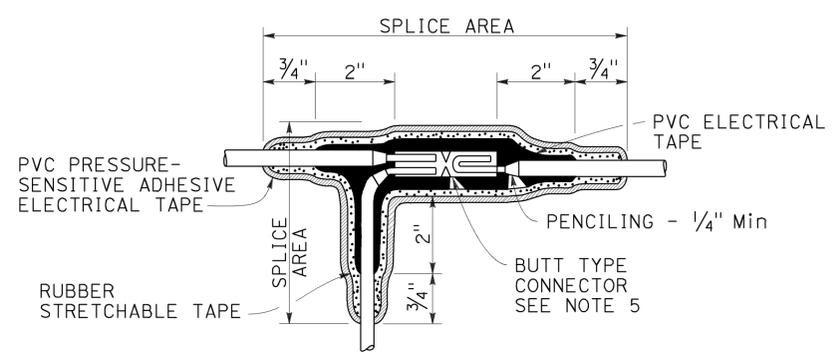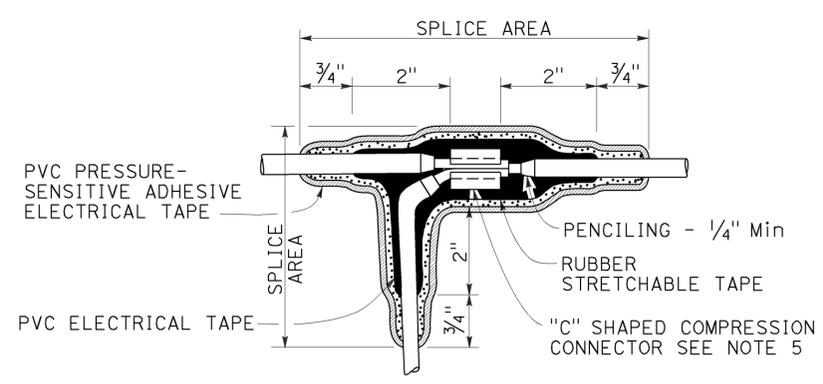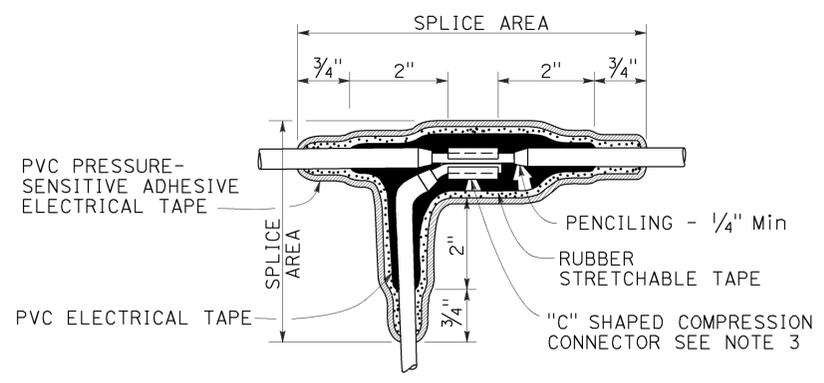

**NOTES:**

1. Dimensions are minimum.
2. Rubber tapes shall be rolled after application.
3. Between 1 free-end and 1 through conductor.
4. Between 2 free-end conductors.
5. Between 3 free-end conductors.

**TYPICAL SPLICE INSULATION METHOD B**

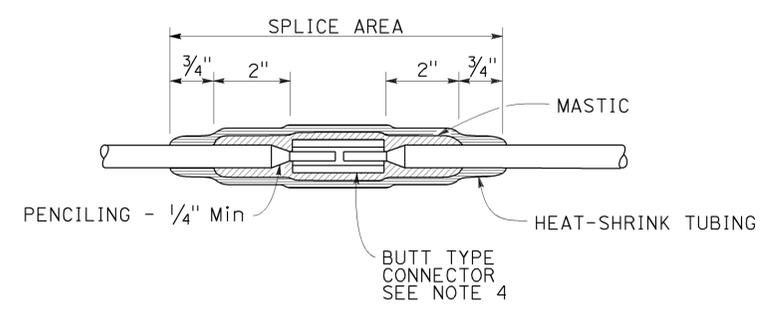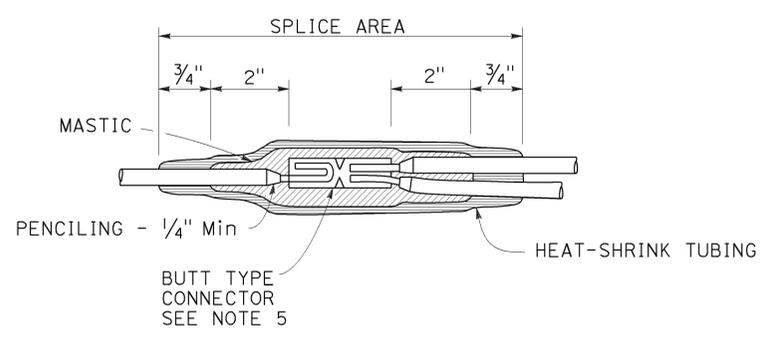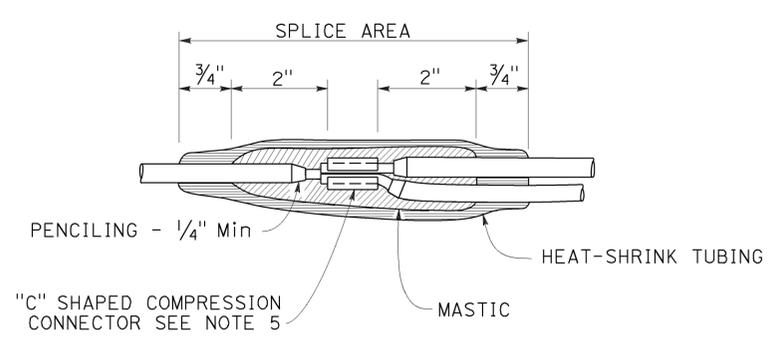

**TYPICAL SPLICE INSULATION HEAT-SHRINK TUBING**

STATE OF CALIFORNIA  
 DEPARTMENT OF TRANSPORTATION  
**ELECTRICAL SYSTEMS**  
**(SPLICE INSULATION METHODS DETAILS)**

NO SCALE  
 RSP ES-13A DATED APRIL 15, 2016 SUPERSEDES RSP ES-13A DATED OCTOBER 30, 2015 AND STANDARD PLAN ES-13A DATED MAY 20, 2011 - PAGE 491 OF THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP ES-13A**

2010 REVISED STANDARD PLAN RSP ES-13A

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
11	SD	78	0.0/R16.5	144	144

*Theresa Gabriel*  
 REGISTERED ELECTRICAL ENGINEER  
 April 15, 2016  
 PLANS APPROVAL DATE



THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

TO ACCOMPANY PLANS DATED 08-01-16


CIRCUIT VOLTAGE	FUSE VOLTAGE RATING	FUSE CURRENT RATING						
		HPS LAMP BALLAST		LOW PRESSURE SODIUM BALLAST	INDUCTION SIGN LIGHTING	SINGLE PHASE (TWO WIRE) TRANSFORMERS (PRIMARY SIDE)		
		70 W	100 W	180 W	85 W	1 KVA	2 KVA	3 KVA
120 V	250 V	5 A	5 A	5 A	5 A	10 A	20 A	30 A
240 V	250 V	5 A	5 A	5 A	5 A	6 A	10 A	20 A
480 V	500-600 V	5 A	5 A	3 A	1 A (SEE NOTE 2)	3 A	6 A	10 A

- NOTES:**
- Primary lines of multiple ballasts shall be provided with fused connectors. Fuse ratings shall be as noted above.
  - See Revised Standard Plan RSP ES-15D, Type SC3 control.

**FUSE RATINGS FOR FUSED CONNECTORS**

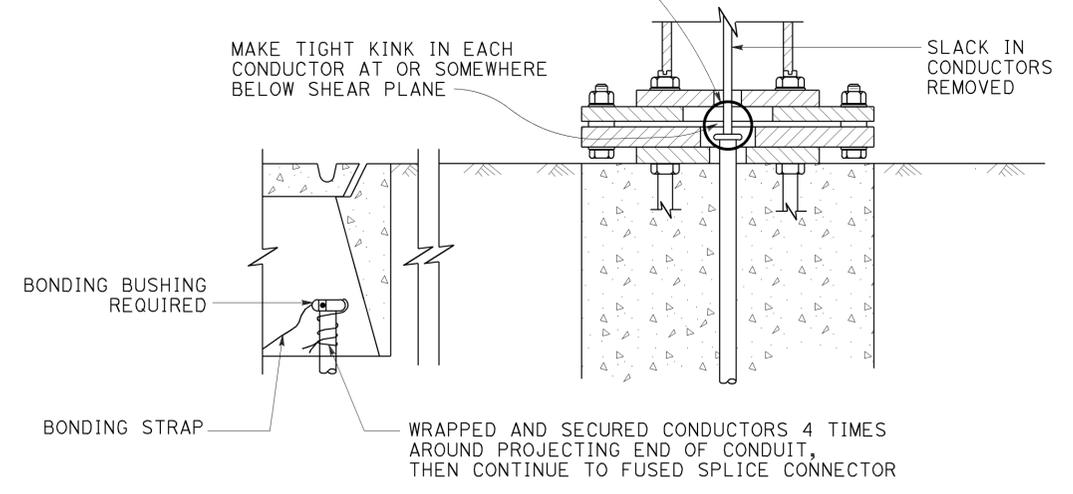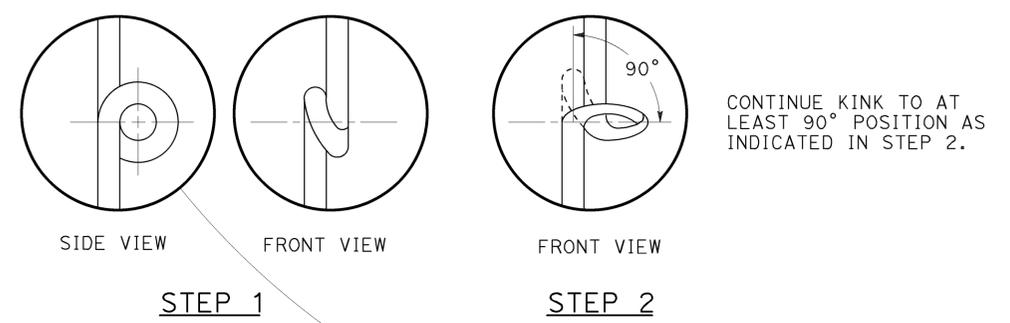

**KINKING DETAIL FOR SLIP BASE STANDARDS**  
DETAIL A

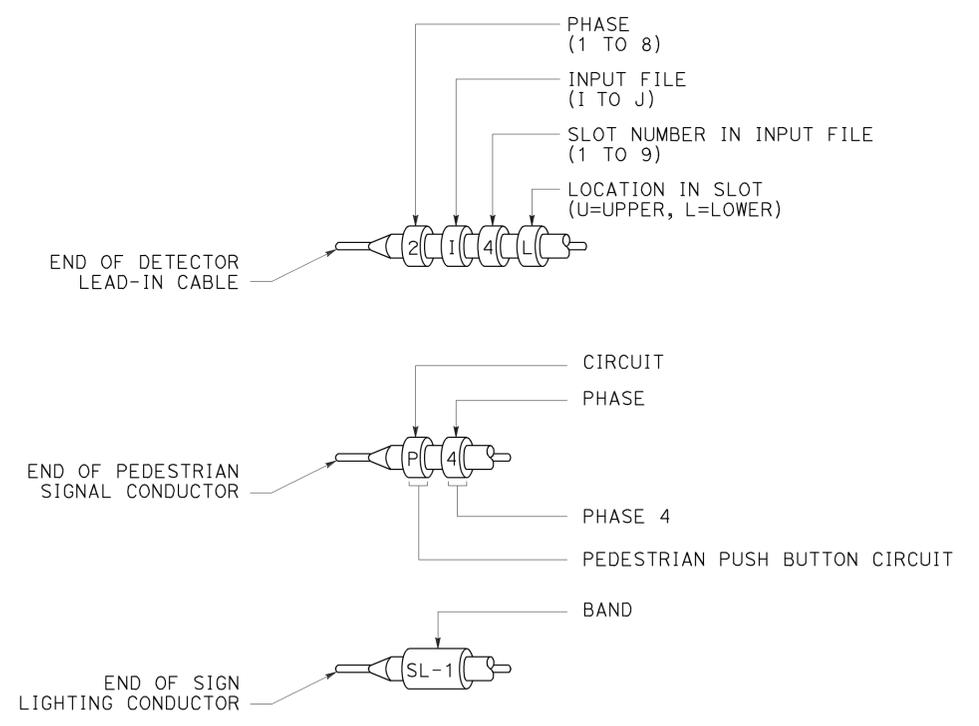

**TYPICAL BANDING DETAILS**  
DETAIL B

STATE OF CALIFORNIA  
 DEPARTMENT OF TRANSPORTATION  
**ELECTRICAL SYSTEMS  
 (FUSE RATING, KINKING AND BANDING DETAIL)**

NO SCALE

RSP ES-13B DATED APRIL 15, 2016 SUPERSEDES STANDARD PLAN ES-13B DATED MAY 20, 2011 - PAGE 492 OF THE STANDARD PLANS BOOK DATED 2010.

2010 REVISED STANDARD PLAN RSP ES-13B