


DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS

*Stanley P. Johnson*  
 REGISTERED CIVIL ENGINEER  
 No. C57395  
 Exp. 3-31-12  
 CIVIL  
 STATE OF CALIFORNIA

May 20, 2011  
 PLANS APPROVAL DATE

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

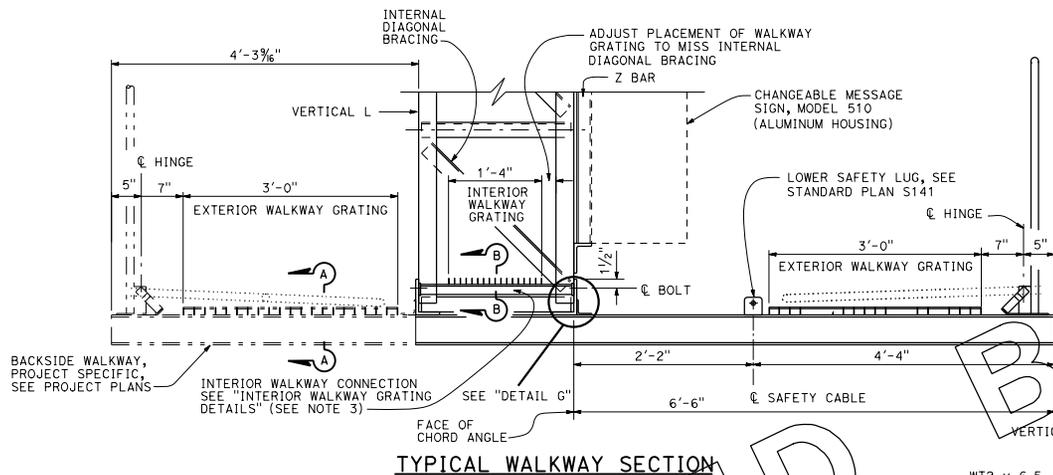


TYPICAL WALKWAY SECTION


NOTES:

1. Welded type grating shall have 1/4" x 1/8" bearing bars at 1 3/8" centers with 1/4" diameter (or equal) cross bars at 4" centers. If mechanical lock grating is used, it shall be equal in strength to the welded type. Alternate hold-down clips may be submitted for approval.
2. Walkway grating to be continuous (no splices) over as many walkway brackets as practical and consistent with fabrication, ease of handling and assembly.
3. Interior grating shall be installed only for projects requiring backside walkways.

419

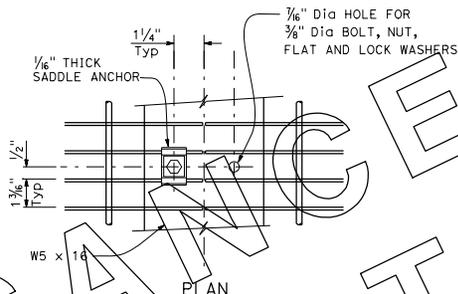


PLAN

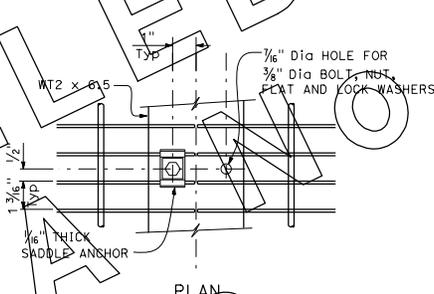


PLAN

SECTION A-A  
EXTERIOR WALKWAY GRATING DETAILS  
Shown at splice


SECTION B-B  
INTERIOR WALKWAY GRATING DETAILS  
Shown at splice

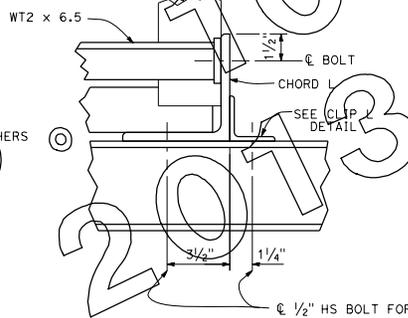

DETAIL G

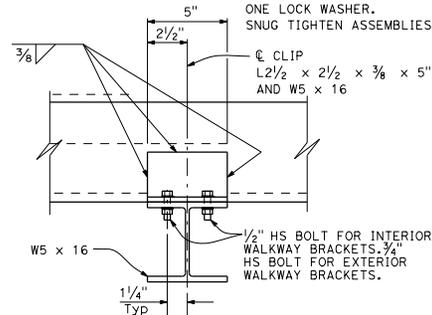

CLIP L DETAIL

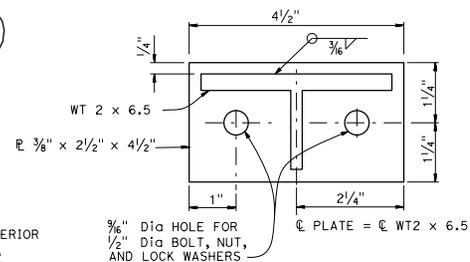

END PLATE CONNECTOR DETAIL

STATE OF CALIFORNIA  
 DEPARTMENT OF TRANSPORTATION  
**OVERHEAD SIGN-TRUSS  
 SINGLE POST TYPE  
 WALKWAY DETAILS  
 CHANGEABLE MESSAGE SIGNS  
 MODEL 510**  
 NO SCALE

S133

2010 STANDARD PLAN S133