




**TRANSVERSE JOINT
DOWEL BAR LAYOUT**

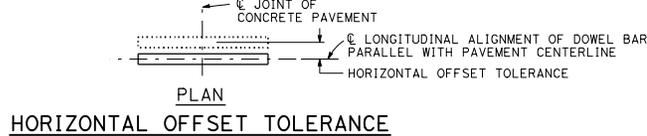


HORIZONTAL OFFSET TOLERANCE

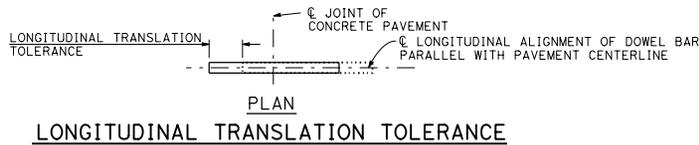


LONGITUDINAL TRANSLATION TOLERANCE

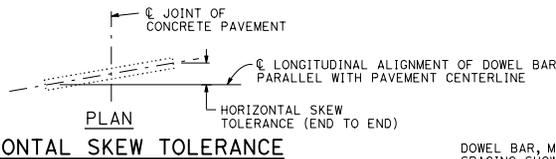


HORIZONTAL SKEW TOLERANCE

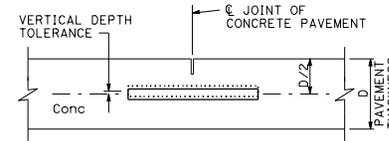


**ELEVATION
VERTICAL DEPTH TOLERANCE**

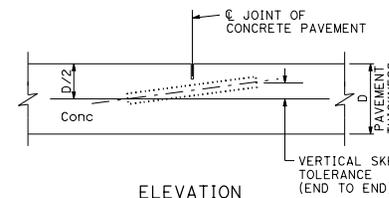


**ELEVATION
VERTICAL SKEW TOLERANCE**

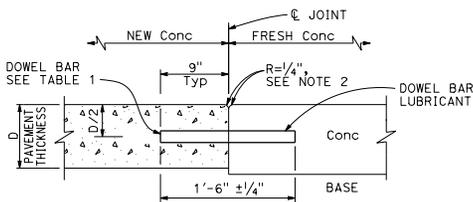

**TRANSVERSE
CONSTRUCTION JOINT
DETAIL**

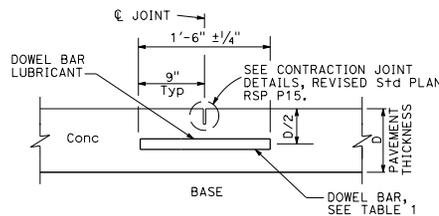


TRANSVERSE CONTRACTION JOINT

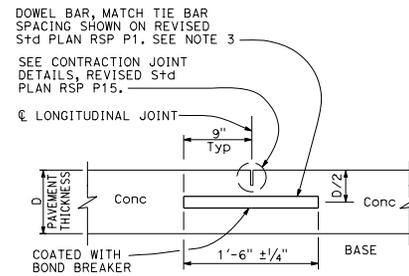


**LONGITUDINAL CONTRACTION
JOINT WITH DOWEL BARS**

See Revised Std Plan RSP P18

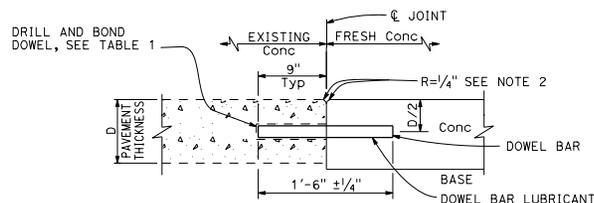

**TRANSVERSE CONSTRUCTION JOINT
FOR EXISTING CONCRETE PAVEMENT**

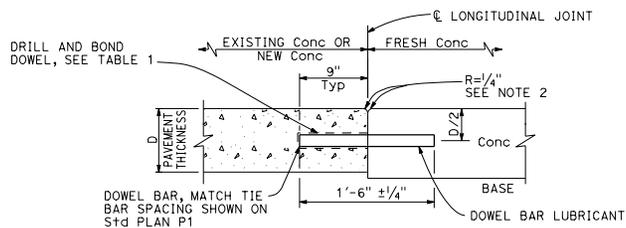

**LONGITUDINAL CONSTRUCTION JOINT
WITH DOWEL BARS**

See Revised Std Plan RSP P18

Dist#	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET TOTAL SHEETS

William K. Faribach
 REGISTERED CIVIL ENGINEER
 No. C49042
 Exp. 9-30-14
 CIVIL
 STATE OF CALIFORNIA

July 19, 2013
 PLANS APPROVAL DATE
 THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

TO ACCOMPANY PLANS DATED _____

NOTES:

- See Revised Standard Plan RSP P1 for typical dowel bar placement and locations.
- Where fresh concrete pavement is placed against new concrete or existing concrete pavement, rounding the corner of the existing concrete pavement is not required.
- May also use 3/4" Dia dowel bars 2'-4" ± 1/4" in length, center the length of dowel bars at the centerline of longitudinal joint.

TABLE 1

DOWEL BAR DIAMETER TABLE			
PAVEMENT THICKNESS	0.65'	> 0.65' - 0.85'	> 0.85'
MINIMUM DOWEL * BAR DIAMETER	1"	1 1/4"	1 1/2"

* The drilled hole diameter must be 1/8" to 3/16" larger than the bar diameter.

STATE OF CALIFORNIA
DEPARTMENT OF TRANSPORTATION
**CONCRETE PAVEMENT
DOWEL BAR
DETAILS**

NO SCALE

RSP P10 DATED JULY 19, 2013 SUPERSEDES RSP P10 DATED APRIL 20, 2012 AND STANDARD PLAN P10 DATED MAY 20, 2011 - PAGE 131 OF THE STANDARD PLANS BOOK DATED 2010.

REVISED STANDARD PLAN RSP P10