

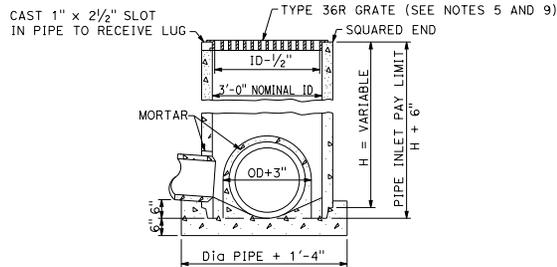



D16*	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS



Raymond Don Isztou
 REGISTERED CIVIL ENGINEER
 October 30, 2015
 PLANS APPROVAL DATE
 No. C37332
 Exp. 6-30-16
 CIVIL
 STATE OF CALIFORNIA



SECTION A-A
TYPE GCP
Concrete pipe inlet with grate




SECTION B-B
TYPE OCP or OCPI
Concrete pipe inlet with steel cover
(See Note 6)

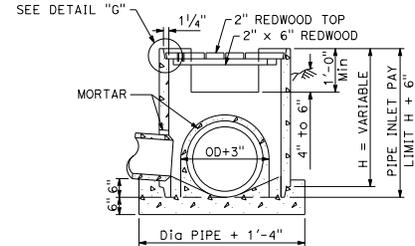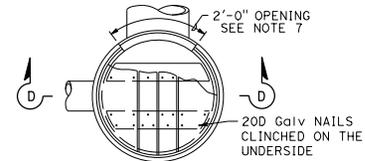


SECTION D-D
TYPE OCP or OCPI
Concrete pipe inlet with redwood cover
(See Notes 6 and 10)

TO ACCOMPANY PLANS DATED _____

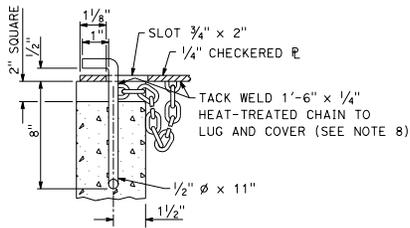


DETAIL "E"

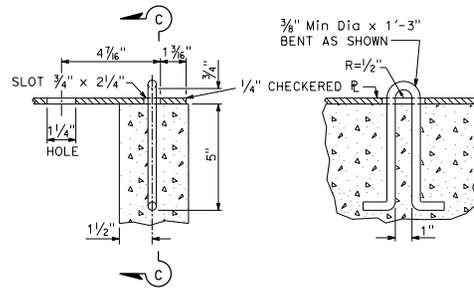

DETAIL "F"

SECTION C-C



DETAIL "G"

NOTES:

- For details of steel pipe inlets, see Standard Plan D75A.
- For details of ladder and steps and when ladder or steps are required, see Standard Plan D75C.
- Inlet pipes shall not protrude into basin.
- Except for inlets used for junction boxes, basin floors shall have minimum slope of 4:1 from all directions toward outlet pipe, and a wood trowel finish.
- See Revised Standard Plans RSP D77A and RSP D77B for Grate and Frame Details and Weights of Miscellaneous Iron and Steel.
- Designation of Type OCPI pipe inlets on plans indicates trash racks are to be furnished and installed on all side openings. See Standard Plan D75C for Trash Rack details.
- More than one side opening may be required. Location and number as ordered by the Engineer. Opening may be cast in pipe.
- Chain to be provided when specified.
- Place pipe so bars of grate will be parallel with main surface flow.
- Redwood covers shall only be placed at locations designated on the plans.

STATE OF CALIFORNIA
DEPARTMENT OF TRANSPORTATION

CONCRETE PIPE INLETS

NO SCALE

RSP D75B DATED OCTOBER 30, 2015 SUPERSEDES STANDARD PLAN D75B DATED MAY 20, 2011 - PAGE 162 OF THE STANDARD PLANS BOOK DATED 2010.

REVISED STANDARD PLAN RSP D75B

2010 REVISED STANDARD PLAN RSP D75B