



DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS
REGISTERED ELECTRICAL ENGINEER Theresa Aziz Gabriel No. E15129 PLANS APPROVAL DATE April 15, 2016 THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.					


TO ACCOMPANY PLANS DATED \_\_\_\_\_

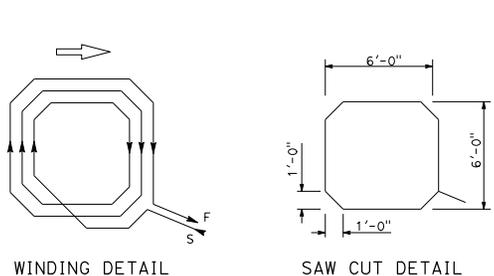


WINDING DETAIL  
SAW CUT DETAIL  
**TYPE A LOOP DETECTOR CONFIGURATION**

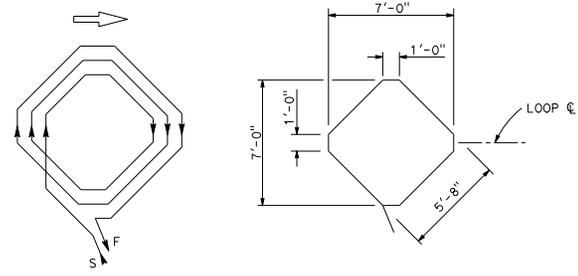


WINDING DETAIL  
SAW CUT DETAIL  
**TYPE B LOOP DETECTOR CONFIGURATION**

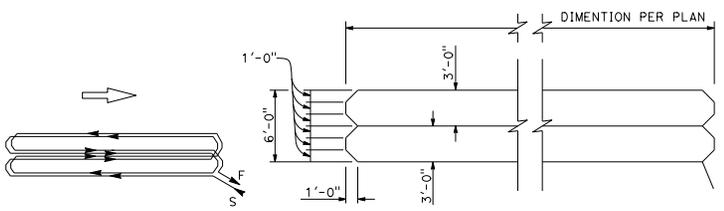


WINDING DETAIL  
SAW CUT DETAIL  
**TYPE C LOOP DETECTOR CONFIGURATION**

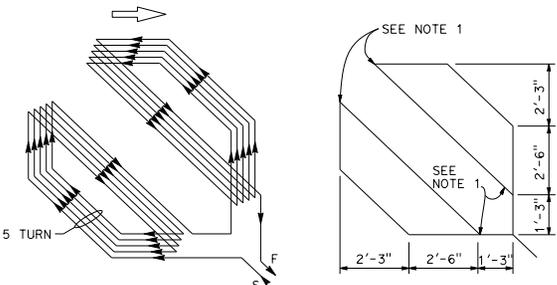


WINDING DETAIL  
SAW CUT DETAIL  
**TYPE D LOOP DETECTOR CONFIGURATION**

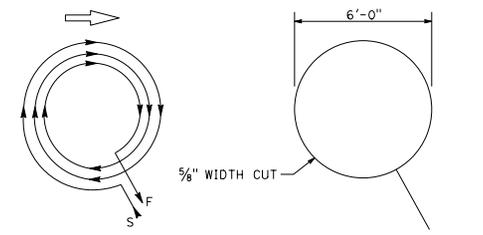

WINDING DETAIL  
SAW CUT DETAIL  
**TYPE E LOOP DETECTOR CONFIGURATION**

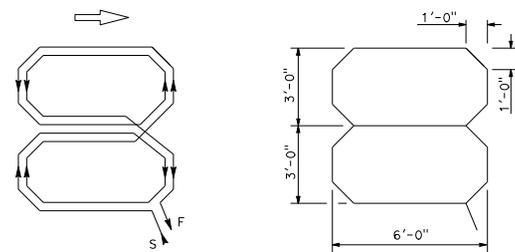

WINDING DETAIL  
SAW CUT DETAIL  
**TYPE Q LOOP DETECTOR CONFIGURATION**

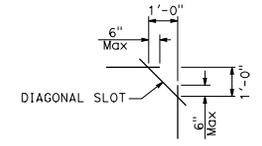

**PLAN VIEW OF  
DIAGONAL SLOT  
AT CORNERS**

- NOTES:**
1. Round corners of acute angle saw cuts to prevent damage to conductors.
  2. Typical distance separating loops from edge to edge is 10' for Type A, B, D and E installation in single lane.
  3. Use Type D loops for limit line detection and bicycle lanes.

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION  
**ELECTRICAL SYSTEMS  
(DETECTORS)**

NO SCALE

RSP ES-5B DATED APRIL 15, 2016 SUPERSEDES RSP ES-5B DATED OCTOBER 30, 2015 AND RSP ES-5B DATED JULY 19, 2013 AND STANDARD PLAN ES-5B DATED MAY 20, 2011 - PAGE 449 OF THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP ES-5B**

**2010 REVISED STANDARD PLAN RSP ES-5B**