



CASE A
Typical driveway, sidewalk not depressed




CASE B
Driveway with depressed sidewalk

SECTIONS


DRIVEWAYS




TYPE A1 CURBS
See Table A

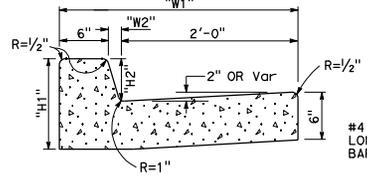


TYPE A2 CURBS
See Table A




TYPE A3 CURBS
Superimposed on existing pavement
See Table A




TYPE D CURBS
See Table A

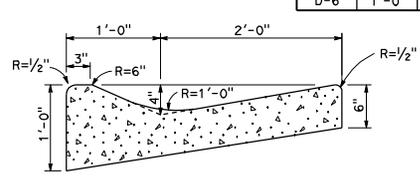


TYPE E CURB




TYPE B1 CURBS
See Table A

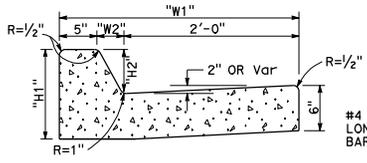


TYPE B2 CURBS
See Table A



TYPE B3 CURBS
Superimposed on existing pavement
See Table A



TYPE B4 CURBS



TYPE H CURB
On Bridges

CURBS

- NOTES:**
- Case A driveway section typically applies.
 - Use Case B driveway section when ramp slopes would exceed 10% in Case A.
 - Use Case B driveway section when sidewalk cross slope would exceed 2% in Case A.
 - X=3'-0" except for curb heights over 10" where 4:1 slopes shall be used on curb slope.
 - X is a variable when sidewalk is located where wheelchairs may traverse the surface. Slopes shall not exceed 8.33%.
 - Sidewalk and ramp thickness "T" at driveway shall be 4" for residential and 6" for commercial.
 - Difference in slope of the driveway ramp and the slope of a line between the gutter and a point on the roadway 5'-0" from gutter line shall not exceed 15%. Reduce driveway ramp slope, not gutter slope, where required.
 - Minimum width of clear passageway for sidewalk shall be 4'-0".
 - Retaining curbs and acquisition of construction easement may be necessary for narrow sidewalks or curb heights in excess of 6".
 - Across the pedestrian route at curb ramp locations, the gutter pan slope shall not exceed 1" of depth for each 2'-0" of width.

CURB QUANTITIES

TYPE	CUBIC YARDS PER LINEAR FOOT
A1-6	0.02585
A1-8	0.03084
A2-6	0.05903
A2-8	0.06379
A3-6	0.01036
A3-8	0.01435
B1-4	0.02185
B1-6	0.02930
B2-4	0.05515
B2-6	0.06171
B3-4	0.00641
B3-6	0.01074
B4	0.05709
D-4	0.04083
D-6	0.06804
E	0.06661

TABLE A

CURB TYPE	DIMENSIONS			
	"H1"	"H2"	"W1"	"W2"
A1-6	1'-2"	6"	7 1/2"	1 1/2"
A1-8	1'-4"	8"	8"	2"
A2-6	1'-0"	6"	2'-7 1/2"	1 1/2"
A2-8	1'-2"	8"	2'-8"	2"
A3-6	6"	5"	7 1/4"	1 1/4"
A3-8	8"	7"	7 3/4"	1 3/4"
B1-4	1'-0"	4"	7 1/2"	2 1/2"
B1-6	1'-2"	6"	9"	4"
B2-4	10"	4"	2'-7 1/2"	2 1/2"
B2-6	1'-0"	6"	2'-9"	4"
B3-4	4"	3"	7"	2"
B3-6	6"	5"	8 1/2"	3 1/2"
D-4	10"	4"	1'-6"	1'-1"
D-6	1'-0"	6"	2'-2"	1'-9"

D16+	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET TOTAL SHEETS

REGISTERED CIVIL ENGINEER
Michael Janzen
No. 44788
Exp. 03-31-12
REGISTERED PROFESSIONAL ENGINEER
STATE OF CALIFORNIA

May 20, 2011
PLANS APPROVAL DATE

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

STATE OF CALIFORNIA
DEPARTMENT OF TRANSPORTATION
CURBS AND DRIVEWAYS

NO SCALE

A87A