


DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET TOTAL SHEETS

REGISTERED CIVIL ENGINEER  
 Tiliot Satter  
 No. C42892  
 Exp. 3-31-12  
 CIVIL  
 STATE OF CALIFORNIA

May 20, 2011  
 PLANS APPROVAL DATE  
 THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

- NOTES:**
1. Walls are to be backfilled before barrier is placed.
  2. Clearance to reinforcing steel in barrier to be 1", except as noted. Longitudinal reinforcement to stop at all expansion joints.
  3. Dimensions may vary with roadway cross slope and with certain thickness of surfacing. See Project Plans.
  4. For typical metal railing connection details not shown, see Standard Plans A77J1 and A77J2.
  5. See Standard Plans ES-9A, ES-9B, ES-9C, ES-9D and ES-9E for electrical details. The maximum number of conduits in the barrier is limited to two 2" conduits along with one 3" conduit. When a 3" conduit is used, it is restricted to the base of the barrier.
  6. For electrolier mounting details, see Standard Plans ES-6A and ES-6B.
  7. Minimum concrete edge distance, to the reinforcing shown, shall be maintained. Edge distance may be adjusted to accommodate increase in concrete cover for architectural treatment.

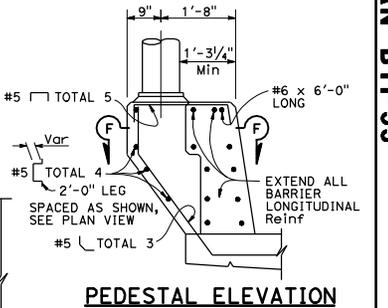

STATE OF CALIFORNIA  
 DEPARTMENT OF TRANSPORTATION  
**CONCRETE BARRIER  
 TYPE 732**  
 NO SCALE  
**B11-55**

2010 STANDARD PLAN B11-55