



DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET TOTAL SHEETS

*William K. Farnbach*  
 REGISTERED CIVIL ENGINEER  
 July 19, 2013  
 PLANS APPROVAL DATE  
 THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

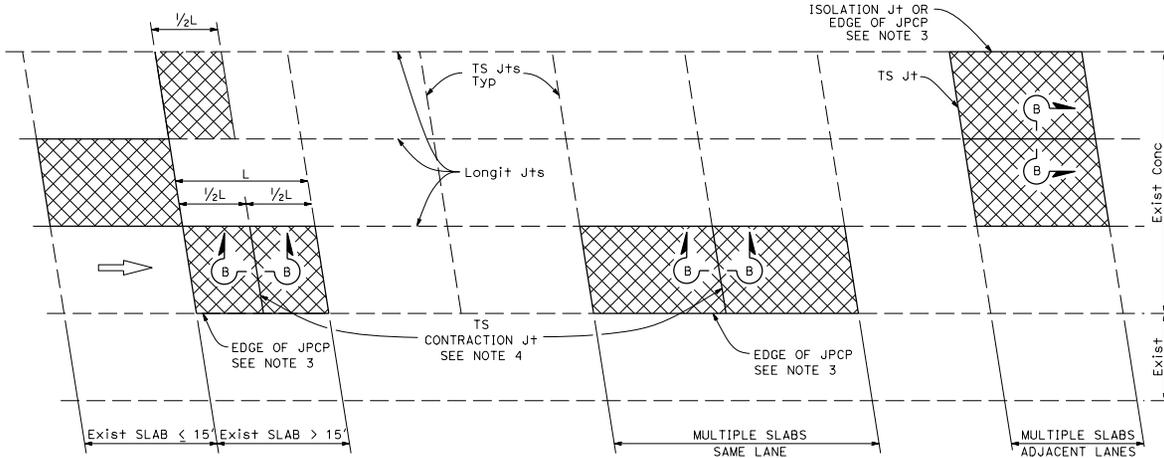

PLAN

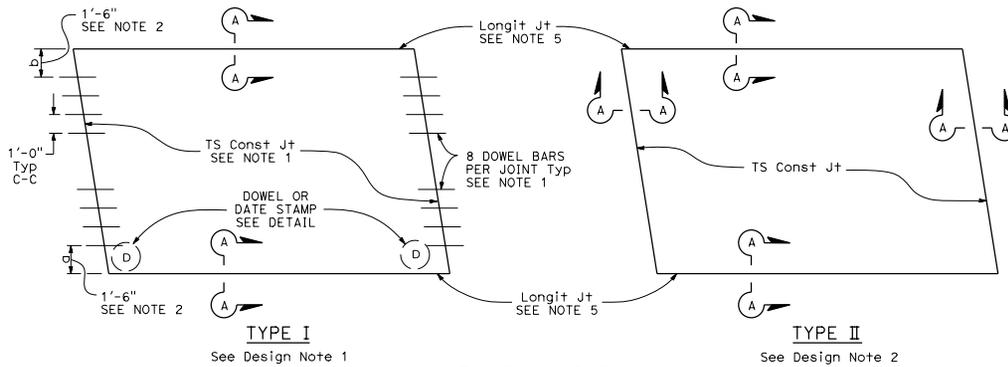

SLAB LAYOUT

LEGEND:


- RSC RAPID STRENGTH CONCRETE
- INDIVIDUAL SLAB REPLACEMENT WITH RSC

NOTES:


- For details not shown, see Revised Standard Plan RSP P10.
- Where the existing outside shoulder is asphalt concrete pavement, "a" = 1'-0" and "b" = 2'-0".
- Use side forms where edge of RSC pavement is adjacent to asphalt concrete.
- Transverse contraction joint to match skew of existing joint. Omit dowel bars.
- Do not place tie bars at longitudinal joints.

DESIGN NOTES:


- For concrete slab repair with at least 5 years design life.
- For short term repairs < 5 yrs design life or for slab replacements with cracking and seating.

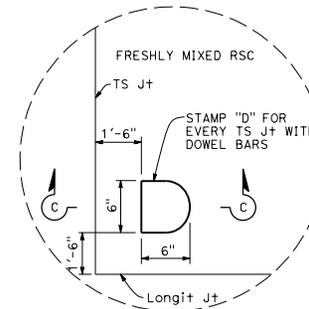


DOWEL STAMP DETAIL

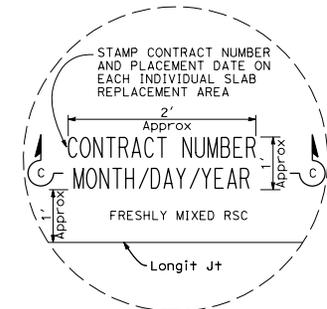


DATE STAMP DETAIL

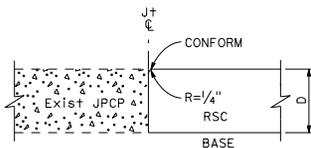

SECTION A-A

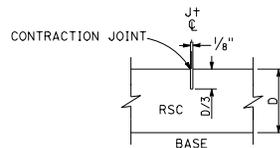

SECTION B-B

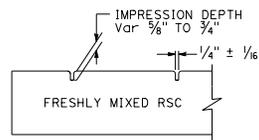

SECTION C-C

**INDIVIDUAL SLAB REPLACEMENT WITH RAPID STRENGTH CONCRETE**

NO SCALE

RSP P8 DATED JULY 19, 2013 SUPERSEDES RSP P8 DATED APRIL 20, 2012 AND STANDARD PLAN P8 DATED MAY 20, 2011 - PAGE 130 OF THE STANDARD PLANS BOOK DATED 2010.

**REVISED STANDARD PLAN RSP P8**