


D16+	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET TOTAL SHEETS

Robert B. Smith
 LICENSED LANDSCAPE ARCHITECT
 May 20, 2011
 PLANS APPROVAL DATE
 THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.


GRAVEL BAG BERM (TYPE 3A) SPACING TABLE

SLOPE OF ROADWAY (PERCENT)	1 TO 3.9	4 TO 5.9	6 TO 7.9	8 TO 10	10+
INTERVAL BETWEEN BERM	100'	75'	50'	25'	12'

For slope of less than 1%, install barriers only if erosion/sediment is prevalent

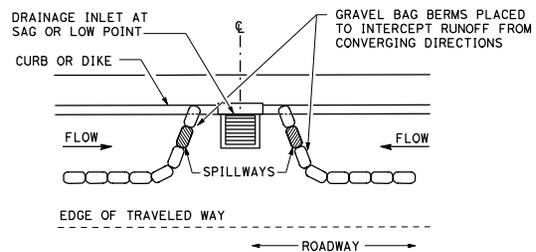


PLAN
CONFIGURATION FOR SAG POINT INLET
(GRAVEL BAG BERM)

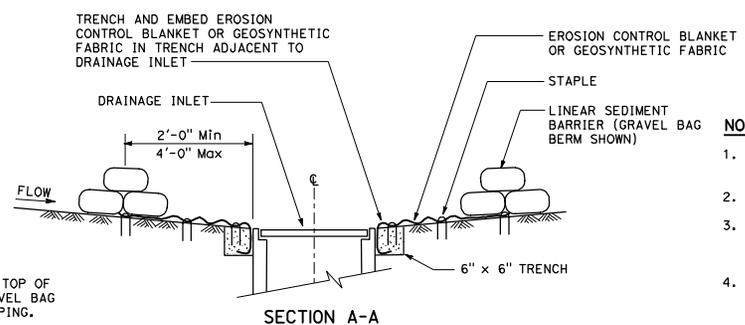

SECTION A-A


NOTES:

1. Place safety cones adjacent to drainage inlet protection.
2. Dimensions may vary to fit field conditions.
3. Install a minimum of 3 gravel bag berms upstream of each drainage inlet to be protected.
4. Position erosion control blanket or geosynthetic fabric at edge of concrete apron and secure in trench.
5. Erosion control blanket or geosynthetic fabric is not required if the area adjacent to the drainage inlet is vegetated or paved.

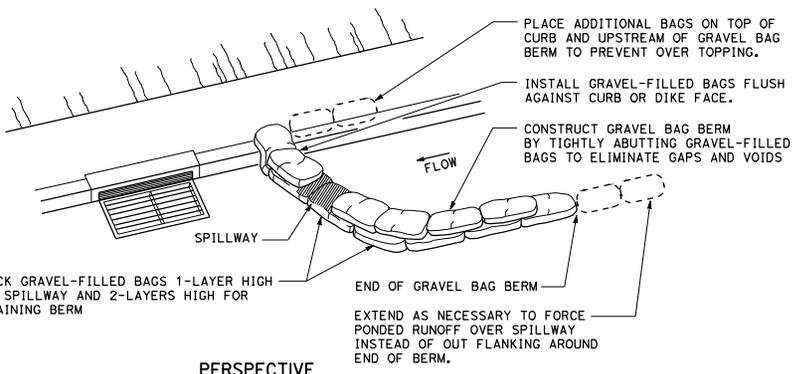


PERSPECTIVE


STACK GRAVEL-FILLED BAGS 1-LAYER HIGH FOR SPILLWAY AND 2-LAYERS HIGH FOR REMAINING BERM

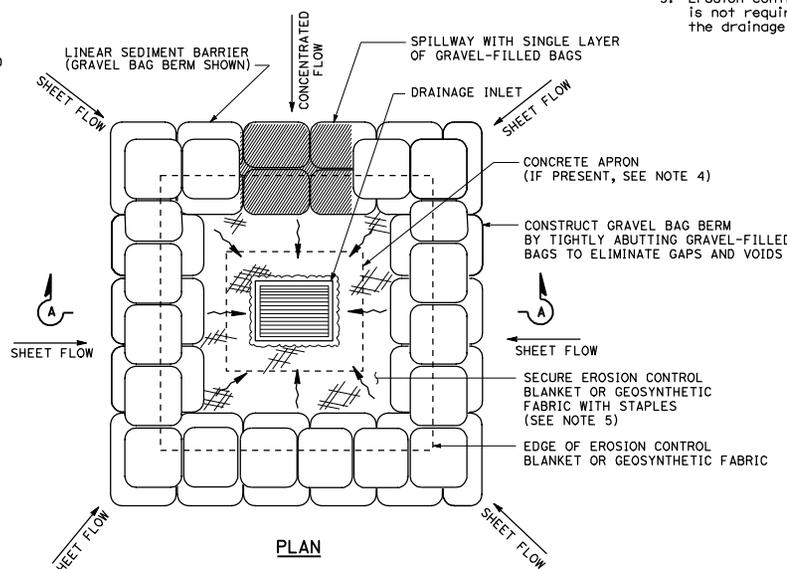

PLAN
TEMPORARY DRAINAGE
INLET PROTECTION (TYPE 3B)



STAPLE DETAIL

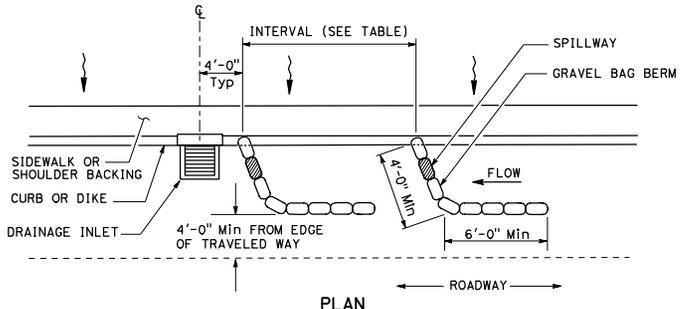

PLAN
TEMPORARY DRAINAGE
INLET PROTECTION (TYPE 3A)
(GRAVEL BAG BERM)

STATE OF CALIFORNIA
 DEPARTMENT OF TRANSPORTATION
TEMPORARY WATER POLLUTION CONTROL DETAILS
(TEMPORARY DRAINAGE INLET PROTECTION)

NO SCALE

T62

257

2010 STANDARD PLAN T62