
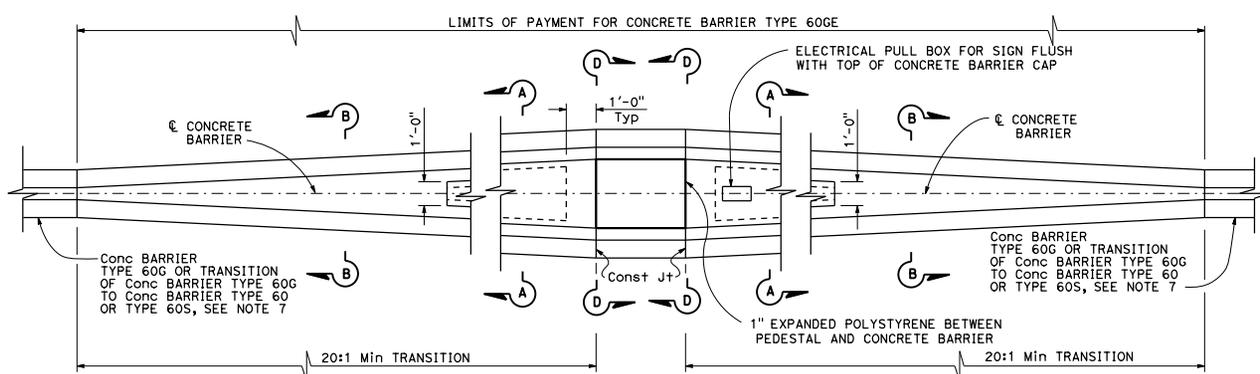
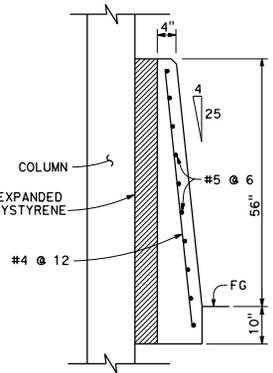
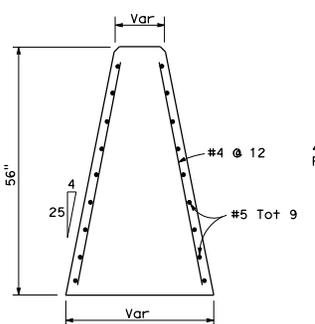
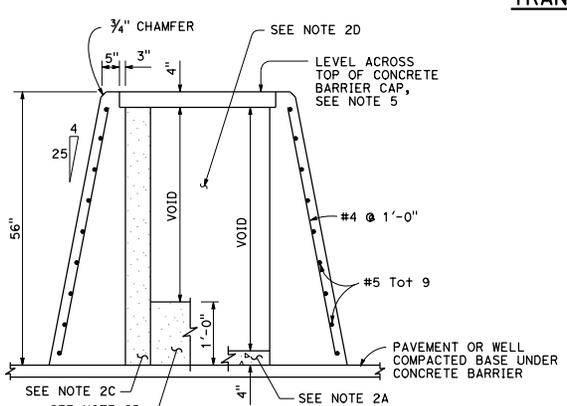
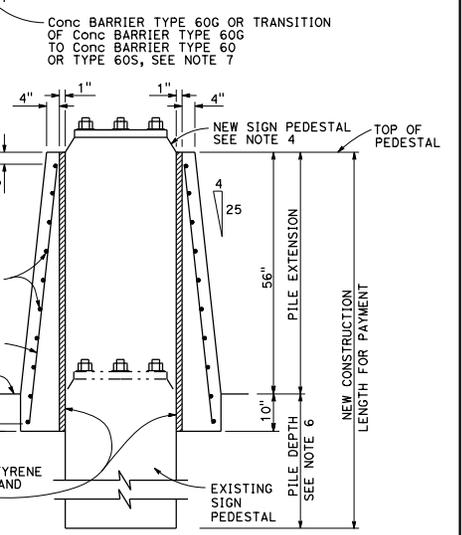


Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET TOTAL SHEETS
Randell D. Hiatt REGISTERED CIVIL ENGINEER October 30, 2015 PLANS APPROVAL DATE No. C50200 Exp. 6-30-17 CIVIL STATE OF CALIFORNIA				

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

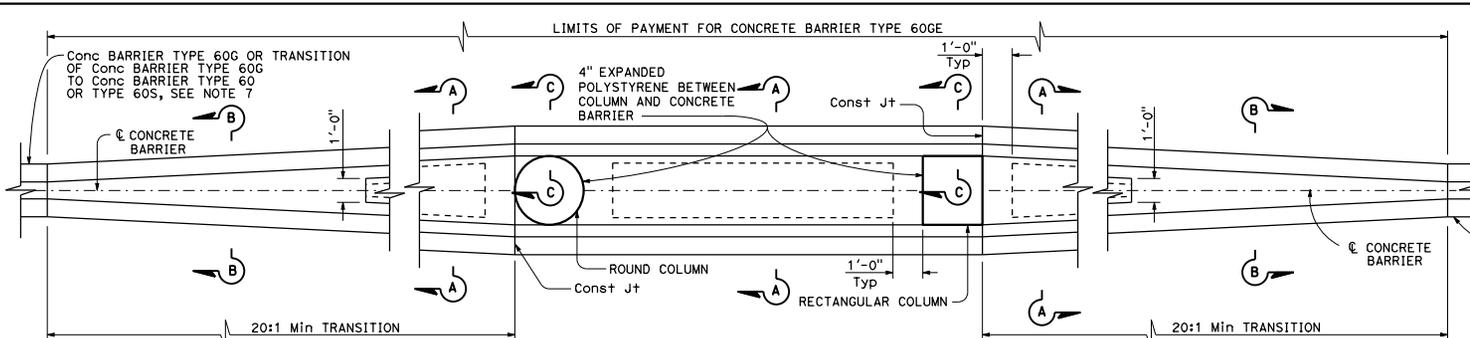

- NOTES:**
- See Standard Plan A76D for Concrete Barrier Type 60G.
 - Contractor options for fill between concrete barrier walls:
 - Place 4" PCC at base between concrete barrier walls.
 - Place 1'-0" of granular material at base between walls.
 - Place granular material from base to bottom of 4" cap.
 - Monolithic concrete with foam blockouts is not permitted.
 - Reinforcing steel shall extend continuous through construction joints.
 - See Overhead Sign plans for sign pedestal elevations on new construction.
 - Adjust height of concrete barrier wall on low side of offset or super-elevated roadways to provide level grade across top of concrete barrier cap.
 - See Overhead Signs Standard Plan Pile Foundation Tables.
 - See Standard Plan A76E for concrete barrier transitions.

STATE OF CALIFORNIA
DEPARTMENT OF TRANSPORTATION

CONCRETE BARRIER TYPE 60GE

NO SCALE

A76F

2015 STANDARD PLAN A76F