



**Caltrans**<sup>®</sup>

**STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION**

**NOTICE TO BIDDERS  
AND  
SPECIAL PROVISIONS**

**FOR CONSTRUCTION ON STATE HIGHWAY IN ORANGE COUNTY IN SANTA ANA  
FROM 0.1 MILE NORTH OF MACARTHUR BOULEVARD UNDERCROSSING TO 0.2 MILE  
SOUTH OF DYER ROAD UNDERCROSSING**

**In District 12 On Route 55**

**Under**

---

Bid book dated March 15, 2010

Standard Specifications dated 2006

Project Plans approved December 28, 2009

Standard Plans dated 2006

---

**Identified by**

**Contract No. 12-0E2504**

**12-Ora-55-7.0/7.9**

Bids open Thursday, April 22, 2010

Dated March 15, 2010



\*\*\*\*\*

# SPECIAL NOTICES

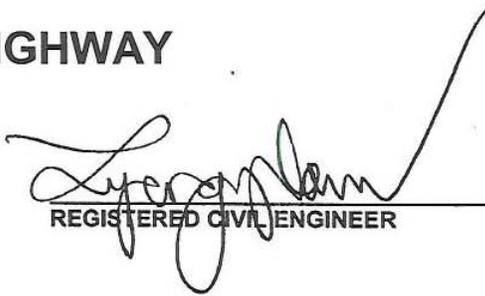
\*\*\*\*\*


- The Subcontractor List form in the Bid book and Section 2-1.12, "Bid Document Completion," of the Amendments to the Standard Specifications have been revised.
- Refer to Section 8-1.07, "Liquidated Damages," of the Amendments to the Standard Specifications for your project-specific liquidated damages based on your total bid.
- The Department has changed its DVBE requirements, including an increased maximum incentive amount. Refer to section titled "Disabled Veteran Business Enterprises" in Section 2, "Bidding," of these special provisions.
- Effective August 1, 2009, the Department is implementing electronic notification of construction contract addenda for all projects. For addenda information, go to:  
  
<http://www.dot.ca.gov/addenda/>
- The contract award period has been extended for this project.
- The Department has revised its specifications for compensation adjustments for price index fluctuations. Refer to section titled "Payment Adjustments for Price Index Fluctuations" in Section 5, "General," of the special provisions. The following list summarizes the main revisions:
  1. The new index is based on the average of the previous month's crude oil prices.
  2. There is a new Web site address.
  3. The 90/10 cost sharing provision was removed.
  4. Sales tax is included in the adjustments.
  5. All paving materials that include asphalt are subject to the adjustments.
  6. Formulas for calculating asphalt quantities for various materials are included.
  7. Bidders may opt out of payment adjustments for price index fluctuations at the time of bid.
- The Department has replaced Section 8, "Prosecution and Progress." This replacement affects references in a large number of other specifications. Due to the extent of affected specifications, these references will not be corrected until there is a change in technical content that merits a specification revision. Section 0, "Global Revisions," of the Amendments to the Standard Specifications covers references affected by the Section 8 replacement.
- The Department is allowing contractors to submit electronic payroll records to the District Labor Compliance Office. Refer to section titled "Electronic Submission of Payroll Records" under Section 5, "General," of these special provisions.

# CONTRACT NO. 12-0E2504

The special provisions contained herein have been prepared by or under the direction of the following Registered Persons.

## HIGHWAY

  
REGISTERED CIVIL ENGINEER




## TRAFFIC

  
REGISTERED CIVIL ENGINEER



## ELECTRICAL

  
REGISTERED ELECTRICAL ENGINEER



## LANDSCAPE

  
LICENSED LANDSCAPE ARCHITECT



# TABLE OF CONTENTS

NOTICE TO BIDDERS .....	1
COPY OF BID ITEM LIST.....	3
SPECIAL PROVISIONS.....	7
SECTION 1 (BLANK).....	7
SECTION 2 BIDDING.....	7
2-1.01 SMALL BUSINESS AND NON-SMALL BUSINESS SUBCONTRACTOR PREFERENCES .....	7
2-1.02 DISABLED VETERAN BUSINESS ENTERPRISES .....	8
2-1.03 CALIFORNIA COMPANIES .....	8
2-1.04 TIE BID RESOLUTION.....	8
2-1.05 OPT OUT OF PAYMENT ADJUSTMENTS FOR PRICE INDEX FLUCTUATIONS .....	9
SECTION 3 CONTRACT AWARD AND EXECUTION.....	9
3-1.01 CONTRACT AWARD.....	9
3-1.02 SMALL BUSINESS PARTICIPATION REPORT .....	9
SECTION 4 BEGINNING OF WORK, TIME OF COMPLETION AND LIQUIDATED DAMAGES .....	9
SECTION 5 GENERAL.....	9
5-1.01 EMISSIONS REDUCTION .....	9
5-1.02 NON-SMALL BUSINESSES .....	9
5-1.03 DISABLED VETERAN BUSINESS ENTERPRISES .....	10
5-1.04 PAYMENT ADJUSTMENTS FOR PRICE INDEX FLUCTUATIONS .....	10
5-1.05 SURFACE MINING AND RECLAMATION ACT.....	13
5-1.06 ELECTRONIC SUBMISSION OF PAYROLL RECORDS.....	13
5-1.07 AREAS FOR CONTRACTOR'S USE .....	14
5-1.08 PAYMENTS .....	15
5-1.09 SUPPLEMENTAL PROJECT INFORMATION.....	15
5-1.10 RELATIONS WITH CALIFORNIA REGIONAL WATER QUALITY CONTROL BOARD .....	15
5-1.11 RELIEF FROM MAINTENANCE AND RESPONSIBILITY .....	16
SECTION 6. (BLANK).....	16
SECTION 7. (BLANK).....	16
SECTION 8. MATERIALS.....	16
SECTION 8-1. MISCELLANEOUS.....	16
8-1.01 PREQUALIFIED AND TESTED SIGNING AND DELINEATION MATERIALS.....	16
8-1.02 SLAG AGGREGATE .....	22
SECTION 8-2. CONCRETE.....	23
8-2.01 PORTLAND CEMENT CONCRETE .....	23
SECTION 8-3. WELDING.....	24
8-3.01 WELDING.....	24
WELDING QUALITY CONTROL.....	26
SECTION 9. (BLANK).....	29
SECTION 10. CONSTRUCTION DETAILS .....	29
SECTION 10-1. GENERAL.....	29
10-1.00 CONSTRUCTION PROJECT INFORMATION SIGNS.....	29
10-1.01 ORDER OF WORK .....	30
10-1.02 WATER POLLUTION CONTROL.....	30
10-1.03 CONSTRUCTION SITE MANAGEMENT.....	36
10-1.04 STREET SWEEPING.....	46
10-1.05 TEMPORARY CONCRETE WASHOUT (PORTABLE) .....	47
10-1.06 TEMPORARY SILT FENCE .....	49
10-1.07 TEMPORARY CONSTRUCTION ENTRANCE .....	51
10-1.08 TEMPORARY DRAINAGE INLET PROTECTION .....	54
10-1.09 COOPERATION.....	63
10-1.10 PROGRESS SCHEDULE (CRITICAL PATH METHOD).....	63
10-1.11 SMALL BUSINESS UTILIZATION REPORT .....	65
10-1.12 CONSTRUCTION AREA TRAFFIC CONTROL DEVICES .....	65
10-1.13 CONSTRUCTION AREA SIGNS .....	66

10-1.14	MAINTAINING TRAFFIC.....	67
10-1.15	CLOSURE REQUIREMENTS AND CONDITIONS .....	70
10-1.16	IMPACT ATTENUATOR VEHICLE.....	71
10-1.17	TRAFFIC CONTROL SYSTEM FOR LANE CLOSURE.....	72
10-1.18	TEMPORARY PAVEMENT DELINEATION .....	73
10-1.19	BARRICADE.....	74
10-1.20	PORTABLE CHANGEABLE MESSAGE SIGNS .....	75
10-1.21	CHANNELIZER.....	76
10-1.22	TEMPORARY TRAFFIC SCREEN.....	76
10-1.23	TEMPORARY CRASH CUSHION MODULE .....	76
10-1.24	REMOVE YELLOW TRAFFIC STRIPE AND PAVEMENT MARKING (HAZARDOUS WASTE).....	78
10-1.25	TREATED WOOD WASTE .....	80
10-1.26	EXISTING HIGHWAY FACILITIES .....	81
	EARTH MATERIAL CONTAINING LEAD.....	81
	REMOVE METAL BEAM GUARD RAILING.....	82
	REMOVE PAVEMENT MARKER .....	82
	REMOVE TRAFFIC STRIPE AND PAVEMENT MARKING .....	82
	REMOVE ASPHALT CONCRETE DIKE.....	83
	REMOVE ROADSIDE SIGN.....	83
	RELOCATE ROADSIDE SIGN.....	83
	REMOVE CONCRETE.....	83
10-1.27	CLEARING AND GRUBBING.....	83
10-1.28	EARTHWORK .....	83
10-1.29	CONTROLLED LOW STRENGTH MATERIAL .....	83
10-1.30	TRANSPLANT PALM TREES .....	84
10-1.31	AGGREGATE SUBBASE.....	85
10-1.32	HOT MIX ASPHALT .....	85
10-1.33	RUBBERIZED HOT MIX ASPHALT (GAP GRADED) .....	86
10-1.34	PILING.....	87
	CAST-IN-DRILLED-HOLE CONCRETE PILES .....	87
10-1.35	CONCRETE STRUCTURES.....	88
10-1.36	STEEL STRUCTURES.....	88
	MATERIALS .....	88
	ROTATIONAL CAPACITY TESTING PRIOR TO SHIPMENT TO JOB SITE .....	88
	INSTALLATION TENSION TESTING AND ROTATIONAL CAPACITY TESTING AFTER ARRIVAL ON THE JOB SITE.....	92
	SEALING.....	92
	WELDING .....	92
10-1.37	ROADSIDE SIGNS .....	93
10-1.38	INSTALL SIGN PANEL ON EXISTING FRAME .....	93
10-1.39	FURNISH SIGN.....	93
	SHEET ALUMINUM.....	95
	RETROREFLECTIVE SHEETING.....	95
	PROCESS COLOR AND FILM .....	95
	SINGLE SHEET ALUMINUM SIGN.....	95
	LAMINATED PANEL SIGN .....	96
	MEASUREMENT AND PAYMENT.....	97
10-1.40	REINFORCED CONCRETE PIPE .....	97
10-1.41	SLOPE PROTECTION .....	98
10-1.42	MISCELLANEOUS CONCRETE CONSTRUCTION .....	98
10-1.43	MISCELLANEOUS IRON AND STEEL .....	98
10-1.44	METAL BEAM GUARD RAILING.....	98
	TERMINAL SYSTEM (TYPE CAT).....	98
	ALTERNATIVE FLARED TERMINAL SYSTEM.....	99
10-1.45	THERMOPLASTIC TRAFFIC STRIPE AND PAVEMENT MARKING .....	99
10-1.46	PAINT TRAFFIC STRIPE.....	100
10-1.47	PAVEMENT MARKERS .....	100
SECTION 10-2	HIGHWAY PLANTING AND IRRIGATION SYSTEMS .....	100

10-2.01 GENERAL .....	100
COST BREAK-DOWN .....	101
10-2.02 EXISTING HIGHWAY PLANTING .....	103
10-2.03 EXISTING HIGHWAY IRRIGATION FACILITIES .....	103
CHECK AND TEST EXISTING IRRIGATION FACILITIES .....	103
MAINTAIN EXISTING IRRIGATION FACILITIES .....	104
10-2.04 HIGHWAY PLANTING .....	104
MULCH .....	104
PESTICIDES .....	106
PLANTING .....	106
PLANT ESTABLISHMENT WORK .....	106
10-2.05 IRRIGATION SYSTEMS .....	107
IRRIGATION SYSTEMS FUNCTIONAL TEST .....	107
PIPE .....	108
SPRINKLERS .....	108
FINAL IRRIGATION SYSTEM CHECK .....	108
SECTION 10-3. ELECTRICAL SYSTEMS .....	108
10-3.01 DESCRIPTION .....	108
10-3.02 COST BREAK-DOWN .....	108
10-3.03 MAINTAINING EXISTING TRAFFIC MANAGEMENT SYSTEM ELEMENTS DURING CONSTRUCTION .....	109
10-3.04 CAST-IN-DRILLED-HOLE CONCRETE PILE FOUNDATIONS .....	110
10-3.05 STANDARDS, STEEL PEDESTALS, AND POSTS .....	110
10-3.06 CONDUIT .....	110
10-3.07 PULL BOXES .....	111
10-3.08 CONDUCTORS, CABLES, AND WIRING .....	111
10-3.09 NUMBERING ELECTRICAL EQUIPMENT .....	111
10-3.10 DETECTORS .....	111
10-3.11 LUMINAIRES .....	111
AMENDMENTS TO THE STANDARD SPECIFICATIONS .....	112

# STANDARD PLANS LIST

The Standard Plan sheets applicable to this contract include, but are not limited to, those indicated below. Applicable Revised Standard Plans (RSP) and New Standard Plans (NSP) indicated below are included in the project plans as Standard Plan sheets.

A10A	Acronyms and Abbreviations (Sheet 1 of 2)
A10B	Acronyms and Abbreviations (Sheet 2 of 2)
A10C	Symbols (Sheet 1 of 2)
A10D	Symbols (Sheet 2 of 2)
A20A	Pavement Markers and Traffic Lines, Typical Details
A20B	Pavement Markers and Traffic Lines, Typical Details
A20C	Pavement Markers and Traffic Lines, Typical Details
A20D	Pavement Markers and Traffic Lines, Typical Details
A24A	Pavement Markings – Arrows
A24B	Pavement Markings – Arrows
A24D	Pavement Markings – Words
A24E	Pavement Markings – Words and Crosswalks
A62A	Excavation and Backfill – Miscellaneous Details
A62B	Limits of Payment for Excavation and Backfill – Bridge Surcharge and Wall
A62D	Excavation and Backfill – Concrete Pipe Culverts
RSP A62DA	Excavation and Backfill – Concrete Pipe Culverts
A73B	Markers
A73C	Delineators, Channelizers and Barricades
A77A1	Metal Beam Guard Railing – Standard Railing Section (Wood Post with Wood Block)
A77B1	Metal Beam Guard Railing – Standard Hardware
A77C1	Metal Beam Guard Railing – Wood Post and Wood Block Details
A77C3	Metal Beam Guard Railing – Typical Line Post Embedment and Hinge Point Offset Details
RSP A77C4	Metal Beam Guard Railing – Typical Railing Delineation and Dike Positioning Details
RSP A77G3	Metal Beam Guard Railing – Typical Layouts for Roadside Fixed Objects
RSP A77G4	Metal Beam Guard Railing – Typical Layouts for Roadside Fixed Objects
RSP A77G5	METAL BEAM GUARD RAILING – TYPICAL LAYOUTS FOR ROADSIDE FIXED OBJECTS
A77H1	Metal Railing – End Anchor Assembly (Type SFT)
RSP A77J4	Metal Beam Guard Railing – Transition Railing (Type WB)
A77L1	Metal Beam Railing – Terminal System (Type SRT)
A77L4	Metal Beam Railing – Terminal System (Type CAT)
A77L5	Metal Beam Railing – Terminal System (Type FLEAT)
RSP A87A	Curbs and Driveways
A87B	Asphalt Concrete Dikes
D73	Drainage Inlets
RSP D77A	Grate Details
D78A	Gutter Depressions
D78B	Inlet Depressions – Concrete Shoulders
D78C	Inlet Depressions – Asphalt Concrete Shoulders
RSP H1	Planting and Irrigation – Abbreviations
RSP H2	Planting and Irrigation – Symbols
H3	Planting and Irrigation Details
RSP H5	Planting and Irrigation Details
H6	Planting and Irrigation Details
H9	Planting and Irrigation Details
RSP T1A	Temporary Crash Cushion, Sand Filled (Unidirectional)

RSP T1B	Temporary Crash Cushion, Sand Filled (Bidirectional)
RSP T2	Temporary Crash Cushion, Sand Filled (Shoulder Installations)
T3	Temporary Railing (Type K)
T4	Temporary Traffic Screen
RSP T7	Construction Project Funding Identification Signs
T10	Traffic Control System for Lane Closure On Freeways and Expressways
T14	Traffic Control System for Ramp Closure
T51	Temporary Water Pollution Control Details (Temporary Silt Fence)
T58	Temporary Water Pollution Control Details (Temporary Construction Entrance)
NSP T61	Temporary Water Pollution Control Details (Temporary Drainage Inlet Protection)
B2-3	16" and 24" Cast-In-Drilled-Hole Concrete Pile
RS1	Roadside Signs, Typical Installation Details No. 1
RS2	Roadside Signs – Wood Post, Typical Installation Details No. 2
RS4	Roadside Signs, Typical Installation Details No. 4
S41	Overhead Signs – Lightweight Balanced – Single Steel Post Connection and Mounting Details
S43	Overhead Signs – Lightweight, Type A, Connection Details
S46	Overhead Signs – Lightweight, Sign Panel Mounting Details, Laminated Panel – Type A
S81	Overhead Laminated Sign – Single or Multiple Panel, Type A (1" Thick)
S87	Type A-1 Mounting Hardware – Overhead Laminated Type A Panel, Truss and Lightweight Sign Structures
S88	Type A-2 Mounting Hardware – Overhead Laminated Type A Panel, Bridge Mounted and Tubular Sign Structures
S93	Framing Details for Framed Single Sheet Aluminum Signs, Rectangular Shape
S94	Roadside Framed Single Sheet Aluminum Signs, Rectangular Shape
S95	Roadside Single Sheet Aluminum Signs, Diamond Shape
RSP ES-1A	Electrical Systems (Symbols and Abbreviations)
RSP ES-1B	Electrical Systems (Symbols and Abbreviations)
RSP ES-1C	Electrical Systems (Symbols and Abbreviations)
ES-3C	Electrical Systems (Controller Cabinet Details)
RSP ES-5A	Electrical Systems (Detectors)
ES-5B	Electrical Systems (Detectors)
ES-5D	Electrical Systems (Detectors)
RSP ES-6E	Electrical Systems (Lighting Standard, Types 30 and 31)
ES-6F	Electrical Systems (Lighting Standard, Types 30 and 31, Slip Base Plate Details)
ES-7M	Electrical Systems (Signal and Lighting Standards – Details No. 1)
ES-7N	Electrical Systems (Signal and Lighting Standards – Details No. 2)
ES-8	Electrical Systems (Pull Box Details)
ES-10	Electrical Systems (Isofootcandle Diagrams)
ES-11	Electrical Systems (Foundation Installations)
ES-13A	Electrical Systems (Splicing Details)
ES-13B	Electrical Systems (Wiring Details and Fuse Ratings)
ES-15A	Electrical Systems (Sign Illumination Equipment)
ES-15C	Electrical Systems (Sign Illumination Equipment)

# NOTICE TO BIDDERS

Bids open Thursday, April 22, 2010

Dated March 15, 2010

General work description: Widen roadway with HMA pavement.

The Department will receive sealed bids for CONSTRUCTION ON STATE HIGHWAY IN ORANGE COUNTY IN SANTA ANA FROM 0.1 MILE NORTH OF MACARTHUR BOULEVARD UNDERCROSSING TO 0.2 MILE SOUTH OF DYER ROAD UNDERCROSSING.

District-County-Route-Post Mile: 12-Ora-55-7.0/7.9

Contract No. 12-0E2504

The Contractor must have either a Class A license or one of the following Class C licenses: C-12.

The Department establishes no DVBE Contract goal but encourages bidders to obtain DVBE participation.

Bids must be on a unit price basis.

Complete the work, including plant establishment work, within 270 working days.

The estimated cost of the project is \$1,780,000.

No prebid meeting is scheduled for this project.

The Department will receive bids until 2:00 p.m. on the bid open date at 3347 Michelson Drive, Suite 100, Irvine, CA 92612-1692. Bids received after this time will not be accepted.

The Department will open and publicly read the bids at the above location immediately after the specified closing time.

District office addresses are provided in the Standard Specifications.

Bidders' inquiries may be presented to the Department by following the instructions at:

[http://www.dot.ca.gov/hq/esc/oe/project\\_status/bid\\_inq.html](http://www.dot.ca.gov/hq/esc/oe/project_status/bid_inq.html)

The Department posts responses to the questions at the District Web sites.

Questions about alleged patent ambiguity of the plans, specifications, or estimate must be asked before bid opening. After bid opening, such questions will not be treated as bid protests.

Submit your bid with bidder's security equal to at least 10 percent of the bid.

Under Govt Code § 14835 et seq. and 2 CA Code of Regs § 1896 et seq., the Department gives preference to certified small businesses and non-small businesses who commit to 25 percent certified small business participation.

Under Pub Cont Code § 6107, the Department gives a reciprocal preference to a California company for bid comparison purposes over a nonresident contractor from any state that provides a preference to contractors from that state on construction contracts.

Prevailing wages are required on this Contract. The Director of the California Department of Industrial Relations determines the general prevailing wage rates. Obtain the wage rates at the DIR Web site, <http://www.dir.ca.gov>, or from the Department's Labor Compliance Office of the district in which the work is located.

The Department has made available Notices of Suspension and Proposed Debarment from the Federal Highway Administration. For a copy of the notices go to [http://www.dot.ca.gov/hq/esc/oe/contractor\\_info](http://www.dot.ca.gov/hq/esc/oe/contractor_info). Additional information is listed in the Excluded Parties List System at <https://www.epls.gov>.

DEPARTMENT OF TRANSPORTATION

EMW

**COPY OF BID ITEM LIST**

Item No.	Item Code	Item Description	Unit of Measure	Estimated Quantity
1	070013	SMALL BUSINESS UTILIZATION REPORT	EA	4
2	074016	CONSTRUCTION SITE MANAGEMENT	LS	LUMP SUM
3	074019	PREPARE STORM WATER POLLUTION PREVENTION PLAN	LS	LUMP SUM
4	074029	TEMPORARY SILT FENCE	LF	2,870
5	074033	TEMPORARY CONSTRUCTION ENTRANCE	EA	2
6	074038	TEMPORARY DRAINAGE INLET PROTECTION	EA	1
7	074041	STREET SWEEPING	LS	LUMP SUM
8	074042	TEMPORARY CONCRETE WASHOUT (PORTABLE)	LS	LUMP SUM
9	120090	CONSTRUCTION AREA SIGNS	LS	LUMP SUM
10	120100	TRAFFIC CONTROL SYSTEM	LS	LUMP SUM
11	120120	TYPE III BARRICADE	EA	23
12	120165	CHANNELIZER (SURFACE MOUNTED)	EA	54
13	128650	PORTABLE CHANGEABLE MESSAGE SIGN	LS	LUMP SUM
14	129000	TEMPORARY RAILING (TYPE K)	LF	5,250
15	129100	TEMPORARY CRASH CUSHION MODULE	EA	31
16	129150	TEMPORARY TRAFFIC SCREEN	LF	4,650
17	141103	REMOVE YELLOW THERMOPLASTIC TRAFFIC STRIPE (HAZARDOUS WASTE)	LF	11,300
18	150662	REMOVE METAL BEAM GUARD RAILING	LF	880
19	150711	REMOVE PAINTED TRAFFIC STRIPE	LF	24,900
20	150714	REMOVE THERMOPLASTIC TRAFFIC STRIPE	LF	19,100

Item No.	Item Code	Item Description	Unit of Measure	Estimated Quantity
21	150715	REMOVE THERMOPLASTIC PAVEMENT MARKING	SQFT	950
22	150722	REMOVE PAVEMENT MARKER	EA	3,610
23	150742	REMOVE ROADSIDE SIGN	EA	19
24	150771	REMOVE ASPHALT CONCRETE DIKE	LF	390
25	152392	RELOCATE ROADSIDE SIGN (WOOD POST)	EA	1
26	153214	REMOVE CONCRETE CURB	LF	510
27	153246	REMOVE CONCRETE (MISCELLANEOUS)	CY	23
28	160101	CLEARING AND GRUBBING	LS	LUMP SUM
29	190101	ROADWAY EXCAVATION	CY	7,670
30	190110	LEAD COMPLIANCE PLAN	LS	LUMP SUM
31	200001	HIGHWAY PLANTING	LS	LUMP SUM
32	204031	TRANSPLANT PALM TREE	EA	1
33	204096	MAINTAIN EXISTING PLANTED AREAS	LS	LUMP SUM
34	204099	PLANT ESTABLISHMENT WORK	LS	LUMP SUM
35	206401	MAINTAIN EXISTING IRRIGATION FACILITIES	LS	LUMP SUM
36	208000	IRRIGATION SYSTEM	LS	LUMP SUM
37	250201	CLASS 2 AGGREGATE SUBBASE	CY	3,720
38	390132	HOT MIX ASPHALT (TYPE A)	TON	7,930
39	390137	RUBBERIZED HOT MIX ASPHALT (GAP GRADED)	TON	1,240
40	394075	PLACE HOT MIX ASPHALT DIKE (TYPE D)	LF	58

Item No.	Item Code	Item Description	Unit of Measure	Estimated Quantity
41	394077	PLACE HOT MIX ASPHALT DIKE (TYPE F)	LF	320
42	397005	TACK COAT	TON	1
43 (F)	510502	MINOR CONCRETE (MINOR STRUCTURE)	CY	1.6
44	560244	FURNISH LAMINATED PANEL SIGN (1"-TYPE A)	SQFT	370
45	560248	FURNISH SINGLE SHEET ALUMINUM SIGN (0.063"-UNFRAMED)	SQFT	270
46	560252	FURNISH SINGLE SHEET ALUMINUM SIGN (0.080"- FRAMED)	SQFT	100
47	566011	ROADSIDE SIGN - ONE POST	EA	7
48	566012	ROADSIDE SIGN - TWO POST	EA	12
49	568016	INSTALL SIGN PANEL ON EXISTING FRAME	SQFT	370
50	650014	18" REINFORCED CONCRETE PIPE	LF	67
51	721009	ROCK SLOPE PROTECTION (FACING, METHOD B)	TON	12
52	729010	ROCK SLOPE PROTECTION FABRIC	SQFT	160
53	731501	MINOR CONCRETE (CURB)	CY	18
54	731502	MINOR CONCRETE (MISCELLANEOUS CONSTRUCTION)	CY	98
55 (F)	750001	MISCELLANEOUS IRON AND STEEL	LB	326
56	820118	GUARD RAILING DELINEATOR	EA	15
57	832003	METAL BEAM GUARD RAILING (WOOD POST)	LF	3,840
58	832014	METAL BEAM GUARD RAILING (8' POST)	LF	20
59	839541	TRANSITION RAILING (TYPE WB)	EA	1
60	839566	TERMINAL SYSTEM (TYPE CAT)	EA	1

Item No.	Item Code	Item Description	Unit of Measure	Estimated Quantity
61	839567	TERMINAL SYSTEM (TYPE CAT) BACKUP	EA	1
62	839581	END ANCHOR ASSEMBLY (TYPE SFT)	EA	2
63	839585	ALTERNATIVE FLARED TERMINAL SYSTEM	EA	2
64	840504	4" THERMOPLASTIC TRAFFIC STRIPE	LF	19,600
65	840506	8" THERMOPLASTIC TRAFFIC STRIPE	LF	2,210
66	840508	8" THERMOPLASTIC TRAFFIC STRIPE (BROKEN 12-3)	LF	940
67	840515	THERMOPLASTIC PAVEMENT MARKING	SQFT	950
68	840525	4" THERMOPLASTIC TRAFFIC STRIPE (BROKEN 36-12)	LF	10,300
69	840526	4" THERMOPLASTIC TRAFFIC STRIPE (BROKEN 17-7)	LF	480
70	840550	8" THERMOPLASTIC TRAFFIC STRIPE (BROKEN 36-12)	LF	860
71	840656	PAINT TRAFFIC STRIPE (2-COAT)	LF	32,300
72	850101	PAVEMENT MARKER (NON-REFLECTIVE)	EA	1,870
73	850111	PAVEMENT MARKER (RETROREFLECTIVE)	EA	1,750
74	860090	MAINTAINING EXISTING TRAFFIC MANAGEMENT SYSTEM ELEMENTS DURING CONSTRUCTION	LS	LUMP SUM
75	860889	MODIFY TRAFFIC MONITORING STATION	LS	LUMP SUM
76	861088	MODIFY RAMP METERING SYSTEM	LS	LUMP SUM
77	861504	MODIFY LIGHTING AND SIGN ILLUMINATION	LS	LUMP SUM
78	999990	MOBILIZATION	LS	LUMP SUM

# SPECIAL PROVISIONS

## SECTION 1 (BLANK)

## SECTION 2 BIDDING

### 2-1.01 SMALL BUSINESS AND NON-SMALL BUSINESS SUBCONTRACTOR PREFERENCES

#### General

The Department applies Small Business Preference or Non-Small Business Preference under Govt Code § 14835 et seq. and 2 CA Code of Regs § 1896 et seq.

Contractors, subcontractors, suppliers, and service providers who qualify as small businesses are encouraged to apply for certification as a small business by submitting their application to the Department of General Services, Office of Small Business and DVBE Services.

Contract award is based on the total bid, not the reduced bid.

#### Small Business Preference

The Department allows a bidder certified as a small business by the Office of Small Business and DVBE Services, Department of General Services, a preference if:

1. The bidder submitted a completed Request for Small Business Preference or Non-Small Business Preference form with its bid
2. The low bidder did not request the preference or is not certified as a small business

The bidder's signature on the Request for Small Business Preference or Non-Small Business Preference form certifies that the bidder is certified as a small business at the time and day of bid or has submitted a complete application to the Department of General Services. The complete application and any required substantiating documentation must be received by the Department of General Services by 5:00 p.m. on bid opening date.

The Department of General Services determines if a bidder was certified on bid opening date. The Department confirms the bidder's status as a small business before applying the small business preference.

The small business preference is a reduction for bid comparison in the total bid submitted by the small business contractor by the lesser of:

1. 5 percent of the verified total bid of the low bidder
2. \$50,000

If after the application of the small business preference the Department determines that a certified small business bidder is the low bidder, the Department does not consider a request for non-small business preference.

#### Non-Small Business Subcontractor Preference

The Department allows a bidder not certified as a small business by the Office of Small Business and DVBE Services, Department of General Services, a preference if:

1. The bidder submitted a completed Request for Small Business Preference or Non-Small Business Preference form with its bid.
2. The Certified Small Business Listing for the Non-Small Business Preference form shows that you are subcontracting at least 25 percent to certified small businesses. You may submit this information with your bid. If you do not, submit it so that it is received at the Office Engineer no later than 4:00 p.m. on the 2nd business day after bid opening.

Each listed subcontractor and supplier must be certified as a small business at the time and day of bid or must have submitted a complete application to the Department of General Services. The complete application and any required substantiating documentation must be received by the Department of General Services by 5:00 p.m. on bid opening date.

The non-small business subcontractor preference is a reduction for bid comparison in the total bid submitted by the non-small business contractor requesting the preference by the lesser of:

1. 5 percent of the verified total bid of the low bidder
2. \$50,000

## **2-1.02 DISABLED VETERAN BUSINESS ENTERPRISES**

### **General**

Take necessary and reasonable steps to ensure that DVBEs have opportunity to participate in the contract.

Comply with Mil & Vet Code § 999 et seq.

The Department encourages bidders to obtain DVBE participation in order to ensure the Department achieves its State-mandated overall DVBE goal.

If you obtain DVBE participation:

1. Complete and submit the Certified DVBE Summary form. List all DVBE participation on this form.
2. List each 1st tier DVBE subcontractor in the Subcontractor List form regardless of percentage of the total bid.

### **DVBE Incentive**

The Department grants a DVBE incentive to each bidder who achieves a DVBE participation of 1 percent or greater (Mil & Vet Code 999.5 and Code of Regs § 1896.98 et seq).

To receive this incentive, submit the Certified DVBE Summary form. If you do not submit this form with your bid and you are the low bidder or the 2nd or 3rd low bidder, submit it so that it is received at the Office Engineer no later than 4:00 p.m. on the 4th business day after bid opening. If a DVBE joint venture is used, submit the joint venture agreement with the Certified DVBE Summary form. Other bidders may be required to submit this form if bid ranking changes.

### **Incentive Evaluation**

The Department applies the Small Business and Non-Small Business preference during bid verification and proceeds with the following evaluation for DVBE incentive.

The DVBE incentive is a reduction, for bid comparison only, in the total bid submitted by the lesser of:

1. Percentage of DVBE achievement, rounded to 2 decimal places, of the verified total bid of the low bidder
2. 5 percent of the verified total bid of the low bidder
3. \$250,000

The Department applies DVBE incentive and determines if bid ranking changes.

A non-small business bidder cannot displace a small business bidder. However, a small business bidder with higher DVBE achievement can displace another small business bidder.

The Department proceeds with awarding the contract to the new low bidder and posts the new verified bid results at its Office Engineer Web site.

## **2-1.03 CALIFORNIA COMPANIES**

Under Pub Cont Code § 6107, the Department gives preference to a "California company," as defined, for bid comparison purposes over a nonresident contractor from any state that gives or requires a preference to be given to contractors from that state on its public entity construction contracts.

Complete a California Company Preference form.

The California company reciprocal preference amount is equal to the preference amount applied by the state of the nonresident contractor with the lowest responsive bid unless the California company is eligible for a small business preference or a non-small business subcontractor preference; in which case the preference amount is the greater of the two, but not both.

If the low bidder is not a California company and a California company's bid with reciprocal preference is equal to or less than the lowest bid, the Department awards the contract to the California company on the basis of its total bid.

## **2-1.04 TIE BID RESOLUTION**

If a small business bidder and a non-small business bidder request preferences and the reductions result in a tied bid, the Department awards the contract to the small business bidder.

If a DVBE small business bidder and a non-DVBE small business bidder request preferences and the reduction results in a tied bid, the Department awards the contract to the DVBE small business bidder.

After bid verification, if there is a tie between 2 or more bidders, the Department breaks the tie by tossing a coin.

## **2-1.05 OPT OUT OF PAYMENT ADJUSTMENTS FOR PRICE INDEX FLUCTUATIONS**

You may opt out of the payment adjustments for price index fluctuations as specified in "Payment Adjustments for Price Index Fluctuations" of these special provisions. If you elect to opt out of the provisions of this specification, you must complete the "Opt Out of Payment Adjustments for Price Index Fluctuations" form. The completed form must be submitted with your bid.

## **SECTION 3 CONTRACT AWARD AND EXECUTION**

### **3-1.01 CONTRACT AWARD**

If the Department awards the Contract, the award is made to the lowest responsible bidder within 60 days.

### **3-1.02 SMALL BUSINESS PARTICIPATION REPORT**

The Department has established an overall 25 percent small business participation goal. To determine if the goal is achieved, the Department is tracking small business participation on all contracts.

Complete and sign the Small Business (SB) Participation Report form included in the contract documents even if no small business participation is reported. Submit it with the executed contract.

## **SECTION 4 BEGINNING OF WORK, TIME OF COMPLETION AND LIQUIDATED DAMAGES**

Complete the work, except plant establishment work, within 145 working days starting on the 15th day after contract approval or on the day you start work at the job site, whichever occurs first.

Complete the work, including plant establishment work, within 270 working days starting on the 15th day after contract approval or on the day you start work at the job site, whichever occurs first.

## **SECTION 5 GENERAL**

### **5-1.01 EMISSIONS REDUCTION**

Contract execution constitutes submittal of the following certification:

I am aware of the emissions reduction regulations being mandated by the California Air Resources Board. I will comply with such regulations before commencing the performance of the work and maintain compliance throughout the duration of this contract.

### **5-1.02 NON-SMALL BUSINESSES**

Use each subcontractor as shown on the Certified Small Business Listing for the Non-Small Business Preference form unless you receive authorization for a substitution.

The requirement that small businesses be certified by the bid opening date does not apply to small business substitutions after contract award.

Maintain records of subcontracts made with certified small business subcontractors and records of materials purchased from certified small business suppliers. Include in the records:

1. Name and business address of each business
2. Total amount paid to each business

For the purpose of determining compliance with 2 CA Code of Regs § 1896 et seq.:

1. Provide the Department relevant information requested.
2. Upon reasonable notice and during normal business hours, permit access to its premises for the purpose of:
  - 2.1. Interviewing employees
  - 2.2. Inspecting and copying books, records, accounts and other material that may be relevant to a matter under investigation

### **5-1.03 DISABLED VETERAN BUSINESS ENTERPRISES**

Use each DVBE as shown on the Certified DVBE Summary form unless you receive authorization for a substitution.

The requirement that DVBEs be certified by the bid opening date does not apply to DVBE substitutions after contract award.

Maintain records of subcontracts made with certified DVBEs. Include in the records:

1. Name and business address of each business
2. Total amount paid to each business

For the purpose of determining compliance with Pub Cont Code § 10115 et seq.:

1. Upon contract completion, complete and submit Final Report - Utilization of Disabled Veteran Business Enterprises (DVBE) State Funded Projects Only form
2. Upon reasonable notice and during normal business hours, permit access to its premises for the purpose of:
  - 2.1. Interviewing employees
  - 2.2. Inspecting and copying books, records, accounts and other material that may be relevant to a matter under investigation

### **5-1.04 PAYMENT ADJUSTMENTS FOR PRICE INDEX FLUCTUATIONS**

#### **GENERAL**

##### **Summary**

This section applies to asphalt contained in materials for pavement structural sections and pavement surface treatments such as hot mix asphalt (HMA), tack coat, asphaltic emulsions, bituminous seals, asphalt binders, and modified asphalt binders placed in the work. This section does not apply if you opted out of payment adjustment for price index fluctuations at the time of bid.

The Engineer adjusts payment if the California Statewide Crude Oil Price Index for the month the material is placed is more than 5 percent higher or lower than the price index at the time of bid.

The California Statewide Crude Oil Price Index is determined each month on or about the 1st business day of the month by the Department using the average of the posted prices in effect for the previous month as posted by Chevron, ExxonMobil, and ConocoPhillips for the Buena Vista, Huntington Beach, and Midway Sunset fields.

If a company discontinues posting its prices for a field, the Department determines the index from the remaining posted prices. The Department may include additional fields to determine the index.

For the California Statewide Crude Oil Price Index, go to:

<http://www.dot.ca.gov/hq/construc/crudeoilindex/>

If the adjustment is a decrease in payment, the Department deducts the amount from the monthly progress payment.

The Department includes payment adjustments for price index fluctuations when making adjustments under Section 4-1.03B, "Increased or Decreased Quantities," of the Standard Specifications.

If you do not complete the work within the contract time, payment adjustments during the overrun period are determined using the California Statewide Crude Oil Price Index in effect for the month in which the overrun period began.

If the price index at the time of placement increases:

1. 50 percent or more over the price index at bid opening, notify the Engineer.
2. 100 percent or more over the price index at bid opening, do not furnish material containing asphalt until the Engineer authorizes you to proceed with that work. The Department may decrease Bid item quantities, eliminate Bid items, or terminate the contract.

##### **Submittals**

Before placing material containing asphalt, submit the current sales and use tax rate in effect in the tax jurisdiction where the material is to be placed.

Submit certified weight slips for HMA, tack coat, asphaltic emulsions, and modified asphalt binders, including those materials not paid for by weight, as specified in Section 9-1.01, "Measurement of Quantities," of the Standard Specifications. For slurry seals, submit certified weight slips separately for the asphaltic emulsion.

## ASPHALT QUANTITIES

### General

Interpret the term "ton" as "tonne" for projects using metric units.

### Hot Mix Asphalt

The Engineer calculates the quantity of asphalt in HMA using the following formula:

$$Q_h = \text{HMATT} \times [X_a / (100 + X_a)]$$

where:

- Q<sub>h</sub> = quantity in tons of asphalt used in HMA
- HMATT = HMA total tons placed
- X<sub>a</sub> = theoretical asphalt content from job mix formula expressed as percentage of the weight of dry aggregate

### Rubberized Hot Mix Asphalt

The Engineer calculates the quantity of asphalt in rubberized HMA (RHMA) using the following formula:

$$Q_{rh} = \text{RHMATT} \times 0.80 \times [X_{arb} / (100 + X_{arb})]$$

where:

- Q<sub>rh</sub> = quantity in tons of asphalt in asphalt rubber binder used in RHMA
- RHMATT = RHMA total tons placed
- X<sub>arb</sub> = theoretical asphalt rubber binder content from the job mix formula expressed as percentage of the weight of dry aggregate

### Modified Asphalt Binder in Hot Mix Asphalt

The Engineer calculates the quantity of asphalt in modified asphalt binder using the following formula:

$$Q_{mh} = \text{MHMATT} \times [(100 - X_{am}) / 100] \times [X_{mab} / (100 + X_{mab})]$$

where:

- Q<sub>mh</sub> = quantity in tons of asphalt in modified asphalt binder used in HMA
- MHMATT = modified asphalt binder HMA total tons placed
- X<sub>am</sub> = specified percentage of asphalt modifier
- X<sub>mab</sub> = theoretical modified asphalt binder content from the job mix formula expressed as percentage of the weight of dry aggregate

### Hot Mix Asphalt Containing Reclaimed Asphalt Pavement (RAP)

The Engineer calculates the quantity of asphalt in HMA containing RAP using the following formulas:

$$Q_{rap} = \text{HMATT} \times [X_{aa} / (100 + X_{aa})]$$

where:

$$X_{aa} = X_{ta} - [(100 - X_{new}) \times (X_{ra} / 100)]$$

and

- Q<sub>rap</sub> = quantity in tons of asphalt used in HMA containing RAP
- HMATT = HMA total tons placed
- X<sub>aa</sub> = asphalt content of HMA adjusted to account for the asphalt content in RAP expressed as percentage of the weight of dry aggregate
- X<sub>ta</sub> = total asphalt content of HMA expressed as percentage of the weight of dry aggregate
- X<sub>new</sub> = theoretical percentage of new aggregate in the HMA containing RAP determined from RAP percentage in the job mix formula
- X<sub>ra</sub> = asphalt content of RAP expressed as percentage

### **Tack Coat**

The Engineer calculates the quantity of asphalt in tack coat (Qt) as either:

1. Asphalt binder using the asphalt binder total tons placed as tack coat
2. Asphaltic emulsion by applying the formula in "Asphaltic Emulsion" to the asphaltic emulsion total tons placed as tack coat

### **Asphaltic Emulsion**

The Engineer calculates the quantity of asphalt in asphaltic emulsions, including fog seals and tack coat, using the following formula:

$$Q_e = AETT \times X_e$$

where:

- Q<sub>e</sub> = quantity in tons of asphalt used in asphaltic emulsions
- AETT = undiluted asphaltic emulsions total tons placed
- X<sub>e</sub> = minimum percent residue specified in Section 94, "Asphaltic Emulsions," of the Standard Specifications based on the type of emulsion used

You may, as an option, determine "X<sub>e</sub>" by submitting actual daily test results for asphalt residue for the asphaltic emulsion used. If you choose this option, you must:

1. Take 1 sample every 200 tons but not less than 1 sample per day in the presence of the Engineer from the delivery truck, at midload from a sampling tap or thief, and in the following order:
  - 1.1. Draw and discard the 1st gallon
  - 1.2. Take two separate 1/2-gallon samples
2. Submit 1st sample at the time of sampling
3. Provide 2nd sample within 3 business days of sampling to an independent testing laboratory that participates in the AASHTO Proficiency Sample Program
4. Submit test results from independent testing laboratory within 10 business days of sample date

### **Slurry Seal**

The Engineer calculates the quantity of asphalt in slurry seals (Q<sub>ss</sub>) by applying the formula in "Asphaltic Emulsion" to the actual quantity of asphaltic emulsion used in producing the slurry seal mix.

### **Modified Asphalt Binder**

The Engineer calculates the quantity of asphalt in modified asphalt binder using the following formula:

$$Q_{mab} = MABTT \times [(100 - X_{am}) / 100]$$

where:

- Q<sub>mab</sub> = quantity in tons of asphalt used in modified asphalt binder
- MABTT = modified asphalt binder total tons placed
- X<sub>am</sub> = specified percentage of asphalt modifier

### **Other Materials**

For other materials containing asphalt not covered above, the Engineer determines the quantity of asphalt (Q<sub>o</sub>).

### **PAYMENT ADJUSTMENTS**

The Engineer includes payment adjustments for price index fluctuations in progress pay estimates. If material containing asphalt is placed within 2 months during 1 estimate period, the Engineer calculates 2 separate adjustments. Each adjustment is calculated using the price index for the month in which the quantity of material containing asphalt subject to adjustment is placed in the work. The sum of the 2 adjustments is used for increasing or decreasing payment in the progress pay estimate.

The Engineer calculates each payment adjustment as follows:

$$PA = Q_t \times A$$

where:

PA = Payment adjustment in dollars for asphalt contained in materials placed in the work for a given month.

Qt = Sum of all quantities of asphalt-contained materials in pavement structural sections and pavement surface treatments placed (Qh + Qrh + Qmh + Qrap + Qtc + Qe + Qss + Qmab + Qo).

A = Adjustment in dollars per ton of asphalt used to produce materials placed in the work rounded to the nearest \$0.01.

For US Customary projects, use:

$A = [(Iu / Ib) - 1.05] \times Ib \times [1 + (T / 100)]$  for an increase in the crude oil price index exceeding 5 percent

$A = [(Iu / Ib) - 0.95] \times Ib \times [1 + (T / 100)]$  for a decrease in the crude oil price index exceeding 5 percent

For metric projects, use:

$A = 1.1023 \times [(Iu / Ib) - 1.05] \times Ib \times [1 + (T / 100)]$  for an increase in the crude oil price index exceeding 5 percent

$A = 1.1023 \times [(Iu / Ib) - 0.95] \times Ib \times [1 + (T / 100)]$  for a decrease in the crude oil price index exceeding 5 percent

Iu = California Statewide Crude Oil Price Index for the month in which the quantity of asphalt subject to adjustment was placed in the work.

Ib = California Statewide Crude Oil Price Index for the month in which the bid opening for the project occurred

T = Sales and use tax rate, expressed as a percent, currently in effect in the tax jurisdiction where the material is placed. If the tax rate information is not submitted timely, the statewide sales and use tax rate is used in the payment adjustment calculations until the tax rate information is submitted.

#### **5-1.05 SURFACE MINING AND RECLAMATION ACT**

Imported borrow or aggregate material must come from a surface mine permitted under the Surface Mining and Reclamation Act of 1975 (SMARA), Pub Res Code § 2710, et seq., or from an exempt site.

The Department of Conservation, Office of Mine Reclamation maintains a list of permitted mine sites. For the list of permitted sites, go to:

[http://www.conservation.ca.gov/omr/ab\\_3098\\_list](http://www.conservation.ca.gov/omr/ab_3098_list)

If you import borrow or aggregate material from a surface mine not on this list, submit proof the mine is exempt from SMARA.

#### **5-1.06 ELECTRONIC SUBMISSION OF PAYROLL RECORDS**

In lieu of submitting weekly payroll records to the Engineer as specified in Section 7-1.01A(3), "Payroll Records," of the Standard Specifications, you may submit weekly payroll records electronically.

Before submitting payroll records electronically, you must complete and sign the Contractor's Acknowledgement and submit it to the District where your project is located. Submit your signed acknowledgement to the corresponding District electronic mailbox shown in the following table:

### Electronic Mailboxes

District	Address
1	district1.payrolls@dot.ca.gov
2	district2.payrolls@dot.ca.gov
3	district3.payrolls@dot.ca.gov
4	district4.payrolls@dot.ca.gov
5	district5.payrolls@dot.ca.gov
6	district6.payrolls@dot.ca.gov
7	district7.payrolls@dot.ca.gov
8	district8.payrolls@dot.ca.gov
9	district9.payrolls@dot.ca.gov
10	district10.payrolls@dot.ca.gov
11	district11.payrolls@dot.ca.gov
12	district12.payrolls@dot.ca.gov

The Department responds with an e-mail containing a Caltrans Internet Certificate to be used for the electronic submission of payroll records. You must agree to accept this certificate and reply to the e-mail. After you accept the certificate and reply to the e-mail, the Department is ready to accept your electronic submissions.

Each electronic submission must:

1. Include payroll records in a nonmodifiable PDF image format. No spreadsheets, word documents, or password protected documents are accepted.
2. Include payroll records with all data elements required by the Labor Code § 1776.
3. Include a signed Statement of Compliance form with each weekly record.
4. Be received by the Department by close of business on the 15th day of the month for the prior month's work.
5. Be encrypted before submission.
6. Contain the following information in the subject line:
  - 6.1. Contract number
  - 6.2. Week ending date as W/E mm/dd/yy
7. Contain 1 contract number and week ending date per submission.

For additional information on electronic submission of payroll records, go to:

<http://www.dot.ca.gov/hq/construc/LaborCompliance/index.htm>

#### 5-1.07 AREAS FOR CONTRACTOR'S USE

Attention is directed to the provisions in Section 7-1.19, "Rights in Land and Improvements," of the Standard Specifications and these special provisions.

The highway right of way shall be used only for purposes that are necessary to perform the required work. The Contractor shall not occupy the right of way, or allow others to occupy the right of way, for purposes which are not necessary to perform the required work.

No State-owned parcels adjacent to the right of way are available for the exclusive use of the Contractor within the contract limits. The Contractor shall secure, at the Contractor's own expense, areas required for plant sites, storage of equipment or materials, or for other purposes.

No area is available within the contract limits for the exclusive use of the Contractor. However, temporary storage of equipment and materials on State property may be arranged with the Engineer, subject to the prior demands of State maintenance forces and to other contract requirements. Use of the Contractor's work areas and other State-owned property shall be at the Contractor's own risk, and the State shall not be held liable for damage to or loss of materials or equipment located within such areas.

**5-1.08 PAYMENTS**

In determining the partial payments to be made to the Contractor, only the following listed materials will be considered for inclusion in the payment as materials furnished but not incorporated in the work:

- A. Reinforced Concrete Pipe
- B. Metal Beam Guard Railing and Appurtenances
- C. Pavement Markers
- D. Lighting Standards
- E. Luminaires
- F. Lighting Fixtures

**5-1.09 SUPPLEMENTAL PROJECT INFORMATION**

The Department makes the following supplemental project information available:

**Supplemental Project Information**

Means	Description
Available for inspection at the District Office	Cross Sections
Available for inspection at 3337 Michelson Drive, Irvine, CA 92612-8894; telephone (949)724-2000	Regional Water Quality Control Board Permit
Available as specified in the Standard Specifications	Bridge as-built drawings

**5-1.10 RELATIONS WITH CALIFORNIA REGIONAL WATER QUALITY CONTROL BOARD**

This project lies within the boundaries of the Santa Ana Regional Water Quality Control Board (RWQCB).

The State Water Resources Control Board (SWRCB) has issued to the Department a permit that governs storm water and non-storm water discharges from the Department's properties, facilities, and activities. The Department's permit is entitled "Order No. 99 - 06 - DWQ, NPDES No. CAS000003, National Pollutant Discharge Elimination System (NPDES) Permit, Statewide Storm Water Permit and Waste Discharge Requirements (WDRs) for the State of California, Department of Transportation (Caltrans)." Copies of the Department's permit are available for review from the SWRCB, Storm Water Permit Unit, 1001 "I" Street, P.O. Box 1977, Sacramento, California 95812-1977, Telephone: (916) 341-5254, and may also be obtained at:

[http://www.waterboards.ca.gov/water\\_issues/programs/stormwater/](http://www.waterboards.ca.gov/water_issues/programs/stormwater/)

The Department's permit references and incorporates by reference the current statewide general permit issued by the SWRCB entitled "Order No. 99-08-DWQ, National Pollutant Discharge Elimination System (NPDES) General Permit No. CAS000002, Waste Discharge Requirements (WDRs) for Discharges of Storm Water Runoff Associated with Construction Activity" that regulates discharges of storm water and non-storm water from construction activities disturbing one acre or more of soil in a common plan of development. Sampling and analysis requirements as specified in SWRCB Resolution No. 2001-46 are added to the statewide general permit. Copies of the statewide permit and modifications thereto are available for review from the SWRCB, Storm Water Permit Unit, 1001 "I" Street, P.O. Box 1977, Sacramento, California 95812-1977, Telephone: (916) 341-5254 and may also be obtained at:

[http://www.waterboards.ca.gov/water\\_issues/programs/stormwater/](http://www.waterboards.ca.gov/water_issues/programs/stormwater/)

The Santa Ana RWQCB has issued a permit which governs storm water and non-storm water discharges resulting from construction activities in the project area. The RWQCB permit is entitled General Permit Order No. R8-2003-0061, NPDES No. CAG998001." Copies of the RWQCB permit are available for review at the Department of Transportation, District 12, Construction Administration Office, 3337 Michelson Drive, Suite 380, Irvine, CA 92612-8894.

The NPDES permits that regulate this project, as referenced above, are collectively referred to in this section as the "permits."

This project shall conform to the permits and modifications thereto. The Contractor shall maintain copies of the permits at the project site and shall make them available during construction.

The Contractor shall know and comply with provisions of Federal, State, and local regulations and requirements that govern the Contractor's operations and storm water and non-storm water discharges from the project site and areas of disturbance outside the project limits during construction. Attention is directed to Sections 7-1.01, "Laws to be Observed," 5-1.18, "Property and Facility Preservation," 7-1.12, "Indemnification and Insurance," and 9-1.07E(5), "Penalty Withholds," of the Standard Specifications.

The Contractor shall notify the Engineer immediately upon request from the regulatory agencies to enter, inspect, sample, monitor, or otherwise access the project site or the Contractor's records pertaining to water pollution control work. The Contractor and the Department shall provide copies of correspondence, notices of violation, enforcement actions, or proposed fines by regulatory agencies to the requesting regulatory agency.

#### **5-1.11 RELIEF FROM MAINTENANCE AND RESPONSIBILITY**

The Contractor may be relieved of the duty of maintenance and protection for those items not directly connected with plant establishment work in conformance with the provisions in Section 7-1.15, "Relief From Maintenance and Responsibility," of the Standard Specifications. Water pollution control, maintain existing planted areas, maintain existing irrigation facilities, transplant trees, and transplant palm trees shall not be relieved of maintenance.

### **SECTION 6. (BLANK)**

### **SECTION 7. (BLANK)**

## **SECTION 8. MATERIALS**

### **SECTION 8-1. MISCELLANEOUS**

#### **8-1.01 PREQUALIFIED AND TESTED SIGNING AND DELINEATION MATERIALS**

The Department maintains the following list of Prequalified and Tested Signing and Delineation Materials. The Engineer shall not be precluded from sampling and testing products on the list of Prequalified and Tested Signing and Delineation Materials.

The manufacturer of products on the list of Prequalified and Tested Signing and Delineation Materials shall furnish the Engineer a Certificate of Compliance in conformance with the provisions in Section 6-1.07, "Certificates of Compliance," of the Standard Specifications for each type of traffic product supplied.

For those categories of materials included on the list of Prequalified and Tested Signing and Delineation Materials, only those products shown within the listing may be used in the work. Other categories of products, not included on the list of Prequalified and Tested Signing and Delineation Materials, may be used in the work provided they conform to the requirements of the Standard Specifications.

Materials and products may be added to the list of Prequalified and Tested Signing and Delineation Materials if the manufacturer submits a New Product Information Form to the New Product Coordinator at the Transportation Laboratory. Upon a Departmental request for samples, sufficient samples shall be submitted to permit performance of required tests. Approval of materials or products will depend upon compliance with the specifications and tests the Department may elect to perform.

#### **PAVEMENT MARKERS, PERMANENT TYPE**

##### **Retroreflective With Abrasion Resistant Surface (ARS)**

1. Apex, Model 921AR (4" x 4")
2. Ennis Paint, Models C88 (4" x 4"), 911 (4" x 4") and C80FH
3. Ray-O-Lite, Models "AA" ARC II (4" x 4") and ARC Round Shoulder (4" x 4")
4. 3M Series 290 (3.5" x 4")
5. 3M Series 290 PSA
6. Glowlite, Inc Model 988AR (4" x 4")

##### **Retroreflective With Abrasion Resistant Surface (ARS)**

(for recessed applications only)

1. Ennis Paint, Model 948 (2.3" x 4.7")
2. Ennis Paint, Model 944SB (2" x 4")\*
3. Ray-O-Lite, Model 2002 (2" x 4.6")
4. Ray-O-Lite, Model 2004 (2" x 4")\*

\*For use only in 4.5 inch wide (older) recessed slots

### **Non-Reflective, 4-inch Round**

1. Apex Universal (Ceramic)
2. Apex Universal, Models 929 (ABS) and 929PP (Polypropylene)
3. Glowlite, Inc. (Ceramic) and PP (Polypropylene)
4. Hi-Way Safety, Inc., Models P20-2000W and 2001Y (ABS)
5. Interstate Sales, "Diamond Back" (Polypropylene)
6. Novabrite Models Cdot (White) Cdot-y (Yellow), Ceramic
7. Novabrite Models Pdot-w (White) Pdot-y (Yellow), Polypropylene
8. Three D Traffic Works TD10000 (ABS), TD10500 (Polypropylene)
9. Ray-O-Lite, Ray-O-Dot (Polypropylene)

### **PAVEMENT MARKERS, TEMPORARY TYPE**

#### **Temporary Markers For Long Term Day/Night Use (180 days or less)**

1. Vega Molded Products "Temporary Road Marker" (3" x 4")
2. Pexco LLC, Halftrack model 25, 26 and 35

#### **Temporary Markers For Short Term Day/Night Use (14 days or less)**

(For seal coat or chip seal applications, clear protective covers are required)

1. Apex Universal, Model 932
2. Pexco LLC, Models T.O.M., T.R.P.M., and "HH" (High Heat)
3. Hi-Way Safety, Inc., Model 1280/1281
4. Glowlite, Inc., Model 932

### **STRIPING AND PAVEMENT MARKING MATERIAL**

#### **Permanent Traffic Striping and Pavement Marking Tape**

1. Advanced Traffic Marking, Series 300 and 400
2. Brite-Line, Series 1000
3. Brite-Line, "DeltaLine XRP"
4. Swarco Industries, "Director 35" (For transverse application only)
5. Swarco Industries, "Director 60"
6. 3M, "Stamark" Series 380 and 270 ES
7. 3M, "Stamark" Series 420 (For transverse application only)

#### **Temporary (Removable) Striping and Pavement Marking Tape (180 days or less)**

1. Advanced Traffic Marking, Series 200
2. Brite-Line, Series 100
3. Garlock Rubber Technologies, Series 2000
4. P.B. Laminations, Aztec, Grade 102
5. Swarco Industries, "Director-2"
6. Trelleborg Industries, R140 Series
7. 3M Series 620 "CR", and Series 780
8. 3M Series A145, Removable Black Line Mask  
(Black Tape: for use only on Hot mix asphalt surfaces)
9. Advanced Traffic Marking Black "Hide-A-Line"  
(Black Tape: for use only on Hot mix asphalt surfaces)
10. Brite-Line "BTR" Black Removable Tape  
(Black Tape: for use only on Hot mix asphalt surfaces)
11. Trelleborg Industries, RB-140  
(Black Tape: for use only on Hot mix asphalt surfaces)

#### **Preformed Thermoplastic (Heated in place)**

1. Flint Trading Inc., "Hot Tape"
2. Flint Trading Inc., "Premark Plus"
3. Ennis Paint Inc., "Flametape"

### **Ceramic Surfacing Laminate, 6" x 6"**

1. Highway Ceramics, Inc.

### **CLASS 1 DELINEATORS**

#### **One Piece Driveable Flexible Type, 66-inch**

1. Pexco LLC, "Flexi-Guide Models 400 and 566"
2. Carsonite, Curve-Flex CFRM-400
3. Carsonite, Roadmarker CRM-375
4. FlexStake, Model 654 TM
5. GreenLine Model CGD1-66

#### **Special Use Type, 66-inch**

1. Pexco LLC, Model FG 560 (with 18-inch U-Channel base)
2. Carsonite, "Survivor" (with 18-inch U-Channel base)
3. Carsonite, Roadmarker CRM-375 (with 18-inch U-Channel base)
4. FlexStake, Model 604
5. GreenLine Model CGD (with 18-inch U-Channel base)
6. Impact Recovery Model D36, with #105 Driveable Base
7. Safe-Hit with 8-inch pavement anchor (SH248-GP1)
8. Safe-Hit with 15-inch soil anchor (SH248-GP2) and with 18-inch soil anchor (SH248-GP3)
9. Safe-Hit RT 360 Post with Soil Mount Anchor (GPS)
10. Shur-Tite Products, Shur-Flex Drivable

#### **Surface Mount Type, 48-inch**

1. Bent Manufacturing Company, Masterflex Model MFEX 180-48
2. Carsonite, "Channelizer"
3. FlexStake, Models 704, 754 TM, and EB4
4. Impact Recovery Model D48, with #101 Fixed (Surface-Mount) Base
5. Three D Traffic Works "Channelflex" ID No. 522248W
6. Flexible Marker Support, Flexistiff Model C-9484
7. Safe-Hit, SH 248 SMR

### **CHANNELIZERS**

#### **Surface Mount Type, 36-inch**

1. Bent Manufacturing Company, Masterflex Models MF-360-36 (Round) MF-180-36 (Flat) and MFEX 180—36
2. Pexco LLC, Flexi-Guide Models FG300PE, FG300UR, and FG300EFX
3. Carsonite, "Super Duck" (Round SDR-336)
4. Carsonite, Model SDCF03601MB "Channelizer"
5. FlexStake, Models 703, 753 TM, and EB3
6. GreenLine, Model SMD-36
7. Hi-way Safety, Inc. "Channel Guide Channelizer" Model CGC36
8. Impact Recovery Model D36, with #101 Fixed (Surface-Mount) Base
9. Safe-Hit, Guide Post, Model SH236SMA and Dura-Post, Model SHL36SMA
10. Three D Traffic Works "Boomerang" 5200 Series
11. Flexible Marker Support, Flexistiff Model C-9484-36
12. Shur-Tite Products, Shur-Flex

#### **Lane Separation System**

1. Pexco LLC, "Flexi-Guide (FG) 300 Curb System"
2. Qwick Kurb, "Klemmfix Guide System"
3. Dura-Curb System
4. Tuff Curb
5. FG 300 Turnpike Curb

## **CONICAL DELINEATORS, 42-inch**

(For 28-inch Traffic Cones, see Standard Specifications)

1. Bent Manufacturing Company "T-Top"
2. Plastic Safety Systems "Navigator-42"
3. Traffix Devices "Grabber"
4. Three D Traffic Works "Ringtop" TD7000, ID No. 742143
5. Three D Traffic Works, TD7500
6. Work Area Protection Corp. C-42

## **OBJECT MARKERS**

### **Type "K", 18-inch**

1. Pexco LLC, Model FG318PE
2. Carsonite, Model SMD 615
3. FlexStake, Model 701 KM
4. Safe-Hit, Model SH718SMA

### **Type "Q" Object Markers, 24-inch**

1. Bent Manufacturing "Masterflex" Model MF-360-24
2. Pexco LLC, Model FG324PE
3. Carsonite, "Channelizer"
4. FlexStake, Model 701KM
5. Safe-Hit, Models SH824SMA\_WA and SH824GP3\_WA
6. Three D Traffic Works ID No. 531702W and TD 5200
7. Three D Traffic Works ID No. 520896W
8. Safe-Hit, Dura-Post SHLQ-24 inch

## **CONCRETE BARRIER MARKERS AND TEMPORARY RAILING (TYPE K) REFLECTORS**

### **Impactable Type**

1. ARTUK, "FB"
2. Pexco LLC, Models PCBM-12 and PCBM-T12
3. Duraflex Corp., "Flexx 2020" and "Electriflexx"
4. Hi-Way Safety, Inc., Model GMKRM100
5. Plastic Safety Systems "BAM" Models OM-BARR and OM-BWAR
6. Three D Traffic Works "Roadguide" Model TD 9300

### **Non-Impactable Type**

1. ARTUK, JD Series
2. Plastic Safety Systems "BAM" Models OM-BITARW and OM-BITARA
3. Vega Molded Products, Models GBM and JD
4. Plastic Vacuum Forming, "Cap-It C400"

## **METAL BEAM GUARD RAIL POST MARKERS**

(For use to the left of traffic)

1. Pexco LLC, "Mini" (3" x 10")
2. Creative Building Products, "Dura-Bull, Model 11201"
3. Duraflex Corp., "Railrider"
4. Plastic Vacuum Forming, "Cap-It C300"

## **CONCRETE BARRIER DELINEATORS, 16-inch**

(For use to the right of traffic)

1. Pexco LLC, Model PCBM T-16
2. Safe-Hit, Model SH216RBM
3. Three D Traffic Works "Roadguide" Model 9400

## **CONCRETE BARRIER-MOUNTED MINI-DRUM (10" x 14" x 22")**

1. Stinson Equipment Company "SaddleMarker"

## **GUARD RAILING DELINEATOR**

(Place top of reflective element at 48 inches above plane of roadway)

### **Wood Post Type, 27-inch**

1. Pexco LLC, FG 427 and FG 527
2. Carsonite, Model 427
3. FlexStake, Model 102 GR
4. GreenLine GRD 27
5. Safe-Hit, Model SH227GRD
6. Three D Traffic Works "Guardflex" TD9100
7. New Directions Mfg, NDM27
8. Shur-Tite Products, Shur-Tite Flat Mount

### **Steel Post Type**

1. Carsonite, Model CFGR-327

## **RETROREFLECTIVE SHEETING**

### **Channelizers, Barrier Markers, and Delineators**

1. Avery Dennison T-6500 Series (For rigid substrate devices only)
2. Avery Dennison WR-7100 Series
3. Nippon Carbide Industries, Flexible Ultralite Grade (ULG) II
4. Reflexite, PC-1000 Metalized Polycarbonate
5. Reflexite, AC-1000 Acrylic
6. Reflexite, AP-1000 Metalized Polyester
7. Reflexite, Conformalight, AR-1000 Abrasion Resistant Coating
8. 3M, High Intensity

### **Traffic Cones, 4-inch and 6-inch Sleeves**

1. Nippon Carbide Industries, Flexible Ultralite Grade (ULG) II
2. Reflexite, Vinyl, "TR" (Semi-transparent) or "Conformalight"
3. 3M Series 3840
4. Avery Dennison S-9000C

### **Drums**

1. Avery Dennison WR-6100
2. Nippon Carbide Industries, Flexible Ultralite Grade (ULG) II
3. Reflexite, "Conformalight", "Super High Intensity" or "High Impact Drum Sheeting"
4. 3M Series 3810

### **Barricades: Type I, Medium-Intensity (Typically Enclosed Lens, Glass-Bead Element)**

1. Nippon Carbide Industries, CN8117
2. Avery Dennison, W 1100 series
3. 3M Series CW 44

### **Barricades: Type II, Medium-High-Intensity (Typically Enclosed Lens, Glass-Bead Element)**

1. Avery Dennison, W-2100 Series

### **Vertical Clearance Signs: Structure Mounted**

1. 3M Model 4061, Diamond Grade DG3, Fluorescent Yellow

### **Signs: Type II, Medium-High-Intensity (Typically Enclosed Lens, Glass-Bead Element)**

1. Avery Dennison, T-2500 Series
2. Nippon Carbide Industries, Nikkalite 18000

**Signs: Type III, High-Intensity (Typically Encapsulated Glass-Bead Element)**

1. Avery Dennison, T-5500A and T-6500 Series
2. Nippon Carbide Industries, Nikkalite Brand Ultralite Grade II
3. 3M 3870 and 3930 Series

**Signs: Type IV, High-Intensity (Typically Unmetallized Microprismatic Element)**

1. Avery Dennison, T-6500 Series
2. Nippon Carbide Industries, Crystal Grade, 94000 Series
3. Nippon Carbide Industries, Model No. 94847 Fluorescent Orange
4. 3M Series 3930 and Series 3924S

**Signs: Type VI, Elastomeric (Roll-Up) High-Intensity, without Adhesive**

1. Avery Dennison, WU-6014
2. Novabrite LLC, "Econobrite"
3. Reflexite "Vinyl"
4. Reflexite "SuperBright"
5. Reflexite "Marathon"
6. 3M Series RS20

**Signs: Type VII, Super-High-Intensity (Typically Unmetallized Microprismatic Element)**

1. 3M Series 3924S, Fluorescent Orange
2. 3M LDP Series 3970

**Signs: Type VIII, Super-High-Intensity (Typically Unmetallized Microprismatic Element)**

1. Avery Dennison, T-7500 Series
2. Avery Dennison, T-7511 Fluorescent Yellow
3. Avery Dennison, T-7513 Fluorescent Yellow Green
4. Avery Dennison, W-7514 Fluorescent Orange
5. Nippon Carbide Industries, Nikkalite Crystal Grade Series 92800
6. Nippon Carbide Industries, Nikkalite Crystal Grade Model 92847 Fluorescent Orange

**Signs: Type IX, Very-High-Intensity (Typically Unmetallized Microprismatic Element)**

1. 3M VIP Series 3981 Diamond Grade Fluorescent Yellow
2. 3M VIP Series 3983 Diamond Grade Fluorescent Yellow/Green
3. 3M VIP Series 3990 Diamond Grade
4. Avery Dennison T-9500 Series
5. Avery Dennison, T9513, Fluorescent Yellow Green
6. Avery Dennison, W9514, Fluorescent Orange
7. Avery Dennison, T-9511 Fluorescent Yellow

**SPECIALTY SIGNS**

1. Reflexite "Endurance" Work Zone Sign (with Semi-Rigid Plastic Substrate)

**ALTERNATIVE SIGN SUBSTRATES**

**Fiberglass Reinforced Plastic (FRP) and Expanded Foam PVC**

1. Fiber-Brite (FRP)
2. Sequentia, "Polyplate" (FRP)
3. Intoplast Group "InteCel" (0.5 inch for Post-Mounted CZ Signs, 48-inch or less)(PVC)

**Aluminum Composite, Temporary Construction Signs and Permanent Signs up to 4 foot, 7 Inches**

1. Alcan Composites "Dibond Material, 80 mils"
2. Mitsubishi Chemical America, Alpollic 350
3. Bone Safety Signs, Bone Light ACM (temporary construction signs only)

### 8-1.02 SLAG AGGREGATE

Air-cooled iron blast furnace slag shall not be used to produce aggregate for:

1. Structure backfill material.
2. Pervious backfill material.
3. Permeable material.
4. Reinforced or prestressed portland cement concrete component or structure.
5. Nonreinforced portland cement concrete component or structure for which a Class 1 Surface Finish is required by the provisions in Section 51-1.18B, "Class 1 Surface Finish," of the Standard Specifications.

Aggregate produced from slag resulting from a steel-making process shall not be used for a highway construction project except for the following items:

1. Imported Borrow.
2. Aggregate Subbase.
3. Class 2 Aggregate Base.
4. Hot Mix Asphalt.

Steel slag to be used to produce aggregate for aggregate subbase and Class 2 aggregate base shall be crushed so that 100 percent of the material will pass a 3/4-inch sieve and then shall be control aged for a period of at least 3 months under conditions that will maintain all portions of the stockpiled material at a moisture content in excess of 6 percent of the dry weight of the aggregate.

A supplier of steel slag aggregate shall provide separate stockpiles for controlled aging of the slag. An individual stockpile shall contain not less than 10,000 tons nor more than 50,000 tons of slag. The material in each individual stockpile shall be assigned a unique lot number and each stockpile shall be identified with a permanent system of signs. The supplier shall maintain a permanent record of the dates on which stockpiles are completed and controlled aging begun, of the dates when controlled aging was completed, and of the dates tests were made and the results of these tests. Moisture tests shall be made at least once each week. No credit for aging will be given for the time period covered by tests which show a moisture content of 6 percent or less. The stockpiles and records shall be available to the Engineer during normal working hours for inspection, check testing and review.

The supplier shall notify the Transportation Laboratory when each stockpile is completed and controlled aging begun. No more aggregate shall be added to the stockpile unless a new aging period is initiated. A further notification shall be sent when controlled aging is completed.

The supplier shall provide a Certificate of Compliance in conformance with the provisions in Section 6-1.07, "Certificates of Compliance," of the Standard Specifications. Each stockpile or portion of a stockpile that is used in the work will be considered a lot. The Certificates of Compliance shall state that the steel slag aggregate has been aged in a stockpile for at least 3 months at a moisture content in excess of 6 percent of the dry weight of the aggregate.

Steel slag used for imported borrow shall be weathered for at least 3 months. Prior to the use of steel slag as imported borrow, the supplier shall furnish a Certificate of Compliance in conformance with the provisions in Section 6-1.07, "Certificates of Compliance," of the Standard Specifications. The Certificate of Compliance shall state that the steel slag has been weathered for at least 3 months.

Each delivery of aggregate containing steel slag for use as aggregate subbase or Class 2 aggregate base shall be accompanied by a delivery tag for each load which will identify the lot of material by stockpile number, where the slag was aged, and the date that the stockpile was completed and controlled aging begun.

Air-cooled iron blast furnace slag or natural aggregate may be blended in proper combinations with steel slag aggregate to produce the specified gradings, for those items for which steel slag aggregate is permitted, unless otherwise provided.

Aggregate containing slag shall meet the applicable quality requirements for the items in which the aggregate is used.

The combined slag aggregate shall conform to the specified grading for the item in which it is used. The grading will be determined by California Test 202, modified by California Test 105 when there is a difference in specific gravity of 0.2 or more between the coarse and fine portion of the aggregate or between blends of different aggregates.

No aggregate produced from slag shall be placed within one foot, measured in any direction, of a non-cathodically protected pipe or structure unless the aggregate is incorporated in portland cement concrete pavement, in hot mix asphalt, or in treated base.

When slag is used as aggregate in hot mix asphalt, the  $K_c$  factor requirements, as determined by California Test 303, will not apply.

Slag aggregate used for embankment construction shall not be placed within 18 inches of finished slope lines, measured normal to the plane of the slope.

If steel slag aggregates are used to make hot mix asphalt, there shall be no other aggregates used in the mixture, except that up to 50 percent of the material passing the No. 4 sieve may consist of iron blast furnace slag aggregates or natural aggregates, or a combination thereof. If iron blast furnace aggregates or natural aggregates or a combination thereof are used in the mix, each type of aggregate shall be fed to the drier at a uniform rate. The rate of feed of each type of aggregate shall be maintained within 10 percent of the amount set. Adequate means shall be provided for controlling and checking the accuracy of the feeder.

Steel slag aggregate shall be stored separately from iron blast furnace slag aggregate and each type of slag aggregate shall also be stored separately from natural aggregate.

Hot mix asphalt produced from more than one of the following shall not be placed in the same layer: steel slag aggregates, iron blast furnace slag aggregates, natural aggregates or any combination thereof. Once a type of aggregate or aggregates is selected, it shall not be changed without prior approval by the Engineer.

If steel slag aggregates are used to produce hot mix asphalt, and if the specific gravity of a compacted stabilometer test specimen is in excess of 2.40, the quantity of hot mix asphalt to be paid for will be reduced. The stabilometer test specimen will be fabricated in conformance with the procedures in California Test 304 and the specific gravity of the specimen will be determined in conformance with Method C of California Test 308. The pay quantity of hot mix asphalt will be determined by multiplying the quantity of hot mix asphalt placed in the work by 2.40 and dividing the result by the specific gravity of the compacted stabilometer test specimen. Such reduction in quantity will be determined and applied as often as is necessary to ensure accurate results as determined by the Engineer.

## SECTION 8-2. CONCRETE

### 8-2.01 PORTLAND CEMENT CONCRETE

Portland cement concrete shall conform to the provisions in Section 90, "Portland Cement Concrete," of the Standard Specifications and these special provisions.

#### STRENGTH DEVELOPMENT TIME

The time allowed to obtain the minimum required compressive strength as specified in Section 90-1.01, "Description," of the Standard Specifications will be 56 days when the Contractor chooses cementitious material that satisfies the following equation:

$$\frac{(41 \times UF) + (19 \times F) + (11 \times SL)}{TC} \geq 7.0$$

Where:

- F = Fly ash or natural pozzolan conforming to the requirements in AASHTO Designation: M 295, Class F or N, including the amount in blended cement, pounds per cubic yard. F is equivalent to either FA or FB as defined in Section 90-2.01C, "Required Use of Supplementary Cementitious Materials," of the Standard Specifications
- SL = GGBFS, including the amount in blended cement, pounds per cubic yard
- UF = Silica fume, metakaolin, or UFFA, including the amount in blended cement, pounds per cubic yard
- TC = Total amount of cementitious material used, pounds per cubic yard

For concrete satisfying the equation above, the Contractor shall test for the modulus of rupture or compressive strength specified for the concrete involved, at least once every 500 cubic yards, at 28, 42, and 56 days. The Contractor shall submit test results to the Engineer and the Transportation Laboratory, Attention: Office of Concrete Materials.

#### SUPPLEMENTARY CEMENTITIOUS MATERIALS

The Contractor may use rice hull ash as a supplementary cementitious material (SCM) to make minor concrete. Rice hull ash shall conform to the requirements in AASHTO Designation: M 321 and the following chemical and physical requirements:

Chemical Requirements	Percent
Silicon Dioxide (SiO <sub>2</sub> ) <sup>a</sup>	90 min.
Loss on ignition	5.0 max.
Total Alkalies (as Na <sub>2</sub> O) equivalent	3.0 max.

Physical Requirements	Percent
Particle size distribution	
Less than 45 microns	95
Less than 10 microns	50
Strength Activity Index with portland cement <sup>b</sup>	
7 days	95 (minimum % of control)
28 days	110 (minimum % of control)
Expansion at 16 days when testing job materials in conformance with ASTM C 1567 <sup>c</sup>	0.10 max.
Surface Area when testing by nitrogen adsorption in conformance with ASTM D 5604	40.0 m <sup>2</sup> /g min.

Notes:

<sup>a</sup> A maximum of 1.0% of the SiO<sub>2</sub> may exist in crystalline form.

<sup>b</sup> When tested in conformance with the requirements for strength activity testing of silica fume in AASHTO Designation: M 307

<sup>c</sup> In the test mix, Type II or Type V portland cement shall be replaced with at least 12% RHA by weight.

Rice hull ash will be considered as a Type UF SCM for the purposes of calculating cementitious material requirements in Section 90-2.01C, "Required Use of Supplementary Cementitious Materials," of the Standard Specifications and these special provisions.

### SECTION 8-3. WELDING

#### 8-3.01 WELDING

##### GENERAL

Flux cored welding electrodes conforming to the requirements of AWS A5.20 E6XT-4 or E7XT-4 shall not be used to perform welding for this project.

Wherever reference is made to the following AWS welding codes in the Standard Specifications, on the plans, or in these special provisions, the year of adoption for these codes shall be as listed:

AWS Code	Year of Adoption
D1.1	2006
D1.4	2005
D1.5	2002
D1.6	1999

Requirements of the AWS welding codes shall apply unless otherwise specified in the Standard Specifications, on the plans, or in these special provisions. Wherever the abbreviation AWS is used, it shall be equivalent to the abbreviations ANSI/AWS or AASHTO/AWS.

Section 6.1.1.1 of AWS D1.5 is replaced with the following:

Quality Control (QC) shall be the responsibility of the Contractor. As a minimum, the Contractor shall perform inspection and testing of each weld joint prior to welding, during welding, and after welding as specified in this section and as necessary to ensure that materials and workmanship conform to the requirements of the contract documents.

Unless otherwise specified, Sections 6.1.3 through 6.1.4.3 of AWS D1.1, Section 7.1.2 of AWS D1.4, and Sections 6.1.1.2 through 6.1.3.3 of AWS D1.5 are replaced with the following:

The QC Inspector shall be the duly designated person who acts for and on behalf of the Contractor for inspection, testing, and quality related matters for all welding.

Quality Assurance (QA) is the prerogative of the Engineer. The QA Inspector is the duly designated person who acts for and on behalf of the Engineer.

The QC Inspector shall be responsible for quality control acceptance or rejection of materials and workmanship, and shall be currently certified as an AWS Certified Welding Inspector (CWI) in conformance with the requirements in AWS QC1, "Standard for AWS Certification of Welding Inspectors."

The QC Inspector may be assisted by an Assistant QC Inspector provided that this individual is currently certified as an AWS Certified Associate Welding Inspector (CAWI) in conformance with the requirements in AWS QC1, "Standard for AWS Certification of Welding Inspectors." The Assistant QC Inspector may perform inspection under the direct supervision of the QC Inspector provided the assistant is always within visible and audible range of the QC Inspector. The QC Inspector shall be responsible for signing all reports and for determining if welded materials conform to workmanship and acceptance criteria. The ratio of QC Assistants to QC Inspectors shall not exceed 5 to 1.

When the term "Inspector" is used without further qualification, it shall refer to the QC Inspector.

When any work is welded in conformance with the provisions in Section 75, "Miscellaneous Metal," of the Standard Specifications, not including Section 75-1.035, "Bridge Joint Restrainer Units," of the Standard Specifications, Section 6.1.4 of AWS D1.1 is replaced with the following:

The QC Inspector shall be responsible for quality control acceptance or rejection of materials and workmanship and shall be currently certified as an AWS CWI in conformance with the requirements in AWS QC1, "Standard for AWS Certification of Welding Inspectors," or as a Welding Inspector Specialist (WIS) in conformance with the requirements in AWS B5.2, "Specification for the Qualification of Welding Inspector Specialists and Welding Inspector Assistants."

Section 6.14.6, "Personnel Qualification," of AWS D1.1, Section 7.8, "Personnel Qualification," of AWS D1.4, and Section 6.1.3.4, "Personnel Qualification," of AWS D1.5 are replaced with the following:

Personnel performing nondestructive testing (NDT) shall be qualified and certified in conformance with the requirements of the American Society for Nondestructive Testing (ASNT) Recommended Practice No. SNT-TC-1A and the Written Practice of the NDT firm. The Written Practice of the NDT firm shall meet or exceed the guidelines of the ASNT Recommended Practice No. SNT-TC-1A. Individuals who perform NDT, review the results, and prepare the written reports shall be either:

- A. Certified NDT Level II technicians, or;
- B. Level III technicians who hold a current ASNT Level III certificate in that discipline and are authorized and certified to perform the work of Level II technicians.

Section 6.5.4 of AWS D1.5 is replaced with the following:

The QC Inspector shall inspect and approve each joint preparation, assembly practice, welding technique, joint fit-up, and the performance of each welder, welding operator, and tack welder to make certain that the applicable requirements of this code and the approved Welding Procedure Specification (WPS) are met. The QC Inspector shall examine the work to make certain that it meets the requirements of Sections 3 and 6.26. The size and contour of all welds shall be measured using suitable gages. Visual inspection for cracks in welds and base metal, and for other discontinuities shall be aided by strong light, magnifiers, or such other devices as may be helpful. Acceptance criteria different from those specified in this code may be used when approved by the Engineer.

Section 6.6.5, "Nonspecified NDT Other than Visual," of AWS D1.1, Section 7.6.5 of AWS D1.4 and Section 6.6.5 of AWS D1.5 shall not apply.

For any welding, the Engineer may direct the Contractor to perform NDT that is in addition to the visual inspection or NDT specified in the AWS or other specified welding codes, in the Standard Specifications, or in these special provisions. Except as provided for in these special provisions, additional NDT required by the Engineer, and associated repair work, will be paid for as extra work as provided in Section 4-1.03D, "Extra Work," of the Standard Specifications. Prior to release of welded material by the Engineer, if testing by NDT methods other than those originally specified discloses an attempt to defraud or reveals a gross nonconformance, all costs associated with the repair of the deficient area, including NDT of the weld and of the repair, and any delays caused by the repair, shall be at the Contractor's expense. A gross nonconformance is defined as the sum of planar type rejectable indications in more than 20 percent of the tested length.

When less than 100 percent of NDT is specified for any weld, it is expected that the entire length of weld meet the specified acceptance-rejection criteria. Should any welding deficiencies be discovered by additional NDT directed or performed by the Engineer that utilizes the same NDT method as that originally specified, all costs associated with the repair of the deficient area, including NDT of the weld and of the weld repair, and any delays caused by the repair, shall be at the Contractor's expense.

Repair work to correct welding deficiencies discovered by visual inspection directed or performed by the Engineer, and any associated delays or expenses caused to the Contractor by performing these repairs, shall be at the Contractor's expense.

The Engineer shall have the authority to verify the qualifications or certifications of any welder, QC Inspector, or NDT personnel to specified levels by retests or other means approved by the Engineer.

Inspection and approval of all joint preparations, assembly practices, joint fit-ups, welding techniques, and the performance of each welder, welding operator, and tack welder shall be documented by the QC Inspector on a daily basis for each day welding is performed. For each inspection, including fit-up, Welding Procedure Specification (WPS) verification, and final weld inspection, the QC Inspector shall confirm and document compliance with the requirements of the AWS or other specified code criteria and the requirements of these special provisions on all welded joints before welding, during welding, and after the completion of each weld.

In addition to the requirements specified in the applicable code, the period of effectiveness for a welder's or welding operator's qualification shall be a maximum of 3 years for the same weld process, welding position, and weld type. If welding will be performed without gas shielding, then qualification shall also be without gas shielding. Excluding welding of fracture critical members, a valid qualification at the beginning of work on a contract will be acceptable for the entire period of the contract, as long as the welder's or welding operator's work remains satisfactory.

In addition to the requirements of AWS D1.1, welding procedures qualification for work welded in conformance with that code shall conform to the following:

When a nonstandard weld joint is to be made using a combination of WPSs, a single test may be conducted combining the WPSs to be used in production, provided the essential variables, including weld bead placement, of each process are limited to those established in Table 4.5.

In addition to the requirements of AWS D1.5, Section 5.12 or 5.13, welding procedures qualification for work welded in conformance with that code shall conform to the following requirements:

- A. Unless considered prequalified, fillet welds shall be qualified in each position. The fillet weld soundness test shall be conducted using the essential variables of the WPS as established by the Procedure Qualification Record (PQR).
- B. For qualification of joints that do not conform to Figures 2.4 and 2.5 of AWS D1.5, a minimum of two WPS qualification tests are required. The tests shall be conducted using both Figure 5.1 and Figure 5.3. The test conforming to Figure 5.1 shall be conducted in conformance with AWS D1.5, Section 5.12 or 5.13. The test conforming to Figure 5.3 shall be conducted using the welding electrical parameters that were established for the test conducted conforming to Figure 5.1. The ranges of welding electrical parameters established during welding per Figure 5.1 in conformance with AWS D1.5, Section 5.12, shall be further restricted according to the limits in Table 5.3 during welding per Figure 5.3.
- C. Multiple zones within a weld joint may be qualified. The travel speed, amperage, and voltage values that are used for tests conducted per AWS D1.5 Section 5.13 shall be consistent for each pass in a weld joint, and shall in no case vary by more than  $\pm 10$  percent for travel speed,  $\pm 10$  percent for amperage, and  $\pm 7$  percent for voltage as measured from a predetermined target value or average within each weld pass or zone. The travel speed shall in no case vary by more than  $\pm 15$  percent when using submerged arc welding.
- D. For a WPS qualified in conformance with AWS D1.5 Section 5.13, the values to be used for calculating ranges for current and voltage shall be based on the average of all weld passes made in the test. Heat input shall be calculated using the average of current and voltage of all weld passes made in the test for a WPS qualified in conformance with Section 5.12 or 5.13.
- E. Macroetch tests are required for WPS qualification tests, and acceptance shall be per AWS D1.5 Section 5.19.3.
- F. When a nonstandard weld joint is to be made using a combination of WPSs, a test conforming to Figure 5.3 may be conducted combining the WPSs to be used in production, provided the essential variables, including weld bead placement, of each process are limited to those established in Table 5.3.
- G. Prior to preparing mechanical test specimens, the PQR welds shall be inspected by visual and radiographic tests. Backing bar shall be 3 inches in width and shall remain in place during NDT testing. Results of the visual and radiographic tests shall comply with AWS D1.5 Section 6.26.2, excluding Section 6.26.2.2. Test plates that do not comply with both tests shall not be used.

## **WELDING QUALITY CONTROL**

Welding quality control shall conform to the requirements in the AWS or other specified welding codes, the Standard Specifications, and these special provisions.

Unless otherwise specified, welding quality control shall apply when any work is welded in conformance with the provisions in Section 49, "Piling," Section 52, "Reinforcement," Section 55, "Steel Structures," or Section 75-1.035, "Bridge Joint Restrainer Units," of the Standard Specifications.

All welding will require inspection by the Engineer. The Contractor shall request inspection at least 3 business days prior to the beginning of welding for locations within California and 5 business days for locations outside of California. The Contractor shall request inspection at:

<http://www.dot.ca.gov/hq/esc/Translab/OSM/smbforms.htm>

Continuous inspection shall be provided when any welding is being performed. Continuous inspection, as a minimum, shall include having a QC Inspector within such close proximity of all welders or welding operators so that inspections by the QC Inspector of each welding operation at each welding location does not lapse for a period exceeding 30 minutes.

When joint weld details that are not prequalified to the details of Section 3 of AWS D1.1 or to the details of Figure 2.4 or 2.5 of AWS D1.5 are proposed for use in the work, the joint details, their intended locations, and the proposed welding parameters and essential variables, shall be approved by the Engineer. The Contractor shall allow the Engineer 15 days to complete the review of the proposed joint detail locations. In the event the Engineer fails to complete the review within the time allowed, and if, in the opinion of the Engineer, completion of the work is delayed or interfered with by reason of the Engineer's delay in completing the review, the Contractor will be compensated for any resulting loss, and an extension of time will be granted, in the same manner as provided for in Section 8-1.09, "Right of Way Delays," of the Standard Specifications. Upon approval of the proposed joint detail locations and qualification of the proposed joint details, welders and welding operators using these details shall perform a qualification test plate using the WPS variables and the joint detail to be used in production. The test plate shall have the maximum thickness to be used in production and a minimum length of 18 inches. The test plate shall be mechanically and radiographically tested. Mechanical and radiographic testing and acceptance criteria shall be as specified in the applicable AWS codes.

The Engineer will witness all qualification tests for WPSs that were not previously approved by the Department. Unless otherwise specified, an approved independent third party will witness the qualification tests for welders or welding operators. The independent third party shall be a current CWI and shall not be an employee of the contractor performing the welding. The Contractor shall allow the Engineer 15 days to review the qualifications and copy of the current certification of the independent third party. In the event the Engineer fails to complete the review within the time allowed, and if, in the opinion of the Engineer, completion of the work is delayed or interfered with by reason of the Engineer's delay in completing the review, the Contractor will be compensated for any resulting loss, and an extension of time will be granted, in the same manner as provided for in Section 8-1.09, "Right of Way Delays," of the Standard Specifications. The Contractor shall notify the Engineer 7 days prior to performing any qualification tests. Witnessing of qualification tests by the Engineer shall not constitute approval of the intended joint locations, welding parameters, or essential variables.

The Contractor shall designate in writing a welding Quality Control Manager (QCM). The QCM shall be responsible directly to the Contractor for the quality of welding, including materials and workmanship, performed by the Contractor and subcontractors.

The QCM shall be the sole individual responsible to the Contractor for submitting, receiving, reviewing, and approving all correspondence, required submittals, and reports to and from the Engineer. The QCM shall be a registered professional engineer or shall be currently certified as a CWI.

Unless the QCM is hired by a subcontractor providing only QC services, the QCM shall not be employed or compensated by any subcontractor, or by other persons or entities hired by subcontractors, who will provide other services or materials for the project. The QCM may be an employee of the Contractor.

Welding inspection personnel or NDT firms to be used in the work shall not be employed or compensated by any subcontractor, or by other persons or entities hired by subcontractors, who will provide other services or materials for the project, except for the following conditions:

- A. The work is welded in conformance with AWS D1.5 and is performed at a permanent fabrication or manufacturing facility that is certified under the AISC Quality Certification Program, Category Cbr, Major Steel Bridges and Fracture Critical endorsement F, when applicable.
- B. The work is welded in conformance with AWS D1.1 at a permanent pipe manufacturing or fabrication facility that maintains a QC program that is independent from production.

For welding performed at such facilities, the inspection personnel or NDT firms may be employed or compensated by the facility performing the welding provided the facility maintains a QC program that is independent from production.

Prior to submitting the Welding Quality Control Plan (WQCP) required herein, a prewelding meeting between the Engineer, the Contractor's QCM, and a representative from each entity performing welding or inspection for this project, shall be held to discuss the requirements for the WQCP.

The Contractor shall submit to the Engineer, in conformance with the provisions in Section 5-1.02, "Plans and Working Drawings," of the Standard Specifications, 2 copies of a separate WQCP for each subcontractor or supplier for each item of work for which welding is to be performed.

The Contractor shall allow the Engineer 15 days to review the WQCP submittal after a complete plan has been received. No welding shall be performed until the WQCP is approved in writing by the Engineer. In the event the Engineer fails to complete the review within the time allowed, and if, in the opinion of the Engineer, completion of the work is delayed or interfered with by reason of the Engineer's delay in completing the review, the Contractor will be compensated for any resulting loss, and an extension of time will be granted, in the same manner as provided for in Section 8-1.09, "Right of Way Delays," of the Standard Specifications.

An amended WQCP or any addendum to the approved WQCP shall be submitted to, and approved in writing by the Engineer, for proposed revisions to the approved WQCP. An amended WQCP or addendum will be required for revisions to the WQCP, including but not limited to a revised WPS; additional welders; changes in NDT firms, QC, or NDT personnel or procedures; or updated systems for tracking and identifying welds. The Engineer shall have 7 days to complete the review of the amended WQCP or addendum. Work affected by the proposed revisions shall not be performed until the amended WQCP or addendum has been approved. In the event the Engineer fails to complete the review within the time allowed, and if, in the opinion of the Engineer, completion of the work is delayed or interfered with by reason of the Engineer's delay in completing the review, the Contractor will be compensated for any resulting loss, and an extension of time will be granted, in the same manner as provided for in Section 8-1.09, "Right of Way Delays," of the Standard Specifications.

Information regarding the contents, format, and organization of a WQCP, is available at the Transportation Laboratory and at:

<http://www.dot.ca.gov/hq/esc/Translab/OSM/smbresources.htm>

After final approval of the WQCP, amended WQCP, or addendum, the Contractor shall submit 7 copies to the Engineer of the approved documents. A copy of the Engineer approved document shall be available at each location where welding is to be performed.

A daily production log for welding shall be kept for each day that welding is performed. The log shall clearly indicate the locations of all welding. The log shall include the welders' names, amount of welding performed, any problems or deficiencies discovered, and any testing or repair work performed, at each location. The daily report from each QC Inspector shall also be included in the log.

The following items shall be included in a Welding Report that is to be submitted to the Engineer within 15 days following the performance of any welding:

- A. A daily production log.
- B. Reports of all visual weld inspections and NDT.
- C. Radiographs and radiographic reports, and other required NDT reports.
- D. A summary of welding and NDT activities that occurred during the reporting period.
- E. Reports of each application of heat straightening.
- F. A summarized log listing the rejected lengths of weld by welder, position, process, joint configuration, and piece number.
- G. Documentation that the Contractor has evaluated all radiographs and other nondestructive tests and corrected all rejectable deficiencies, and that all repaired welds have been reexamined using the required NDT and found acceptable.

The following information shall be clearly written on the outside of radiographic envelopes: name of the QCM, name of the nondestructive testing firm, name of the radiographer, date, contract number, complete part description, and all included weld numbers, report numbers, and station markers or views, as detailed in the WQCP. In addition, all interleaves shall have clearly written on them the part description and all included weld numbers and station markers or views, as detailed in the WQCP. A maximum of 2 pieces of film shall be used for each interleave.

Reports of all visual inspections and NDT shall be signed by the inspector or technician and submitted daily to the QCM for review and signature prior to submittal to the Engineer. Corresponding names shall be clearly printed or typewritten next to all signatures. Reports of all NDT, whether specified, additional, or informational, performed by the Contractor shall be submitted to the Engineer.

The Engineer will review the Welding Report to determine if the Contractor is in conformance with the WQCP. Except for steel pipe piling, the Engineer shall be allowed 15 days to review the report and respond in writing after the complete Welding Report has been received. Prior to receiving notification from the Engineer of the Contractor's conformance with the WQCP, the Contractor may encase in concrete or cover welds for which the Welding Report has been submitted. However, should the Contractor elect to encase or cover those welds prior to receiving notification from the Engineer, it is expressly understood that the Contractor shall not be relieved of the responsibility for incorporating material in the work that conforms to the requirements of the plans and specifications. Material not conforming to these requirements will be subject to rejection. Should the Contractor elect to wait to encase or cover welds pending notification by the Engineer, and in the event the Engineer fails to complete the review within the time allowed, and if, in the opinion of the Engineer, completion of the work is delayed or interfered with by reason of the Engineer's delay in completing the review, the Contractor will be compensated for any resulting loss, and an extension of time will be granted, in the same manner as provided for in Section 8-1.09, "Right of Way Delays," of the Standard Specifications.

For steel pipe piling, including bar reinforcement in the piling, the Contractor shall allow the Engineer 2 business days to review the Welding Report and respond in writing after the required items have been received. No field welded steel pipe piling shall be installed, and no reinforcement in the piling shall be encased in concrete until the Engineer has approved the above requirements in writing.

In addition to the requirements in AWS D1.1 and AWS D1.5, second-time excavations of welds or base metal to repair unacceptable discontinuities, regardless of NDT method, and all repairs of cracks require prior approval of the Engineer.

The Engineer shall be notified immediately in writing when welding problems, deficiencies, base metal repairs, or any other type of repairs not submitted in the WQCP are discovered, and also of the proposed repair procedures to correct them. For requests to perform second-time repairs or repairs of cracks, the Contractor shall include an engineering evaluation of the proposed repair. The engineering evaluation, at a minimum, shall address the following:

- A. What is causing each defect?
- B. Why the repair will not degrade the material properties?
- C. What steps are being taken to prevent similar defects from happening again?

The Contractor shall allow the Engineer 7 days to review these procedures. No remedial work shall begin until the repair procedures are approved in writing by the Engineer. In the event the Engineer fails to complete the review within the time allowed, and if, in the opinion of the Engineer, completion of the work is delayed or interfered with by reason of the Engineer's delay in completing the review, the Contractor will be compensated for any resulting loss, and an extension of time will be granted, in the same manner as provided for in Section 8-1.09, "Right of Way Delays," of the Standard Specifications.

The QCM shall sign and furnish to the Engineer, a Certificate of Compliance in conformance with the provisions in Section 6-1.07, "Certificates of Compliance," of the Standard Specifications for each item of work for which welding was performed. The certificate shall state that all of the materials and workmanship incorporated in the work, and all required tests and inspections of this work, have been performed in conformance with the details shown on the plans, the Standard Specifications, and these special provisions.

#### **PAYMENT**

Full compensation for conforming to the requirements of "Welding" shall be considered as included in the contract prices paid for the various items of work involved and no additional compensation will be allowed therefor.

#### **SECTION 9. (BLANK)**

#### **SECTION 10. CONSTRUCTION DETAILS**

#### **SECTION 10-1. GENERAL**

#### **10-1.00 CONSTRUCTION PROJECT INFORMATION SIGNS**

Before any major physical construction work readily visible to highway users is started on this contract, the Contractor shall furnish and erect 1 Type 2 Construction Project Information signs at the locations designated by the Engineer.

The signs and overlays shall be of a type and material consistent with the estimated time of completion of the project and shall conform to the details shown on the plans.

The sign letters, the border and the Department's construction logos shall conform to the colors (non-reflective) and details shown on the plans, and shall be on a white background (non-reflective). The colors blue and orange shall conform to PR Color Number 3 and Number 6, respectively, as specified in the Federal Highway Administration's Color Tolerance Chart.

The sign message to be used for fund types shall consist of the following, in the order shown:

STATE HIGHWAY FUNDS
---------------------

The sign message to be used for type of work shall consist of the following:

#### **HIGHWAY CONSTRUCTION**

The sign message to be used for the Year of Completion of Project Construction will be furnished by the Engineer. The Contractor shall furnish and install the "Year" sign overlay within 10 working days of notification of the year date to be used.

The letter sizes to be used shall be as shown on the plans. The information shown on the signs shall be limited to that shown on the plans.

The signs shall be kept clean and in good repair by the Contractor.

Upon completion of the work, the signs shall be removed and disposed of outside the highway right of way in conformance with the provisions in Section 7-1.13 of the Standard Specifications.

Full compensation for furnishing, erecting, maintaining, and removing and disposing of the construction project information signs shall be considered as included in the contract lump sum price paid for construction area signs and no additional compensation will be allowed therefor.

#### **10-1.01 ORDER OF WORK**

Order of work shall conform to the provisions in Section 5-1.05, "Order of Work," of the Standard Specifications and these special provisions.

The SB Rte 55 on-ramp from Dyer Road shall remain closed to traffic for the duration of lane widening. The on-ramp will be opened once the widening is completed.

Full compensation for anchoring the k rail shall be considered as included in the contract price paid per linear feet for temporary railing (type K), and no separate payment/additional compensation will be made/allowed therefor

The first order of work shall be to place the order for the electrical equipment. The Engineer shall be furnished a statement from the vendor that the order for the electrical equipment has been received and accepted by the vendor.

Loop detectors shall be installed after the placement of uppermost layer of new pavement, and before applying traffic stripes and pavement markings.

Attention is directed to "Maintaining Traffic" and "Temporary Pavement Delineation" of these special provisions and to the stage construction sheets of the plans.

The work shall be performed in conformance with the stages of construction shown on the plans. Nonconflicting work in subsequent stages may proceed concurrently with work in preceding stages, provided satisfactory progress is maintained in the preceding stages of construction.

In each stage, after completion of the preceding stage, the first order of work shall be the removal of existing pavement delineation as directed by the Engineer. Pavement delineation removal shall be coordinated with new delineation so that lane lines are provided at all times on traveled ways open to public traffic.

Before obliterating any pavement delineation (traffic stripes, pavement markings, and pavement markers) that is to be replaced on the same alignment and location, as determined by the Engineer, the pavement delineation shall be referenced by the Contractor, with a sufficient number of control points to reestablish the alignment and location of the new pavement delineation. The references shall include the limits or changes in striping pattern, including one- and 2-way barrier lines, limit lines, crosswalks and other pavement markings. Full compensation for referencing existing pavement delineation shall be considered as included in the contract prices paid for new pavement delineation and no additional compensation will be allowed therefor.

At those locations exposed to public traffic where guard railings or barriers are to be constructed, reconstructed, or removed and replaced, the Contractor shall schedule operations so that at the end of each working day there shall be no post holes open nor shall there be any railing or barrier posts installed without the blocks and rail elements assembled and mounted thereon.

At least 60 days before planting the plants, furnish the Engineer a statement from the vendor that the order for the plants required for this contract, including inspection plants, has been received and accepted by the vendor. The statement from the vendor must include the names, sizes, and quantities of plants ordered and the anticipated date of delivery.

Do not perform clearing, grubbing, and earthwork operations in areas where existing irrigation facilities are to remain in place until existing irrigation facilities have been checked for proper operation as specified under "Existing Highway Irrigation Facilities" of these special provisions.

#### **10-1.02 WATER POLLUTION CONTROL**

##### **GENERAL**

Water pollution control work shall conform to the provisions in Section 7-1.01G, "Water Pollution," of the Standard Specifications, section of these special provisions entitled "Relations With California Regional Water Quality Control Board," and these special provisions.

The Contractor may obtain other National Pollutant Discharge Elimination System (NPDES) permits that apply to activities and mobile operations within or outside of the project limits including hot mix asphalt batch plants, material borrow areas, concrete plants, staging areas, storage yards, or access roads.

The Contractor shall perform water pollution control work in conformance with the requirements in the "Storm Water Pollution Prevention Plan (SWPPP) and Water Pollution Control Program (WPCP) Preparation Manual" and its addenda in effect on the day the Notice to Bidders is dated. This manual is referred to as the "Preparation Manual." Copies of the Preparation Manual may be obtained from:

State of California  
Department of Transportation  
Publication Distribution Unit  
1900 Royal Oaks Drive  
Sacramento, California 95815  
Telephone: (916) 445-3520

The Preparation Manual and other references for performing water pollution control work are available from the Department's Construction Storm Water and Water Pollution Control web site at:

<http://www.dot.ca.gov/hq/construc/stormwater/stormwater1.htm>

Before the start of job site activities, the Contractor shall provide training for project managers, supervisory personnel, and employees involved with water pollution control work. The training shall include:

- A. Rules and regulations
- B. Implementation and maintenance for:
  - 1. Temporary Soil Stabilization
  - 2. Temporary Sediment Control
  - 3. Tracking Control
  - 4. Wind Erosion Control

The Contractor shall designate in writing a Water Pollution Control Manager (WPCM). The Contractor shall submit a statement of qualifications describing the training, work history, and expertise of the proposed WPCM. The qualifications shall include either:

- A. A minimum of 24 hours of Department approved storm water management training described at Department's Construction Storm Water and Water Pollution Control web site.
- B. Certification as a Certified Professional in Erosion and Sediment Control (CPESC).

The WPCM shall be:

- A. Responsible for water pollution control work.
- B. The primary contact for water pollution control work.
- C. Have authority to mobilize crews to make immediate repairs to water pollution control practices.

The Contractor may designate one manager to prepare the SWPPP and a different manager to implement the plan. The WPCP preparer shall meet the training requirements for the WPCM.

#### **STORM WATER POLLUTION PREVENTION PLAN**

The Contractor shall submit a Storm Water Pollution Prevention Plan (SWPPP) to the Engineer for approval. The SWPPP shall conform to the requirements in the Preparation Manual, the NPDES permit, and these special provisions. The SWPPP shall be submitted in place of the water pollution control program required by the provisions in Section 7-1.01G, "Water Pollution," of the Standard Specifications.

The SWPPP shall include water pollution control practices:

- A. For storm water and non-storm water from areas outside of the job site related to construction activities for this contract such as:
  - 1. Staging areas.
  - 2. Storage yards.
  - 3. Access roads.
- B. Appropriate for each season as described in "Implementation Requirements" of these special provisions.
- C. For activities or mobile operations related to all NPDES permits.

The SWPPP shall include a schedule that:

- A. Describes when work activities that could cause water pollution will be performed.
- B. Identifies soil stabilization and sediment control practices for disturbed soil area.
- C. Includes dates when these practices will be 25, 50, and 100 percent complete.
- D. Shows 100 percent completion of these practices before the rainy season.

The SWPPP shall include the following temporary water pollution control practices and their associated contract items of work as shown on the plans or specified in these special provisions:

- A. Temporary Sediment Control
  - 1. Temporary Concrete Washout (Portable)
  - 2. Temporary Silt Fence
  - 3. Temporary Drainage Inlet Protection
- B. Tracking Control
  - 1. Temporary Construction Entrance
  - 2. Street Sweeping

Within 20 days after contract approval, the Contractor shall submit 3 copies of the SWPPP to the Engineer. The Contractor shall allow 20 days for the Engineer's review. If revisions are required, the Engineer will provide comments and specify the date that the review stopped. The Contractor shall revise and resubmit the SWPPP within 15 days of receipt of the Engineer's comments. The Engineer's review will resume when the complete SWPPP is resubmitted. When the Engineer approves the SWPPP, the Contractor shall submit 4 copies of the approved SWPPP to the Engineer. The Contractor may proceed with construction activities if the Engineer conditionally approves the SWPPP while minor revisions are being completed.

The Contractor shall not perform work that may cause water pollution until the SWPPP has been approved by the Engineer. The Engineer's review and approval shall not waive any contract requirements and shall not relieve the Contractor from complying with Federal, State and local laws, regulations, and requirements.

If there is a change in construction schedule or activities, the Contractor shall prepare an amendment to the SWPPP to identify additional or revised water pollution control practices. The Contractor shall submit the amendment to the Engineer for review within a time agreed to by the Engineer not to exceed the number of days specified for the initial submittal of the SWPPP. The Engineer will review the amendment within the same time allotted for the review of the initial submittal of the SWPPP.

If directed by the Engineer or requested in writing by the Contractor and approved by the Engineer, changes to the water pollution control work specified in these special provisions will be allowed. Changes may include addition of new water pollution control practices. The Contractor shall incorporate these changes in the SWPPP. Additional water pollution control work will be paid for as extra work in accordance with Section 4-1.03D, "Extra Work," of the Standard Specifications.

The Contractor shall keep a copy of the approved SWPPP at the job site. The SWPPP shall be made available when requested by a representative of the Regional Water Quality Control Board, State Water Resources Control Board, United States Environmental Protection Agency, or the local storm water management agency. Requests from the public shall be directed to the Engineer.

### **SAMPLING AND ANALYSIS**

The Contractor shall include a Sampling and Analysis Plan (SAP) in the SWPPP to monitor the effectiveness of the water pollution control practices. The Contractor shall prepare the SAP in conformance with the Preparation Manual.

The Contractor shall designate trained personnel to collect water quality samples. The personnel and training shall be documented in the SAP. Training shall consist of the following elements:

- A. SAP review,
- B. Health and safety review, and
- C. Sampling simulations.

In the SAP the Contractor shall describe the following water quality sampling procedures:

- A. Sampling preparation,
- B. Collection,
- C. Quality assurance and quality control,
- D. Sample labeling,
- E. Collection documentation,
- F. Sample shipping,
- G. Chain of custody,
- H. Sample numbering, and
- I. Precautions from the construction site health and safety plan.

The Contractor shall document sample collection during precipitation.

Samples to be analyzed in the field shall be taken by the Contractor's designated sampling personnel using collection and analysis methods, and equipment calibration specified by the manufacturer of the sampling equipment. Samples to be analyzed by a laboratory, shall be sampled, preserved, and analyzed by a State-certified laboratory in conformance with the requirements in 40 CFR Part 136, "Guidelines Establishing Test Procedures for the Analysis of Pollutants." The Contractor shall identify the State-certified laboratory, sample containers, preservation requirements, holding times, and analysis method in the SAP. A list of State-certified laboratories that are approved by the Department is available at:

<http://www.dhs.ca.gov/ps/ls/ELAP/html/lablist.htm>

### **Non-Visible Pollutants**

This project has the potential to discharge non-visible pollutants in storm water from the construction site. The Contractor shall include in the SAP a description of the sampling and analysis strategy to be implemented on the project for monitoring non-visible pollutants.

In the SAP the Contractor shall identify potential non-visible pollutants that will be present on the construction site associated with the following:

- A. Construction materials and wastes;
- B. Existing contamination due to historical site usage; or
- C. Application of soil amendments, including soil stabilization products, with the potential to alter pH or contribute toxic pollutants to storm water.

The Contractor shall show the locations planned for storage and use of the potential non-visible pollutants on the SWPPP Water Pollution Control Drawings.

The Contractor shall include in the SAP the following list of conditions that require sampling when observed during a storm water inspection:

- A. Materials or wastes containing potential non-visible pollutants are not stored under watertight conditions.
- B. Materials or wastes containing potential non-visible pollutants are stored under watertight conditions, but:
  - 1. A breach, leakage, malfunction, or spill is observed;
  - 2. The leak or spill has not been cleaned up before precipitation; and
  - 3. There is the potential for discharge of non-visible pollutants to surface waters or drainage system.
- C. Construction activities; such as application of fertilizer, pesticide, herbicide, methyl methacrylate concrete sealant, or non-pigmented curing compound; have occurred during precipitation or within 24 hours preceding precipitation, and have the potential to discharge pollutants to surface waters or drainage system.
- D. Soil amendments, including soil stabilization products, with the potential to alter pH levels or contribute toxic pollutants to storm water runoff have been applied, and have the potential to discharge pollutants to surface waters or drainage system (unless independent test data are available that demonstrate acceptable concentrations of non-visible pollutants in the soil amendment).
- E. Storm water runoff from an area contaminated by historical usage of the site has the potential to discharge pollutants to surface waters or drainage system.

The Contractor shall describe in the SAP the schedule for collecting a sample downhill from each non-visible pollutant source and an uncontaminated control sample, during the first 2 hours of discharge from precipitation during daylight hours that result in enough discharge for sample collection. If discharge flows to the non-visible pollutant source, a sample shall be collected immediately downhill from where the discharge enters the Department's right of way. If precipitation occurs again after at least 72 hours of dry weather the Contractor shall take new samples.

In the SAP the Contractor shall identify sampling locations for collecting downstream and control samples, and the reason for their selection. The control sampling location shall be selected so the sample does not come into contact with materials, wastes or areas associated with potential non-visible pollutants or disturbed soil areas. The Contractor shall show non-visible pollutant sampling locations on the SWPPP Water Pollution Control Drawings.

The Contractor shall identify in the SAP the analytical method to be used for downhill and control samples for potential non-visible pollutants on the project.

### **Analytical Results and Evaluation**

The Contractor shall submit a hard copy and electronic copy of water quality analytical results, and quality assurance and quality control data to the Engineer within 5 days of sampling for field analyses, and within 30 days for laboratory analyses. The Contractor shall also provide an evaluation of whether the downhill samples show levels of the tested parameter higher than in the control sample. If downhill or downstream samples show increased levels, the Contractor will assess the water pollution control measures, site conditions, and surrounding influences to determine the probable cause for the increase. As determined by the assessment, the Contractor will repair or modify water pollution control measures to address increases and amend the SWPPP as necessary. Electronic results (in one of the following file formats: .xls, .txt, .csv, .dbs, or .mdb) shall have the following information:

- A. Sample identification number.
- B. Contract number.
- C. Constituent.
- D. Reported value.
- E. Analytical method.
- F. Method detection limit.
- G. Reported limit.

The Contractor shall maintain the water quality sampling documentation and analytical results with the SWPPP on the project site.

If construction activities or knowledge of site conditions change such that discharges or sampling locations change, the Contractor shall amend the SAP in conformance with this section, "Water Pollution Control."

### **IMPLEMENTATION REQUIREMENTS**

The Contractor's responsibility for SWPPP implementation shall continue throughout any temporary suspension of work ordered in conformance with the provisions in Section 8-1.05, "Temporary Suspension of Work," of the Standard Specifications.

If the Contractor or the Engineer identifies a deficiency in the implementation of the approved SWPPP, the deficiency shall be corrected immediately, unless an agreed date for correction is approved in writing by the Engineer. The deficiency shall be corrected before the onset of precipitation. If the Contractor fails to correct the deficiency by the agreed date or before the onset of precipitation, the Department may correct the deficiency and deduct the cost of correcting deficiencies from payments.

If the Contractor fails to conform to the provisions of this section, "Water Pollution Control," the Engineer may order the suspension of work until the project complies with the requirements of this section.

### **Year-Round**

The Contractor shall monitor the National Weather Service weather forecast on a daily basis during the contract. The Contractor may use an alternative weather forecasting service if approved by the Engineer. Appropriate water pollution control practices shall be in place before precipitation.

The Contractor may discontinue earthwork operations for a disturbed area for up to 21 days and the disturbed soil area will still be considered active. When earthwork operations in the disturbed area have been completed, the Contractor shall implement appropriate water pollution control practices within 15 days, or before predicted precipitation, whichever occurs first.

### **Rainy Season**

The Contractor shall provide soil stabilization and sediment control practices during the rainy season between October 1st and May 1st.

The Contractor shall implement soil stabilization and sediment control practices a minimum of 10 days before the start of the rainy season.

During the defined rainy season, the active disturbed soil area of the project site shall be not more than 2.24 acres. The Engineer may approve expansions of the active disturbed soil area limit if requested in writing. The Contractor shall maintain soil stabilization and sediment control materials on site to protect disturbed soil areas.

### **INSPECTION AND MAINTENANCE**

The WPCM shall inspect the water pollution control practices identified in the SWPPP as follows:

- A. Before a forecasted storm,
- B. After precipitation that causes site runoff,
- C. At 24-hour intervals during extended precipitation,
- D. On a predetermined schedule, a minimum of once every 2 weeks outside of the defined rainy season, and
- E. On a predetermined schedule, a minimum of once a week during the defined rainy season.

The WPCM shall oversee the maintenance of the water pollution control practices.

The WPCM shall use the Storm Water Quality Construction Site Inspection Checklist provided in the Preparation Manual or an alternative inspection checklist provided by the Engineer. A copy of the completed site inspection checklist shall be submitted to the Engineer within 24 hours of finishing the inspection.

The Contractor may request approval from the Engineer to suspend inspections of water pollution control practices after work except plant establishment is complete. The Engineer's approval is contingent on approval from the Regional Water Quality Control Board. The Contractor shall not suspend inspections until written approval from the Engineer is received.

### **REPORTING REQUIREMENTS**

If the Contractor identifies discharges into surface waters or drainage systems causing or potentially causing pollution, or if the project receives a written notice or order from a regulatory agency, the Contractor shall immediately inform the Engineer. The Contractor shall submit a written report to the Engineer within 7 days of the discharge, notice or order. The report shall include the following information:

- A. The date, time, location, and nature of the operation, type of discharge and quantity, and the cause of the notice or order.
- B. The water pollution control practices used before the discharge, or before receiving the notice or order.
- C. The date of placement and type of additional or altered water pollution control practices placed after the discharge, or after receiving the notice or order.
- D. A maintenance schedule for affected water pollution control practices.

### **Annual Certifications**

By June 15 of each year, the Contractor shall complete and submit to the Engineer an Annual Certification of Compliance, as contained in the Preparation Manual.

### **PAYMENT**

During each estimate period the Contractor fails to conform to the provisions in this section, "Water Pollution Control," or fails to implement the water pollution control practices shown on the plans or specified elsewhere in these special provisions as items of work, the Department will withhold 25 percent of the progress payment.

Withholds for failure to perform water pollution control work will be in addition to all other withholds provided for in the contract. The Department will return performance-failure withholds in the progress payment following the correction of noncompliance.

The contract lump sum price paid for prepare storm water pollution prevention plan shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals and for doing all the work involved in preparing, obtaining approval of, and amending the SWPPP and inspecting water pollution control practices as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

Payments for prepare storm water pollution prevention plan will be made as follows:

- A. After the SWPPP has been approved by the Engineer, 50 percent of the contract item price for prepare storm water pollution prevention plan will be included in the monthly progress estimate.

- B. Forty percent of the contract item price for prepare storm water pollution prevention plan will be paid over the life of the contract.
- C. After acceptance of the contract in conformance with the provisions in Section 7-1.17, "Acceptance of Contract," of the Standard Specifications, payment for the remaining 10 percent of the contract item price for prepare storm water pollution prevention plan will be made in conformance with the provisions in Section 9-1.08B, "Payment Before Final Estimate."

Storm water sampling and analysis will be paid for as extra work as provided in Section 4-1.03D, "Extra Work," of the Standard Specifications. No payment will be made for the preparation, collection, analysis, and reporting of storm water samples where appropriate water pollution control practices are not implemented before precipitation or if a failure of a water pollution control practice is not corrected before precipitation.

Implementation of water pollution control practices in areas outside the highway right of way not specifically provided for in the SWPPP or in these special provisions will not be paid for.

Water pollution control practices for which there are separate contract items of work will be measured and paid for as those contract items of work.

### 10-1.03 CONSTRUCTION SITE MANAGEMENT

#### GENERAL

##### Summary

This work includes controlling potential sources of water pollution before they come in contact with storm water systems or watercourses.

Control material pollution and manage waste and non-storm water at the job site by implementing effective handling, storage, use, and disposal practices.

For information on documents under these special provisions, refer to the Department's Preparation Manual, Dewatering Guide, and BMP Manual.

Preparation Manual, Dewatering Guide, and BMP Manual are available from the Department's Construction Storm Water and Water Pollution Control web site at:

<http://www.dot.ca.gov/hq/construc/stormwater/stormwater1.htm>

##### Definitions

**BMP Manual:** The Department's Construction Site Best Management Practices (BMP) Manual.

**Dewatering Guide:** The Department's Field Guide to Construction Site Dewatering.

**Minor spills:** Small quantities of oil, gasoline, paint, or other material that are small enough to be controlled by a first responder upon discovery of the spill.

**Preparation Manual:** The Department's Storm Water Pollution Prevention Plan (SWPPP) and Water Pollution Control Program (WPCP) Preparation Manual.

**Semi-significant spills:** Spills that can be controlled by a first responder with help from other personnel.

**Significant or hazardous spills:** Spills that cannot be controlled by construction personnel.

##### Submittals

Submit the following:

1. Material Safety Data Sheet (MSDS) at least 5 days before material is used or stored
2. Monthly inventory records for material used or stored
3. Stormwater training:
  - 3.1. Include training dates and subject for employees and subcontractors with SWPPP or WPCP. Include dates and subject for ongoing training, including tailgate meetings.
  - 3.2. Employee training records:
    - 3.2.1. Within 5 days of SWPPP or WPCP approval for existing employees
    - 3.2.2. Within 5 days of training for new employees
    - 3.2.3. At least 5 days before subcontractors begin work for subcontractor's employees
4. Manifest forms for hazardous waste disposal within 5 days of transport and disposal

5. Copy of written approval to discharge into a sanitary sewer system at least 5 days before beginning discharge activities

### **Quality Control and Assurance**

Train all employees and subcontractors in these subjects:

1. Material pollution prevention and control
2. Waste management
3. Non-storm water management
4. Identifying and handling hazardous substances
5. Potential dangers to humans and the environment from spills and leaks or exposure to toxic or hazardous substances

Training must take place before starting work on this job. New employees must receive the complete training before starting work on this job. Conduct weekly meetings to discuss and reinforce spill prevention and control; material delivery, storage, use, and disposal; waste management; and non-storm water management procedures.

### **MATERIALS**

Not used.

### **CONSTRUCTION**

#### **Spill Prevention and Control**

Implement spill and leak prevention procedures for chemicals and hazardous substances stored on the job site.

As soon as it is safe, contain and clean up spills of petroleum products, sanitary and septic waste substances listed under CFR Title 40, Parts 110, 117, and 302.

Minor Spills: Clean up minor spills using these procedures:

1. Contain spread of the spill
2. Recover spilled material using absorption
3. Clean contaminated area
4. Dispose of contaminated material promptly and properly

Semi-significant Spills: Clean up semi-significant spills immediately using these procedures:

1. Contain spread of the spill
2. Recover spilled material using absorption where the spill occurs on paved or an impermeable surface
3. Contain the spill with an earthen dike and dig up contaminated soil for disposal where the spill occurs on soil
4. When the spill occurs during precipitation, cover the spill with plastic or other material to prevent contaminated runoff
5. Dispose of contaminated material promptly and properly

Significant or Hazardous Spills: Immediately notify qualified personnel of significant or hazardous spills. Take these steps:

1. Construction personnel must not attempt to cleanup the spill until qualified staff have arrived
2. Notify the Engineer and follow up with a written report
3. Obtain the services of a spills contractor or hazardous material team immediately
4. Notify the local emergency response team by dialing 911 and county officials at the emergency phone numbers kept on the job site
5. Notify the Governor's Office of Emergency Services Warning Center at (805) 852-7550
6. Notify the National Response Center at (800) 424-8802 regarding spills of Federal reportable quantities under CFR Title 40, Parts 110, 119, and 302
7. Notify other agencies as appropriate, including:
  - 7.1. Fire Department
  - 7.2. Public Works Department
  - 7.3. Coast Guard
  - 7.4. Highway Patrol
  - 7.5. City Police or County Sheriff Department

- 7.6. Department of Toxic Substances
- 7.7. California Division of Oil and Gas
- 7.8. Cal OSHA
- 7.9. Regional Water Resources Control Board

Report minor, semi-significant, and significant spills to the WPC (Water Pollution Control) manager. WPC manager must notify the Engineer immediately. WPC manager must oversee and enforce proper spill prevention and control measures.

Prevent spills from entering storm water runoff before and during cleanup. Spills must not be buried or washed with water.

Keep material or waste storage areas clean, well organized, and equipped with enough cleanup supplies for the material being stored.

## **Material Management**

### **General**

Material must be delivered, used, and stored for this job in a way that minimizes or eliminates discharge of material into the air, storm drain systems, or watercourses.

Implement the practices described in this section while taking delivery of, using, or storing these materials:

1. Hazardous chemicals including:

- 1.1. Acids
- 1.2. Lime
- 1.3. Glues
- 1.4. Adhesives
- 1.5. Paints
- 1.6. Solvents
- 1.7. Curing compounds

2. Soil stabilizers and binders

3. Fertilizers

4. Detergents

5. Plaster

6. Petroleum products including:

- 6.1. Fuel
- 6.2. Oil
- 6.3. Grease

7. Asphalt components and concrete components

8. Pesticides and herbicides

Employees trained in emergency spill cleanup procedures must be present during unloading of hazardous materials or chemicals.

If practical, use less hazardous products.

### **Material Storage**

Use these storage procedures:

1. Store liquids, petroleum products, and substances listed in CFR Title 40, Parts 110, 117, and 302 in containers or drums approved by the United States Environmental Protection Agency, and place them in secondary containment facilities.
2. Secondary containment facilities must be impervious to the materials stored there for a minimum contact time of 72 hours.
3. Throughout the rainy season, cover secondary containment facilities during non-working days and when precipitation is predicted. Secondary containment facilities must be adequately ventilated.
4. Keep secondary containment facility free of accumulated rainwater or spills. After precipitation, or in the event of spills or leaks, collect accumulated liquid and place into drums within 24 hours. Handle these liquids as hazardous waste under "Hazardous Waste" unless testing determines them to be nonhazardous.

5. Do not store incompatible materials, such as chlorine and ammonia, in the same secondary containment facility.
6. Store materials in the original containers with the original product labels maintained in legible condition. Replace damaged or illegible labels immediately.
7. Secondary containment facility must have the capacity to contain precipitation from a 24-hour-long, 25-year storm; and 10 percent of the aggregate volume of all containers, or entire volume of the largest container within the facility, whichever is greater.
8. Store bagged or boxed material on pallets. Throughout the rainy season, protect bagged or boxed material from wind and rain during non-working days and while precipitation is predicted.
9. Provide sufficient separation between stored containers to allow for spill cleanup or emergency response access. Storage areas must be kept clean, well organized, and equipped with cleanup supplies appropriate for the materials being stored.
10. Repair or replace perimeter controls, containment structures, covers, and liners as necessary. Inspect storage areas before and after precipitation, and at least weekly during other times.

### **Stockpile Management**

Implement practices described in this section for managing stockpiles:

1. During the rainy season
2. During the non-rainy season when the National Weather Service predicts precipitation with a probability of at least 30 percent

Use these stockpile management procedures:

1. Reduce or eliminate potential air and water pollution from stockpiled material including soil, paving material, or pressure treated wood.
2. Locate stockpiles:
  - 2.1. If within the floodplain, at least 100 feet from concentrated flows of storm water, drainage courses, or inlets unless approved
  - 2.2. If outside the floodplain, at least 50 feet from concentrated flows of storm water, drainage courses, or inlets unless approved

Active and inactive soil stockpiles must be:

1. Covered with soil stabilization measures, plastic sheeting, or geosynthetic fabric
2. Surrounded with a linear sediment barrier

Portland cement concrete rubble, AC, HMA, AC and HMA rubble, aggregate base or aggregate sub-base stockpiles must be:

1. Covered with plastic sheeting, or geosynthetic fabric
2. Surrounded with a linear sediment barrier

Pressure treated wood stockpiles must be:

1. Placed on pallets
2. Covered with impermeable material

Cold mix asphalt concrete stockpiles must be:

1. Placed on impervious surface
2. Covered with impermeable material
3. Protected from run-on and runoff

If you discontinue adding or removing material for up to 21 days the stockpile is considered still active during that period.

Control wind erosion during the non-rainy season and dry weather under Section 10, "Dust Control".

Repair or replace linear sediment barriers and covers as needed to keep them functioning properly. If sediment accumulates to 1/3 of the linear sediment barrier height, remove sediment.

## **Waste Management**

### **Solid Waste**

Do not allow litter or debris to accumulate anywhere on the job site, including storm drain grates, trash racks, and ditch lines. Pick up and remove trash and debris from the job site at least once a week. WPC manager must monitor solid waste storage and disposal procedures on the job site.

If practicable, recycle nonhazardous job site waste and excess material. If recycling is not practicable, disposal must comply with Section 7-1.13, "Disposal of Material Outside the Highway Right of Way."

Furnish enough closed-lid dumpsters of sufficient size to contain the solid waste generated by work activities. When refuse reaches the fill line, empty dumpsters. Dumpsters must be watertight. Do not wash out dumpsters at the job site. Furnish additional containers and more frequent pickup during the demolition phase of construction.

Solid waste includes:

1. Brick
2. Mortar
3. Timber
4. Metal scraps
5. Sawdust
6. Pipe
7. Electrical cuttings
8. Non-hazardous equipment parts
9. Styrofoam and other packaging materials
10. Vegetative material and plant containers from highway planting
11. Litter and smoking material, including litter generated randomly by the public
12. Other trash and debris

Furnish and use trash receptacles in the job site yard, field trailers, and locations where workers gather for lunch and breaks.

### **Hazardous Waste**

Use hazardous waste management practices if waste is generated on the job site from these substances:

1. Petroleum products
2. Asphalt products
3. Concrete curing compound
4. Pesticides
5. Acids
6. Paints
7. Stains
8. Solvents
9. Wood preservatives
10. Roofing tar
11. Road flares
12. Lime
13. Glues and adhesives
14. Materials classified as hazardous by California Code of Regulations, Title 22, Division 4.5; or listed in CFR Title 40, Parts 110, 117, 261, or 302

WPC manager must oversee and enforce hazardous waste management practices. Minimize the production of hazardous materials and hazardous waste at the job site. If damaged, repair or replace perimeter controls, containment structures, and covers.

If hazardous material levels are unknown, use a laboratory certified by the Environmental Laboratory Accreditation Program (ELAP) under the California Department of Public Health (CDPH) to sample and test waste to determine safe methods for storage and disposal.

Separate potentially hazardous waste from nonhazardous waste at the job site. Hazardous waste must be handled, stored, and disposed of under California Code of Regulations, Title 22, Division 4.5, Section 66262.34; and in CFR Title 49, Parts 261, 262, and 263.

Store hazardous waste in sealed containers constructed and labeled with the contents and date accumulated under California Code of Regulations, Title 22, Division 4.5; and in CFR Title 49, Parts 172, 173, 178, and 179. Keep hazardous waste containers in temporary containment facilities under "Material Storage" of these special provisions.

Furnish containers with adequate storage volume at convenient locations for hazardous waste collection. Do not overfill hazardous waste containers. Do not mix hazardous wastes. Do not allow potentially hazardous waste to accumulate on the ground. Store containers of dry waste that are not watertight on pallets. Store hazardous waste away from storm drains, watercourses, moving vehicles, and equipment.

Clean water based or oil based paint from brushes or equipment within a contained area and in a way that does not contaminate soil, watercourses, or storm drain systems. Handle and dispose of these as hazardous waste: paints, thinners, solvents, residues, and sludges that cannot be recycled or reused. When thoroughly dry, dispose of these as solid waste: dry, latex paint and paint cans, used brushes, rags, absorbent materials, and drop cloths.

Dispose of hazardous waste within 90 days of being generated. Use a licensed hazardous waste transporter to take hazardous waste to a Class I Disposal Site. Submit a copy of uniform hazardous waste manifest forms within 24 hours of transporting hazardous waste.

WPC manager must inspect these daily:

1. Storage areas for hazardous materials and wastes
2. Hazardous waste disposal and transporting activities
3. Hazardous material delivery and storage activities

### **Contaminated Soil**

Identify contaminated soil from spills or leaks by noticing discoloration, odors, or differences in soil properties. Soil with evidence of contamination must be sampled and tested by a laboratory certified by ELAP.

If levels of contamination are found to be hazardous, handle and dispose of the soil as hazardous waste.

Prevent the flow of water, including ground water, from mixing with contaminated soil by using one or a combination of these measures:

1. Berms
2. Cofferdams
3. Grout curtains
4. Freeze walls
5. Concrete seal course

If water mixes with contaminated soil and becomes contaminated, sample and test the water using a laboratory certified by ELAP. If levels of contamination are found to be hazardous, handle and dispose of the water as hazardous waste.

### **Concrete Waste**

Use practices to prevent the discharge of portland cement concrete, AC, or HMA waste into storm drain systems or watercourses.

Collect and dispose of portland cement concrete, AC, or HMA waste at locations where:

1. Concrete material, including grout, is used
2. Concrete dust and debris result from demolition
3. Sawcutting, coring, grinding, grooving, or hydro-concrete demolition of portland cement concrete, AC, or HMA creates a residue or slurry
4. Concrete truck or other concrete-coated equipment is cleaned at the job site

### **Sanitary and Septic Waste**

Do not bury or discharge wastewater from sanitary or septic systems within Department right of way. WPC manager must inspect sanitary or septic waste storage and monitor disposal procedures at least weekly. Sanitary facilities that discharge to the sanitary sewer system must be properly connected and free from leaks. Place sanitary facilities at least 50 feet away from storm drains, watercourse, and flow lines.

Obtain written approval from local health agency, city, county, and sewer district before discharging from a sanitary or septic system directly into a sanitary sewer system, and submit a copy to the Engineer. Comply with local health agency provisions while using an on-site disposal system.

## **Liquid Waste**

Use practices to prevent job site liquid waste from entering storm drain systems or watercourses. Liquid wastes include the following:

1. Drilling slurries or fluids
2. Grease-free or oil-free wastewater or rinse water
3. Dredgings, including liquid waste from drainage system cleaning
4. Liquid waste running off a surface including wash or rinse water
5. Other non-storm water liquids not covered by separate permits

Hold liquid waste in structurally sound, leak proof containers such as:

1. Roll-off bins
2. Portable tanks

Liquid waste containers must be of sufficient quantity and volume to prevent overflow, spills and leaks.

Store containers:

1. At least 50 feet from moving vehicles and equipment
2. If within the floodplain, at least 100 feet from concentrated flows of storm water, drainage courses, watercourses, or storm drain inlets unless approved
3. If outside the floodplain, at least 50 feet from concentrated flows of storm water, drainage courses, watercourses, or storm drain inlets unless approved

Remove and dispose of deposited solids from sediment traps under "Solid Waste" unless the Engineer authorizes another method.

Liquid waste may require testing to determine hazardous material content before disposal.

Drilling fluids and residue must be disposed of outside the highway right of way.

If an approved location is available within the job site, fluids and residue exempt under California Code of Regulations, Title 23, Section 2511(g) may be dried by evaporation in a leak proof container. Dispose of remaining solid waste under "Solid Waste" of these special provisions.

## **Non-Storm Water Management**

### **Water Control and Conservation**

Manage water used for work activities to prevent erosion or discharge of pollutants into storm drain systems or watercourses. Obtain approval before washing anything on the job site with water that could discharge into a storm drain system or watercourse. Report discharges immediately.

If water is used at the job site, implement water conservation practices. Inspect irrigation areas. Adjust watering schedules to prevent erosion, excess watering, or runoff. Shut off water source to broken lines, sprinklers, or valves, and repair breaks within 24 hours. If possible, reuse water from waterline flushing for landscape irrigation. Sweep and vacuum paved areas: do not wash with water.

Direct job site water runoff, including water from water line repair, to areas where it can infiltrate into the ground and not enter storm drain systems or watercourses. Do not allow spilled water to escape water truck filling areas. If possible, direct water from off-site sources around the job site. Minimize the contact of off-site water with job site water.

### **Illegal Connection and Discharge Detection and Reporting**

Inspect the job site and the site perimeter before starting work for evidence of illegal connections, discharges, or dumping. After starting work, inspect the job site and perimeter on a daily schedule.

When illegal connections, discharges, or dumping are discovered, notify the Engineer immediately. Take no further action unless ordered by the Engineer. Assume unlabeled or unidentifiable material is hazardous.

Look for the following evidence of illegal connections, discharges, or dumping:

1. Debris or trash piles
2. Staining or discoloration on pavement or soils
3. Pungent odors coming from drainage systems
4. Discoloration or oily sheen on water
5. Stains or residue in ditches, channels or drain boxes
6. Abnormal water flow during dry weather

7. Excessive sediment deposits
8. Nonstandard drainage junction structures
9. Broken concrete or other disturbances near junction structures

### **Vehicle and Equipment Cleaning**

Limit vehicle and equipment cleaning or washing at the job site except what is necessary to control vehicle tracking or hazardous waste. Notify the Engineer before cleaning vehicles and equipment at the job site with soap, solvents, or steam. Contain and recycle or dispose of resulting waste under "Liquid Waste" or "Hazardous Waste" of these special provisions, whichever is applicable. Do not use diesel to clean vehicles or equipment, and minimize the use of solvents.

Clean or wash vehicles and equipment in a structure equipped with disposal facilities. If using a structure is not possible, vehicles and equipment must be cleaned or washed in an outside area:

1. Paved with AC, HMA, or portland cement concrete
2. Surrounded by a containment berm
3. Equipped with a sump to collect and dispose of wash water
4. If within the floodplain, located at least 100 feet from concentrated flows of storm water, drainage courses, watercourses, or storm drain inlets unless approved
5. If outside the floodplain, located at least 50 feet from concentrated flows of storm water, drainage courses, watercourses, or storm drain inlets unless approved

When washing vehicles or equipment with water, use as little water as possible. Hoses must be equipped with a positive shutoff valve.

Discharge liquid from wash racks to a recycle system or to another approved system. Remove liquids and sediment as necessary.

WPC manger must inspect vehicle and equipment cleaning facilities:

1. Daily when vehicle and equipment cleaning occurs daily
2. Weekly when vehicle and equipment cleaning does not occur daily

### **Vehicle and Equipment Fueling and Maintenance**

If practicable, perform maintenance on vehicles and equipment off the job site.

If fueling or maintenance must be done at the job site, designate a site, or sites, and obtain approval before using. Minimize mobile fueling or maintenance.

If vehicle and equipment fueling and maintenance must be done on the job site, areas for these activities must be:

1. On level ground
2. Protected from stormwater run-on
3. If within the floodplain, located at least 100 feet from concentrated flows of storm water, drainage courses, watercourses, or storm drain inlets unless approved
4. If outside the floodplain, located at least 50 feet from concentrated flows of storm water, drainage courses, watercourses, or storm drain inlets unless approved

Use containment berms or dikes around the fueling and maintenance area. Keep adequate quantities of absorbent spill cleanup material and spill kits in the fueling and maintenance area and on fueling trucks. Dispose of spill cleanup material and kits immediately after use. Use drip pans or absorbent pads during fueling or maintenance.

Fueling or maintenance activities must not be left unattended. Fueling nozzles must be equipped with an automatic shutoff control. Vapor recovery fueling nozzles must be used where required by the Air Quality Management District. When not in use, nozzles must be secured upright. Do not top-off fuel tanks.

Recycle or properly dispose of used batteries and tires.

WPC manager must inspect vehicle and equipment maintenance and fueling areas:

1. Daily when vehicle and equipment maintenance and fueling occurs daily
2. Weekly when vehicle and equipment maintenance and fueling does not occur daily

WPC manager must inspect vehicles and equipment at the job site for leaks and spills on a daily schedule. Operators must inspect vehicles and equipment each day of use.

If leaks cannot be repaired immediately, remove the vehicle or equipment from the job site.

### **Material and Equipment Used Over Water**

Place drip pans and absorbent pads under vehicles or equipment used over water. Keep an adequate supply of spill cleanup material with the vehicle or equipment. If the vehicle or equipment will be idle for more than one hour, place drip pans or plastic sheeting under vehicles or equipment on docks, barges, or other surfaces over water.

Furnish watertight curbs or toe boards on barges, platforms, docks, or other surfaces over water to contain material, debris, and tools. Secure material to prevent spills or discharge into water due to wind.

### **Structure Removal Over or Adjacent to Water**

Do not allow demolished material to enter storm water systems or watercourses. Use approved covers and platforms to collect debris. Use attachments on equipment to catch debris on small demolition activities. Empty debris catching devices daily and handle debris under "Waste Management" of these special provisions.

WPC manager must inspect demolition sites within 50 feet of storm water systems or watercourses daily.

### **Paving, Sealing, Sawcutting, and Grinding Activities**

Prevent these materials from entering storm drain systems or water courses:

1. Cementitious material
2. Asphaltic material
3. Aggregate or screenings
4. Grinding or sawcutting residue
5. Pavement chunks
6. Shoulder backing
7. Methacrylate

Cover drainage inlets and use linear sediment barriers to protect downhill watercourses until paving, sealing, sawcutting, or grinding activities are completed and excess material has been removed. Cover drainage inlets and manholes during the application of seal coat, tack coat, slurry seal, or fog seal.

During the rainy season or when precipitation is predicted, limit paving, sawcutting, and grinding to places where runoff can be captured.

Do not start seal coat, tack coat, slurry seal, or fog seal activities when precipitation is predicted during application or curing period. Do not excavate material from existing roadways during precipitation.

Use a vacuum to remove slurry from sawcutting activities immediately after slurry is produced. Do not allow slurry to run onto lanes open to public traffic or off the pavement.

Collect residue from portland cement concrete grinding activities with a vacuum attachment on the grinding machine. Do not leave residue on pavement or allow residue to flow across pavement.

If approved, material excavated from existing roadways may be stockpiled under "Stockpile Management" of these special provisions.

Do not coat asphalt trucks and equipment with substances that contain soap, foaming agents, or toxic chemicals.

When paving equipment is not in use, park over drip pans or plastic sheeting with absorbent material to catch drips.

### **Thermoplastic Striping and Pavement Markers**

Thermoplastic striping and preheating equipment shutoff valves must work properly at all times. Do not preheat, transfer, or load thermoplastic within 50 feet of drainage inlets or watercourses. Do not fill preheating container above a level that is 6 inches below the top. Truck beds must be cleaned daily of scraps or melted thermoplastic.

Do not unload, transfer, or load bituminous material for pavement markers within 50 feet of drainage inlets or watercourses. Release all pressure from melting tanks before removing the lid to fill or service. Do not fill melting tanks above a level that is 6 inches below the top.

Collect bituminous material from the roadway after marker removal.

### **Pile Driving**

Keep spill kits and cleanup material at pile driving locations. Pile driving equipment must be parked over drip pans, absorbent pads, or plastic sheeting with absorbent material. When precipitation is predicted, protect pile driving equipment by parking on plywood and covering with plastic.

When not in use, store pile driving equipment:

1. On level ground
2. Protected from stormwater run-on

3. If within the floodplain, at least 100 feet from concentrated flows of storm water, drainage courses, watercourses, or storm drain inlets unless approved
4. If outside the floodplain, at least 50 feet from concentrated flows of storm water, drainage courses, watercourses, or storm drain inlets unless approved

If practicable, use vegetable oil instead of hydraulic fluid.  
WPC manager must inspect pile driving area for leaks and spills:

1. Daily when pile driving occurs daily
2. Weekly when pile driving does not occur daily

### **Concrete Curing**

Do not overspray chemical curing compound. Minimize drift by spraying as close to the concrete as possible. Cover drainage inlets before applying curing compound.

Minimize the use and discharge of water by using wet blankets or similar methods to maintain moisture while curing concrete.

### **Concrete Finishing**

Collect and dispose of water and solid waste from high-pressure water blasting. Cover drainage inlets within 50 feet before sandblasting. Minimize drift of dust and blast material by keeping the nozzle close to the surface of the concrete. Blast residue may contain hazardous material.

Inspect containment structures for concrete finishing activities for damage before each day of use and before predicted precipitation. Remove liquid and solid waste from the containment structure after each work shift.

### **Sweeping**

Sweeping must be done using hand or mechanical methods such as vacuuming.

Sweeping must be done:

1. At the end of each work shift
2. When the National Weather Service predicts precipitation with a probability of at least 30 percent
3. On paved roads at job site entrance and exit locations
4. On paved areas within the job site that flow to storm drains or water bodies

You may stockpile collected material at the job site. Dispose of collected material at least once per week. Remove collected material including sediment from paved shoulders, drain inlets, curbs and dikes, and other drainage areas.

Sediment collected from the roadway during sweeping may be disposed of within the job site. Protect disposal areas against erosion.

Remove and dispose of trash collected during sweeping under Section 7-1.13, "Disposal of Material Outside the Highway Right of Way".

### **Dewatering**

Dewatering consists of discharging accumulated storm water, ground water, or surface water from excavations or temporary containment facilities.

If dewatering and discharging activities are specified under another work item such as "Temporary Active Treatment System" or "Dewatering and Discharge", then perform dewatering work as specified in those sections.

If dewatering and discharging activities are not specified under another work item, then:

1. At least 10 days before starting dewatering, submit a Dewatering and Discharge Plan under Section 5-1.02, "Plans and Working Drawings," and "Water Pollution Control" of the Standard Specifications. Dewatering and Discharge Plan must include:
  - 1.1. Title sheet and table of contents
  - 1.2. Description of dewatering and discharge activities detailing locations, quantity of water, equipment, and discharge point
  - 1.3. Estimated schedule for dewatering and discharge (start and end dates, intermittent or continuous)
  - 1.4. Discharge alternatives such as dust control or percolation
  - 1.5. Visual monitoring procedures with inspection log

2. Conduct dewatering activities under the Field Guide for Construction Dewatering.
3. Ensure that dewatering discharge does not cause erosion, scour, or sedimentary deposits that impact natural bedding materials.
4. Discharge water within project limits. If water cannot be discharged within project limits due to site constraints, dispose of it in the same way specified for material in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way".
5. Do not discharge storm water or non-storm water that has an odor, discoloration other than sediment, an oily sheen, or foam on the surface. Notify the Engineer immediately upon discovering any of those conditions.
6. WPC manager must inspect dewatering activities:
  - 6.1. Daily when dewatering work occurs daily
  - 6.2. Weekly when dewatering work does not occur daily

## **PAYMENT**

The contract lump sum price paid for construction site management includes full compensation for furnishing all labor, materials, tools, equipment, and incidentals and for doing all the work involved in spill prevention and control, material management, waste management, non-storm water management, and dewatering and identifying, sampling, testing, handling, and disposing of hazardous waste, as specified in the Standard Specifications and these special provisions, and as ordered by the Engineer.

### **10-1.04 STREET SWEEPING**

#### **GENERAL**

##### **Summary**

This work includes street sweeping.

The SWPPP must describe and include the use of street sweeping as a water pollution control practice for sediment control and tracking control.

##### **Submittals**

At least 5 business days before starting clearing and grubbing, earthwork, or other activities with the potential for tracking sediment or debris, submit:

1. Number of sweepers described in the SWPPP
2. Type of sweeper technology

##### **Quality Control and Assurance**

Retain and submit records of street sweeping including:

1. Quantity of sweeping waste disposal
2. Sweeping times and locations

## **CONSTRUCTION**

### **Street Sweepers**

Sweepers must use one of these technologies:

1. Mechanical sweeper followed by a vacuum-assisted sweeper
2. Vacuum-assisted dry (waterless) sweeper
3. Regenerative-air sweeper

### **Operation**

Street sweeping must be done at:

1. Paved roads at job site entrance and exit locations
2. Paved areas within the job site that flow to storm drains or water bodies

Street sweeping must be done:

1. During clearing and grubbing activities

2. During earthwork activities
3. During trenching activities
4. During roadway structural section activities
5. When vehicles are entering and leaving the job site
6. After soil disturbing activities
7. After observing offsite tracking of material

Monitor paved areas and roadway within the jobsite. Street sweeping must be done:

1. Within 1 hour, if sediment or debris is observed during activities that require sweeping
2. Within 24 hours, if sediment or debris is observed during activities that do not require sweeping

At least 1 sweeper must be on the job site at all times when sweeping work is required. The sweeper must be in good working order.

Perform street sweeping to minimize dust. If dust generation is excessive or sediment pickup is ineffective, use water or a vacuum.

You may stockpile collected material on the jobsite according to the approved SWPPP. Dispose of collected material at least once per week.

Material collected during street sweeping must be removed and disposed of under Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

Your WPCM must inspect paved roads at job site access points:

1. Daily if earthwork and other sediment or debris generating activities occur daily
2. Weekly if earthwork and other sediment or debris generating activities do not occur daily
3. When the National Weather Service predicts precipitation with a probability of at least 30 percent

#### **MEASUREMENT AND PAYMENT**

The contract lump sum price paid for street sweeping includes full compensation for furnishing all labor, materials, tools, equipment, and incidentals and for doing all the work involved in street sweeping, including disposal of collected material, as shown on the plans, as specified in the Standard Specifications, these special provisions, and as directed by the Engineer.

#### **10-1.05 TEMPORARY CONCRETE WASHOUT (PORTABLE)**

##### **GENERAL**

###### **Summary**

This work includes removal and disposal of concrete waste by furnishing, maintaining, and removing portable temporary concrete washouts.

SWPPP must describe and include the use of a portable temporary concrete washout as a water pollution control practice for waste management and materials pollution control.

###### **Submittals**

At least 5 business days before concrete activities start, submit:

1. Name and location of off-site concrete waste disposal facility to receive concrete waste
2. Copy of permit issued by RWQCB for off-site commercial disposal facility
3. Copy of license for off-site commercial disposal facility
4. Copy of permit issued by state or local agency having jurisdiction over disposal facility if disposal site is located outside of the State of California

###### **Quality Control and Assurance**

Retain and submit records of disposed concrete waste including:

1. Weight tickets
2. Delivery and removal of temporary concrete washouts

## **MATERIALS**

### **Portable Temporary Concrete Washout**

Portable temporary concrete washout must:

1. Be a commercially available watertight container.
2. Have sufficient capacity to contain all liquid and concrete waste generated by washout activities without seepage or spills.
3. Have at least 55-gallon capacity.
4. Be labeled for the exclusive use as a concrete waste and washout facility. Stencil "Concrete Waste material" in 3-inch high letters on white background. Top of stenciling must be 12 inches from the top of the container.

### **Concrete Washout Sign**

Concrete washout sign must comply with the provisions in Section 12-3.06B, "Portable Signs" of the Standard Specifications and:

1. Be approved by the Engineer
2. Consist of base, framework, and sign panel
3. Be made of plywood
4. Be minimum 2' x 4' in size
5. Read "Concrete Washout" with 3 inches high black letters on white background

## **CONSTRUCTION**

### **Placement**

Place portable temporary concrete washouts at job site:

1. Before concrete placement activities start
2. In the immediate area of concrete work as approved by the Engineer
3. No closer than 50 feet from storm drain inlets, open drainage facilities, ESAs, or watercourses
4. Away from construction traffic or public access areas

Install a concrete washout sign adjacent to each portable temporary concrete washout location.

### **Operation**

Use portable temporary concrete washouts for:

1. Washout from concrete delivery trucks
2. Slurries containing portland cement concrete or hot mix asphalt from sawcutting, coring, grinding, grooving, and hydro-concrete demolition
3. Concrete waste from mortar mixing stations

Relocate portable temporary concrete washouts as needed for concrete construction work.

Replace portable temporary concrete washouts when filled to capacity. Do not fill higher than 6 inches below rim.

Your WPC manager must inspect portable temporary concrete washouts:

1. Daily if concrete work occurs daily
2. Weekly if concrete work does not occur daily

### **Maintenance**

When relocating or transporting a portable temporary concrete washout within the job site, secure it to prevent spilling of concrete waste material. If any spilled material is observed, remove spilled material and place it into portable temporary concrete washout.

### **Removal**

Dispose of concrete waste material at a facility specifically licensed to receive solid concrete waste, liquid concrete waste, or both. When portable temporary concrete washout is full, remove and dispose of concrete waste within 2 days.

## PAYMENT

The contract lump sum price paid for temporary concrete washout (portable) includes full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in furnishing, maintaining, and removing the portable temporary concrete washout, including removal and disposal of concrete waste, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

### 10-1.06 TEMPORARY SILT FENCE

#### GENERAL

##### Summary

This work includes installing, maintaining, and removing temporary silt fence.

The SWPPP must describe and include the use of temporary silt fence as a water pollution control practice for sediment control.

##### Submittals

Submit a Certificate of Compliance as specified in Section 6-1.07, "Certificates of Compliance" of the Standard Specifications for silt fence fabric.

#### MATERIALS

##### Silt Fence Fabric

Geosynthetic fabric for temporary silt fence must consist of one of the following:

1. Polyester
2. Polypropylene
3. Combined polyester and polypropylene

Sample under ASTM D 4354, Procedure C.

Test under ASTM D 4759. All properties must be based on Minimum Average Roll Value (MARV).

Identify, store, and handle under ASTM D 4873.

Protect geosynthetics from moisture, sunlight, and damage during shipping and storage. Label each unit with the manufacturer's name, identifying information, and product identification.

Silt fence fabric must comply with:

Property	ASTM Designation	Specification	
		Woven	Non-woven
Grab breaking load 1-inch grip, lb, min. in each direction	D 4632	120	120
Apparent elongation percent, min., in each direction	D 4632	15	50
Water Flow Rate max. average roll value, gallons per minute/square foot	D 4491	10-50	100-150
Permittivity 1/sec., min.	D 4491	0.05	0.05
Apparent opening size max. average roll value, U.S. Standard sieve size	D 4751	30	30
Ultraviolet Degradation percent of original unexposed grab breaking load 500 hr, minimum	D 4595	70	

## **Posts**

Posts must be wood or metal.

Wood posts must be:

1. Untreated fir, redwood, cedar, or pine and cut from sound timber
2. Straight and free of loose or unsound knots and other defects that would render the stakes unfit for use
3. Pointed on the end to be driven into the ground
4. At least 2" x 2" in size, and 4 feet long

Metal posts must:

1. Be made of steel.
2. Have a "U," "T," "L," or other cross sectional shape that can resist failure from lateral loads.
3. Be pointed on the end to be driven into the ground.
4. Weigh at least 0.75-pound per foot.
5. Be at least 4 feet long.
6. Have a safety cap attached to the exposed end. The safety cap must be orange or red plastic and fit snugly to the metal post.

## **CONSTRUCTION**

Silt fence must be:

1. Constructed with silt fence fabric, posts, and fasteners
2. Prefabricated or assembled at the job site

Silt fence fabric must be attached to posts using these methods:

1. If prefabricated silt fence is used, posts must be inserted into sewn pockets
2. If assembled on the job site:
  - 2.1. If wood posts are used, fasteners must be staples or nails
  - 2.2. If steel posts are used, fasteners must be tie wires or locking plastic fasteners
  - 2.3. Spacing of the fasteners must be no more than 8 inches apart

Place silt fence approximately parallel to the slope contour. For any 50 foot section of silt fence, do not allow the elevation at the base of the fence to vary more than 1/3 of the fence height.

Install silt fence by:

1. Placing the bottom of the fabric in a trench that is 6 inches deep
2. Securing with posts placed on the downhill side of the fabric
3. Backfilling the trench with soil and hand or mechanically tamping to secure the fabric in the trench

If you reinforce the silt fence fabric with wire or plastic mesh, you may increase the post spacing to a maximum of 10 feet. The field-assembled reinforced silt fence must be able to retain saturated sediment without collapsing.

Connect silt fence sections by:

1. Joining separate sections of silt fence to form reaches that are no more than 500 feet long
2. Securing the end posts of each section by wrapping the tops of the posts with at least two wraps of 16-gage diameter tie wire
3. Ensuring that each reach is a continuous run of silt fence from end to end or from an end to an opening, including joined panels

If you mechanically push the silt fence fabric vertically through the soil, you must demonstrate that the silt fence fabric will not be damaged and will not slip out of the soil, resulting in sediment passing under the silt fence fabric.

## **MAINTENANCE**

Maintain temporary silt fence to provide sediment holding capacity and to reduce runoff velocities.

Remove sediment deposits, trash, and debris from temporary silt fence as needed or when directed by the Engineer. If removed sediment is deposited within project limits, it must be stabilized and not subject to erosion by wind or water. Trash and debris must be removed and disposed of as specified in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

Maintain temporary silt fence by:

1. Removing sediment from behind the silt fence when sediment is 1/3 the height of the silt fence above ground
2. Repairing or adjusting the silt fence when rills and other evidence of concentrated runoff occur beneath the silt fence fabric
3. Repairing or replacing the silt fence fabric when it become split, torn, or unraveled

Repair temporary silt fence within 24 hours of discovering damage unless the Engineer approves a longer period.

If your vehicles, equipment, or activities disturb or displace temporary silt fence, repair temporary silt fence at your expense.

The Department does not pay maintenance costs for cleanup, repair, removal, disposal, or replacement due to improper installation or your negligence.

## **REMOVAL**

When the Engineer determines that temporary silt fence is not required, remove and dispose of fence under Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

Ground disturbance, including holes and depressions, caused by the installation and removal of the temporary silt fence must be backfilled and repaired under Section 15-1.02, "Preservation of Property," of the Standard Specifications.

## **MEASUREMENT AND PAYMENT**

Temporary silt fence is measured by the linear foot along the centerline of the installed fence.

The contract price paid per linear foot for temporary silt fence includes full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in constructing the temporary silt fence, complete in place, including removal of materials, cleanup and disposal of retained sediment and debris, and backfilling and repairing holes, depressions and other ground disturbance, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

The State and you share the cost of maintaining the temporary silt fence. The State determines the maintenance cost under Section 9-1.03, "Force Account Payment," of the Standard Specifications and pays you one-half of that cost.

## **10-1.07 TEMPORARY CONSTRUCTION ENTRANCE**

### **GENERAL**

#### **Summary**

This work includes constructing, maintaining, and removing temporary construction entrance to provide temporary access.

The SWPPP must describe and include the use of temporary construction entrance as a water pollution control practice for tracking control.

Temporary construction entrance must be Type 1, Type 2, or a combination.

#### **Submittals**

Submit a Certificate of Compliance under Section 6-1.07, "Certificates of Compliance," of the Standard Specifications for:

1. Temporary entrance fabric
2. Rock

Submit details for alternatives at least 5 business days before installation. You may propose alternatives for the following items:

1. Alternative sump
2. Alternative corrugated steel panels

If the Engineer approves, you may eliminate the sump.

**MATERIALS**

**Temporary Entrance Fabric**

Temporary entrance fabric must comply with Section 88-1.04, "Rock Slope Protection Fabric," of the Standard Specifications and be woven Type B or non-woven Type B.

**Rock**

Rock must be Type A or Type B.

Rock (Type A) must comply with:

1. Requirements under Section 72-2.02, "Materials," of the Standard Specifications
2. Following sizes:

Square Screen Size (inch)	Percentage Passing	Percentage Retained
6	100	0
3	0	100

Rock (Type B) must be Railway Ballast Number 25. Do not use blast furnace slag. Railway Ballast Number 25 must comply with:

1. Description in AREMA Manual for Railway Engineering.
2. Following sizes:

Nominal Size Square Opening	Percentage Passing								
	3"	2-1/2"	2"	1-1/2"	1"	3/4"	1/2"	3/8"	No. 4
2-1/2"-3/8"	100	80-100	60-85	50-70	25-50	-	5-20	0-10	0-3

3. Following properties:

Specification	Requirements
Percent material passing No. 200 sieve, max. ASTM: C 117	1.0
Bulk specific gravity, min. ASTM: C 127	2.60
Absorption, percent min. ASTM: C 127	1.0
Clay lumps and friable particles, percent max. ASTM: C 142	0.5
Degradation, percent max. ASTM: C 535	30
Soundness (Sodium Sulfate), percent max. ASTM: C 88	5.0
Flat, elongated particles, or both, percent max. ASTM: D 4791	5.0

**Corrugated Steel Panels**

Corrugated steel panels must:

1. Be made of steel.
2. Be pressed or shop welded
3. Have a slot or hook for connecting panels together

## **CONSTRUCTION**

Prepare location for temporary construction entrance by:

1. Removing vegetation to ground level and clear away debris
2. Grading ground to uniform plane
3. Grading ground surface to drain
4. Removing sharp objects that may damage fabric
5. Compacting the top 1.5 feet of soil to at least 90 percent relative compaction

If temporary entrance (Type 1) is specified, use rock (Type A).

If temporary construction entrance (Type 2) is specified, use Rock (Type B) under corrugated steel panels. Use at least 6 corrugated steel panels for each entrance. Couple panels together.

Install temporary construction entrance by:

1. Positioning fabric along the length of the entrance
2. Overlapping sides and ends of fabric by at least 12 inches
3. Spreading rock over fabric in the direction of traffic
4. Covering fabric with rock within 24 hours
5. Keeping a 6 inch layer of rock over fabric to prevent damage to fabric by spreading equipment

Do not drive on fabric until rock is spread.

Unless the Engineer eliminates the sump, install a sump within 20 feet of each temporary construction entrance.

Repair fabric damaged during rock spreading by placing a new fabric over the damaged area. New fabric must be large enough to cover damaged area and provide at least 18-inch overlap on all edges.

### **Maintenance**

Maintain temporary construction entrance to minimize generation of dust and tracking of soil and sediment onto public roads. If dust or sediment tracking increases, place additional rock unless the Engineer approves another method.

Repair temporary construction entrance if:

1. Fabric is exposed
2. Depressions in the entrance surface develop
3. Rock is displaced

Repair temporary construction entrance within 24 hours of discovering damage unless the Engineer approves a longer period.

During use of temporary construction entrance, do not allow soil, sediment, or other debris tracked onto pavement to enter storm drains, open drainage facilities, or watercourses. When material is tracked onto pavement, remove it within 24 hours unless the Engineer approves a longer period.

If your vehicles, equipment, or activities disturb or displace the temporary construction entrance, repair it at your expense.

The Department does not pay maintenance costs for cleanup, repair, removal, disposal, or replacement due to improper installation or your negligence.

### **Removal**

When the Engineer determines that temporary construction entrance is not required, remove and dispose of it under Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

Backfill and repair ground disturbance, including holes and depressions, caused by installation and removal of temporary construction entrance under Section 15-1.02, "Preservation of Property," of the Standard Specifications.

## **MEASUREMENT AND PAYMENT**

Temporary construction entrance is determined from actual count in place. Temporary construction entrance is measured one time only and no additional measurement will be recognized.

The contract price paid for temporary construction entrance includes full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in constructing temporary construction entrance, complete in place, including removal of temporary construction entrance, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

No additional compensation will be made if the temporary construction entrance is relocated during the course of construction.

The State and you share the cost of maintaining temporary construction entrance. The State determines the maintenance cost under Section 9-1.03, "Force Account Payment," of the Standard Specifications and pays you one-half of that cost.

## **10-1.08 TEMPORARY DRAINAGE INLET PROTECTION**

### **GENERAL**

#### **Summary**

This work includes constructing, maintaining, and removing temporary drainage inlet protection. Drainage inlet protection settles and filters sediment before stormwater runoff discharges into storm drainage systems.

The SWPPP must describe and include the use of temporary drainage inlet protection as a water pollution control practice for sediment control.

Provide temporary drainage inlet protection to meet the changing conditions around the drainage inlet. Temporary drainage inlet protection must be:

1. Appropriate type to meet the conditions around the drainage inlet
2. Type 1

#### **Submittals**

Submit a Certificate of Compliance as specified in Section 6-1.07, "Certificates of Compliance" of the Standard Specifications for:

1. Erosion control blanket
2. Fiber rolls
3. Safety cap for metal posts
4. Silt fence fabric
5. Sediment filter bag
6. Foam barrier
7. Rigid plastic barrier
8. Gravel-filled bag fabric

If you substitute the steel wire staple with an alternative attachment device, submit a sample of the device for approval at least 5 business days before installation.

### **MATERIALS**

#### **Geosynthetic Fabrics**

Geosynthetic fabrics for temporary drainage inlet protection must consist of one of the following:

1. Polyester
2. Polypropylene
3. Combined polyester and polypropylene

Geosynthetic fabrics for temporary drainage inlet must comply with the specifications for water pollution control in Section 88-1.05, "Water Pollution Control," of the Standard Specifications.

Foam barrier must comply with:

**Foam Barrier**

Property	ASTM Designation	Specification
Grab breaking load 1-inch grip, lb, min. in each direction	D 4632	200
Apparent elongation percent, min., in each direction	D 4632	15
Water Flow Rate max. average roll value, gallons per minute/square foot	D 4491	100-150
Permittivity 1/sec., min.	D 4491	0.05
Apparent opening size max. average roll value, U.S. Standard sieve size	D 4751	40
Ultraviolet Degradation percent of original unexposed grab breaking load 500 hr, minimum	D 4595	70

Sample under ASTM D 4354, Procedure C.

Test under ASTM D 4759. All properties are based on Minimum Average Roll Value (MARV).

Identify, store, and handle under ASTM D 4873.

**Erosion Control Blanket**

Erosion control blanket must be:

1. Described as a rolled erosion control product (RECP)
2. Classified as temporary and degradable or long-term and non-degradable
3. Machine-made mats
4. Provided in rolled strips
5. Classified by the Erosion Control Technology Council (ECTC)

Erosion control blanket classified as temporary and degradable must be one of the following:

1. Double net excelsior blanket:
  - 1.1. Classified as ECTC Type 2D
  - 1.2. Classified as an erosion control blanket
  - 1.3. Designed to last for at least one year after installation
  - 1.4. With a Universal Soil Loss Equation (USLE) C-Factor of not more than 0.20 at a 2:1 (horizontal:vertical) slope
  - 1.5. With 80 percent of the wood excelsior fibers being 6 inches or longer
  - 1.6. Capable to withstand a maximum shear stress of 1.75 pounds per square foot under ASTM D 6460
  - 1.7. With a minimum tensile strength of 75 pounds per foot under ASTM D 5035
  - 1.8. With top and bottom surfaces covered with lightweight non-synthetic netting

2. Double net straw and coconut blanket:
  - 2.1. Classified as ECTC Type 2D
  - 2.2. Classified as an erosion control blanket
  - 2.3. Designed to last for at least one year after installation
  - 2.4. With a USLE C-Factor of not more than 0.20 at a 2:1 (horizontal:vertical) slope
  - 2.5. Comprised of 70 percent straw and 30 percent coconut fiber
  - 2.6. Capable to withstand a maximum shear stress of 1.75 pounds per square foot under ASTM D 6460
  - 2.7. With a minimum tensile strength of 75 pounds per foot under ASTM D 5035
  - 2.8. With top and bottom surfaces covered with lightweight non-synthetic netting
  
3. Jute netting:
  - 3.1. Classified as ECTC Type 3B
  - 3.2. Classified as an open weave textile and have from 14 to 20 strands per foot in each direction
  - 3.3. Designed to last for at least one year after installation
  - 3.4. With a USLE C-Factor of not more than 0.25 at a 1.5:1 (horizontal:vertical) slope
  - 3.5. Comprised of 100 percent unbleached and undyed spun yarn made of jute fiber
  - 3.6. With an average open area from 63 to 70 percent
  - 3.7. From 48 to 72 inches in width
  - 3.8. Capable to withstand a maximum shear stress of 2.0 pounds per square foot under ASTM D 6460
  - 3.9. With a minimum tensile strength of 100 pounds per foot under ASTM D 5035
  - 3.10. From 0.90 to 1.20 pounds per square yard in weight
  
4. Coir netting:
  - 4.1. Classified as ECTC Type 4
  - 4.2. Classified as an open weave textile and from 13 to 18 strands per foot in each direction
  - 4.3. Designed to last for at least three years after installation
  - 4.4. With a USLE C-Factor of not more than 0.25 at a 1:1 (horizontal:vertical) slope
  - 4.5. Comprised of 100 percent unbleached and undyed spun coir yarn made of coconut fiber
  - 4.6. With an average open area from 63 to 70 percent
  - 4.7. From 72 to 158 inches in width
  - 4.8. Capable to withstand a maximum shear stress of 2.25 pounds per square foot under ASTM D6460
  - 4.9. With a minimum tensile strength of 125 pounds per foot under ASTM D 5035
  - 4.10. From 1.20 to 1.67 pounds per square yard in weight

Erosion control blanket classified as long-term and non-degradable must:

1. Be a geosynthetic fabric
2. Comply with the specifications for rock slope protection fabric (Class 8) in Section 88-1.06, "Channel and Shore Protection," of the Standard Specifications

**Staples**

You may use an alternative attachment device such as a geosynthetic pins or plastic pegs to install erosion control blanket.

**Rock**

Rock must comply with:

1. Requirements under Section 72-2.02, "Materials," of the Standard Specifications
2. Following sizes:

Square Screen Size (inch)	Percentage Passing	Percentage Retained
6	100	0
3	0	100

## **Rope**

Rope for fiber rolls must be:

1. Biodegradable, such as sisal or manila
2. At least 1/4 inch in diameter

## **Fiber Rolls**

Fiber rolls must:

1. Last for at least one year after installation
2. Be Type 1 or Type 2

For Type 1, fiber rolls must be:

1. Made from an erosion control blanket classified as temporary and degradable
2. Rolled along the width
3. Secured with natural fiber twine every 6'-6" from each end
4. Finished to be either:
  - 4.1. From 8 to 10 inches in diameter, from 10 to 20 feet long, and at least 0.5 pounds per linear foot
  - 4.2. From 10 to 12 inches in diameter, at least 10 feet long, and at least 2 pounds per linear foot

For Type 2, fiber rolls must:

1. Be filled with rice or wheat straw, wood excelsior, or coconut fiber
2. Be covered with biodegradable jute, sisal, or coir fiber netting
3. Have netting secured tightly at each end
4. Be finished to be either:
  - 4.1. From 8 to 10 inches in diameter, from 10 to 20 feet long, and at least 1.1 pounds per linear foot
  - 4.2. From 10 to 12 inches in diameter, at least 10 feet long, and at least 3 pounds per linear foot

## **Wood Stakes**

Wood stakes must be:

1. Untreated fir, redwood, cedar, or pine and cut from sound timber
2. Straight and free of loose or unsound knots and other defects which would render the stakes unfit for use
3. Pointed on the end to be driven into the ground

For fiber rolls, wood stakes must be at least:

1. 1" x 1" x 24" in size for Type 1 installation
2. 1" x 2" x 24" in size for Type 2 installation

## **Posts**

Posts must be wood or metal.

Wood posts must be:

1. Untreated fir, redwood, cedar, or pine and cut from sound timber
2. Straight and free of loose or unsound knots and other defects that would render the stakes unfit for use
3. Pointed on the end to be driven into the ground
4. At least 2" x 2" in size, and 4 feet long

Metal posts must:

1. Be made of steel.
2. Have a "U," "T," "L," or other cross sectional shape that can resist failure from lateral loads.
3. Be pointed on the end to be driven into the ground.
4. Weigh at least 0.75-pound per foot.
5. Be at least 4 feet long.
6. Have a safety cap attached to the exposed end. The safety cap must be orange or red plastic and fit snugly to the metal post.

#### **Silt Fence**

Silt fence must be:

1. Constructed with silt fence fabric, posts, and fasteners
2. Prefabricated or assembled at the job site

Silt fence fabric must be attached to posts using these methods:

1. If prefabricated silt fence is used, posts must be inserted into sewn pockets
2. If assembled on the job site:
  - 2.1. If wood posts are used, fasteners must be staples or nails
  - 2.2. If steel posts are used, fasteners must be tie wires or locking plastic fasteners
  - 2.3. Spacing of the fasteners must be at least 8 inches

#### **Gravel-filled Bags**

Gravel-filled bags must:

1. Be made from fabric.
2. Have inside dimensions from 24 to 32 inches in length, and from 16 to 20 inches in width.
3. Have the opening bound to retain the gravel. The opening must be sewn with yarn, bound with wire, or secured with a closure device.
4. Weigh from 30 to 50 pounds when filled with gravel.

Gravel for gravel-filled bags must be:

1. From 3/8 to 3/4 inch in diameter
2. Clean and free from clay balls, organic matter, and other deleterious materials

#### **Sediment Filter Bag**

Sediment filter bag must:

1. Be made of fabric
2. Be sized to fit the catch basin or drainage inlet
3. Include a high-flow bypass

Sediment filter bag may include a metal frame. Sediment filter bags that do not have a metal frame and are deeper than 18 inches must:

1. Include lifting loops and dump straps
2. Include a restraint cord to keep the sides of the bag away from the walls of the catch basin

**Foam Barriers**

Foam barriers must:

1. Be filled with a urethane foam core
2. Have a geosynthetic fabric cover and flap
3. Have a triangular, circular, or square shaped cross section
4. Have a vertical height of at least 5 inches after installation
5. Have a horizontal flap of at least 8 inches in width
6. Have a length of at least 4 feet per unit
7. Have the ability to interlock separate units into a longer barrier so that water does not flow between the units
8. Be secured to:
  - 8.1. Pavement with 1-inch concrete nails with 1-inch washers and solvent-free adhesive
  - 8.2. Soil with 6-inch nails with 1-inch washers

**Rigid Plastic Barriers**

Rigid plastic barriers must:

1. Have an integrated filter
2. Have a formed outer jacket of perforated high density polyethylene (HDPE) or polyethylene terephthalate (PET)
3. Have a flattened tubular shaped cross section
4. Be made from virgin or recycled materials
5. Be free from biodegradable filler materials that degrade the physical or chemical characteristics of the finished filter core or outer jacket
6. Have a length of at least 4 feet per unit
7. Have the ability to interlock separate units into a longer barrier so that water does not flow between the units
8. Be secured to:
  - 8.1 Pavement with 1-inch concrete nails with 1-inch washers and solvent-free adhesive, with gravel-filled bags, or a combination
  - 8.2 Soil with 6-inch nails with 1-inch washers and wood stakes
9. Comply with the following properties:

Specification	Requirements
Grab tensile strength of outer jacket material, pounds/square inch, min. in each direction ASTM D 4632*	4000
Break strength of outer jacket, pounds/square inch ASTM D 4632*	1300
Permittivity of filter core, l/sec., min. ASTM D 4491	0.38
Flow rate of filter core, gallons per minute per square foot, ASTM D 4491	100 min. 200 max.
Filter core aperture size, max., Average Opening Size (AOS), microns	425
Ultraviolet stability (outer jacket & filter core), percent tensile strength retained after 500 hours, min. ASTM D 4355 (xenon-arc lamp and water spray weathering method)	90

\* or appropriate test method for specific polymer

If used at a curb inlet without a grate, rigid plastic barriers must:

1. Have a horizontal flap of at least 6 inches with an under-seal gasket to prevent underflows
2. Include a high-flow bypass
3. Have a vertical height of at least 7 inches after installation
4. Be sized to fit the catch basin or drainage inlet

If used at a grated catch basin without a curb inlet, rigid plastic barriers must:

1. Cover the grate by at least 2 inches on each side and have an under-seal gasket to prevent underflows
2. Include a high-flow bypass
3. Have a vertical height of at least 1.5 inches after installation
4. Be sized to fit the catch basin or drainage inlet

If used at a curb inlet with a grate, rigid plastic barriers must:

1. Have a horizontal flap that covers the grate by at least 2 inches on the 3 sides away from the curb opening and have an under-seal gasket to prevent underflows
2. Include a high-flow bypass
3. Have a vertical section that covers the curb opening by at least 5 inches after installation
4. Be sized to fit the catch basin or drainage inlet

If used as a linear sediment barrier, rigid plastic barriers:

1. Must have an installed height of at least 6 inches
2. May have a horizontal flap of at least 4 inches

#### **Linear Sediment Barrier**

Linear sediment barriers must consist of one or more of the following:

1. Silt fence
2. Gravel-filled bags
3. Fiber roll
4. Rigid plastic barrier
5. Foam barrier

#### **Flexible Sediment Barrier**

Flexible sediment barriers consist of one or more of the following:

1. Rigid plastic barrier
2. Foam barrier

### **CONSTRUCTION**

For drainage inlet protection at drainage inlets in paved and unpaved areas:

1. Prevent ponded runoff from encroaching on the traveled way or overtopping the curb or dike. Use linear sediment barriers to redirect runoff and control ponding.
2. Clear the area around each drainage inlet of obstructions including rocks, clods, and debris greater than one inch in diameter before installing the drainage inlet protection.
3. Install a linear sediment barrier up-slope of the existing drainage inlet and parallel with the curb, dike, or flow line to prevent sediment from entering the drainage inlet.

#### **Erosion Control Blanket**

To install erosion control blanket and geosynthetic fabric:

1. Secure blanket or fabric to the surface of the excavated sediment trap with staples and embed in a trench adjacent to the drainage inlet
2. Anchor the perimeter edge of the erosion control blanket in a trench

#### **Silt Fence**

If silt fence is used as a linear sediment barrier:

1. Place fence along the perimeter of the erosion control blanket, with the posts facing the drainage inlet
2. Install fence with the bottom edge of the silt fence fabric in a trench. Backfill the trench with soil and compact manually

### **Gravel Bag Berm**

If gravel bag berm is used as a linear sediment barrier:

1. Place gravel-filled bags end-to-end to eliminate gaps
2. Stack bags in a way that the bags in the top row overlap the joints in the lower row

If gravel bag berms are used for Type 3A and Type 3B:

1. Place gravel-filled bags end-to-end to eliminate gaps
2. Stack bags in a way that the bags in the top row overlap the joints in the lower row
3. Arrange bags to create a spillway by removing one or more gravel-filled bags from the upper layer

If used within shoulder area, place gravel-filled bags behind temporary railing (Type K).

### **Fiber Rolls**

If fiber rolls are used as a linear sediment barrier:

1. Place fiber rolls in a furrow.
2. Secure fiber rolls with stakes installed along the length of the fiber rolls. Stakes must be installed from 6 to 12 inches from the end of the rolls.

If fiber rolls are used as a linear sediment barrier for Type 4A, place them over the erosion control blanket.

### **Foam Barriers**

If foam barriers are used as a linear sediment barrier:

1. Install barriers with the horizontal flap in a 3 inch deep trench and secured with nails and washers placed no more than 4 feet apart
2. Secure barriers with 2 nails at the connection points where separate units overlap
3. Place barriers without nails or stakes piercing the core

### **Flexible Sediment Barriers**

If flexible sediment barriers are used:

1. Secure barriers to the pavement with nails and adhesive, gravel-filled bags, or a combination
2. Install barriers flush against the sides of concrete, asphalt concrete, or hot mix asphalt curbs or dikes
3. Place barriers to provide a tight joint with the curb or dike and anchored in a way that runoff cannot flow behind the barrier

If flexible sediment barriers are used for Type 4B:

1. Secure barriers to the pavement according to the angle and spacing shown on the plans
2. Place barriers to provide a tight joint with the curb or dike. Cut the cover fabric or jacket to ensure a tight fit

### **Rigid Sediment Barriers**

If rigid sediment barriers are used at a grated catch basin without a curb inlet:

1. Place barriers using the gasket to prevent runoff from flowing under the barrier
2. Secure barriers to the pavement with nails and adhesive, gravel-filled bags, or a combination

If rigid sediment barriers are used for linear sediment barriers:

1. Install barriers in a trench. Backfill the trench with soil and compact manually
2. Place barrier with separate units overlapping at least 4 inches
3. Reinforce barriers with a wood stake at each overlap
4. Fasten barriers to the wood stakes with steel screws, 16 gauge galvanized steel wire, or with UV stabilized cable ties that are from 5 to 7 inches in length

### **Sediment Filter Bags**

Install sediment filter bags for Type 5 by:

1. Removing the drainage inlet grate
2. Placing the sediment bag in the opening
3. Replacing the grate to secure the sediment filter bag in place

### **MAINTENANCE**

Maintain temporary drainage inlet protection to provide sediment holding capacity and to reduce runoff velocities.

Remove sediment deposits, trash, and debris from temporary drainage inlet protection as needed or when directed by the Engineer. If removed sediment is deposited within project limits, it must be stabilized and not subject to erosion by wind or water. Trash and debris must be removed and disposed of as specified in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

Maintain temporary drainage inlet protection by removing sediment from:

1. Behind flexible sediment barriers when sediment exceeds 1 inch in depth
2. Surface of the erosion control blanket when sediment exceeds 1 inch in depth
3. Sediment trap for Type 2 when the volume has been reduced by approximately one-half
4. Behind silt fence when the sediment is 1/3 the height of the silt fence fabric above ground
5. Sediment filter bags when filled or when the restraint cords are no longer visible

If rills and other evidence of concentrated runoff occur beneath the linear sediment barrier, repair or adjust the barrier.

If silt fence fabric becomes split, torn, or unraveled, repair or replace silt fence.

If geosynthetic fabric becomes split, torn, or unraveled, repair or replace foam barriers.

Repair or replace sagging or slumping linear sediment barriers with additional stakes. Replace broken or split wood stakes.

Reattach foam barriers and rigid plastic barriers that become detached or dislodged from the pavement.

Repair split or torn rigid plastic barriers with 16 gauge galvanized steel wire or UV stabilized cable ties that are from 5 to 7 inches in length.

For sediment filter bags without metal frames, empty by placing one inch steel reinforcing bars through the lifting loops and then lift the filled bag from the drainage inlet. For sediment filter bags with metal frames, empty by lifting the metal frame from the drainage inlet. Rinse before replacing in the drainage inlet. When rinsing the sediment filter bags, do not allow the rinse water to enter a drain inlet or waterway.

Repair temporary drainage inlet protection within 24 hours of discovering damage unless the Engineer approves a longer period.

If your vehicles, equipment, or activities disturb or displace temporary drainage inlet protection, repair temporary drainage inlet protection at your expense.

The Department does not pay maintenance costs for cleanup, repair, removal, disposal, or replacement due to improper installation or your negligence.

### **REMOVAL**

When the Engineer determines that the temporary drainage inlet protection is not required, it must be removed and disposed of under Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

Ground disturbance, including holes and depressions, caused by the installation and removal of the temporary drainage inlet protection must be backfilled and repaired under Section 15-1.02, "Preservation of Property," of the Standard Specifications.

### **MEASUREMENT AND PAYMENT**

Quantities of temporary drainage inlet protection will be determined from actual count in place. The protection will be measured one time only and no additional measurement will be recognized.

The contract unit price paid for temporary drainage inlet protection includes full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in constructing the temporary drainage inlet protection, complete in place, including removal of materials, cleanup and disposal of retained sediment and debris, and backfilling and repairing holes, depressions and other ground disturbance, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

No additional compensation will be made if the temporary drainage inlet protection is relocated during the course of construction.

The State and you share the cost of maintaining the temporary drainage inlet protection. The State determines the maintenance cost under Section 9-1.03, "Force Account Payment," of the Standard Specifications and pays you one-half of that cost.

**10-1.09 COOPERATION**

It is anticipated that work by another contractor may be in progress adjacent to or within the limits of this project during progress of the work on this contract. The following table lists contracts anticipated to be in progress during this contract.

Contract No.	Co-Rte-PM	Location	Type of Work
12-0G9604	Ora-55-R7.7/R9.4	SB Route 55 between Edinger Ave on-ramp and East Dyer Rd off-ramp	Widen Freeway

Comply with Section 7-1.14, "Cooperation," of the Standard Specifications.

**10-1.10 PROGRESS SCHEDULE (CRITICAL PATH METHOD)**

**GENERAL**

**Summary**

Comply with Section 8-1.04, "Progress Schedule," of the Standard Specifications, except you must:

1. Use a computer software to prepare the schedule
2. Furnish compatible software for the Engineer's exclusive possession and use

You are responsible for assuring that all activity sequences are logical and that each schedule shows a coordinated plan for complete performance of the work.

**Definitions**

**contract completion date:** The current extended date for completion of the contract shown on the weekly statement of working days furnished by the Engineer as specified in Section 8-1.06, "Time of Completion," of the Standard Specifications.

**data date:** The day after the date through which a schedule is current. Everything occurring earlier than the data date is "as-built" and everything on or after the data date is "planned."

**float:** The difference between the earliest and latest allowable start or finish times for an activity.

**milestone:** An event activity that has zero duration and is typically used to represent the beginning or end of a certain stage of the project.

**near critical path:** A chain of activities with total float exceeding that of the critical path but having no more than 10 working days of total float.

**time-scaled network diagram:** A graphic depiction of a CPM schedule comprised of activity bars with relationships for each activity represented by arrows. The tail of each arrow connects to the activity bar for the predecessor and points to the successor.

**total float:** The amount of time that an activity or chain of activities can be delayed before extending the scheduled completion date.

**Submittals**

**General Requirements**

Submit to the Engineer baseline, monthly updated, and final updated schedules, each consistent in all respects with the time and order of work requirements of the contract. Perform work in the sequence indicated on the current accepted schedule.

Each schedule must show:

1. Calculations using critical path method to determine controlling activities.
2. Duration activities less than 20 working days.
3. Each required constraint. Constraints other than those required by the special provisions may be included only if authorized.

The Engineer's review and acceptance of schedules does not waive any contract requirements and does not relieve you of any obligation or responsibility for submitting complete and accurate information. Correct rejected schedules and resubmit them within 7 days of notification by the Engineer, at which time a new review period of 7 days will begin.

Errors or omissions on schedules do not relieve you from finishing all work within the time limit specified for completion of the contract. If, after a schedule has been accepted by the Engineer, either you or the Engineer discover that any aspect of the schedule has an error or omission, you must correct it on the next updated schedule.

### **Computer Software**

Submit to the Engineer for review a description of proposed schedule software to be used. After the Engineer accepts the proposed software, furnish schedule software and all original software instruction manuals. All software must be compatible with the current version of the Windows operating system in use by the Engineer. The schedule software must include:

1. Latest version of Primavera SureTrak Project Manager for Windows, or equivalent
2. Latest version of schedule-comparing HST SureChange, or equivalent

If a schedule software equivalent to SureTrak is proposed, it must be capable of generating files that can be imported into SureTrak. The schedule-comparing software must be compatible with schedule software submitted and must be able to compare two schedules and provide reports of changes in activity ID, activity description, constraints, calendar assignments, durations, and logic ties.

The schedule software and schedule-comparing software will be returned to you before the final estimate. The Department will compensate you as specified in Section 4-1.03, "Extra Work," of the Standard Specifications for replacement of software or manuals damaged, lost, or stolen after delivery to the Engineer.

Instruct the Engineer in the use of the software and provide software support until the contract is accepted. Within 15 days of contract approval, provide a commercial 8-hour training session for 2 Department employees in the use of the software at a location acceptable to the Engineer. It is recommended that you also send at least 2 employees to the same training session to facilitate development of similar knowledge and skills in the use of the software. If schedule software other than SureTrak is submitted, then the training session must be a total of 16-hours for each Department employee.

### **Network Diagrams, Reports, and Data**

Include the following with each schedule submittal:

1. Two sets of originally plotted, time-scaled network diagrams
2. One read-only compact disk or floppy diskette containing the schedule data

The time-scaled network diagrams must conform to the following:

1. Show a continuous flow of information from left to right
2. Be based on early start and early finish dates of activities
3. Clearly show the critical path using graphical presentation
4. Be prepared on 11" x 17" or larger size
5. Include a title block and a timeline on each page

### **Baseline Schedule**

Submit to the Engineer a baseline schedule within 20 days of approval of the contract. Allow 20 days for the Engineer's review after the baseline schedule and all support data are submitted. Beginning the week the baseline schedule is first submitted, meet with the Engineer weekly to discuss and resolve schedule issues until the baseline schedule is accepted.

The baseline schedule must include the entire scope of work and must show how you plan to complete all work contemplated. Multiple critical paths and near-critical paths must be kept to a minimum. A total of not more than 50 percent of the baseline schedule activities must be critical or near critical, unless otherwise authorized by the Engineer.

The baseline schedule must not extend beyond the number of working days originally provided in these special provisions.

### **Updated Schedule**

Submit an updated schedule and meet with the Engineer to review contract progress on or before the 1st day of each month, beginning one month after the baseline schedule is accepted. Allow 15 days for the Engineer's review after the updated schedule and all support data are submitted, except that the review period will not start until any previous month's required schedule is accepted. Updated schedules that are not accepted or rejected within the review period are considered accepted by the Engineer.

The updated schedule must show:

1. Data date of the 21st day of the month or other date established by the Engineer
2. Changes from approved revised schedules

### **Final Updated Schedule**

Submit a final updated schedule with actual start and finish dates for the activities within 30 days after completion of contract work. Provide a written certificate with this submittal signed by your project manager or an officer of the company stating, "To my knowledge and belief, the enclosed final updated schedule reflects the actual start and finish dates of the actual activities for the project contained herein." An officer of the company may delegate in writing the authority to sign the certificate to a responsible manager.

### **PAYMENT**

Full compensation for furnishing software is considered as included in the contract prices paid for the various items of work involved and no additional compensation will be allowed.

### **10-1.11 SMALL BUSINESS UTILIZATION REPORT**

Submit a completed Small Business Utilization Report form on or before the following dates for the prior reporting period:

1. January 15th
2. April 15th
3. July 15th
4. October 15th

Submit a completed final Small Business Utilization Report form within 30 days after contract acceptance.

The Department pays \$250 for each report submitted. The contract unit price paid for small business utilization report includes full compensation for doing all the work involved in submitting the completed Small Business Utilization Report form. If you fail to submit a completed form by the specified time, you will not receive payment for that report.

The Department does not adjust payment for an increase or decrease in the quantity of small business utilization reports submitted. Section 4-1.03B, "Increased or Decreased Quantities," of the Standard Specifications does not apply.

The work to complete the final Small Business Utilization Report contract item is excluded from Section 7-1.17, "Acceptance of Contract," of the Standard Specifications.

Failure to submit the Small Business Utilization Report is not considered a performance failure. Section 9-1.07E(3), "Performance Failure Withholds," of the Standard Specifications does not apply.

### **10-1.12 CONSTRUCTION AREA TRAFFIC CONTROL DEVICES**

Flagging, signs, and temporary traffic control devices furnished, installed, maintained, and removed when no longer required shall conform to the provisions in Section 12, "Construction Area Traffic Control Devices," of the Standard Specifications and these special provisions.

Category 1 temporary traffic control devices are defined as small and lightweight (less than 100 pounds) devices. These devices shall be certified as crashworthy by crash testing, crash testing of similar devices, or years of demonstrable safe performance. Category 1 temporary traffic control devices include traffic cones, plastic drums, portable delineators, and channelizers.

If requested by the Engineer, the Contractor shall provide written self-certification for crashworthiness of Category 1 temporary traffic control devices at least 5 business days before beginning any work using the devices or within 2 business days after the request if the devices are already in use. Self-certification shall be provided by the manufacturer or Contractor and shall include the following:

- A. Date,
- B. Federal Aid number (if applicable),
- C. Contract number, district, county, route and post mile of project limits,
- D. Company name of certifying vendor, street address, city, state and zip code,
- E. Printed name, signature and title of certifying person; and
- F. Category 1 temporary traffic control devices that will be used on the project.

The Contractor may obtain a standard form for self-certification from the Engineer.

Category 2 temporary traffic control devices are defined as small and lightweight (less than 100 pounds) devices that are not expected to produce significant vehicular velocity change, but may cause potential harm to impacting vehicles. Category 2 temporary traffic control devices include barricades and portable sign supports.

Category 2 temporary traffic control devices shall be on the Federal Highway Administration's (FHWA) list of Acceptable Crashworthy Category 2 Hardware for Work Zones. This list is maintained by FHWA and can be located at:

[http://safety.fhwa.dot.gov/roadway\\_dept/road\\_hardware/listing.cfm?code=workzone](http://safety.fhwa.dot.gov/roadway_dept/road_hardware/listing.cfm?code=workzone)

The Department also maintains this list at:

<http://www.dot.ca.gov/hq/traffops/signtech/signdel/pdf/Category2.pdf>

Category 2 temporary traffic control devices that have not received FHWA acceptance shall not be used. Category 2 temporary traffic control devices in use that have received FHWA acceptance shall be labeled with the FHWA acceptance letter number and the name of the manufacturer. The label shall be readable and permanently affixed by the manufacturer. Category 2 temporary traffic control devices without a label shall not be used.

If requested by the Engineer, the Contractor shall provide a written list of Category 2 temporary traffic control devices to be used on the project at least 5 business days before beginning any work using the devices or within 2 business days after the request if the devices are already in use.

Category 3 temporary traffic control devices consist of temporary traffic-handling equipment and devices that weigh 100 pounds or more and are expected to produce significant vehicular velocity change to impacting vehicles. Temporary traffic-handling equipment and devices include crash cushions, truck-mounted attenuators, temporary railing, temporary barrier, and end treatments for temporary railing and barrier.

Type III barricades may be used as sign supports if the barricades have been successfully crash tested, meeting the NCHRP Report 350 criteria, as one unit with a construction area sign attached.

Category 3 temporary traffic control devices shall be shown on the plans or on the Department's Highway Safety Features list. This list is maintained by the Division of Engineering Services and can be found at:

[http://www.dot.ca.gov/hq/esc/approved\\_products\\_list/](http://www.dot.ca.gov/hq/esc/approved_products_list/)

Category 3 temporary traffic control devices that are not shown on the plans or not listed on the Department's Highway Safety Features list shall not be used.

Full compensation for providing self-certification for crashworthiness of Category 1 temporary traffic control devices and for providing a list of Category 2 temporary traffic control devices used on the project shall be considered as included in the prices paid for the various items of work requiring the use of the Category 1 or Category 2 temporary traffic control devices and no additional compensation will be allowed therefor.

**10-1.13 CONSTRUCTION AREA SIGNS**

Construction area signs for temporary traffic control shall be furnished, installed, maintained, and removed when no longer required in conformance with the provisions in Section 12, "Construction Area Traffic Control Devices," of the Standard Specifications and these special provisions.

Attention is directed to "Furnish Sign" of these special provisions.

Attention is directed to the provisions in "Prequalified and Tested Signing and Delineation Materials" of these special provisions. Type II retroreflective sheeting shall not be used on construction area sign panels. Type III, IV, VII, VIII, or IX retroreflective sheeting shall be used for stationary mounted construction area sign panels.

Attention is directed to "Construction Project Information Signs" of these special provisions regarding the number and type of construction project information signs to be furnished, erected, maintained, and removed and disposed of.

Unless otherwise shown on the plans or specified in these special provisions, the color of construction area warning and guide signs shall have black legend and border on orange background, except W10-1 or W47(CA) (Highway-Rail Grade Crossing Advance Warning) sign shall have black legend and border on yellow background.

Orange background on construction area signs shall be fluorescent orange.

Repair to construction area sign panels will not be allowed, except when approved by the Engineer. At nighttime under vehicular headlight illumination, sign panels that exhibit irregular luminance, shadowing or dark blotches shall be immediately replaced at the Contractor's expense.

The Contractor shall notify the appropriate regional notification center for operators of subsurface installations at least 2 business days, but not more than 14 days, prior to commencing excavation for construction area sign posts. The regional notification centers include, but are not limited to, the following:

Notification Center	Telephone Number
Underground Service Alert	811

Excavations required to install construction area signs shall be performed by hand methods without the use of power equipment, except that power equipment may be used if it is determined there are no utility facilities in the area of the proposed post holes. The post hole diameter, if backfilled with portland cement concrete, shall be at least 4 inches greater than the longer dimension of the post cross section.

Construction area signs placed within 15 feet from the edge of the travel way shall be mounted on stationary mounted sign supports as specified in "Construction Area Traffic Control Devices" of these special provisions.

The Contractor shall maintain accurate information on construction area signs. Signs that are no longer required shall be immediately covered or removed. Signs that convey inaccurate information shall be immediately replaced or the information shall be corrected. Covers shall be replaced when they no longer cover the signs properly. The Contractor shall immediately restore to the original position and location any sign that is displaced or overturned, from any cause, during the progress of work.

#### **10-1.14 MAINTAINING TRAFFIC**

Maintaining traffic shall conform to the provisions in Sections 7-1.08, "Public Convenience," Section 7-1.09, "Public Safety," and Section 12, "Construction Area Traffic Control Devices," of the Standard Specifications and these special provisions.

Closure is defined as the closure of a traffic lane or lanes, including shoulder, ramp or connector lanes, within a single traffic control system.

Closures shall conform to the provisions in "Traffic Control System for Lane Closure" of these special provisions.

In addition to the provisions set forth in Section 7-1.09, "Public Safety," of the Standard Specifications, whenever work, including the work of installing, maintaining, and removing temporary railing (Type K) is to be performed on the freeway within 6 feet of the adjacent traffic lane, the adjacent traffic lane shall be closed.

Except as listed above, closure of adjacent traffic lane will not be required for installing, maintaining and removing traffic control devices.

Work that interferes with public traffic shall be limited to the hours when lane closures are allowed, except for work required under Sections 7-1.08, "Public Convenience," and Section 7-1.09, "Public Safety."

Designated legal holidays are: January 1st, the third Monday in February, the last Monday in May, July 4th, the first Monday in September, November 11th, Thanksgiving Day, and December 25th. When a designated legal holiday falls on a Sunday, the following Monday shall be a designated legal holiday. When November 11th falls on a Saturday, the preceding Friday shall be a designated legal holiday.

Special days are: December 24<sup>th</sup> and December 31<sup>st</sup>.

Not more than one separate stationary lane closures will be allowed in each direction of travel at one time.

Local authorities shall be notified at least 5 business days before work begins. The Contractor shall cooperate with local authorities to handle traffic through the work area and shall make arrangements to keep the work area clear of parked vehicles.

SC6-3(CA) (RAMP CLOSED) sign shall be used to inform motorists of the temporary closing of a connector, entrance ramp or exit ramp for 1 business day.

SC6-4(CA) (RAMP CLOSED) sign shall be used to inform motorists of the temporary closing of a connector, entrance ramp or exit ramp for more than 1 business day.

The SC6-3(CA) or SC6-4(CA) signs shall be installed at least 7 days before closing the connector or ramp, but not more than 15 days before the connector or ramp closure. The Contractor shall notify the Engineer at least 2 business days before installing the SC6-3(CA) or SC6-4(CA) signs.

Accurate information shall be maintained on the SC6-3(CA) or SC6-4(CA) signs. The SC6-3(CA) or SC6-4(CA) signs, when no longer required, shall be immediately covered or removed.

Personal vehicles of the Contractor's employees shall not be parked on the traveled way or shoulders including sections closed to public traffic.

When work vehicles or equipment are parked within 6 feet of a traffic lane to perform active construction, the shoulder area shall be closed as shown on the plans.

If minor deviations from the lane requirement charts are required, a written request shall be submitted to the Engineer at least 15 days before the proposed date of the closure. The Engineer may approve the deviations if there is no significant increase in the cost to the State and if the work can be expedited and better serve the public traffic.

When complete freeway, expressway or conventional highway closure is required, only one detour for each direction of travel will be allowed for the following operations: Temporary Striping.

Full compensation for furnishing, erecting, maintaining, and removing and disposing of the SC6-3(CA) and SC6-4(CA) signs shall be considered as included in the contract lump sum price paid for construction area signs and no additional compensation will be allowed therefor.

Lane Closure Restriction for Designated Legal Holidays and Special Days										
Thu	Fri	Sat	Sun	Mon	Tues	Wed	Thu	Fri	Sat	Sun
x	<b>H</b> xx	xx	xx							
	<b>SD</b> xx									
x	xx	<b>H</b> xx	xx							
		<b>SD</b> xx								
	x	xx	<b>H</b> xx	xx						
			<b>SD</b> xx							
	x	xx	xx	<b>H</b> xx	xxx					
	x	xx	xx	<b>SD</b> xx	xxx					
				x	<b>H</b> xx					
				x	<b>SD</b> xx					
					x	<b>H</b> xx				
						<b>SD</b> xx				
						x	<b>H</b> xx	xx	xx	xx
							<b>SD</b> xx			
Legends:										
	Refer to lane closure charts									
x	The full width of the traveled way shall be open for use by public traffic after 5:00 a.m.									
xx	The full width of the traveled way shall be open for use by public traffic.									
xxx	The full width of the traveled way shall be open for use by public traffic until 11:00 p.m.									
<b>H</b>	Designated Legal Holiday									
<b>SD</b>	Special Day									

<b>Chart No. 1</b>																									
<b>Freeway/Expressway Lane Requirements</b>																									
County:Orange					Route/Direction:Rte 405/SB										PM:R7.0/R7.9										
Closure Limits:From MacArthur Blvd to North of Dyer Rd undercrossing.																									
FROM HOUR TO HOUR	24	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
Mondays through Thursdays	1	1	1	1	2																			3	2
Fridays	1	1	1	1	2																			3	2
Saturdays	2	1	1	1	1	2																		3	2
Sundays	2	1	1	1	1	2	2																	3	2
Legend:																									
<input type="checkbox"/> 1 Provide at least one through freeway lane open in direction of travel <input type="checkbox"/> 2 Provide at least two adjacent through freeway lanes open in direction of travel <input type="checkbox"/> 3 Provide at least three adjacent through freeway lanes open in direction of travel <input type="checkbox"/> Work permitted within project right of way where shoulder or lane closure is not required.																									
REMARKS:																									

<b>Chart No. 2</b>																									
<b>Complete Freeway/Expressway Closure Hours</b>																									
County:Orange					Route/Direction:Rte 55/SB										PM:R7.0/7.9										
Closure Limits:From MacArthur Blvd to North of Dyer Rd undercrossing																									
FROM HOUR TO HOUR	24	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
Mondays through Thursdays																									
Fridays																									
Saturdays	C	C	C	C	C																				
Sundays	C	C	C	C	C	C																			
Legend:																									
<input type="checkbox"/> C Freeway or expressway may be closed completely. <input type="checkbox"/> No complete freeway or expressway closure is permitted.																									
REMARKS:																									
<ul style="list-style-type: none"> <li>Closure chart shall only be used to place pavement delineation as needed.</li> </ul>																									

Chart No. 3 Complete Ramp Closure Hours/Ramp Lane Requirements																									
County:Orange					Route/Direction:Rte 55/SB										PM:R7.0/R7.9										
Closure Limits: 1. SB Rte 55 on-ramp from Dyer Rd. 2. SB Rte 55 off-ramp to MacArthur Blvd																									
FROM HOUR TO HOUR 24 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24																									
Mondays through Thursdays		C	C	C	C	C																			C
Fridays		C	C	C	C	C																			C
Saturdays		C	C	C	C	C	C																		C
Sundays		C	C	C	C	C	C	C																	C
Legend: <input type="checkbox"/> C Ramp may be closed completely <input type="checkbox"/> Work permitted within project right of way where shoulder or lane closure is not required.																									
REMARKS:																									

**10-1.15 CLOSURE REQUIREMENTS AND CONDITIONS**

Closures shall conform to the provisions in "Maintaining Traffic" of these special provisions and these special provisions.

**CLOSURE SCHEDULE**

A written schedule of planned closures for the next week period, defined as Sunday noon through the following Sunday noon, shall be submitted by noon each Monday. A written schedule shall be submitted not less than 25 days and not more than 125 days before the anticipated start of any operation that will:

1. Reduce horizontal clearances, traveled way, including shoulders, to two lanes or less due to such operations as temporary barrier placement and paving
2. Reduce the vertical clearances available to the public due to such operations as pavement overlay, overhead sign installation, or falsework or girder erection

The Closure Schedule shall show the locations and times of the proposed closures. The Closure Schedule request forms furnished by the Engineer shall be used. Closure Schedules submitted to the Engineer with incomplete or inaccurate information will be rejected and returned for correction and resubmittal. The Contractor will be notified of disapproved closures or closures that require coordination with other parties as a condition of approval.

Closure Schedule amendments, including adding additional closures, shall be submitted by noon to the Engineer, in writing, at least 3 business days in advance of a planned closure. Approval of Closure Schedule amendments will be at the discretion of the Engineer.

- The Engineer shall be notified of cancelled closures 2 business days before the date of closure.
- Closures that are cancelled due to unsuitable weather may be rescheduled at the discretion of the Engineer.

**CONTINGENCY PLAN**

A detailed contingency plan shall be prepared for reopening closures to public traffic. If required by "Beginning of Work, Time of Completion and Liquidated Damages" of these special provisions, the contingency plan shall be submitted to the Engineer before work at the job site begins. Otherwise, the contingency plan shall be submitted to the Engineer within one business day of the Engineer's request.

## LATE REOPENING OF CLOSURES

If a closure is not reopened to public traffic by the specified time, work shall be suspended in conformance with the provisions in Section 8-1.05, "Temporary Suspension of Work," of the Standard Specifications. No further closures are to be made until the Engineer has accepted a work plan, submitted by the Contractor, that will insure that future closures will be reopened to public traffic at the specified time. The Engineer will have 2 business days to accept or reject the Contractor's proposed work plan. The Contractor will not be entitled to compensation for the suspension of work resulting from the late reopening of closures.

For each 10-minute interval, or fraction thereof past the time specified to reopen the closure, the Department will deduct the amount per interval shown below from moneys due or that may become due the Contractor under the contract. Damages are limited to 5 percent of project cost per occurrence and will not be assessed when the Engineer requests that the closure remain in place beyond the scheduled pickup time.

Type of Facility	Route or Segment	Period	Damages/interval (\$)
Mainline	SB 55 from MacArthur Blvd to Dyer Rd.	1st half hour	\$3,600 / 10 minutes
		2nd half hour	\$5,300 / 10 minutes
		2nd hour and beyond	\$7,100 / 10 minutes

## COMPENSATION

The Engineer shall be notified of delays in the Contractor's operations due to the following conditions, and if, in the opinion of the Engineer, the Contractor's controlling operation is delayed or interfered with by reason of those conditions, and the Contractor's loss due to that delay could not have been avoided by rescheduling the affected closure or by judicious handling of forces, equipment and plant, the delay will be considered a right of way delay and will be compensated in conformance with the provisions in Section 8-1.09, "Right of Way Delays," of the Standard Specifications:

1. The Contractor's proposed Closure Schedule is denied and his planned closures are within the time frame allowed for closures in "Maintaining Traffic" of these special provisions, except that the Contractor will not be entitled to compensation for amendments to the Closure Schedule that are not approved.
2. The Contractor is denied a confirmed closure.

Should the Engineer direct the Contractor to remove a closure before the time designated in the approved Closure Schedule, delay to the Contractor's schedule due to removal of the closure will be considered a right of way delay and compensation for the delay will be determined in conformance with the provisions in Section 8-1.09, "Right of Way Delays," of the Standard Specifications.

## 10-1.16 IMPACT ATTENUATOR VEHICLE

### GENERAL

#### Summary

Work includes protecting traffic and workers by using impact attenuator vehicle as a shadow vehicle when placing and removing components of a traffic control system, and when performing a moving lane closure.

Comply with Section 12-3.03, "Flashing Arrow Signs," of the Standard Specifications.

Impact attenuator vehicle must comply with the following test levels under National Cooperative Highway Research Program 350:

1. Test level 3 for pre-construction posted speed limit of 50 mph or more
2. Test levels 2 or 3 for pre-construction posted speed limit of 45 mph or less

Comply with the attenuator manufacturer's recommendations for:

1. Support truck
2. Trailer-mounted operation
3. Truck-mounted operation

#### Definitions

**impact attenuator vehicle:** Support truck towing a deployed attenuator mounted to a trailer or support truck with a deployed attenuator mounted to the support truck.

## **Submittals**

Upon request, submit a Certificate of Compliance for attenuator to the Engineer under Section 6-1.07, "Certificates of Compliance," of the Standard Specifications.

## **Quality Control and Assurance**

Attenuator must be a brand listed on the Department's pre-approved list under Highway Safety Features at:

[http://www.dot.ca.gov/hq/esc/approved\\_products\\_list/](http://www.dot.ca.gov/hq/esc/approved_products_list/)

## **MATERIALS**

The combined weight of the support truck and the attenuator must be at least 19,800 pounds, except the weight of the support truck must not be less than 16,100 pounds or greater than 26,400 pounds.

If using the Trinity MPS-350 truck-mounted attenuator, the support truck must not have any underneath fuel tank mounted within 10'-6" of the rear of the support truck.

Each impact attenuator vehicle must:

1. Have standard brake lights, taillights, sidelights, and turn signals
2. Have an inverted "V" chevron pattern placed across the entire rear of the attenuator composed of alternating 4 inch wide non-reflective black stripes and 4 inch wide yellow retroreflective stripes sloping at 45 degrees
3. Have a Type II flashing arrow sign
4. Have a flashing or rotating amber light
5. Have an operable 2-way communication system for maintaining contact with workers

## **CONSTRUCTION**

Use impact attenuator vehicle to follow behind equipment and workers who are placing and removing components of a traffic control system for a lane closure or a ramp closure. Flashing arrow sign must be operating in arrow mode during this activity. Follow at a distance to prevent intrusion into the workspace from passing traffic.

After placing components of a traffic control system for a lane closure or a ramp closure you may use impact attenuator vehicle in a closed lane and in advance of a work area to protect traffic and workers.

Secure objects including equipment, tools and ballast on impact attenuator vehicle to prevent loosening upon impact by an errant vehicle.

Do not use a damaged attenuator in the work. Replace, at your expense, an attenuator damaged from an impact during work.

## **MEASUREMENT AND PAYMENT**

Full compensation for furnishing and operating impact attenuator vehicle is included in the contract lump sum price paid for traffic control system, and no additional compensation will be allowed therefor.

### **10-1.17 TRAFFIC CONTROL SYSTEM FOR LANE CLOSURE**

A traffic control system shall consist of closing traffic lanes and ramps in conformance with the details shown on the plans, the provisions in Section 12, "Construction Area Traffic Control Devices," of the Standard Specifications, the provisions under "Maintaining Traffic" and "Construction Area Signs" of these special provisions, and these special provisions.

The provisions in this section will not relieve the Contractor from the responsibility to provide additional devices or take measures as may be necessary to comply with the provisions in Section 7-1.09, "Public Safety," of the Standard Specifications.

Each vehicle used to place, maintain and remove components of a traffic control system on multilane highways shall be equipped with a Type II flashing arrow sign which shall be in operation when the vehicle is being used for placing, maintaining or removing components. Vehicles equipped with Type II flashing arrow sign not involved in placing, maintaining or removing components when operated within a stationary lane closure shall only display the caution display mode. The sign shall be controllable by the operator of the vehicle while the vehicle is in motion. The flashing arrow sign shown on the plans shall not be used on vehicles which are being used to place, maintain and remove components of a traffic control system and shall be in place before a lane closure requiring its use is completed.

If components in the traffic control system are displaced or cease to operate or function as specified, from any cause, during the progress of the work, the Contractor shall immediately repair the components to the original condition or replace the components and shall restore the components to the original location.

When lane and ramp closures are made for work periods only, at the end of each work period, components of the traffic control system, except portable delineators placed along open trenches or excavation adjacent to the traveled way, shall be removed from the traveled way and shoulder. If the Contractor so elects, the components may be stored at selected central locations designated by the Engineer within the limits of the highway right of way.

The contract lump sum price paid for traffic control system shall include full compensation for furnishing all labor, materials (including signs), tools, equipment, and incidentals, and for doing all the work involved in placing, removing, storing, maintaining, moving to new locations, replacing, and disposing of the components of the traffic control system shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

The adjustment provisions in Section 4-1.03, "Changes," of the Standard Specifications shall not apply to the item of traffic control system. Adjustments in compensation for traffic control system will be made only for increased or decreased traffic control system required by changes ordered by the Engineer and will be made on the basis of the cost of the increased or decreased traffic control necessary. The adjustment will be made on a force account basis as provided in Section 9-1.03, "Force Account Payment," of the Standard Specifications for increased work and estimated on the same basis in the case of decreased work.

Traffic control system required by work which is classed as extra work, as provided in Section 4-1.03D of the Standard Specifications, will be paid for as a part of the extra work.

#### **10-1.18 TEMPORARY PAVEMENT DELINEATION**

Temporary pavement delineation shall be furnished, placed, maintained, and removed in conformance with the provisions in Section 12-3.01, "General," of the Standard Specifications and these special provisions. Nothing in these special provisions shall be construed as reducing the minimum standards specified in the California MUTCD or as relieving the Contractor from the responsibilities specified in Section 7-1.09, "Public Safety," of the Standard Specifications.

##### **GENERAL**

When the work causes obliteration of pavement delineation, temporary or permanent pavement delineation shall be in place before opening the traveled way to public traffic. Laneline or centerline pavement delineation shall be provided for traveled ways open to public traffic. On multilane roadways (freeways and expressways) edgeline delineation shall be provided for traveled ways open to public traffic.

The Contractor shall perform the work necessary to establish the alignment of temporary pavement delineation, including required lines or markers. Surfaces to receive application of paint or removable traffic tape temporary pavement delineation shall be dry and free of dirt and loose material. Temporary pavement delineation shall not be applied over existing pavement delineation or other temporary pavement delineation. Temporary pavement delineation shall be maintained until superseded or replaced with a new pattern of temporary pavement delineation or permanent pavement delineation, or as determined by the Engineer.

Temporary pavement markers, including underlying adhesive, and removable traffic tape that are applied to the final layer of surfacing or existing pavement to remain in place or that conflicts with a subsequent or new traffic pattern for the area shall be removed when no longer required for the direction of public traffic, as determined by the Engineer.

##### **TEMPORARY LANELINE AND CENTERLINE DELINEATION**

When lanelines or centerlines are obliterated and temporary pavement delineation to replace the lines is not shown on the plans, the minimum laneline and centerline delineation to be provided for that area shall be temporary pavement markers placed at longitudinal intervals of not more than 24 feet. The temporary pavement markers shall be the same color as the laneline or centerline the pavement markers replace. Temporary pavement markers shall be, at the option of the Contractor, one of the temporary pavement markers listed for short term day/night use (14 days or less) or long term day/night use (180 days or less) in "Prequalified and Tested Signing and Delineation Materials" of these special provisions. The temporary pavement markers shall be placed in conformance with the manufacturer's instructions. Temporary pavement markers for long term day/night use (180 days or less) shall be cemented to the surfacing with the adhesive recommended by the manufacturer, except epoxy adhesive shall not be used to place the temporary pavement markers in areas where removal of the temporary pavement markers will be required.

Temporary laneline or centerline delineation consisting entirely of temporary pavement markers listed for short term day/night use (14 days or less), shall be placed on longitudinal intervals of not more than 24 feet and shall be used for a maximum of 14 days on lanes opened to public traffic. Before the end of the 14 days the permanent pavement delineation shall be placed. If the permanent pavement delineation is not placed within the 14 days, the Contractor shall replace the temporary pavement markers and provide additional temporary pavement delineation and shall bear the cost thereof. The additional temporary pavement delineation to be provided shall be equivalent to the pattern specified for the permanent pavement delineation for the area, as determined by the Engineer.

## **TEMPORARY EDGELINE DELINEATION**

On multilane roadways (freeways and expressways), when edgelines are obliterated and temporary pavement delineation to replace those edgelines is not shown on the plans, the edgeline delineation to be provided for those areas adjacent to lanes open to public traffic shall be as follows:

1. Temporary pavement delineation for right edgelines shall, at the option of the Contractor, consist of either a solid 4-inch wide traffic stripe tape of the same color as the stripe it replaces, traffic cones, portable delineators or channelizers placed at longitudinal intervals not to exceed 100 feet.
2. Temporary pavement delineation for left edgelines shall, at the option of the Contractor, consist of either solid 4-inch wide traffic stripe tape of the same color as the stripe it replaces, traffic cones, portable delineators or channelizers placed at longitudinal intervals not to exceed 100 feet or temporary pavement markers placed at longitudinal intervals of not more than 6 feet.

Where removal of the 4-inch wide traffic stripe will not be required, painted traffic stripe conforming to the provisions of "Temporary Traffic Stripe (Paint)" of these special provisions may be used.

The lateral offset for traffic cones, portable delineators or channelizers used for temporary edgeline delineation shall be as determined by the Engineer. If traffic cones or portable delineators are used as temporary pavement delineation for edgelines, the Contractor shall provide personnel to remain at the project site to maintain the cones or delineators during the hours of the day that the portable delineators are in use.

Channelizers used for temporary edgeline delineation shall be the surface mounted type and shall be orange in color. Channelizer bases shall be cemented to the pavement in the same manner provided for cementing pavement markers to pavement in "Pavement Markers" of these special provisions, except epoxy adhesive shall not be used to place channelizers on the top layer of pavement. Channelizers shall be, at the Contractor's option, one of the surface mount types (36 inch) listed in "Prequalified and Tested Signing and Delineation Materials" of these special provisions.

Temporary edgeline delineation shall be removed when no longer required for the direction of public traffic as determined by the Engineer.

## **MEASUREMENT AND PAYMENT**

Full compensation for furnishing, placing, maintaining, and removing the temporary pavement markers (including underlying adhesive, layout (dribble) lines to establish alignment of temporary pavement markers or used for temporary laneline and centerline delineation) for those areas where temporary laneline and centerline delineation is not shown on the plans and for providing equivalent patterns of permanent traffic lines for those areas when required, shall be considered as included in the contract prices paid for the items of work that obliterated the laneline and centerline pavement delineation and no separate payment will be made therefor.

Full compensation for furnishing, placing, maintaining, and removing temporary edgeline delineation not shown on the plans shall be considered as included in the contract prices paid for the items of work that obliterated the edgeline pavement delineation and no separate payment will be made therefor. The quantity of channelizers used as temporary edgeline delineation will not be included in the quantity of channelizer (surface mounted) to be paid for.

### **10-1.19 BARRICADE**

Barricades shall be furnished, placed and maintained at the locations shown on the plans, specified in the Standard Specifications or in these special provisions or where designated by the Engineer. Barricades shall conform to the provisions in Section 12, "Construction Area Traffic Control Devices," of the Standard Specifications and these special provisions.

Attention is directed to "Prequalified and Tested Signing and Delineation Materials" of these special provisions regarding retroreflective sheeting for barricades.

Construction area sign and marker panels conforming to the provisions in Section 12-3.06, "Construction Area Signs," of the Standard Specifications shall be installed on barricades in a manner determined by the Engineer at the locations shown on the plans.

Sign panels for construction area signs and marker panels installed on barricades shall conform to the provisions in Section 12-3.06A, "Stationary Mounted Signs," of the Standard Specifications.

Full compensation for furnishing, installing, maintaining, and removing construction area signs and marker panels on barricades shall be considered as included in the contract unit price paid for the type of barricade involved and no separate payment will be made therefor.

Barricades shown on the plans as part of a traffic control system will be paid for as provided in "Traffic Control System for Lane Closure" of these special provisions and will not be included in the count for payment of barricades.

## **10-1.20 PORTABLE CHANGEABLE MESSAGE SIGNS**

### **GENERAL**

#### **Summary**

Work includes furnishing, placing, operating, maintaining, and removing portable changeable message signs. Comply with Section 12-3.12 "Portable Changeable Message Signs," of the Standard Specifications.

#### **Definitions**

**useable shoulder area:** Paved or unpaved contiguous surface adjacent to the traveled way with:

1. Sufficient weight bearing capacity to support portable changeable message sign
2. Slope not greater than 6:1 (horizontal:vertical)

#### **Submittals**

Upon request, submit a Certificate of Compliance for each portable changeable message sign under Section 6-1.07, "Certificates of Compliance," of the Standard Specifications.

#### **Quality Control and Assurance**

Comply with the manufacturer's operating instructions for portable changeable message sign.

Approaching drivers must be able to read the entire message for all phases at least twice at the posted speed limit before passing portable changeable message sign. You may use more than 1 portable changeable message sign to meet this requirement.

Only display the message shown on the plans or ordered by the Engineer or specified in these special provisions.

### **MATERIALS**

The text of the message displayed on portable changeable message sign must not scroll, or travel horizontally or vertically across the face of the message panel.

### **CONSTRUCTION**

Continuously repeat the entire message in no more than 2 phases of at least 3 seconds per phase.

If useable shoulder area is at least 15 feet wide, the displayed message on portable changeable message sign must be minimum 18-inch character height. If useable shoulder area is less than 15 feet wide, you may use a smaller message panel with minimum 12-inch character height to prevent encroachment in the traveled way.

Start displaying the message on portable changeable message sign 15 minutes before closing the lane or as directed by the Engineer.

Place portable changeable message sign in advance of the first warning sign for:

1. Each stationary lane closure
2. Each off-ramp closure

Place portable changeable message sign as far from the traveled way as practicable where it is legible to traffic and does not encroach on the traveled way. Place portable changeable sign before or at the crest of vertical roadway curvature where it is visible to approaching traffic. Avoid placing portable changeable message sign within or immediately after horizontal roadway curvature. Where possible, place portable changeable message sign behind guardrail or temporary railing (Type K).

Except where placed behind guardrail or temporary railing (Type K) use traffic control for shoulder closure to delineate portable changeable message sign.

Remove portable changeable message sign when not in use.

### **MEASUREMENT AND PAYMENT**

The contract lump sum price paid for portable changeable message signs includes full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in furnishing, placing, operating, modifying messages, maintaining portable changeable message signs, complete in place, including transporting from location to location, removing, and repairing or replacing defective or damaged portable changeable message signs, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

Portable changeable message signs ordered by the Engineer in excess of the number shown on the plans or specified in these special provisions will be paid for as extra work under Section 4-1.03D, "Extra Work," of the Standard Specifications.

### **10-1.21 CHANNELIZER**

Channelizers shall conform to the provisions in Section 12, "Construction Area Traffic Control Devices," of the Standard Specifications and these special provisions.

Channelizers shall conform to the provisions in "Prequalified and Tested Signing and Delineation Materials" of these special provisions.

When no longer required for the work as determined by the Engineer, channelizers and underlying adhesive used to cement the channelizer bases to the pavement shall be removed. Removed channelizers and adhesive shall become the property of the Contractor and shall be removed from the site of work.

### **10-1.22 TEMPORARY TRAFFIC SCREEN**

Temporary traffic screen shall be furnished, installed, and maintained on top of temporary railing (Type K) at the locations designated on the plans, specified in the special provisions or directed by the Engineer and shall conform to the provisions specified for traffic handling equipment and devices in Section 12, "Construction Area Traffic Control Devices," of the Standard Specifications and these special provisions.

Temporary traffic screen panels shall be new or used CDX Grade, or better, plywood or weather resistant strandboard mounted and anchored on temporary railing (Type K). Wale boards shall be new or used Douglas fir, rough sawn, Construction Grade, or better. Pipe screen supports shall be new or used galvanized steel pipe, Schedule 40. Nuts, bolts, and washers shall be cadmium plated. Screws shall be black or cadmium plated flat head, cross slotted screws with full thread length.

When no longer required, as determined by the Engineer, temporary traffic screen shall be removed from the site of the work and shall become the property of the Contractor.

Temporary traffic screen will be measured by the linear foot from actual measurements along the line of the completed temporary traffic screen, at each location designated on the plans, specified or directed by the Engineer. If the Engineer orders a lateral move of temporary railing, with temporary traffic screen attached, and the repositioning is not shown on the plans, moving the temporary traffic screen will be paid for as part of the extra work for moving the temporary railing as specified in Section 12-4.01, "Measurement and Payment," of the Standard Specifications. Temporary traffic screen placed in excess of the length shown, specified or directed by the Engineer will not be paid for.

The contract price paid per linear foot for temporary traffic screen shall include full compensation for furnishing all labor, materials (including anchoring systems), tools, equipment, and incidentals, and for doing all the work involved in installing, maintaining, and removing the temporary traffic screen, complete in place, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

### **10-1.23 TEMPORARY CRASH CUSHION MODULE**

This work shall consist of furnishing, installing, and maintaining sand filled temporary crash cushion modules in groupings or arrays at each location shown on the plans, as specified in these special provisions or where designated by the Engineer. The grouping or array of sand filled modules shall form a complete sand filled temporary crash cushion in conformance with the details shown on the plans and these special provisions.

Temporary crash cushions shall be secured in place prior to commencing work for which the temporary crash cushions are required.

Whenever the work or the Contractor's operations establishes a fixed obstacle, the exposed fixed obstacle shall be protected with a sand filled temporary crash cushion. The sand filled temporary crash cushion shall be in place prior to opening the lanes adjacent to the fixed obstacle to public traffic.

Sand filled temporary crash cushions shall be maintained in place at each location, including times when work is not actively in progress. Sand filled temporary crash cushions may be removed during a work period for access to the work provided that the exposed fixed obstacle is 15 feet or more from a lane carrying public traffic and the temporary crash cushion is reset to protect the obstacle prior to the end of the work period in which the fixed obstacle was exposed. When no longer required, as determined by the Engineer, sand filled temporary crash cushions shall be removed from the site of the work.

Sand filled temporary crash cushion modules shall be one of the following, or equal, and be manufactured after March 31, 1997:

1. Energite III and Fitch Inertial Modules, manufactured by Energy Absorption Systems, Inc., 35 East Wacker Drive, Suite 1100, Chicago, IL 60601:
  - 1.1. Northern California: Traffic Control Service, Inc., 8585 Thys Court, Sacramento, CA 95828, telephone (800) 884-8274, FAX (916) 387-9734
  - 1.2. Southern California: Traffic Control Service, Inc., 1818 E. Orangethorpe, Fullerton, CA 92831-5324, telephone (800) 222-8274, FAX (714) 526-9501

2. Traffix Sand Barrels, manufactured by Traffix Devices, Inc., 220 Calle Pintesco, San Clemente, CA 92672, telephone (949) 361-5663, FAX (949) 361-9205
  - 2.1. Northern California: United Rentals, Inc., 1533 Berger Drive, San Jose, CA 95112, telephone (408) 287-4303, FAX (408) 287-1929
  - 2.2. Southern California: Statewide Safety & Sign, Inc., P.O. Box 1440, Pismo Beach, CA 93448, telephone (800) 559-7080, FAX (805) 929-5786
3. CrashGard Model CC-48 Sand Barrels, manufactured by Plastic Safety Systems, Inc., 2444 Baldwin Road, Cleveland, OH 44104:
  - 3.1. Northern California:
    - 3.1.1. Capitol Barricade Safety & Sign, 6329 Elvas Ave, Sacramento, CA 95819, telephone (888) 868-5021, FAX (916) 451-5388
    - 3.1.2. Sierra Safety, Inc., 9093 Old State Highway, New Castle, CA 95658, telephone (916) 663-2026, FAX (916) 663-1858
  - 3.2. Southern California: Hi Way Safety Inc., 13310 5th Street, Chino, CA 91710, telephone (909) 591-1781, FAX (909) 627-0999

Modules contained in each temporary crash cushion shall be of the same type at each location. The color of the modules shall be the standard yellow color, as furnished by the vendor, with black lids. The modules shall exhibit good workmanship free from structural flaws and objectionable surface defects. The modules need not be new. Good used undamaged modules conforming to color and quality of the types specified herein may be utilized. If used Fitch modules requiring a seal are furnished, the top edge of the seal shall be securely fastened to the wall of the module by a continuous strip of heavy duty tape.

Modules shall be filled with sand in conformance with the manufacturer's directions, and to the sand capacity in pounds for each module shown on the plans. Sand for filling the modules shall be clean washed concrete sand of commercial quality. At the time of placing in the modules, the sand shall contain not more than 7 percent water as determined by California Test 226.

Modules damaged due to the Contractor's operations shall be repaired immediately by the Contractor at the Contractor's expense. Modules damaged beyond repair, as determined by the Engineer, due to the Contractor's operations shall be removed and replaced by the Contractor at the Contractor's expense.

Temporary crash cushion modules may be placed on movable pallets or frames. Comply with dimensions shown on the plans. The pallets or frames shall provide a full bearing base beneath the modules. The modules and supporting pallets or frames shall not be moved by sliding or skidding along the pavement or bridge deck.

A Type R or P marker panel shall be attached to the front of the crash cushion as shown on the plans, when the closest point of the crash cushion array is within 12 feet of the traveled way. The marker panel, when required, shall be firmly fastened to the crash cushion with commercial quality hardware or by other methods determined by the Engineer.

At the completion of the project, temporary crash cushion modules, sand filling, pallets or frames, and marker panels shall become the property of the Contractor and shall be removed from the site of the work. Temporary crash cushion modules shall not be installed in the permanent work.

Temporary crash cushion modules will be measured by the unit as determined from the actual count of modules used in the work or ordered by the Engineer at each location. Temporary crash cushion modules placed in conformance with Section 7-1.09, "Public Safety," of the Standard Specifications and modules placed in excess of the number specified or shown will not be measured nor paid for.

Repairing modules damaged by public traffic will be paid for as extra work as provided in Section 4-1.03D of the Standard Specifications. Modules damaged beyond repair by public traffic, when ordered by the Engineer, shall be removed and replaced immediately by the Contractor. Modules replaced due to damage by public traffic will be measured and paid for as temporary crash cushion module.

If the Engineer orders a lateral move of the sand filled temporary crash cushions and the repositioning is not shown on the plans, moving the sand filled temporary crash cushion will be paid for as extra work as provided in Section 4-1.03D of the Standard Specifications and these temporary crash cushion modules will not be counted for payment in the new position.

The contract unit price paid for temporary crash cushion module shall include full compensation for furnishing all labor, materials (including sand, pallets or frames and marker panels), tools, equipment, and incidentals, and for doing all the work involved in furnishing, installing, maintaining, moving, and resetting during a work period for access to the work, and removing from the site of the work when no longer required (including those damaged by public traffic) sand filled

temporary crash cushion modules, complete in place, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

#### **10-1.24 REMOVE YELLOW TRAFFIC STRIPE AND PAVEMENT MARKING (HAZARDOUS WASTE)**

##### **GENERAL**

###### **Summary**

This work includes removing existing yellow thermoplastic and yellow painted traffic stripe and pavement marking at the locations shown on the plans. The residue from the removal of this material is a hazardous waste.

Residue from removal of yellow thermoplastic and yellow painted traffic stripe and pavement marking contains lead chromate. The average lead concentration is greater than or equal to 1000 mg/kg total lead or 5 mg/l soluble lead. When applied to the roadway, the yellow thermoplastic and yellow painted traffic stripe and pavement marking contained as much as 2.6 percent lead. Residue produced from the removal of this yellow thermoplastic and yellow painted traffic stripe and pavement marking contains heavy metals in concentrations that exceed thresholds established by the Health and Safety Code and 22 CA Code of Regs. For bidding purposes, assume that the residue is not regulated under the Federal Resource Conservation and Recovery Act (RCRA), 42 USC § 6901 et seq.. Yellow thermoplastic and yellow paint may produce toxic fumes when heated.

###### **Submittals**

**Lead Compliance Plan:** Submit a lead compliance plan under Section 7-1.07, "Lead Compliance Plan," of the Standard Specifications.

**Work Plan:** Submit a work plan for the removal, containment, storage, and disposal of yellow thermoplastic and yellow painted traffic stripe and pavement marking for acceptance not less than 15 days prior to the start of the removal operations. The work plan must include:

1. Objective of the operation
2. Removal equipment
3. Type of hazardous waste storage containers
4. Container storage location and how it will be secured
5. Hazardous waste sampling protocol and QA/QC requirements and procedures
6. Qualifications of sampling personnel
7. Analytical lab that will perform the analyses
8. Certification documentation of the hazardous waste hauler that will transport the hazardous waste
9. Disposal site that will accept the hazardous waste residue

The Engineer will review the work plan within 5 business days of receipt.

Do not perform work that generates hazardous waste residue until the work plan has been accepted by the Engineer. The Engineer's review and acceptance does not waive any contract requirements and does not relieve the Contractor from complying with Federal, State, and local laws, regulations, and requirements.

Correct any rejected work plan and resubmit a corrected work plan within 5 business days of notification by the Engineer; at which time a new review period of 5 business days will begin.

**Analytical Test Results:** Submit analytical test results of the residue from removal of yellow thermoplastic and yellow painted traffic stripe and pavement marking, including chain of custody documentation, for review and acceptance before:

1. Requesting the Engineer's signature on the waste profile requested by the disposal facility
2. Requesting the Engineer obtain an EPA ID no. for disposal
3. Removing the residue from the site

**United States Environmental Protection Agency Identification Number Request:** Submit a request for the U.S. EPA ID no. when the Engineer accepts analytical test results documenting that residue from removal of yellow thermoplastic and yellow painted traffic stripe and pavement marking is a hazardous waste.

**Disposal Documentation:** Submit receiving landfill documentation of proper disposal within 5 business days of residue transport from the project.

## CONSTRUCTION

Where grinding or other approved methods are used to remove yellow thermoplastic and yellow painted traffic stripe and pavement marking that will produce a hazardous waste residue, the removed residue, including dust, must be contained and collected immediately. Use a HEPA filter-equipped vacuum attachment operated concurrently with the removal operations or other equally effective approved methods for collection of the residue.

Store hazardous waste residue in labeled and covered containers. Labels must comply with the provisions of 22 CA Code of Regs §§66262.31 and 66262.32. Mark labels with:

1. Date the hazardous waste is generated
2. The words "Hazardous Waste"
3. Composition and physical state of the hazardous waste (for example, asphalt grindings with thermoplastic or paint)
4. The word "Toxic"
5. Name, address, and telephone no. of the Engineer
6. Contract no.
7. Contractor or subcontractor name

Use metal containers approved by the U.S. Department of Transportation for the transportation and temporary storage of the removed residue. Handle the containers such that no spillage occurs. Store containers in a secured enclosure. Acceptable secure enclosures include a locked chain link fenced area or a lockable shipping container located within the project limits until disposal as approved.

Make necessary arrangements to test the yellow thermoplastic and yellow paint hazardous waste residue as required by the disposal facility and these special provisions. Testing must include, at a minimum:

1. Total lead by EPA Method 6010C
2. Total chromium by US EPA Method 7000 series
3. Soluble lead by California Waste Extraction Test
4. Soluble chromium by California Waste Extraction Test
5. Soluble lead by Toxicity Characteristic Leaching Procedure
6. Soluble chromium by Toxicity Characteristic Leaching Procedure

From the 1st 220 gallons of hazardous waste or portion thereof if less than 220 gallons of hazardous waste are produced, a minimum of 4 randomly selected samples must be taken and analyzed individually. Samples must not be composited. From each additional 880 gallons of hazardous waste or portion thereof if less than 880 gallons are produced, a minimum of 1 additional random sample must be taken and analyzed. Use chain of custody procedures consistent with Chapter 9 of U.S. EPA Test Methods for Evaluating Solid Waste, Physical/Chemical Methods (SW-846) while transporting samples from the project to the laboratory. Each sample must be homogenized before analysis by the laboratory performing the analyses. A sample aliquot sufficient to cover the amount necessary for the total and the soluble analyses must then be taken. This aliquot must be homogenized a 2nd time and the total and soluble analyses run on this aliquot. The homogenization process must not include grinding of the samples. Submit the name and location of the disposal facility that will be accepting the hazardous waste and the analytical laboratory along with the testing requirements not less than 5 business days before the start of removal of yellow thermoplastic and yellow painted traffic stripe and pavement marking. The analytical laboratory must be certified by the CA Department of Public Health Environmental Laboratory Accreditation Program for all analyses to be performed.

After the Engineer accepts the analytical test results, dispose of yellow thermoplastic and yellow paint hazardous waste residue at a Class I disposal facility located in CA under the requirements of the disposal facility operator within 30 days after accumulating 220 pounds of residue and dust.

If less than 220 pounds of hazardous waste residue and dust is generated in total, it must be disposed of within 30 days after the start of accumulation of the residue and dust.

Use a hazardous waste manifest and a transporter registered with the CA Department of Toxic Substance Control. The Engineer will obtain the U.S. EPA ID no. and will sign all manifests as the generator within 2 business days of receiving and accepting the analytical test results and receiving your request for the U.S. EPA ID no.

If analytical test results demonstrate that the residue is a non-hazardous waste and the Engineer agrees, dispose of the residue at an appropriately permitted Class II or Class III facility under Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

## MEASUREMENT AND PAYMENT

The contract price paid per linear foot for remove yellow thermoplastic traffic stripe and remove yellow painted traffic stripe or per square foot for remove yellow thermoplastic pavement marking and remove yellow painted pavement marking includes full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all of the work involved in removal, containment, storage, and disposal, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

Full compensation for (1) work plan for the removal, containment, storage, and disposal of yellow thermoplastic and yellow painted traffic stripe and pavement marking hazardous waste residue, (2) analytical test results, (3) US EPA ID no. request, and (4) receiving landfill documentation of proper disposal are included in the contract prices paid per linear foot for remove yellow thermoplastic traffic stripe and remove yellow painted traffic stripe or per square foot for remove yellow thermoplastic pavement marking and remove yellow painted pavement marking and no separate payment will be made therefor.

Additional disposal costs for hazardous waste residue regulated under RCRA, as determined by test results, will be paid for as extra work as specified in Section 4-1.03D, "Extra Work," of the Standard Specifications.

If analytical test results demonstrate that the residue is a non-hazardous waste and the Engineer agrees to disposal at a non-hazardous waste disposal facility, no cost adjustment will be made.

### 10-1.25 TREATED WOOD WASTE

#### GENERAL

##### Summary

This work includes handling, storing, transporting, and disposing of treated wood waste.

Wood removed from metal beam guard railing and roadside sign is treated with one or more of the following:

1. Creosote
2. Pentachlorophenol
3. Copper azole
4. Copper boron azole
5. Chromated copper arsenate
6. Ammoniacal copper zinc arsenate
7. Copper naphthenate
8. Alkaline copper quaternary

Manage treated wood waste under Title 22 CA Code of Regulations, Division 4.5, Chapter 34.

##### Submittals

For disposal of treated wood waste submit a copy of each completed shipping record and weight receipt to the Engineer within 5 business days of disposal.

#### CONSTRUCTION

Provide training to personnel who handle treated wood waste or may come in contact with treated wood waste that includes:

1. All applicable requirements of Title 8 CA Code of Regulations
2. Procedures for identifying and segregating treated wood waste
3. Safe handling practices
4. Requirements of Title 22 CA Code of Regulations, Division 4.5, Chapter 34
5. Proper disposal methods

Store treated wood waste before disposal using any of the following methods:

1. Elevate on blocks above a reasonably foreseeable run-on elevation and protect from precipitation
2. Place in water-resistant containers designed for shipping or solid waste collection
3. Place on a containment surface protected from run-on and precipitation

Prevent unauthorized access to treated wood waste using a secured enclosure such as a locked chain link fenced area or a lockable shipping container located within the project limits.

Resize and segregate treated wood waste at a location where debris from the operation including sawdust and chips can be contained. Collect and manage the debris as treated wood waste.

Provide water-resistant labels, that comply with Title 22 CA Code of Regulations, Division 4.5, Chapter 34, § 67386.5, to clearly mark and identify treated wood waste and accumulation areas. Labels must include:

1. Caltrans, District number, Construction, contract number
2. District office address
3. Engineer's name, address, and telephone number
4. Contractor's contact name and telephone number

Before transporting treated wood waste, obtain agreement from the receiving facility that the treated wood waste will be accepted. Protect shipments of treated wood waste from loss and exposure to precipitation. Request a generator identification number from the Engineer at least 5 business days before the first shipment. Each shipment must be accompanied by a shipping record such as a manifest or bill of lading that includes:

1. Caltrans with district number
2. Construction contract number
3. District office address
4. Engineer name, address, and telephone number
5. Contractor contact name and telephone number
6. Receiving facility name and address
7. Waste description: Treated wood waste (preservative type if known or unknown/mixture)
8. Project location
9. Estimated quantity of shipment by weight or volume
10. Date of transport
11. Date of receipt by the receiving treated wood waste facility
12. Weight of shipment as measured by the receiving treated wood waste facility
13. Generator identification number

The shipping record must be at least a 4-part carbon or carbonless 8-1/2" x 11" form to allow retention of copies by the Engineer, transporter, and disposal facility.

Dispose of treated wood waste in an approved treated wood waste facility. A list of currently approved treated wood waste facilities may be viewed at:

[http://www.dtsc.ca.gov/HazardousWaste/upload/TWW\\_Confirmed\\_Landfill\\_List.pdf](http://www.dtsc.ca.gov/HazardousWaste/upload/TWW_Confirmed_Landfill_List.pdf)

Dispose of treated wood waste within:

1. 90 days of generation if stored on blocks
2. 90 days of filling a container if containerized
3. 180 days of generation if stored on a containment surface

#### **MEASUREMENT AND PAYMENT**

Full compensation for handling, storing, transporting, and disposing treated wood waste, including personnel training, is included in the contract price paid per linear foot for metal beam guard railing and per unit for roadside sign and no additional compensation will be allowed therefor.

#### **10-1.26 EXISTING HIGHWAY FACILITIES**

The work performed in connection with various existing highway facilities shall conform to the provisions in Section 15, "Existing Highway Facilities," of the Standard Specifications and these special provisions.

#### **EARTH MATERIAL CONTAINING LEAD**

##### **General**

This work includes handling earth material containing lead under the Standard Specifications and these special provisions.

##### **Submittals**

Submit a lead compliance plan under Section 7-1.07, "Lead Compliance Plan," of the Standard Specifications.

**Project Conditions**

Lead is present in earth material within the project limits at average concentrations below 1,000 mg/kg total lead and below 5 mg/l soluble lead. Earth material within the project limits:

- 1. Is not a hazardous waste
- 2. Does not require disposal at a permitted landfill or solid waste disposal facility

Lead is typically found within the top 2 feet of material in unpaved areas of the highway. Reuse all excavated earth material within the project limits.

**Construction**

Handle earth material containing lead under all applicable laws, rules, and regulations, including those of the following agencies:

- 1. Cal/OSHA
- 2. CA Regional Water Quality Control Board, Region 8 – Santa Ana
- 3. CA Department of Toxic Substances Control

Manage earth material as shown in the following table.

**Earth Material Management**

Location	Depth	Management requirements
“M” 372+36.98 To “D” 405+18.37	Vary from 0.5 ft to 4 ft	Reuse all earth material within project limits

**Measurement and Payment**

Full compensation for handling earth material containing lead is included in the contract price paid per cubic yard for roadway excavation, and no additional compensation will be allowed therefor.

**REMOVE METAL BEAM GUARD RAILING**

Existing metal beam guard railing, where shown on the plans to be removed, shall be removed and disposed of.

Existing concrete anchors or steel foundation tubes shall be completely removed and disposed of. Full compensation for removing concrete anchors shall be considered as included in the contract price paid per linear foot for remove metal beam guard railing and no separate payment will be made therefor.

Full compensation for removing cable anchor assemblies, terminal anchor assemblies or steel foundation tubes shall be considered as included in the contract price paid per linear foot for remove metal beam guard railing and no separate payment will be made therefor.

**REMOVE PAVEMENT MARKER**

Existing pavement markers, including underlying adhesive, when no longer required for traffic lane delineation as determined by the Engineer, shall be removed and disposed of.

**REMOVE TRAFFIC STRIPE AND PAVEMENT MARKING**

This work includes removing existing traffic stripe and pavement marking at the locations shown on the plans.

Submit a lead compliance plan under Section 7-1.07, "Lead Compliance Plan," of the Standard Specifications.

Waste residue from removal of thermoplastic and painted traffic stripe and pavement marking is a non-hazardous waste residue and contains lead in average concentrations less than 1000 mg/kg total lead and 5 mg/L soluble lead. This waste residue does not contain heavy metals in concentrations that exceed thresholds established by the Health and Safety Code and 22 CA Code of Regs and is not regulated under the Federal Resource Conservation and Recovery Act (RCRA), 42 USC § 6901 et seq.

### **REMOVE ASPHALT CONCRETE DIKE**

Existing asphalt concrete dike, where shown on the plans to be removed, shall be removed.

Prior to removing the dike, the outside edge of the asphalt concrete to remain in place shall be cut on a neat line to a minimum depth of 0.17-foot.

The dike shall be removed in such a manner that the surfacing which is to remain in place is not damaged.

The dike shall be disposed of outside the highway right of way in conformance with the provisions in Section 7-1.13 of the Standard Specifications.

### **REMOVE ROADSIDE SIGN**

Existing roadside signs, at those locations shown on the plans to be removed, shall be removed and disposed of.

Existing roadside signs shall not be removed until replacement signs have been installed or until the existing signs are no longer required for the direction of public traffic, unless otherwise directed by the Engineer.

### **RELOCATE ROADSIDE SIGN**

Existing roadside signs shall be removed and relocated to the new locations shown on the plans.

Each roadside sign shall be installed at the new location on the same day that the sign is removed from its original location.

Two holes shall be drilled in each existing post as required to provide the breakaway feature shown on the plans.

### **REMOVE CONCRETE**

Concrete, where shown on the plans to be removed, shall be removed.

Removing concrete curb will be measured by the linear foot, measured along the curb, barrier or sidewalk before removal operations.

Concrete removed shall be disposed of outside the highway right of way in conformance with the provisions in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

### **10-1.27 CLEARING AND GRUBBING**

Clearing and grubbing shall conform to the provisions in Section 16, "Clearing and Grubbing," of the Standard Specifications and these special provisions.

Vegetation shall be cleared and grubbed only within the excavation and embankment slope lines.

### **10-1.28 EARTHWORK**

Earthwork shall conform to the provisions in Section 19, "Earthwork," of the Standard Specifications and these special provisions.

Surplus excavated material shall become the property of the Contractor and shall be disposed of in conformance with the provisions in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

Where a portion of the existing surfacing is to be removed, the outline of the area to be removed shall be cut on a neat line with a power-driven saw to a minimum depth of 0.17-foot before removing the surfacing. Full compensation for cutting the existing surfacing shall be considered as included in the contract price paid per cubic yard for roadway excavation and no additional compensation will be allowed therefor.

Reinforcement or metal attached to reinforced concrete rubble placed in embankments shall not protrude above the grading plane. Prior to placement within 2 feet below the grading plane of embankments, reinforcement or metal shall be trimmed to no greater than 3/4 inch from the face of reinforced concrete rubble. Full compensation for trimming reinforcement or metal shall be considered as included in the contract prices paid per cubic yard for the types of excavation shown in the Engineer's estimate, or the contract prices paid for furnishing and placing imported borrow or embankment material, as the case may be, and no additional compensation will be allowed therefor.

### **10-1.29 CONTROLLED LOW STRENGTH MATERIAL**

Controlled low strength material shall consist of a workable mixture of aggregate, cementitious materials, and water and shall conform to the provisions for slurry cement backfill in Section 19-3.062, "Slurry Cement Backfill," of the Standard Specifications and these special provisions.

At the option of the Contractor, controlled low strength material may be used as structure backfill for pipe culverts, except that controlled low strength material shall not be used as structure backfill for culverts having a diameter or span greater than 20 feet.

When controlled low strength material is used for structure backfill, the width of the excavation shown on the plans may be reduced so that the clear distance between the outside of the pipe and the side of the excavation, on each side of the pipe, is a minimum of 12 inches. This minimum may be reduced to 6 inches when the height of cover is less than or equal to 20 feet or the pipe diameter or span is less than 42 inches.

Controlled low strength material in new construction shall not be permanently placed higher than the basement soil. For trenches in existing pavements, permanent placement shall be no higher than the bottom of the existing pavement permeable drainage layer. If a drainage layer does not exist, permanent placement in existing pavements shall be no higher than one inch below the bottom of the existing asphalt concrete surfacing or no higher than the top of base below the existing portland cement concrete pavement. The minimum height that controlled low strength material shall be placed, relative to the culvert invert, is 0.5 diameter or 0.5 height for rigid culverts and 0.7 diameter or 0.7 height for flexible culverts.

When controlled low strength material is proposed for use, the Contractor shall submit a mix design and test data to the Engineer for approval prior to excavating the trench for which controlled low strength material is proposed for use. The test data and mix design shall provide for the following:

- A. A 28-day compressive strength between 50 pounds per square inch and 100 pounds per square inch for pipe culverts having a height of cover of 20 feet or less and a minimum 28-day compressive strength of 100 pounds per square inch for pipe culverts having a height of cover greater than 20 feet. Compressive strength shall be determined in conformance with the requirements in ASTM Designation: D 4832.
- B. Cement shall be any type of portland cement conforming to the requirements in ASTM Designation: C 150; or any type of blended hydraulic cement conforming to the requirements in ASTM Designation: C 595M or the physical requirements in ASTM Designation: C 1157M. Testing of cement will not be required.
- C. Admixtures may be used in conformance with the provisions in Section 90-4, "Admixtures," of the Standard Specifications. Chemical admixtures containing chlorides as Cl in excess of one percent by weight of admixture, as determined in conformance with the requirements of California Test 415, shall not be used. If an air-entraining admixture is used, the maximum air content shall be limited to 20 percent. Mineral admixtures shall be used at the Contractor's option.

Materials for controlled low strength material shall be thoroughly machine-mixed in a pugmill, rotary drum or other approved mixer. Mixing shall continue until the cementitious material and water are thoroughly dispersed throughout the material. Controlled low strength material shall be placed in the work within 3 hours after introduction of the cement to the aggregates.

When controlled low strength material is to be placed within the traveled way or otherwise to be covered by paving or embankment materials, the material shall achieve a maximum indentation diameter of 3 inches prior to covering and opening to public traffic. Penetration resistance shall be measured in conformance with the requirements in ASTM Designation: D 6024.

Controlled low strength material used as structure backfill for pipe culverts will be considered structure backfill for compensation purposes.

### **10-1.30 TRANSPLANT PALM TREES**

Transplanting palm trees shall conform to the provisions in Section 20-4, "Highway Planting," of the Standard Specifications and these special provisions.

Palm trees to be transplanted shall be removed and either stored or transplanted at the new locations prior to performing other work within the location of the palm trees.

When the palm trees are removed and the work within the areas to which the trees are to be transplanted is not completed to the stage at which the trees can be planted, the trees shall be stored and maintained until transplanting can be completed. In other cases, the palm trees shall be planted at the new locations the same day the palm trees are removed.

Transplanting palm trees shall be performed between March 15 and October 15 unless otherwise directed by the Engineer.

Before each palm tree is planted, dead fronds and frond stubs shall be removed from the trunk. In addition, green fronds shall be removed up to 2 rows of fronds away from the center growth. The 2 remaining rows of fronds shall be tied in an upright position with light hemp or manila rope. Fronds and frond stubs for *Phoenix dactylifera* (Date Palm) shall be removed approximately 4 inches from the trunk. Other fronds and frond stubs shall be removed at the trunk in a manner that will not injure the tree trunk.

The roots of each palm tree or clump of palm trees shall be balled in a manner approved by the Engineer. Approval shall be obtained before removing any palm tree to be transplanted. The diameter and depth of each root ball shall be a minimum of 8 inches larger than the trunk diameter at the ground line. Exposed root balls shall be kept covered with wet burlap or canvas until the trees are planted.

Holes resulting from the removal of transplanted palm trees shall be backfilled the same day the trees are removed. Soil from the surrounding area may be used to backfill the holes. The backfill shall be mounded slightly above the surrounding ground level.

Palm trees shall not be dragged during transplanting operations and the trunks shall be protected from injury.

Each planting hole shall conform to the details shown on the plans.

Commercial fertilizer (packet) shall be slow or controlled release and shall be in a biodegradable packet form. The packet shall gradually release nutrients over a 12-month period. Each packet shall have a weight of 10 g ± 1 g and shall have the following guaranteed chemical analysis:

Ingredient	Percentage
Nitrogen	20
Phosphoric Acid	10
Water Soluble Potash	5

Backfill material for the palm tree planting holes shall be 100 percent washed plaster sand.

After the planting holes have been backfilled, water shall be applied to the full depth of the backfill soil.

Watering basins for the transplanted palm trees shall be constructed as shown on the plans.

When the palm trees are planted, a root stimulant, approved by the Engineer, shall be applied to the roots of each palm tree in conformance with the printed instructions of the root stimulant manufacturer. A copy of the printed instructions shall be furnished to the Engineer before applying a stimulant. Root stimulant to be used shall be submitted to the Engineer not less than 2 weeks prior to the stimulant's intended use. Root stimulants not approved by the Engineer shall not be used.

Palm trees to be transplanted shall be maintained by the Contractor from the time the palm trees are removed to the time of acceptance of the contract, provided however, that the contract will not be accepted unless the trees have been satisfactorily maintained for at least 125 working days after transplanting has been completed. The palm trees shall be watered as necessary to maintain the trees in a healthy condition. Trash, debris and weeds within the basins, including the basin walls, shall be removed and disposed of in conformance with the provisions in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications. Weeds shall be removed before the weeds exceed 2 inches in length. Pesticides to be used for weed control shall be submitted to the Engineer not less than 2 weeks prior to the pesticide's intended use. Pesticides not approved by the Engineer shall not be used.

The provisions specified in Section 20-4.07, "Replacement," of the Standard Specifications for the replacement of unsuitable plants shall apply to transplanted palm trees. The replacement palm tree for each unsuitable transplanted palm tree shall be the same size and species as the palm tree being replaced. Each replacement palm tree shall be planted in the planting hole of the unsuitable palm tree which the new tree is replacing. The method for planting replacement palm trees shall be as specified in this section for transplanting palm trees. Removed unsuitable transplanted palm trees shall be disposed of in conformance with the provisions in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

The contract lump sum price paid for transplant palm tree shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in transplanting palm trees, including mulch, complete in place, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

### 10-1.31 AGGREGATE SUBBASE

Aggregate subbase must comply with Section 25, "Aggregate Subbases," of the Standard Specifications and these special provisions.

Aggregate subbase must be Class 2.

Do not store reclaimed asphalt concrete or aggregate subbase with reclaimed asphalt concrete within 100 feet measured horizontally of any culvert, watercourse, or bridge.

### 10-1.32 HOT MIX ASPHALT

#### GENERAL

##### Summary

This work includes producing and placing hot mix asphalt (HMA) Type A using the Standard process. Comply with Section 39, "Hot Mix Asphalt," of the Standard Specifications.

#### MATERIALS

##### Asphalt Binder

The grade of asphalt binder mixed with aggregate for HMA Type A must be PG 64-10.

### **Aggregate**

The aggregate for HMA Type A must comply with the ¾ inch grading.

## **CONSTRUCTION**

### **Vertical Joints**

Before opening the lane to public traffic, pave shoulders and median borders adjacent to a lane being paved. Do not leave a vertical joint more than 0.15 foot high between adjacent lanes open to public traffic.

### **Conform Tapers**

Place shoulder conform tapers concurrently with the adjacent lane's paving.

Place additional HMA along the pavement's edge to conform to road connections and private drives. Hand rake, if necessary, and compact the additional HMA to form a smooth conform taper.

## **10-1.33 RUBBERIZED HOT MIX ASPHALT (GAP GRADED)**

### **GENERAL**

#### **Summary**

This work includes producing and placing rubberized hot mix asphalt (gap graded) (RHMA-G) using the Standard process.

Comply with Section 39, "Hot Mix Asphalt," of the Standard Specifications.

### **MATERIALS**

#### **Asphalt Binder**

Asphalt binder mixed with asphalt modifier and crumb rubber modifier (CRM) for asphalt rubber binder must be PG 64-16.

### **Aggregate**

The aggregate for RHMA-G must comply with the ¾ inch grading.

#### **Asphalt Rubber Binder Content**

Determine the amount of asphalt rubber binder to be mixed with the aggregate for RHMA-G under California Test 367 except:

1. Determine the specific gravity used in California Test 367, Section B, "Void Content of Specimen," using California Test 308, Method A.
2. California Test 367, Section C, "Optimum Bitumen Content," is revised as follows:
  - 2.1. Base the calculations on the average of 3 briquettes produced at each asphalt rubber binder content.
  - 2.2. Use California Test 309 to determine theoretical maximum specific gravity and density of the RHMA-G.
  - 2.3. Plot asphalt rubber binder content versus average air voids content based on California Test 309 for each set of three specimens on Form TL-306 (Figure 3), and connect adjacent points with a best-fit curve.
  - 2.4. Plot asphalt rubber binder content versus average Hveem stability for each set of three specimens and connect adjacent points with a best-fit curve.
  - 2.5. Calculate voids in mineral aggregate (VMA) and voids filled with asphalt (VFA) for each specimen, average each set, and plot the average versus asphalt rubber binder content.
  - 2.6. Calculate the dust proportion and plot versus asphalt rubber binder content.
  - 2.7. From the curve plotted in Step 2.3, select the theoretical asphalt rubber binder content that has 5% percent air voids.
  - 2.8. At the selected asphalt rubber binder content, evaluate corresponding voids in mineral aggregate, voids filled with asphalt, and dust proportion to verify compliance with requirements. If necessary, develop an alternate composite aggregate gradation to conform to the RHMA-G requirements.
  - 2.9. Record the asphalt rubber binder content in Step 2.7 as the Optimum Bitumen Content (OBC).
  - 2.10. To establish a recommended range, use the OBC as the high value and 0.3 percent less as the low value. Notwithstanding, the recommended range must not extend below 7.0 percent. If the OBC is 7.0 percent, then there is no recommended range, and 7.0 percent is the recommended value.

3. Laboratory mixing and compaction must comply with California Test 304, except the mixing temperature of the aggregate must be between 300 °F and 325 °F. The mixing temperature of the asphalt-rubber binder must be between 375 °F and 425 °F. The compaction temperature of the combined mixture must be between 290 °F and 300 °F.

## **CONSTRUCTION**

### **Vertical Joints**

Before opening the lane to public traffic, pave shoulders and median borders adjacent to a lane being paved. Do not leave a vertical joint more than 0.15 foot high between adjacent lanes open to public traffic.

### **Conform Tapers**

Place shoulder conform tapers concurrently with the adjacent lane's paving.

Place additional RHMA-G along the pavement's edge to conform to road connections and private drives. Hand rake, if necessary, and compact the additional RHMA-G to form a smooth conform taper.

## **10-1.34 PILING**

### **GENERAL**

Piling shall conform to the provisions in Section 49, "Piling," of the Standard Specifications, and these special provisions.

Unless otherwise specified, welding of any work performed in conformance with the provisions in Section 49, "Piling," of the Standard Specifications, shall be in conformance with the requirements in AWS D1.1.

Difficult pile installation is anticipated due to the requirements of traffic control.

When a calculated nominal driving resistance is shown on the plans for piling, that value shall be utilized in lieu of nominal resistance in Section 49, "Piling," of the Standard Specifications, the plans, and these special provisions.

## **CAST-IN-DRILLED-HOLE CONCRETE PILES**

### **GENERAL**

#### **Summary**

Cast-in-drilled-hole (CIDH) concrete piling shall conform to the provisions in Section 49-4, "Cast-In-Place Concrete Piles," of the Standard Specifications and these special provisions.

The provisions of "Welding" of these special provisions shall not apply to temporary steel casings.

### **SUBMITTALS**

#### **Pile Installation Plan**

The Contractor shall submit a pile installation plan to the Engineer for approval for all CIDH concrete piling. The pile installation plan shall be submitted at least 15 days before constructing CIDH concrete piling and shall include complete descriptions, details, and supporting calculations for the following:

- A. Concrete mix design, certified test data, and trial batch reports.
- B. Drilling or coring methods and equipment.
- C. Proposed method for casing installation and removal when necessary.
- D. Plan view drawing of pile showing reinforcement. Include inspection pipes on the drawing if inspection pipes are required.
- E. Methods for placing, positioning, and supporting bar reinforcement.
- F. Methods and equipment for determining the depth of concrete and actual and theoretical volume placed, including effects on volume of concrete when any casings are withdrawn.
- G. Methods and equipment for verifying that the bottom of the drilled hole is clean before placing concrete.
- H. Methods and equipment for preventing upward movement of reinforcement, including the Contractor's means of detecting and measuring upward movement during concrete placement operations.

#### **Aggregate Grading**

The combined aggregate grading shall be either the 1-inch maximum grading, the 1/2-inch maximum grading, or the 3/8-inch maximum grading and shall conform to the requirements in Section 90-3, "Aggregate Gradings," of the Standard Specifications.

All provisions for CIDH concrete piling shall apply to replacement piles.

### **10-1.35 CONCRETE STRUCTURES**

Portland cement concrete structures shall conform to the provisions in Section 51, "Concrete Structures," of the Standard Specifications and these special provisions.

### **10-1.36 STEEL STRUCTURES**

Construction of steel structures shall conform to the provisions in Section 55, "Steel Structures," of the Standard Specifications and these special provisions.

Attention is directed to "Welding" in Section 8, "Materials," of these special provisions.

### **MATERIALS**

Structural steel rolled shapes used in electricity lighting standards shall conform to the Charpy V-notch impact values specified for steel plate in Section 55-2, "Materials," of the Standard Specifications.

High-strength fastener assemblies and other bolts attached to structural steel with nuts and washers shall be zinc coated. When direct tension indicators are used in these assemblies, the direct tension indicator and all components of the fastener assembly shall be zinc coated by the mechanical deposition process.

### **ROTATIONAL CAPACITY TESTING PRIOR TO SHIPMENT TO JOB SITE**

Rotational capacity tests shall be performed on all lots of high-strength fastener assemblies prior to shipment of these lots to the project site. Zinc-coated assemblies shall be tested after all fabrication, coating, and lubrication of components has been completed. One hardened washer shall be used under each nut for the tests.

The requirements of this section do not apply to high-strength cap screws or high-strength bolts used for slip base plates.

Each combination of bolt production lot, nut lot, and washer lot shall be tested as an assembly.

A rotational capacity lot number shall be assigned to each combination of lots tested. Each shipping unit of fastener assemblies shall be plainly marked with the rotational capacity lot number.

Two fastener assemblies from each rotational capacity lot shall be tested.

The following equipment, procedure, and acceptance criteria shall be used to perform rotational capacity tests on and determine acceptance of long bolts. Fasteners are considered to be long bolts when full nut thread engagement can be achieved when installed in a bolt tension measuring device:

#### **A. Long Bolt Test Equipment:**

1. Calibrated bolt tension measuring device with adequate tension capacity for the bolts being tested.
2. Calibrated dial or digital torque wrench. Other suitable tools will be required for performing Steps 7 and 8 of the Long Bolt Test Procedure. A torque multiplier may be required for large diameter bolts.
3. Spacer washers or bushings. When spacer washers or bushings are required, they shall have the same inside diameter and equal or larger outside diameter as the appropriate hardened washers conforming to the requirements in ASTM Designation: F 436.
4. Steel beam or member, such as a girder flange or cross frame, to which the bolt tension measuring device will be attached. The device shall be accessible from the ground.

#### **B Long Bolt Test Procedure:**

1. Measure the bolt length. The bolt length is defined as the distance from the end of the threaded portion of the shank to the underside of the bolt head.
2. Install the nut on the bolt so that 3 to 5 full threads of the bolt are located between the bearing face of the nut and the underside of the bolt head. Measure and record the thread stickout of the bolt. Thread stickout is determined by measuring the distance from the outer face of the nut to the end of the threaded portion of the shank.
3. Insert the bolt into the bolt tension measuring device and install the required number of washers, and additional spacers as needed, directly beneath the nut to produce the thread stickout measured in Step 2 of this procedure.
4. Tighten the nut using a hand wrench to a snug-tight condition. The snug tension shall not be less than the Table A value but may exceed the Table A value by a maximum of 2 kips.

Table A

High-Strength Fastener Assembly Tension Values to Approximate Snug-Tight Condition	
Bolt Diameter (inches)	Snug Tension (kips)
1/2	1
5/8	2
3/4	3
7/8	4
1	5
1-1/8	6
1-1/4	7
1-3/8	9
1-1/2	10

5. Match-mark the assembly by placing a heavy reference start line on the face plate of the bolt tension measuring device which aligns with (1) a mark placed on one corner of the nut and (2) a radial line placed across the flat on the end of the bolt or on the exposed portions of the threads of tension control bolts. Place an additional mark on the outside of the socket that overlays the mark on the nut corner such that this mark will be visible while turning the nut. Make an additional mark on the face plate, either 2/3 of a turn, one turn, or 1-1/3 turn clockwise from the heavy reference start line, depending on the bolt length being tested as shown in Table B.

Table B

Required Nut Rotation for Rotational Capacity Tests <sup>(a) (b)</sup>	
Bolt Length (measured in Step 1)	Required Rotation (turn)
4 bolt diameters or less	2/3
Greater than 4 bolt diameters but no more than 8 bolt diameters	1
Greater than 8 bolt diameters, but no more than 12 bolt diameters <sup>(c)</sup>	1-1/3

(a) Nut rotation is relative to bolt, regardless of the element (nut or bolt) being turned. For bolts installed by 1/2 turn and less, the tolerance shall be plus or minus 30 degrees; for bolts installed by 2/3 turn and more, the tolerance shall be plus or minus 45 degrees.

(b) Applicable only to connections in which all material within grip of the bolt is steel.

(c) When bolt length exceeds 12 diameters, the required rotation shall be determined by actual tests in a suitable tension device simulating the actual conditions.

6. Turn the nut to achieve the applicable minimum bolt tension value listed in Table C. After reaching this tension, record the moving torque, in foot-pounds, required to turn the nut, and also record the corresponding bolt tension value in pounds. Torque shall be measured with the nut in motion. Calculate the value, T, where  $T = [(the\ measured\ tension\ in\ pounds) \times (the\ bolt\ diameter\ in\ inches) / 48]$ .

Table C

Minimum Tension Values for High-Strength Fastener Assemblies	
Bolt Diameter (inches)	Minimum Tension (kips)
1/2	12
5/8	19
3/4	28
7/8	39
1	51
1-1/8	56
1-1/4	71
1-3/8	85
1-1/2	103

7. Turn the nut further to increase bolt tension until the rotation listed in Table B is reached. The rotation is measured from the heavy reference line made on the face plate after the bolt was snug-tight. Record this bolt tension.

8. Loosen and remove the nut and examine the threads on both the nut and bolt.

C. Long Bolt Acceptance Criteria:

1. An assembly shall pass the following requirements to be acceptable: (1) the measured moving torque (Step 6) shall be less than or equal to the calculated value, T (Step 6), (2) the bolt tension measured in Step 7 shall be greater than or equal to the applicable turn test tension value listed in Table D, (3) the nut shall be able to be removed from the bolt without signs of thread stripping or galling after the required rotation in Step 7 has been achieved, (4) the bolt does not shear from torsion or fail during the test, and (5) the assembly does not seize before the final rotation in Step 7 is reached. Elongation of the bolt in the threaded region between the bearing face of the nut and the underside of the bolt head is expected and will not be considered a failure. Both fastener assemblies tested from one rotational capacity lot shall pass for the rotational capacity lot to be acceptable.

Table D

Turn Test Tension Values	
Bolt Diameter (inches)	Turn Test Tension (kips)
1/2	14
5/8	22
3/4	32
7/8	45
1	59
1-1/8	64
1-1/4	82
1-3/8	98
1-1/2	118

The following equipment, procedure, and acceptance criteria shall be used to perform rotational capacity tests on and determine acceptance of short bolts. Fasteners are considered to be short bolts when full nut thread engagement cannot be achieved when installed in a bolt tension measuring device:

A. Short Bolt Test Equipment:

1. Calibrated dial or digital torque wrench. Other suitable tools will be required for performing Steps 7 and 8 of the Short Bolt Test Procedure. A torque multiplier may be required for large diameter bolts.
2. Spud wrench or equivalent.
3. Spacer washers or bushings. When spacer washers or bushings are required, they shall have the same inside diameter and equal or larger outside diameter as the appropriate hardened washers conforming to the requirements in ASTM Designation: F 436.
4. Steel plate or girder with a hole to install bolt. The hole size shall be 1/16 inch greater than the nominal diameter of the bolt to be tested. The grip length, including any plates, washers, and additional spacers as needed, shall provide the proper number of threads within the grip, as required in Step 2 of the Short Bolt Test Procedure.

B. Short Bolt Test Procedure:

1. Measure the bolt length. The bolt length is defined as the distance from the end of the threaded portion of the shank to the underside of the bolt head.
2. Install the nut on the bolt so that 3 to 5 full threads of the bolt are located between the bearing face of the nut and the underside of the bolt head. Measure and record the thread stickout of the bolt. Thread stickout is determined by measuring the distance from the outer face of the nut to the end of the threaded portion of the shank.
3. Install the bolt into a hole on the plate or girder and install the required number of washers and additional spacers as needed between the bearing face of the nut and the underside of the bolt head to produce the thread stickout measured in Step 2 of this procedure.
4. Tighten the nut using a hand wrench to a snug-tight condition. The snug condition shall be the full manual effort applied to the end of a 12-inch long wrench. This applied torque shall not exceed 20 percent of the maximum allowable torque in Table E.

Table E

Maximum Allowable Torque for High-Strength Fastener Assemblies	
Bolt Diameter (inches)	Torque (ft-lb)
1/2	145
5/8	285
3/4	500
7/8	820
1	1220
1-1/8	1500
1-1/4	2130
1-3/8	2800
1-1/2	3700

5. Match-mark the assembly by placing a heavy reference start line on the steel plate or girder which aligns with (1) a mark placed on one corner of the nut and (2) a radial line placed across the flat on the end of the bolt or on the exposed portions of the threads of tension control bolts. Place an additional mark on the outside of the socket that overlays the mark on the nut corner such that this mark will be visible while turning the nut. Make 2 additional small marks on the steel plate or girder, one 1/3 of a turn and one 2/3 of a turn clockwise from the heavy reference start line on the steel plate or girder.
6. Using the torque wrench, tighten the nut to the rotation value listed in Table F. The rotation is measured from the heavy reference line described in Step 5 made after the bolt was snug-tight. A second wrench shall be used to prevent rotation of the bolt head during tightening. Measure and record the moving torque after this rotation has been reached. The torque shall be measured with the nut in motion.

Table F

Nut Rotation Required for Turn-of-Nut Installation <sup>(a),(b)</sup>	
Bolt Length (measured in Step 1)	Required Rotation (turn)
4 bolt diameters or less	1/3

- (a) Nut rotation is relative to bolt, regardless of the element (nut or bolt) being turned. For bolts installed by 1/2 turn and less, the tolerance shall be plus or minus 30 degrees.
- (b) Applicable only to connections in which all material within grip of the bolt is steel.

7. Tighten the nut further to the 2/3-turn mark as indicated in Table G. The rotation is measured from the heavy reference start line made on the plate or girder when the bolt was snug-tight. Verify that the radial line on the bolt end or on the exposed portions of the threads of tension control bolts is still in alignment with the start line.

Table G

Required Nut Rotation for Rotational Capacity Test	
Bolt Length (measured in Step 1)	Required Rotation (turn)
4 bolt diameters or less	2/3

8. Loosen and remove the nut and examine the threads on both the nut and bolt.

C. Short Bolt Acceptance Criteria:

1. An assembly shall pass the following requirements to be acceptable: (1) the measured moving torque from Step 6 shall be less than or equal to the maximum allowable torque from Table E, (2) the nut shall be able to be removed from the bolt without signs of thread stripping or galling after the required rotation in Step 7 has been achieved, (3) the bolt does not shear from torsion or fail during the test, and (4) the assembly shall not seize before the final rotation in Step 7 is reached. Elongation of the bolt in the threaded region between the bearing face of the nut and the underside of the bolt head will not be considered a failure. Both fastener assemblies tested from one rotational capacity lot shall pass for the rotational capacity lot to be acceptable.

## **INSTALLATION TENSION TESTING AND ROTATIONAL CAPACITY TESTING AFTER ARRIVAL ON THE JOB SITE**

Installation tension tests and rotational capacity tests on high-strength fastener assemblies shall be performed by the Contractor prior to acceptance or installation and after arrival of the fastener assemblies on the project site. Installation tension tests and rotational capacity tests shall be performed at the job site, in the presence of the Engineer, on each rotational capacity lot of fastener assemblies.

The requirements of this section do not apply to high-strength cap screws or high-strength bolts used for slip base plates.

Installation tension tests shall be performed on 3 representative fastener assemblies in conformance with the provisions in Section 8, "Installation," of the RCSC Specification. For short bolts, Section 8.2, "Pretensioned Joints," of the RCSC Specification shall be replaced by the "Pre-Installation Testing Procedures," of the "Structural Bolting Handbook," published by the Steel Structures Technology Center, Incorporated.

The rotational capacity tests shall be performed in conformance with the requirements for rotational capacity tests in "Rotational Capacity Testing Prior to Shipment to Job Site" of these special provisions.

At the Contractor's expense, additional installation tension tests, tests required to determine job inspecting torque, and rotational capacity tests shall be performed by the Contractor on each rotational capacity lot, in the presence of the Engineer, if:

1. Any fastener is not used within 3 months after arrival on the job site,
2. Fasteners are improperly handled, stored, or subjected to inclement weather prior to final tightening,
3. Significant changes are noted in original surface condition of threads, washers, or nut lubricant, or
4. The Contractor's required inspection is not performed within 48 hours after all fasteners in a joint have been tensioned.

Failure of a job-site installation tension test or a rotational capacity test will be cause for rejection of unused fasteners that are part of the rotational capacity lot.

When direct tension indicators are used, installation verification tests shall be performed in conformance with Appendix Section X1.4 of ASTM Designation: F 959, except that bolts shall be initially tensioned to a value 5 percent greater than the minimum required bolt tension.

## **SEALING**

When zinc-coated tension control bolts are used, the sheared end of each fastener shall be completely sealed with non-silicone type sealing compound conforming to the provisions in Federal Specification TT-S-230, Type II. The sealant shall be gray in color and shall have a minimum thickness of 50 mils. The sealant shall be applied to a clean sheared surface on the same day that the splined end is sheared off.

## **WELDING**

Table 2.2 of AWS D1.5 is superseded by the following table:

Base Metal Thickness of the Thicker Part Joined, inches	Minimum Effective Partial Joint Penetration Groove Weld Size*, inches
Over 1/4 to 1/2 inclusive	3/16
Over 1/2 to 3/4 inclusive	1/4
Over 3/4 to 1-1/2 inclusive	5/16
Over 1-1/2 to 2-1/4 inclusive	3/8
Over 2-1/4 to 6 inclusive	1/2
Over 6	5/8

\* Except the weld size need not exceed the thickness of the thinner part

Dimensional details and workmanship for welded joints in tubular and pipe connections shall conform to the provisions in Part A, "Common Requirements of Nontubular and Tubular Connections," and Part D, "Specific Requirements for Tubular Connections," in Section 2 of AWS D1.1.

Backing for welds, subject to computed stresses, that is left in place in the completed structure shall be a single length. Backing shall be of the same material as the structural steel being welded. Single lengths of backing shall be obtained by using a continuous strip, or may consist of lengths of backing joined by full penetration butt welds. Butt welds in the backing material shall be subject to the same type and frequency of testing as specified for the type of joint in the material being joined. Butt welds in backing material shall be ground flush as necessary to obtain proper inspection and for proper fit-up in the welded joint with which the backing is to be used.

The requirement of conformance with AWS D1.5 shall not apply to work conforming to Section 56-1, "Overhead Sign Structures," or Section 86-2.04, "Standards, Steel Pedestals and Posts," of the Standard Specifications.

#### **10-1.37 ROADSIDE SIGNS**

Roadside signs shall be furnished and installed at the locations shown on the plans or where designated by the Engineer and in conformance with the provisions in Section 56-2, "Roadside Signs," of the Standard Specifications and these special provisions.

The Contractor shall furnish roadside sign panels in conformance with the provisions in "Furnish Sign" of these special provisions.

Wood posts shall be pressure treated after fabrication in conformance with the provisions in Section 58, "Preservative Treatment of Lumber, Timber and Piling," of the Standard Specifications and AWPAC Use Category System: UC4A, Commodity Specification A or B.

Type N (CA) marker panels mounted on a post with a roadside sign shall be considered to be sign panels and will not be paid for as markers.

#### **10-1.38 INSTALL SIGN PANEL ON EXISTING FRAME**

Sign panels shall be installed on existing frames at the locations shown on the plans or where designated by the Engineer and in conformance with the provisions in Section 56-1.06, "Sign Panels and Fastening Hardware," of the Standard Specifications and these special provisions.

The Contractor shall furnish sign panels in conformance with the provisions in "Furnish Sign" of these special provisions.

Existing sign panels, as shown on the plans, shall be salvaged or removed and disposed of as provided in Section 15, "Existing Highway Facilities," of the Standard Specifications.

Installing sign panels on existing frames will be measured by the square foot and the quantity to be paid for will be the total area, in square feet, of sign panels installed in place.

The contract price paid per square foot for install sign panel on existing frame shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in installing sign panels on existing frames, complete in place (including removing, salvaging, and disposing of existing sign panels), as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

#### **10-1.39 FURNISH SIGN**

Signs shall be fabricated and furnished in accordance with details shown on the plans, the Traffic Sign Specifications, and these special provisions.

Traffic Sign Specifications for California sign codes are available for review at:

<http://www.dot.ca.gov/hq/traffops/signtech/signdel/specs.htm>

Traffic Sign Specifications for signs referenced with Federal MUTCD sign codes can be found in Standard Highway Signs Book, administered by the Federal Highway Administration, which is available for review at:

[http://mutcd.fhwa.dot.gov/ser-shs\\_millennium.htm](http://mutcd.fhwa.dot.gov/ser-shs_millennium.htm)

Information on cross-referencing California sign codes with the Federal MUTCD sign codes is available at:

<http://www.dot.ca.gov/hq/traffops/signtech/signdel/specs.htm>

Temporary or permanent signs shall be free from blemishes that may affect the serviceability and detract from the general sign color and appearance when viewing during daytime and nighttime from a distance of 25 feet. The face of each finished sign shall be uniform, flat, smooth, and free of defects, scratches, wrinkles, gel, hard spots, streaks, extrusion marks, and air bubbles. The front, back, and edges of the sign panels shall be free of router chatter marks, burns, sharp edges, loose rivets, delaminated skins, excessive adhesive over spray and aluminum marks.

#### **QUALITY CONTROL FOR SIGNS**

The requirements of "Quality Control for Signs" in this section shall not apply to construction area signs.

No later than 14 days before sign fabrication, the Contractor shall submit a written copy of the quality control plan for signs to the Engineer for review. The Engineer will have 10 days to review the quality control plan. Sign fabrication shall not begin until the Engineer approves the Contractor's quality control plan in writing. The Contractor shall submit to the

Engineer at least 3 copies of the approved quality control plan. The quality control plan shall include, but not be limited to the following requirements:

- A. Identification of the party responsible for quality control of signs,
- B. Basis of acceptance for incoming raw materials at the fabrication facility,
- C. Type, method and frequency of quality control testing at the fabrication facility,
- D. List (by manufacturer and product name) of process colors, protective overlay film, retroreflective sheeting and black non-reflective film,
- E. Recommended cleaning procedure for each product, and
- F. Method of packaging, transport and storage for signs.

No legend shall be installed at the project site. Legend shall include letters, numerals, tildes, bars, arrows, route shields, symbols, logos, borders, artwork, and miscellaneous characters. The style, font, size, and spacing of the legend shall conform to the Standard Alphabets published in the FHWA Standard Highway Signs Book. The legend shall be oriented in the same direction in accordance with the manufacturer's orientation marks found on the retroreflective sheeting.

On multiple panel signs, legend shall be placed across joints without affecting the size, shape, spacing, and appearance of the legend. Background and legend shall be wrapped around interior edges of formed panel signs as shown on plans to prevent delamination.

The following notation shall be placed on the lower right side of the back of each sign where the notation will not be blocked by the sign post or frame:

- A. PROPERTY OF STATE OF CALIFORNIA,
- B. Name of the sign manufacturer,
- C. Month and year of fabrication,
- D. Type of retroreflective sheeting, and
- E. Manufacturer's identification and lot number of retroreflective sheeting.

The above notation shall be applied directly to the aluminum sign panels in 1/4-inch upper case letters and numerals by die-stamp and applied by similar method to the fiberglass reinforced plastic signs. Painting, screening, or engraving the notation will not be allowed. The notation shall be applied without damaging the finish of the sign.

Signs with a protective overlay film shall be marked with a dot of 3/8 inch in diameter. The dot placed on white border shall be black, while the dot placed on black border shall be white. The dot shall be placed on the lower border of the sign before application of the protective overlay film and shall not be placed over the legend and bolt holes. The application method and exact location of the dot shall be determined by the manufacturer of the signs.

For sign panels that have a minor dimension of 48 inches or less, no splice will be allowed in the retroreflective sheet except for the splice produced during the manufacturing of the retroreflective sheeting. For sign panels that have a minor dimension greater than 48 inches, only one horizontal splice will be allowed in the retroreflective sheeting.

Unless specified by the manufacturer of the retroreflective sheeting, splices in retroreflective sheeting shall overlap by a minimum of one inch. Splices shall not be placed within 2 inches from edges of the panels. Except at the horizontal borders, the splices shall overlap in the direction from top to bottom of the sign to prevent moisture penetration. The retroreflective sheeting at the overlap shall not exhibit a color difference under the incident and reflected light.

Signs exhibiting a significant color difference between daytime and nighttime shall be replaced immediately.

Repairing sign panels will not be allowed except when approved by the Engineer.

The Department will inspect signs at the Contractor's facility and delivery location, and in accordance with Section 6, "Control of Materials," of the Standard Specifications. The Engineer will inspect signs for damage and defects before and after installation.

Regardless of kind, size, type, or whether delivered by the Contractor or by a common carrier, signs shall be protected by thorough wrapping, tarping, or other methods to ensure that signs are not damaged by weather conditions and during transit. Signs shall be dry during transit and shipped on pallets, in crates, or tier racks. Padding and protective materials shall be placed between signs as appropriate. Finished sign panels shall be transported and stored by method that protects the face of signs from damage. The Contractor shall replace wet, damaged, and defective signs.

Signs shall be stored in dry environment at all times. Signs shall not rest directly on the ground or become wet during storage. Signs, whether stored indoor or outdoor, shall be free standing. In areas of high heat and humidity signs shall be stored in enclosed climate-controlled trailers or containers. Signs shall be stored indoor if duration of the storage will exceed 30 days.

Screen processed signs shall be protected, transported and stored as recommended by the manufacturer of the retroreflective sheeting.

When requested, the Contractor shall provide the Engineer test samples of signs and materials used at various stages of production. Sign samples shall be 12" x 12" in size with applied background, letter or numeral, and border strip.

The Contractor shall assume the costs and responsibilities resulting from the use of patented materials, equipment, devices, and processes for the Contractor's work.

### **SHEET ALUMINUM**

Alloy and temper designations for sheet aluminum shall be in accordance with ASTM Designation: B 209.

The Contractor shall furnish the Engineer a Certificate of Compliance in conformance with Section 6-1.07, "Certificates of Compliance," of the Standard Specifications for the sheet aluminum.

Sheet aluminum shall be pretreated in accordance to ASTM Designation: B 449. Surface of the sheet aluminum shall be cleaned, deoxidized, and coated with a light and tightly adherent chromate conversion coating free of powdery residue. The conversion coating shall be Class 2 with a weight between 10 milligrams per square foot and 35 milligrams per square foot, and an average weight of 25 milligrams per square foot. Following the cleaning and coating process, the sheet aluminum shall be protected from exposure to grease, oils, dust, and contaminants.

Sheet aluminum shall be free of buckles, warps, dents, cockles, burrs, and defects resulting from fabrication.

Base plate for standard route marker shall be die cut.

### **RETROREFLECTIVE SHEETING**

The Contractor shall furnish retroreflective sheeting for sign background and legend in conformance with ASTM Designation: D 4956 and "Prequalified and Tested Signing and Delineation Materials" of these special provisions.

Retroreflective sheeting shall be applied to sign panels as recommended by the retroreflective sheeting manufacturer without stretching, tearing, and damage.

Class 1, 3, or 4 adhesive backing shall be used for Type II, III, IV, VII, VIII, and IX retroreflective sheeting. Class 2 adhesive backing may also be used for Type II retroreflective sheeting. The adhesive backing shall be pressure sensitive and fungus resistant.

When the color of the retroreflective sheeting determined from instrumental testing is in dispute, the Engineer's visual test will govern.

### **PROCESS COLOR AND FILM**

The Contractor shall furnish and apply screened process color, non-reflective opaque black film, and protective overlay film of the type, kind, and product that are approved by the manufacturer of the retroreflective sheeting.

The Contractor shall furnish the Engineer a Certificate of Compliance in accordance to Section 6-1.07, "Certificates of Compliance," of the Standard Specifications for the screened process color, non-reflective opaque black film, and protective overlay film.

The surface of the screened process color shall be flat and smooth. When the screened process colors determined from the instrumental testing in accordance to ASTM Designation: D 4956 are in dispute, the Engineer's visual test will govern.

The Contractor shall provide patterns, layouts, and set-ups necessary for the screened process.

The Contractor may use green, red, blue, and brown reverse-screened process colors for background and non-reflective opaque black film or black screened process color for legend. The coefficient of retroreflection for reverse-screened process colors on white retroreflective sheeting shall not be less than 70 percent of the coefficient of retroreflection specified in ASTM Designation: D 4956.

The screened process colors and non-reflective opaque black film shall have the same outdoor weatherability as that of the retroreflective sheeting.

After curing, screened process colors shall withstand removal when tested by applying 3M Company Scotch Brand Cellophane Tape No. 600 or equivalent tape over the color and removing with one quick motion at 90° angle.

### **SINGLE SHEET ALUMINUM SIGN**

Single sheet aluminum signs shall be fabricated and furnished with or without frame. The Contractor shall furnish the sheet aluminum in accordance to "Sheet Aluminum" of these special provisions. Single sheet aluminum signs shall be fabricated from sheet aluminum alloy 6061-T6 or 5052-H38.

Single Sheet aluminum signs shall not have a vertical splice in the sheet aluminum. For signs with depth greater than 48 inches, one horizontal splice will be allowed in the sheet aluminum.

Framing for single sheet aluminum signs shall consist of aluminum channel or rectangular aluminum tubing. The framing shall have a length tolerance of  $\pm 1/8$  inch. The face sheet shall be affixed to the frame with rivets of 3/16-inch diameter. Rivets shall be placed within the web of channels and shall not be placed less than 1/2 inch from edges of the sign panels. Rivets shall be made of aluminum alloy 5052 and shall be anodized or treated with conversion coating to prevent corrosion. The exposed portion of rivets on the face of signs shall be the same color as the background or legend where the rivets are placed.

Finished signs shall be flat within a tolerance of  $\pm 1/32$  inch per linear foot when measured across the plane of the sign in all directions. The finished signs shall have an overall tolerance within  $\pm 1/8$  inch of the detailed dimensions.

Aluminum channels or rectangular aluminum tubings shall be welded together with the inert gas shielded-arc welding process using E4043 aluminum electrode filler wires as shown on the plans. Width of the filler shall be equal to wall thickness of smallest welded channel or tubing.

**LAMINATED PANEL SIGN**

Laminated panel signs shall consist of two sheet aluminum laminated to a honeycomb core and extruded aluminum frame to produce flat and rigid panels of one-inch or 2-1/2-inch nominal thickness.

The face of laminated panel signs shall be fabricated from sheet aluminum alloy 6061-T6 or 5052-H32 of 0.063-inch thickness. The back of laminated panel signs shall be fabricated from sheet aluminum alloy 3003-H14 of 0.040-inch thickness. The Contractor shall furnish sheet aluminum as provided in "Sheet Aluminum" of these special provisions.

The core material shall be phenolic impregnated kraft paper honeycomb and fungus resistant in accordance to Military Specification MIL-D-5272. The honeycomb cell size shall be 1/2 inch. Weight of the kraft paper shall be 80 pounds and impregnated minimum 18 percent by weight.

A laminating adhesive that can produce a resilient oil and water-resistant bond shall be used to adhere the extruded aluminum frame and the honeycomb core to the sheet aluminum. Edge and interior delamination occur when a 0.010-inch thick feeler gauge of 1/2 inch in length can be inserted into a depth of more than 1/2 inch between the extruded aluminum frame and the sheet aluminum. Laminated panel sign with delamination will be rejected.

Laminated panels shall be able to resist a wind load of 33 pounds per square foot for the following simple span lengths with a bending safety factor of 1.25:

Panel Type	Nominal Panel Thickness	Simple Span Length
A	one inch	9 feet 0 inch
B	one inch	9 feet 0 inch
	2-1/2 inch	14 feet 6 inches
H	2-1/2 inch	14 feet 6 inches

The tensile strength of laminated panels shall be at least 20 pounds per square inch when tested in accordance with the following modification and with ASTM Designations: C 297 and C 481, Cycle B after aging. Instead of spraying with hot water, the specimen shall be totally immersed in 158° F hot water. When requested by the Engineer or the Transportation Laboratory, at least one test sample of 12" x 12" in size shall be taken for every 2,000 square feet of the panel production cycle or of the total factory production order, whichever occurs first.

Rivets used to secure the sheet aluminum to the perimeter frame shall be fabricated from aluminum alloy 5052 and anodized or treated with a conversion coating to prevent corrosion. Size of the aluminum rivets shall be 3/16 inch in diameter and placed at the corners of the laminated panels. Color of the exposed portion of the rivets shall be the same color as the sign background or legend on which the rivets are placed. Rivets or stainless steel screws shall be placed in holes drilled during fabrication in the perimeter frame.

On laminated multiple panel signs, a closure H-Section shall be placed in the top channel of the bottom panel. Perimeter frame of adjoining panel shall accommodate the closure H-Section in the closed position.

For signs with a depth of 5 feet 0 inch or less, the laminated panels shall be fabricated with no horizontal joints, splices or seams. For signs with a depth of greater than 5 feet 0 inch, the laminated panels may be fabricated in two panels.

The face of laminated panels shall be flat with a tolerance of ±3/32 inch per linear foot when measured across the plane of each panel in all directions. Where laminated panels adjoin, the gap between adjoining edges from one corner to the other corner shall not deviate by more than 1/32 inch. Non-adjoining edges from one corner to the other corner shall not deviate by more than 1/8 inch from a straight plane. The front and back sheet aluminum shall be flush with the perimeter frame. The panel edges shall be smooth.

Laminated panel signs shall be within +1/8 inch or -1/2 inch of the detailed dimensions. The difference in length between adjoining panels of multiple panel signs shall not be greater than 1/2 inch.

Roadside laminated panel signs shall be Type B. Type B panels shall have a nominal thickness of one inch or 2-1/2 inches.

The perimeter frame of Type B panels shall consist of extruded channel edges. The interior and exterior sides of the channels, except the sides touching the face and back sheet aluminum, shall be welded at the joint. Sealant shall be placed at the corners of the perimeter frame to prevent moisture penetration.

Each side of the vertical tube spacers of Type B panels shall be welded to the perimeter frame, except the sides touching the front and back sheet aluminum.

Overhead laminated panel signs shall be Type A and have a nominal thickness of one inch.

For overhead laminated signs with a length of 24 feet or less, the laminated panels shall be fabricated with no vertical joints, splices or seams. For signs with a length of greater than 24 feet, the length of each adjoining panel shall be as determined by the Engineer or as shown on the plans.

The perimeter frame of Type A overhead laminated panels shall be connected by self-tapping hex head stainless steel screws. Sealant shall be placed at the corners of the perimeter frame to prevent moisture penetration. The perimeter frame of Type A panels shall consist of extruded channel edges on the vertical sides and consist of modified "H" section extrusion on the horizontal sides. The modified "H" section extrusion acts as an integral retainer track for affixing the bolts to provide blind fastening of panels to the structure support.

The Contractor shall furnish mounting hardware for overhead laminated panel signs, such as closure H-sections, clamps, bolts, nuts, and washers. The clamps shall be cast aluminum alloy with a minimum tensile strength of 25 kips per square inch. Bolt torque used for installing clamps shall not exceed 100 inch-pounds.

### MEASUREMENT AND PAYMENT

Furnishing signs (except for construction area signs) will be measured by the square foot and the quantity to be paid for will be the total area, in square feet, of the sign panel types installed in place.

The contract price paid per square foot for furnish sign of the types specified in the Engineer's estimate shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in fabricating and furnishing the signs, including removable sign panel frame and fastening hardware, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

### 10-1.40 REINFORCED CONCRETE PIPE

Reinforced concrete pipe shall conform to the provisions in Section 65, "Reinforced Concrete Pipe," of the Standard Specifications and these special provisions.

#### GENERAL

Where embankment will not be placed over the top of the pipe, a relative compaction of not less than 85 percent shall be required below the pipe spring line for pipe installed using Method 1 backfill in trench, as shown on Standard Plan A62D. Where the pipe is to be placed under the traveled way, a relative compaction of not less than 90 percent shall be required unless the minimum distance between the top of the pipe and the pavement surface is the greater of 4 feet or one half of the outside diameter of the pipe.

Except as otherwise designated by classification on the plans or in the specifications, joints for culvert and drainage pipes shall conform to the plans or specifications for standard joints.

#### MATERIALS

The concrete for reinforced concrete pipe shall contain not less than 470 pounds of cementitious material per cubic yard and have a water-cementitious material ratio that does not exceed 0.40 by weight. Supplementary cementitious material is optional. Reinforcement shall have a minimum cover of 1 inch.

Reinforced concrete pipe that is to be hydrostatically tested shall be strength tested by the 3-edge bearing method to a maximum D-load of 10 percent greater than the 0.01-inch cracking D-load specified in AASHTO Designation: M 170 or to the actual D-load required to produce a 0.01-inch crack, whichever is the lesser.

Special oval shaped reinforced concrete pipe, having concrete cover over the steel reinforcement greater than the cover specified in AASHTO Designation: M 207, shall conform to the provisions in Section 65-1.02, "Materials," and Section 65-1.02B, "Oval Shaped Reinforced Concrete Pipe," of the Standard Specifications, except the width of crack produced by the D-load test specified in AASHTO Designation: M 207 shall be the width determined by the following formula:

$$b = \frac{t - 3/8d}{t - 3/8d - C} \times 0.01 \text{ inch}$$

Where:

- b = Width of crack to be produced in lieu of the 0.01-inch crack specified in AASHTO Designation: M 207
- t = Wall thickness of pipe, inches
- d = Effective depth of the section to be tested, feet
- C = Concrete cover over steel reinforcement in excess of cover specified in AASHTO Designation: M 207

Oval shaped reinforced concrete pipe that is to be hydrostatically tested shall be strength tested by the 3-edge bearing method to a maximum D-load of 10 percent greater than the 0.01-inch cracking D-load specified in AASHTO Designation: M 207 or to the actual D-load required to produce a 0.01-inch crack, whichever is the lesser.

## **MEASUREMENT AND PAYMENT**

The Department does not pay any additional cost for use of optional supplementary cementitious material.

The Department does not pay any additional cost for excess concrete cover over steel reinforcement.

### **10-1.41 SLOPE PROTECTION**

Slope protection shall be placed or constructed in conformance with the provisions in Section 72, "Slope Protection," of the Standard Specifications.

Rock slope protection fabric must be Class 8.

### **10-1.42 MISCELLANEOUS CONCRETE CONSTRUCTION**

Minor Concrete (Curb) and (Textured Paving) shall conform to the provisions in Section 73, "Concrete Curbs and Sidewalks," of the Standard Specifications and these special provisions.

### **10-1.43 MISCELLANEOUS IRON AND STEEL**

Miscellaneous iron and steel shall conform to the provisions in Section 75, "Miscellaneous Metal," of the Standard Specifications.

### **10-1.44 METAL BEAM GUARD RAILING**

Metal beam guard railing shall be constructed in conformance with the provisions in Section 83-1, "Railings," of the Standard Specifications and these special provisions.

Attention is directed to "Order of Work" of these special provisions.

Line posts shall be wood, steel, or plastic. Blocks shall be wood or plastic.

### **TERMINAL SYSTEM (TYPE CAT)**

Terminal system (Type CAT) and terminal system (Type CAT) backup shall be furnished and installed as shown on the plans and in conformance with these special provisions.

Terminal system (Type CAT) shall be a CAT-350 Crash Cushion Attenuating Terminal as manufactured by Trinity Industries, Inc., and shall include items detailed for terminal system (Type CAT) shown on the plans.

Terminal system (Type CAT) backup shall consist of items detailed for terminal system (Type CAT) backup shown on the plans, and shall conform to the provisions in Section 83-1.02B, "Metal Beam Guard Railing," of the Standard Specifications.

Excluding the terminal system (Type CAT) backup, arrangements have been made to ensure that any successful bidder can obtain the CAT-350 Crash Cushion Attenuating Terminal from the manufacturer, Trinity Industries, Inc., P.O. Box 99, 950 West 400S, Centerville, UT 84014, telephone (800) 772-7976. The price quoted by the manufacturer for the CAT-350 Crash Cushion Attenuating Terminal, FOB Centerville, Utah is \$3000, not including sales tax.

The above price will be firm for orders placed on or before June 1, 2010, provided delivery is accepted within 90 days after the order is placed.

The Contractor shall provide the Engineer with a Certificate of Compliance from the manufacturer in conformance with the provisions in Section 6-1.07, "Certificates of Compliance," of the Standard Specifications. The Certificate of Compliance shall certify that the terminal system (Type CAT) conforms with the contract plans and specifications, conforms to the prequalified design and material requirements, and was manufactured in conformance with the approved quality control program.

The terminal system (Type CAT) shall be installed in conformance with the manufacturer's installation instructions and these requirements. The steel foundation tubes with soil plates attached shall be, at the Contractor's option, either driven, with or without pilot holes, or placed in drilled holes. Space around the steel foundation tubes shall be backfilled with selected earth, free of rock, placed in layers approximately 4 inches thick and each layer shall be moistened and thoroughly compacted. Wood posts shall be inserted into the steel foundation tubes by hand. Before the wood posts are inserted, the inside surfaces of the steel foundation tubes to receive the wood posts shall be coated with a grease which will not melt or run at a temperature of 149 °F or less. The edges of the wood posts may be slightly rounded to facilitate insertion of the post into the steel foundation tubes.

Surplus excavated material remaining after the terminal system (Type CAT) and backup have been constructed shall be disposed of in a uniform manner along the adjacent roadway where designated by the Engineer.

The contract unit price paid for terminal system (Type CAT) backup shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in furnishing and installing terminal system (Type CAT) backup, complete in place, including excavation, backfill, and disposal of surplus material, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

## **ALTERNATIVE FLARED TERMINAL SYSTEM**

Alternative flared terminal system shall be furnished and installed as shown on the plans and in conformance with these special provisions.

The allowable alternatives for a flared terminal system shall consist of one of the following or a Department approved equal.

- A. **TERMINAL SYSTEM (TYPE FLEAT)** - Terminal system (Type FLEAT) shall be a Flared Energy Absorbing Terminal 350 manufactured by Road Systems, Inc., located in Big Spring, Texas, and shall include items detailed for terminal system (Type FLEAT) shown on the plans. The Flared Energy Absorbing Terminal 350 can be obtained from the distributor, Universal Industrial Sales, P.O. Box 699, Pleasant Grove, UT 84062, telephone (801) 785-0505 or from the distributor, Gregory Highway Products, 4100 13<sup>th</sup> Street, S.W., Canton, OH 44708, telephone (330) 477-4800.
- B. **TERMINAL SYSTEM (TYPE SRT)** - Terminal system (Type SRT) shall be an SRT-350 Slotted Rail Terminal (8-post system) as manufactured by Trinity Industries, Inc., and shall include items detailed for terminal system (Type SRT) shown on the plans. The SRT-350 Slotted Rail Terminal (8-post system) can be obtained from the manufacturer, Trinity Industries, Inc., P.O. Box 99, 950 West 400S, Centerville, UT 84014, telephone (800) 772-7976.

The Contractor shall provide the Engineer with a Certificate of Compliance from the manufacturer in conformance with the provisions in Section 6-1.07, "Certificates of Compliance," of the Standard Specifications. The Certificate of Compliance shall certify that the terminal systems furnished conform to the contract plans and specifications, conform to the prequalified design and material requirements, and were manufactured in conformance with the approved quality control program.

Terminal systems shall be installed in conformance with the manufacturer's installation instructions and these requirements. Each terminal system installed shall be identified by painting the type of terminal system in neat black letters and figures 2 inches high on the backside of the rail element between system posts numbers 4 and 5.

For terminal system (Type SRT), the steel foundation tubes with soil plates attached shall be, at the Contractor's option, either driven, with or without pilot holes, or placed in drilled holes. Space around the steel foundation tubes shall be backfilled with selected earth, free of rock, placed in layers approximately 4 inches thick and each layer shall be moistened and thoroughly compacted. The wood terminal posts shall be inserted into the steel foundation tubes by hand and shall not be driven. Before the wood terminal posts are inserted, the inside surfaces of the steel foundation tubes to receive the wood posts shall be coated with a grease which will not melt or run at a temperature of 149° F or less. The edges of the wood terminal posts may be slightly rounded to facilitate insertion of the post into the steel foundation tubes.

For terminal system (Type FLEAT), the soil tubes shall be, at the Contractor's option, driven with or without pilot holes, or placed in drilled holes. Space around the steel foundation tubes shall be backfilled with selected earth, free of rock, placed in layers approximately 4 inches thick and each layer shall be moistened and thoroughly compacted. Wood posts shall be inserted into the steel foundation tubes by hand. Before the wood terminal posts are inserted, the inside surfaces of the steel foundation tubes to receive the wood posts shall be coated with a grease which will not melt or run at a temperature of 149° F or less. The edges of the wood posts may be slightly rounded to facilitate insertion of the post into the steel foundation tubes.

Surplus excavated material remaining after the terminal system has been installed shall be disposed of in a uniform manner along the adjacent roadway where designated by the Engineer.

The contract unit price paid for alternative flared terminal system shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in furnishing and installing alternative flared terminal system, complete in place, including excavation, backfill and disposal of surplus material, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

### **10-1.45 THERMOPLASTIC TRAFFIC STRIPE AND PAVEMENT MARKING**

Thermoplastic traffic stripes (traffic lines) and pavement markings shall be applied in conformance with the provisions in Section 84, "Traffic Stripes and Pavement Markings," of the Standard Specifications and these special provisions.

Thermoplastic material shall be free of lead and chromium, and shall conform to the requirements in State Specification PTH-02ALKYD.

Retroreflectivity of the thermoplastic traffic stripes and pavement markings shall conform to the requirements in ASTM Designation: D 6359-99. White thermoplastic traffic stripes and pavement markings shall have a minimum initial retroreflectivity of 250 mcd m<sup>-2</sup> lx<sup>-1</sup>. Yellow thermoplastic traffic stripes and pavement markings shall have a minimum initial retroreflectivity of 150 mcd m<sup>-2</sup> lx<sup>-1</sup>.

Where striping joins existing striping, as shown on the plans, the Contractor shall begin and end the transition from the existing striping pattern into or from the new striping pattern a sufficient distance to ensure continuity of the striping pattern.

Thermoplastic traffic stripes shall be applied at the minimum thickness and application rate as specified below. The minimum application rate is based on a solid stripe of 4 inches in width.

Minimum Stripe Thickness (inch)	Minimum Application Rate (lb/ft)
0.098	0.34

Thermoplastic traffic stripes and pavement markings shall be free of runs, bubbles, craters, drag marks, stretch marks, and debris.

At the option of the Contractor, permanent traffic striping and pavement marking tape conforming to the provisions in "Prequalified and Tested Signing and Delineation Materials" of these special provisions may be placed instead of the thermoplastic traffic stripes and pavement markings specified herein. Permanent tape, if used, shall be installed in conformance with the manufacturer's specifications.

If permanent tape is placed instead of thermoplastic traffic stripes and pavement markings, the tape will be measured and paid for by the linear foot as thermoplastic traffic stripe and by the square foot as thermoplastic pavement marking.

**10-1.46 PAINT TRAFFIC STRIPE**

Painted traffic stripes (traffic lines) shall be applied in conformance with the provisions in Section 84, "Traffic Stripes and Pavement Markings," of the Standard Specifications and these special provisions.

Traffic stripe paint shall conform to the requirements in State Specification No. PTWB-01.

The color of the painted traffic stripes shall conform to the requirements in ASTM Designation: D 6628-01.

Retroreflectivity of the paint traffic stripes shall conform to the requirements in ASTM Designation: D 6359-99. White painted traffic stripes shall have a minimum initial retroreflectivity of 250 mcd m<sup>-2</sup> lx<sup>-1</sup>. Yellow painted traffic stripes shall have a minimum initial retroreflectivity of 150 mcd m<sup>-2</sup> lx<sup>-1</sup>.

At the option of the Contractor, permanent traffic striping tape conforming to the provisions in "Prequalified and Tested Signing and Delineation Materials" of these special provisions may be placed instead of painted traffic stripes. Permanent tape, if used, shall be placed in conformance with the manufacturer's specifications.

If permanent tape is placed instead of painted traffic stripes, the tape will be measured and paid for by the linear foot as paint traffic stripe of the number of coats designated in the Engineer's Estimate.

**10-1.47 PAVEMENT MARKERS**

Pavement markers shall be placed in conformance with the provisions in Section 85, "Pavement Markers," of the Standard Specifications and these special provisions.

The Contractor shall furnish the Engineer certificates of compliance for the pavement markers in conformance with the provisions in Section 6-1.07, "Certificates of Compliance," of the Standard Specifications.

Retroreflective pavement markers shall be marked as abrasion resistant on the body of the markers.

**SECTION 10-2 HIGHWAY PLANTING AND IRRIGATION SYSTEMS**

**10-2.01 GENERAL**

The work performed in connection with highway planting and irrigation systems shall conform to the provisions in Section 20, "Erosion Control and Highway Planting," of the Standard Specifications and these special provisions.

The Contractor shall notify the Engineer not less than 72 hours prior to requiring initial access to the existing irrigation controllers. When the Engineer determines that access to the controllers is required at other times, arrangements will be made to provide this access.

When fluctuations of water pressure and water supply are encountered during normal working hours, plants shall be watered at other times, as often, and in sufficient amounts as conditions may require to keep the soil and plant roots moist during the life of the contract.

Full compensation for watering plants outside normal working hours shall be considered as included in the contract lump sum prices paid for highway planting and plant establishment work and no additional compensation will be allowed therefor.

## **COST BREAK-DOWN**

The Contractor shall furnish the Engineer a cost break-down for the contract lump sum items of highway planting and irrigation system. Cost break-down tables shall be submitted to the Engineer for approval within 15 working days after the contract has been approved. Cost break-down tables will be approved, in writing, by the Engineer before any partial payment will be made for the applicable items of highway planting and irrigation system involved.

Attention is directed to "Time-Related Overhead" of these special provisions regarding compensation for time-related overhead.

Cost break-downs shall be completed and furnished in the format shown in the samples of the cost break-downs included in this section. Line item descriptions of work shown in the samples are the minimum to be submitted. Additional line item descriptions of work may be designated by the Contractor. If the Contractor elects to designate additional line item descriptions of work, the quantity, value and amount for those line items shall be completed in the same manner as for the unit descriptions shown in the samples. The line items and quantities given in the samples are to show the manner of preparing the cost break-downs to be furnished by the Contractor.

The Contractor shall determine the quantities required to complete the work shown on the plans. The quantities and their values shall be included in the cost break-downs submitted to the Engineer for approval. The Contractor shall be responsible for the accuracy of the quantities and values used in the cost break-downs submitted for approval.

The sum of the amounts for the line items of work listed in each cost break-down table for highway planting and for irrigation system work shall be equal to the contract lump sum price bid for Highway Planting and Irrigation System, respectively. Overhead and profit, shall be included in each individual line item of work listed in a cost break-down table.

No adjustment in compensation will be made in the contract lump sum prices paid for highway planting and irrigation system due to differences between the quantities shown in the cost break-downs furnished by the Contractor and the quantities required to complete the work as shown on the plans and as specified in these special provisions.

Individual line item values in the approved cost break-down tables will be used to determine partial payments during the progress of the work and as the basis for calculating an adjustment in compensation for the contract lump sum items of highway planting and irrigation system due to changes in line items of work ordered by the Engineer. When the total of ordered changes to line items of work increases or decreases the lump sum price bid for either Highway Planting or Irrigation System by more than 25 percent, the adjustment in compensation for the applicable lump sum item will be determined in the same manner specified for increases and decreases in the total pay quantity of an item of work in Section 4-1.03B, "Increased or Decreased Quantities," of the Standard Specifications.

**HIGHWAY PLANTING COST BREAK-DOWN**

**Contract No. 12-0E2504**

UNIT DESCRIPTION	UNIT	APPROXIMATE QUANTITY	VALUE	AMOUNT
PLANT GROUP F	EA	9200		
MULCH	LS	LUMP SUM		

**TOTAL** \_\_\_\_\_

**IRRIGATION SYSTEM COST BREAK-DOWN**

**Contract No. 12-0E2504**

UNIT DESCRIPTION	UNIT	APPROXIMATE QUANTITY	VALUE	AMOUNT
SPRINKLER (A-5)	EA	4		
SPRINKLER (A-6)	EA	3		
SPRINKLER (C-3)	EA	8		
3/4" PLASTIC PIPE (PR 200)	FT	700		
1" PLASTIC PIPE (PR 200)	FT	150		
1 1/2" PLASTIC PIPE (PR 200)	FT	100		
CHECK AND TEST EXISTING IRRIGATION FACILITIES	LS	LUMP SUM		
FINAL IRRIGATION SYSTEM CHECK	LS	LUMP SUM		

**TOTAL** \_\_\_\_\_

## **MAINTAIN EXISTING PLANTED AREAS**

Existing planted areas, designated on the plans to be maintained, shall be maintained throughout the life of the contract in conformance with these special provisions.

Existing plants shall be watered in conformance with the provisions in Section 20-4.06, "Watering," of the Standard Specifications.

Existing planted areas to be maintained shall be inspected for deficiencies by the Contractor in the presence of the Engineer. Deficiencies requiring corrective action shall include weeds; dead, diseased, or unhealthy plants; missing plant stakes and tree ties; inadequate plant basins; and other deficiencies needing corrective action to promote healthy plant life. The inspection shall be completed within 15 days after the start of work.

Deficiencies found during the inspection shall be corrected within 15 days after the inspection ends. Correction of deficiencies, as directed by the Engineer, will be paid for as extra work in conformance with the provisions in Section 4-1.03D, "Extra Work," of the Standard Specifications.

After deficiencies have been corrected, the Contractor shall perform work to maintain existing planted areas in a neat appearance and to promote healthy plant growth. The work shall include the following:

- A. Weeds shall be killed before the weeds reach the seed stage of growth or exceed 6 inches in length.
- B. Weeds shall be removed from existing planted areas. Weeds shall be killed prior to removal. Weed removal in ground cover areas shall extend beyond the outer limits of ground cover areas to the adjacent edges of paving, fences and proposed plants and planting areas, and a 6-foot diameter area centered at each existing tree and shrub outside of existing ground cover areas.
- C. When a portion of a new automatic irrigation system is completed, the existing plants to be watered by that portion of the irrigation system shall be watered automatically.
- D. Pesticides for maintaining existing planted areas shall conform to the provisions in "Pesticides" of these special provisions.

The contract lump sum price paid for maintain existing planted areas shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in maintain existing planted areas, complete in place, as shown on the plans, as specified in the standard specifications and these special provisions, and as directed by the Engineer.

## **10-2.02 EXISTING HIGHWAY PLANTING**

In addition to the provisions in Section 20, "Erosion Control and Highway Planting," of the Standard Specifications, work performed in connection with existing highway planting shall conform to the provisions in "Existing Highway Facilities," of these special provisions.

## **10-2.03 EXISTING HIGHWAY IRRIGATION FACILITIES**

The work performed in connection with the various existing highway irrigation system facilities shall conform to the provisions in "Existing Highway Facilities," of these special provisions.

Water shall be maintained in conformance with the provisions in Section 20-5.025, "Maintain Existing Water Supply," of the Standard Specifications.

## **CHECK AND TEST EXISTING IRRIGATION FACILITIES**

Existing irrigation facilities that are to remain or to be relocated, and that are within those areas where clearing and grubbing or earthwork operations are to be performed, shall be checked for missing or damaged components and proper operation prior to performing clearing and grubbing or earthwork operations. Existing irrigation facilities outside of work areas that are affected by the construction work shall also be checked for proper operation.

A written list of existing irrigation system deficiencies shall be submitted to the Engineer within 5 working days after checking the existing facilities.

Deficiencies found during checking of the existing facilities shall be corrected as directed by the Engineer. Corrective work ordered by the Engineer will be paid for as extra work as provided in Section 4-1.03D, "Extra Work," of the Standard Specifications.

When existing irrigation facilities are checked, existing backflow preventers shall be tested for proper operation in conformance with the provisions in Section 20-5.03J, "Check and Test Backflow Preventers," of the Standard Specifications.

Existing backflow preventers shall be retested one year after the satisfactory completion of the previous test, and each year thereafter until the plant establishment period is completed. An additional test shall be provided not more than 10 days prior to acceptance of the contract.

Length of watering cycles for use of potable water from water meters for checking or testing existing irrigation facilities shall be as determined by the Engineer.

Additional repairs required for the existing irrigation system as ordered by the Engineer, except as otherwise provided for in "Maintain Existing Irrigation Facilities" of these special provisions, will be paid for as extra work as provided in Section 4-1.03D, "Extra Work," of the Standard Specifications.

#### **MAINTAIN EXISTING IRRIGATION FACILITIES**

Existing irrigation facilities shall be maintained throughout the life of the contract. Prior to the start of maintaining existing irrigation facilities work, the facilities shall be checked for proper operation, and repaired in conformance with the provisions in "Check and Test Existing Irrigation Facilities" of these special provisions.

After the existing facilities have been checked and repaired, the Contractor shall be responsible for the routine maintenance of existing irrigation systems. The work shall include, but not limited to, checking irrigation systems for proper operation and adjusting, repairing or replacing valves, valve boxes, sprinklers, risers, swing joints, wye strainers, valve assembly units, and filter assembly units.

The Contractor will not be responsible for maintaining existing water meters, underground pipe supply lines, control and neutral conductors, and electrical conduits. Except as otherwise specified in "Existing Highway Irrigation Facilities" of these special provisions, repair work to these facilities ordered by the Engineer will be paid for as extra work as provided in Section 4-1.03D, "Extra Work," of the Standard Specifications.

Existing automatic irrigation systems shall be operated automatically during the life of the contract, except manual operation will be allowed for the work during plant replacement, fertilization, weed germination, and the repair of irrigation facilities.

Irrigation controllers shall be programmed by the Contractor for seasonal water requirements. During winter seasons irrigation systems shall be operated automatically a minimum of 2 minutes every 2 weeks.

Irrigation systems and facilities shall be checked for proper operation at least once every 30 days. When required, as determined by the Engineer, adjusting, repairing or replacing irrigation facilities shall be completed within 5 working days after checking the irrigation systems. Except as provided in these special provisions, repair and replacement of irrigation facilities shall conform to the provisions in "Existing Highway Irrigation Facilities" of these special provisions.

Except as provided in these special provisions, the contract lump sum price paid for maintain existing irrigation facilities shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in maintaining existing irrigation facilities, complete in place, including checking irrigation facilities, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

#### **10-2.04 HIGHWAY PLANTING**

The work performed in connection with highway planting shall conform to the provisions in Section 20-4, "Highway Planting," of the Standard Specifications and these special provisions.

#### **MULCH**

Mulch must be green material and must comply with the following:

1. The mulch provider must be a compost producer and a participant in the United States Composting Council (USCC) Seal of Testing Assurance (STA) program.
2. The green material producer must be fully permitted as a compost producer in accordance with requirements of the California Integrated Waste Management Board (CIWMB), Local Enforcement Agencies (LEA) and any other State and Local Agencies that regulate solid waste facilities. If exempt from State permitting requirements, the composting facility must certify that it follows all guidelines and procedures for production of compost meeting the environmental health standards of Title 14, California Code of Regulations, Division 7, Chapter 3.1, Article 7.
3. Green material may be derived from any single or mixture of chipped, shredded, or ground vegetation; or clean processed recycled wood products.
4. Compost green materials such that weed seeds, pathogens and deleterious materials are reduced as specified under Title 14, California Code of Regulations, Division 7, Chapter 3.1, Article 7, Section 17868.3.
5. Green material must not contain paint, petroleum products, herbicides, fungicides or other chemical residues harmful to animal life or plant growth. Compost must possess no objectionable odors.
6. Metal concentrations in green material must not exceed the maximum metal concentrations listed in Title 14, California Code of Regulations, Division 7, Chapter 3.1, Section 17868.2.
7. Green material must comply with the following table:

Physical and Chemical Requirements		
Property	Test Method	Requirement
pH	TMECC 04.11-A Elastometric pH 1:5 Slurry Method pH Units	6.0–8.5
Soluble Salts	TMECC 04.10-A Electrical Conductivity 1:5 Slurry Method dS/m (mmhos/cm)	0–10.0
Moisture Content	TMECC 03.09-A Total Solids & Moisture at 70+/- 5 deg C % Wet Weight Basis	N/A
Organic Matter Content	TMECC 05.07-A Loss-On-Ignition Organic Matter Method (LOI) % Dry Weight Basis	30–100
Maturity	TMECC 05.05-A Germination and Vigor Seed Emergence Seedling Vigor % Relative to Positive Control	N/A N/A
Stability	TMECC 05.08-B Carbon Dioxide Evolution Rate mg CO <sub>2</sub> -C/g OM per day	N/A
Particle Size	TMECC 02.02-B Sample Sieving for Aggregate Size Classification % Dry Weight Basis	Inches      % Passing 3              99% 3/8            < 25% Max. Length 4 inches
Pathogen	TMECC 07.01-B Fecal Coliform Bacteria < 1000 MPN/gram dry wt.	Pass
Pathogen	TMECC 07.01-B Salmonella < 3 MPN/4 grams dry wt.	Pass
Physical Contaminants	TMECC 02.02-C Man Made Inert Removal and Classification: Plastic, Glass and Metal % > 4mm fraction	Combined Total: < 1.0
Physical Contaminants	TMECC 02.02-C Man Made Inert Removal and Classification: Sharps (Sewing needles, straight pins and hypodermic needles) % > 4mm fraction	None Detected

NOTE: TMECC refers to "Test Methods for the Examination of Composting and Compost," published by the United States Department of Agriculture and the United States Compost Council (USCC).

8. Before mulch application, submit a copy of the green material producer's Compost Technical Data Sheet and a copy of the compost producers STA certification. The Compost Technical Data Sheet must include laboratory analytical test results, directions for product use, and a list of product ingredients.
9. Before mulch application, submit a Certificate of Compliance under Section 6-1.07, "Certificates of Compliance," of the Standard Specifications.

## **PESTICIDES**

Pesticides used to control weeds shall conform to the provisions in Section 20-4.026, "Pesticides," of the Standard Specifications. Except as otherwise provided in these special provisions, pesticide use shall be limited to the following materials:

- Cacodylic Acid
- Diquat
- Fluazifop-butyl
- Glyphosate
- Isoxaben (Preemergent)
- Sethoxydim
- Oxadiazon - 50 percent WP (Preemergent)
- Oryzalin (Preemergent)
- Pendimethalin (Preemergent)
- Prodiamine (Preemergent)
- Trifluralin (Preemergent)
- Ammonium Sulfate
- Magnesium Chloride
- Melfluidide (Growth regulator)
- Napropamide (Preemergent)

Glyphosate shall be used to kill stolon type weeds.

Oxadiazon shall be of the emulsifiable concentration or wettable powder type, except when Oxadiazon is used under mulch in conformance with these special provisions.

Prior to the application of preemergents, ground cover plants shall have been planted a minimum of 3 days and shall have been thoroughly watered.

A minimum of 100 days shall elapse between applications of preemergents.

Except for ground cover plants, preemergents shall not be applied within 18 inches of plants or within wild flower seeding areas.

Growth regulators shall not be applied within 6 feet of trees, shrubs or vines.

Ammonium sulfate and magnesium chloride shall be used only in areas planted to *Carpobrotus* or *Delosperma*. Ammonium sulfate and magnesium chloride shall not be applied in a manner that allows the pesticides to come in contact with trees or shrubs.

If the Contractor elects to request the use of other pesticides on this project, the request shall be submitted, in writing, to the Engineer not less than 15 days prior to the intended use of the other pesticides. Except for the pesticides listed in these special provisions, no pesticides shall be used or applied without prior written approval of the Engineer.

Pesticides shall not be applied within the limits of the plant basins. Pesticides shall not be applied in a manner that allows the pesticides to come in contact with the foliage and woody parts of the plants.

## **PLANTING**

Attention is directed to "Irrigation Systems Functional Test" of these special provisions regarding functional tests of the irrigation systems. Do not perform planting in an area until the functional test has been completed for the irrigation system serving that area.

## **PLANT ESTABLISHMENT WORK**

The plant establishment period shall be Type 2 and shall not be less than 125 working days.

Attention is directed to "Relief From Maintenance and Responsibility" in these special provisions regarding relief from maintenance and protection.

The center to center spacing of replacement plants for unsuitable ground cover plants shall be determined by the number of completed plant establishment working days at the time of replacement and the original spacing in conformance with the following:

ORIGINAL SPACING (Inches)	SPACING OF REPLACEMENT GROUND COVER PLANTS (Inches)		
	Number of Completed Plant Establishment Working Days		
	1-125	126-190	191-End of Plant Establishment
9	9	6	6
12	12	9	6
18	18	12	9
24	24	18	12
36	36	24	18

During the plant establishment period, the plants shall be watered utilizing the Remote Irrigation Control System (RICS) software program. A watering schedule shall be submitted to the Engineer for use during the plant establishment period.

Weeds within plant basins, including basin walls and ground cover, shall be controlled by hand pulling.

Weeds within mulched and ground cover areas and outside of plant basins shall be controlled by killing.

Weeds within median areas, pavement, curbs, sidewalk, and other surfaced areas shall be controlled by killing.

At the option of the Contractor, plants of a larger container size than those originally specified may be used for replacement plants during the first 125 working days of the plant establishment period.

After 125 working days of the plant establishment period have been completed, replacement of plants, except for ground cover plants, shall be one-gallon size for seedlings, pot and liner size plants; 5-gallon size for one-gallon size plants; 15-gallon size for 5-gallon size plants; and other plant replacement plants shall be the same size as originally specified.

When ordered by the Engineer, one application of a preemergent pesticide conforming to the provisions in "Pesticides" of these special provisions, shall be applied between 40 working days and 50 working days prior to completion of the plant establishment period. This work will be paid for as extra work as provided in Section 4-1.03D, "Extra Work," of the Standard Specifications.

Wye strainers shall be cleaned at least 15 days prior to the completion of the plant establishment period.

The final inspection shall be performed in conformance with the provisions in Section 5-1.13, "Final Inspection," of the Standard Specifications and shall be completed a minimum of 20 working days before the estimated completion of the contract.

#### **10-2.05 IRRIGATION SYSTEMS**

Irrigation systems shall be furnished and installed in conformance with the provisions in Section 20-5, "Irrigation Systems," of the Standard Specifications, except materials containing asbestos fibers shall not be used.

Method A pressure testing shall conform to the provisions in Section 20-5.03H(1), "Method A", of the Standard Specifications, except leaks that develop in the tested portion of the system shall be located and repaired after each test period when a drop of more than 5 pounds per square inch is indicated by the pressure gage. After the leaks have been repaired, the one hour pressure test shall be repeated and additional repairs made until the drop in pressure is 5 pounds per square inch or less.

#### **IRRIGATION SYSTEMS FUNCTIONAL TEST**

Functional tests for the irrigation controllers and associated automatic irrigation systems shall conform to the provisions in Section 20-5.027J, "Testing," of the Standard Specifications and these special provisions.

Tests shall demonstrate to the Engineer, through one complete cycle of the irrigation controllers in the automatic mode, that the associated automatic components of the irrigation systems operate properly. If automatic components of the irrigation systems fail a functional test, these components shall be repaired at the Contractor's expense and the testing repeated until satisfactory operation is obtained.

Associated automatic components shall include, but not be limited to, remote control valves.

Upon completion of work on an irrigation system, including correction of deficiencies and satisfactory functional tests for the systems involved, the plants to be planted in the area watered by the irrigation system may be planted provided the planting areas have been prepared as specified in these special provisions.

## **PIPE**

### **Plastic Pipe**

Plastic pipe supply lines must be polyvinyl chloride (PVC) 1120 or 1220 pressure rated pipe with the minimum pressure rating (PR) shown on the plans.

Plastic pipe supply lines and fittings that are 3 inches or larger in diameter on the supply side of control valves must be the rubber ring gasket type, except when pressure rating (PR) 315 plastic pipe supply line is required.

Plastic pipe supply lines less than 3 inches in diameter must have solvent cemented type joints. Primers must be used on the solvent cemented type joints.

Plastic pipe supply lines (main) must have a minimum cover of 1.5 feet.

Plastic pipe supply lines downstream from the remote control valves for Type C sprinklers must have a minimum cover of 6 inches.

Plastic pipe (irrigation lines) must be installed not less than 12 inches below the finished grade, measured to the top of the pipe.

A nonhardening joint compound must be used in place of the pipe thread sealant tape conforming to the provisions in Section 20-5.03E, "Pipe," of the Standard Specifications. Joint compounds must be applied in conformance with the manufacturer's recommendations.

Fittings for plastic pipe supply lines with a pressure rating (PR) of 315 must be Schedule 80.

### **SPRINKLERS**

Sprinklers shall conform to the type, pattern, material, and operating characteristics listed in the "Sprinkler Schedule" shown on the plans.

### **FINAL IRRIGATION SYSTEM CHECK**

A final check of existing and new irrigation facilities shall be performed not more than 40 working days and not less than 30 working days prior to acceptance of the contract.

The length of watering cycles using potable water measured by water meters for the final check of irrigation facilities will be determined by the Engineer.

Remote control valves connected to existing and new irrigation controllers shall be checked for automatic performance when the controllers are in automatic mode.

Unsatisfactory performance of irrigation facilities installed or modified by the Contractor shall be repaired and rechecked at the Contractor's expense until satisfactory performance is obtained, as determined by the Engineer.

Repair or replacement of existing irrigation facilities due to unsatisfactory performance shall conform to the provisions in "Existing Highway Irrigation Facilities" of these special provisions.

Nothing in this section "Final Irrigation System Check" shall relieve the Contractor of full responsibility for making good or repairing defective work or materials found before the formal written acceptance of the entire contract by the Director.

Full compensation for checking the irrigation systems prior to the acceptance of the contract shall be considered as included in the contract lump sum price paid for plant establishment work and no additional compensation will be allowed therefor.

## **SECTION 10-3. ELECTRICAL SYSTEMS**

### **10-3.01 DESCRIPTION**

Modify lighting and sign illumination, ramp metering systems, traffic monitoring stations, and maintaining existing traffic management system elements during construction shall conform to the provisions in Section 86, "Electrical Systems," of the Standard Specifications and these special provisions.

### **10-3.02 COST BREAK-DOWN**

Cost break-downs shall conform to the provisions in Section 86-1.03, "Cost Break-Down," of the Standard Specifications and these special provisions.

The Engineer shall be furnished a cost break-down for each contract lump sum item of work described in this Section 10-3.

The cost break-down shall be submitted to the Engineer for approval within 15 days after the contract has been approved. The cost break-down shall be approved, in writing, by the Engineer before any partial payment for the items of electrical work will be made.

### **10-3.03 MAINTAINING EXISTING TRAFFIC MANAGEMENT SYSTEM ELEMENTS DURING CONSTRUCTION**

Traffic Management System (TMS) elements include, but are not limited to ramp metering (RM) system, communication system, traffic monitoring stations, video image vehicle detection system (VIVDS), microwave vehicle detection system (MVDS), loop detection system, changeable message sign (CMS) system, extinguishable message sign (EMS) system, highway advisory radio (HAR) system, closed circuit television (CCTV) camera system, roadway weather information system (RWIS), visibility sensor, and fiber optic system.

Existing TMS elements, including detection systems, identified on the plans and located within the project limits shall remain in place, and be protected from damage. If the construction activities require existing TMS elements to be nonoperational or off line, and if temporary or portable TMS elements are not shown on the plans, the Contractor shall provide for temporary or portable TMS elements. The Contractor shall receive the Engineer's approval on the type of temporary or portable TMS elements and installation method.

Before work is performed, the Engineer, the Contractor, and the Department's Traffic Operations Electrical representatives shall jointly conduct a pre-construction operational status check of all existing TMS elements and each element's communication status with the Traffic Management Center (TMC), including existing TMS elements that are not shown on the plans and elements that may not be impacted by the Contractor's activities. The Department's Traffic Operations Electrical representatives will certify the TMS elements' location and status, and provide a copy of the certified list of the existing TMS elements within the project limits to the Contractor. The status list will include the operational, defined as having full functionality, and the nonoperational components.

The Contractor shall obtain written approval from the Engineer, at least 72 hours before interrupting existing TMS elements' communication with the TMC that will result in the elements being nonoperational or off line. The Contractor shall notify the Engineer at least 72 hours before starting excavation activities.

Traffic monitoring stations and their associated communication systems which were verified to be operational during the pre-construction operational status check, shall remain operational on freeway/highway mainline at all times, except:

1. for a duration of up to 15 days on any continuous segment of the freeway/highway longer than 3 miles
2. for a duration of up to 60 days on any continuous segment of the freeway/highway shorter than 3 miles

If the construction activities require existing detection systems to be nonoperational or off line for a longer time period or the spacing between traffic monitoring stations is more than the specified criteria above, and temporary or portable detection operations are not shown on the plans, the Contractor shall provide provisions for temporary or portable detection operations. The Contractor shall receive the Engineer's approval on the type of detection and installation before installing the temporary or portable detection.

If existing TMS elements shown on the plans or identified during the pre-construction operational status check, except traffic monitoring stations, are damaged or fail due to the Contractor's activity, where the elements are not fully functional, the Engineer shall be notified immediately. If the Contractor is notified by the Engineer that existing TMS elements have been damaged, have failed or are not fully functional due to the Contractor's activity, the damaged or failed TMS elements, excluding Structure-related elements, shall be repaired or replaced, at the Contractor's expense, within 24 hours. For a Structure-related elements, the Contractor shall install temporary or portable TMS elements within 24 hours. For nonstructure-related TMS elements, the Engineer may approve temporary or portable TMS elements for use during the construction activities.

The Contractor shall demonstrate that repaired or replaced elements operate in a manner equal to or better than the replaced equipment or as directed by the Engineer. If the Contractor fails to perform required repairs or replacement work, as determined by the Engineer, the State may perform the repair or replacement work and the cost will be deducted from monies due to the Contractor.

A TMS element shall be considered nonoperational or off line for the duration of time that active communications with the TMC is disrupted, resulting in messages and commands not transmitted from or to the TMS element.

The Contractor shall provide provisions for replacing existing TMS elements within the project limits, including detection systems that were not identified on the plans or during the pre-construction operational status check that became damaged due to Contractor's activities.

If the pre-construction operational status check identified existing TMS elements, then the Contractor, the Engineer, and the Department's Traffic Operations Electrical representatives shall jointly conduct a post construction operational status check of all existing TMS elements and each element's communication status with the TMC. The Department's Traffic Operations Electrical representatives will certify the TMS elements' status and provide a copy of the certified list of the existing TMS elements within the project limits to the Contractor. The status list will include the operational, defined as having full functionality, and the nonoperational components. TMS elements that cease to be functional between pre and post construction status checks shall be repaired at the Contractor's expense and as directed by the Engineer.

The Engineer will approve, in writing, the schedule for final replacement, the replacement methods and the replacement elements, including element types and installation methods before repair or replacement work is performed. The final TMS elements shall be new and of equal or better quality than the existing TMS elements.

#### **PAYMENT**

The contract lump sum price paid for maintaining existing traffic management system elements during construction shall include full compensation for furnishing all labor, materials, tools, equipment and incidentals, and for doing all the work involved in maintaining existing traffic management system elements as shown on the plans, specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

If no electrical work exists on the project and no TMS elements are identified within the project limits, the pre-construction operational status check will be paid for as extra work as provided in Section 4-1.03D, "Extra Work," of the Standard Specifications.

Furnishing and installing temporary or portable TMS elements that are not shown on the plans, but are required when an existing TMS element becomes nonoperational or off line due to construction activities, will be paid for as extra work as provided in Section 4-1.03D, "Extra Work," of the Standard Specifications.

Furnishing and installing temporary or portable TMS elements and replacing TMS elements that are not shown on the plans nor identified during the pre-construction operational status check and were damaged by construction activities will be paid for as extra work as provided in Section 4-1.03D, "Extra Work," of the Standard Specifications.

If the Contractor is required to submit provisions for the replacement of TMS elements that were not identified, the provisions will be paid for as extra work as provided in Section 4-1.03D, "Extra Work," of the Standard Specifications.

### **10-3.04 CAST-IN-DRILLED-HOLE CONCRETE PILE FOUNDATIONS**

#### **GENERAL**

##### **Summary**

This work includes constructing cast-in-drilled-hole concrete pile foundations for traffic signal and lighting standards. Comply with Section 86-2.03, "Foundations," of the Standard Specifications and "Piling" of these special provisions.

#### **MATERIALS**

Concrete must contain not less than 590 pounds of cementitious material per cubic yard.

#### **CONSTRUCTION**

For standards located in sidewalk areas, the pile foundation must be:

1. Placed to final sidewalk grade before the sidewalk is placed
2. Square for the top 4 inches

#### **PAYMENT**

Payment for cast-in-drilled-hole concrete pile foundations shall conform to the provisions in Section 86-8, "Payment," of the Standard Specifications.

### **10-3.05 STANDARDS, STEEL PEDESTALS, AND POSTS**

Standards, steel pedestals, and posts for traffic signal and lighting standards shall conform to the provisions in Section 86-2.04, "Standards, Steel Pedestals and Posts," of the Standard Specifications, "Steel Structures" of these special provisions, and the following requirements.

Steel bolts not designated on the plans as high-strength (HS) or stainless steel shall be for general applications and shall conform to the requirements in ASTM Designation: A 307.

Anchor bolts shall conform to the requirements in ASTM Designation: F 1554, Grade 36. High-strength (HS) anchor bolts shall conform to the requirements in ASTM Designation: F 1554, Grade 105.

Handhole reinforcement rings for standards, steel pedestals, and posts shall be continuous around the handholes.

### **10-3.06 CONDUIT**

Conduit to be installed underground shall be Type 1.

The conduit in a foundation and between a foundation and the nearest pull box shall be Type 1.

When a standard coupling cannot be used for joining Type 1 conduit, a UL-listed threaded union coupling conforming to the provisions in Section 86-2.05C, "Installation," of the Standard Specifications, or a concrete-tight split coupling, or concrete-tight set screw coupling shall be used.

After conductors have been installed, the ends of conduits terminating in pull boxes and controller cabinet shall be sealed with an approved type of sealing compound.

### **10-3.07 PULL BOXES**

Grout shall not be placed in the bottom of pull boxes.

### **10-3.08 CONDUCTORS, CABLES, AND WIRING**

The splicing and materials shall conform to the requirements provided in Section 86-2.09, "Wiring," of the Standard Specifications. Splices shall be insulated by "Method B", except for the splice insulation method to be used for loop wire to loop Detector Lead-in Cable (DLC), which shall be "Modified Method B".

In "Modified Method B", splicing shall be as "Method B" shown on Standard Plan ES-13A, in addition a heat-shrink tubing shall be placed over the entire splice. In the case of loop wire to loop DLC splicing, both the loop start wire and finish wire splices shall be placed in the same heat-shrink tubing.

Conductors shall be wrapped around projecting end of conduit in pull boxes, as shown on the plans. Cables shall be secured to the projecting end of conduit in pull boxes to prevent pulling of cables without removing the securing device.

### **10-3.09 NUMBERING ELECTRICAL EQUIPMENT**

The placement of numbers on electrical equipment will be done by others.

### **10-3.10 DETECTORS**

Loop detectors shall be Type E.

The sides of the slot shall be vertical and the minimum radius of the slot entering and leaving the circular part of the loop shall be 1-1/2 inches. Slot width shall be a maximum of 5/8 inch. Loop wire for circular loops shall be Type 2. Slots of circular loops shall be filled with elastomeric sealant or hot melt rubberized asphalt sealant.

### **10-3.11 LUMINAIRES**

Ballasts shall be the lag or lead regulator type.

**AMENDMENTS TO THE STANDARD SPECIFICATIONS  
DATED MAY 2006**

## AMENDMENTS ISSUE DATE: 02-11-10

### SECTION 0 GLOBAL REVISIONS

(Issued 06-05-09)

Global revisions are changes to contract documents not specific to a section of the Standard Specifications. In each contract document at each occurrence, interpret the following terms as shown:

Term	Interpretation	Conditions
AC	HMA	1. Where AC means asphalt concrete 2. Except where existing AC is described
Asphalt concrete	Hot mix asphalt	Except where existing asphalt concrete is described
Class 1 concrete	Concrete containing not less than 675 pounds of cementitious material per cubic yard	--
Class 2 concrete	Concrete containing not less than 590 pounds of cementitious material per cubic yard	--
Class 3 concrete	Concrete containing not less than 505 pounds of cementitious material per cubic yard	--
Class 4 concrete	Concrete containing not less than 420 pounds of cementitious material per cubic yard	--
Clause providing an option to use either a class concrete or minor concrete	Use minor concrete	--
Clause referring to a delay as a right-of-way delay	Delay under Section 8-1.09, "Delays"	--
Contact joint	Construction joint	--
Controlling operation	Controlling activity	--
Engineer's Estimate	Verified Bid Item List	--
Engineering fabrics	Geosynthetics	--
Notice to Contractors	Notice to Bidders	--
Partial payments	Progress payments	Except in Section 9-1.07D, "Mobilization"
PCC pavement	Concrete pavement	Except where existing PCC pavement is described
Portland cement concrete pavement	Concrete pavement	Except where existing portland cement concrete pavement is described
Project information	Supplemental project information	Except in "Contract Project Information Signs"
Reference to a working day or non-working day under Section 8-1.06, "Time of Completion"	Working day as defined in Section 1-4.02, "Glossary"	--
Section 9-1.015	Section 9-1.01C	--
Section 86, "Signal, Lighting and Electrical Systems"	Section 86, "Electrical Systems"	--
Section 86-2.07, "Traffic Pull Boxes"	Section 86-2.06, "Pull Boxes"	



Headings are included for the purposes of organization and referencing. Inclusion of a heading with no related content, "Reserved," or "Not Used" does not indicate that no specification exists for that subject; applicable specifications may be covered in a general or referenced specification.

## **1-2 REFERENCES**

### **1-2.01 REFERENCES**

Where Standard Specifications refer to the special provisions to describe the work, interpret the reference as a reference to the Bid Item List, the special provisions, or both.

Interpret a reference to a section of the Standard Specifications as a reference to the Standard Specifications as revised by any amendment, special provision, or both.

A reference within parentheses to a law or regulation is included in the contract for convenience only and is not a comprehensive listing of related laws and regulations. Lack of a reference does not indicate no related laws or regulations exist.

Where the version of a referenced document is not specified, use the current version in effect on the date of Notice to Bidders.

A reference to a subsection includes the section's general specifications of which the subsection is a part.

A code not specified as a Federal code is a California code.

## **1-3 ABBREVIATIONS AND MEASUREMENT UNITS**

### **1-3.01 ABBREVIATIONS**

### Abbreviations

Abbreviation	Meaning
AAN	American Association of Nurserymen
AASHTO	American Association of State Highway and Transportation Officials
AISC	American Institute of Steel Construction
AISI	American Iron and Steel Institute
AMA	archaeological monitoring area
ANSI	American National Standards Institute
APHA	American Public Health Association
API	American Petroleum Institute
AREMA	American Railway Engineering and Maintenance-of-Way Association
ASME	American Society of Mechanical Engineers
ASTM	American Society for Testing and Materials
AWG	American Wire Gage
AWPA	American Wood-Preservers' Association
AWS	American Welding Society
AWWA	American Water Works Association
CIH	Certified Industrial Hygienist
DBE	Disadvantaged Business Enterprise
DVBE	Disabled Veteran Business Enterprise
EIA	Electronic Industries Alliance
ESA	environmentally sensitive area
ETL	Electrical Testing Laboratories
FHWA	Federal Highway Administration
IEEE	Institute of Electrical and Electronics Engineers
ITE	Institute of Transportation Engineers
NEC	National Electrical Code
NETA	National Electrical Testing Association, Inc.
NEMA	National Electrical Manufacturers Association
PLAC	permit, license, agreement, certification, or any combination of these
RFI	request for information
SSPC	The Society for Protective Coatings
TIA	time impact analysis
UL	Underwriters' Laboratories Inc.

### 1-3.02 MEASUREMENT UNITS

Measurement Units		
Symbols as used in the specifications	Symbols as used in the Bid Item List	Meaning
A	—	amperes
	ACRE	acre
	CF	cubic foot
	CY	cubic yard
--	EA	each
g	--	gram
ksi	--	kips per square inch
	GAL	gallon
h	H	hour
	LB	pound
--	LS	lump sum
	LF	linear foot
	LNMI	lane mile
	MFBM	thousand foot board measure
	MI	mile
	MSYD	thousand station yard
Ω	--	ohm
pcf	--	pounds per cubic foot
s	--	second
	STA	100 feet
	SQFT	square foot
	SQYD	square yard
	TAB	tablet
ton	TON	2,000 pounds
V	--	volt
W	--	watt
--	WDAY	working day

### 1-4 DEFINITIONS

#### 1-4.01 GENERAL

Interpret terms as defined in the contract documents. A construction-industry term not defined in the contract documents has the meaning defined in Means Illustrated Construction Dictionary, Condensed Version, Second Edition.

#### 1-4.02 GLOSSARY

**aerially deposited lead:** Lead primarily from vehicle emissions deposited within unpaved areas or formerly unpaved areas.

**archaeological monitoring area:** Area within, near, or straddling the project limits where access is allowed, but work is subject to archaeological monitoring.

**archaeological resources:** Remains of past human activity, including historic and prehistoric material (e.g., tools and tool fragments, hearth and food remains, structural remains, and human remains).

**acceptance:** Formal written acceptance by the Director of an entire contract that has been completed in all respects in accordance with the plans and specifications and any modifications to them previously approved.

**base:** Layer of specified material of planned thickness placed immediately below the pavement or surfacing.

**basement material:** Material in excavation or embankments underlying the lowest layer of subbase, base, pavement, surfacing, or other specified layer to be placed.

**bid item:** Specific work unit for which the bidder provides a price.

**Bid Item List:** List of bid items and the associated quantities.

**Bid Item List, verified:** Bid Item List with verified prices. The Contract Proposal of Low Bidder at the Department's Web site is the verified Bid Item List.

**bridge:** Structure, with a bridge number, that carries a utility facility, or railroad, highway, pedestrian or other traffic, over a water course or over or under or around any obstruction.

**building-construction contract:** Contract that has "building construction" on the cover of the Notice to Bidders and Special Provisions.

**business day:** Day on the calendar except Saturday or holiday.

**California Manual on Uniform Traffic Control Devices:** The California Manual on Uniform Traffic Control Devices for Streets and Highways (California MUTCD) is issued by the Department of Transportation and is the Federal Highway Administration's MUTCD 2003 Edition, as amended for use in California.

**Certified Industrial Hygienist:** Industrial hygienist certified in comprehensive practice by the American Board of Industrial Hygiene.

**conduit:** Pipe or tube in which smaller pipes, tubes, or electrical conductors are inserted or are to be inserted.

**contract:** Written and executed contract between the Department and the Contractor.

**contract bonds:** Security for the payment of workers and suppliers furnishing materials, labor, and services and for guaranteeing the Contractor's work performance.

**contract item:** Bid item.

**Contractor:** Person or business or its legal representative entering into a contract with the Department for performance of the work.

**culvert:** Structure, other than a bridge, that provides an opening under a roadway for drainage or other purposes.

**day:** 24 consecutive hours running from midnight to midnight; calendar day.

**deduction:** Amount of money permanently taken from progress payment and final payment. Deductions are not retentions under Pub Cont Code § 7107.

**Department:** Department of Transportation as defined in St & Hwy Code § 20 and authorized in St & Hwy Code § 90; its authorized representatives.

**detour:** Temporary route for traffic around a closed road part. A passageway through a job site is not a detour.

**Director:** Department's Director.

**Disabled Veteran Business Enterprise:** Business certified as a DVBE by the Office of Small Business and DVBE Services, Department of General Services.

**divided highway:** Highway with separated traveled ways for traffic, generally in opposite directions.

**Engineer:** Department's Chief Engineer acting either directly or through properly authorized agents; the agents acting within the scope of the particular duties delegated to them.

**environmentally sensitive area:** Area within, near, or straddling the project limits where access is prohibited or limited to protect environmental resources.

**Federal-aid contract:** Contract that has a Federal-aid project number on the cover of the Notice to Bidders and Special Provisions.

**fixed costs:** Labor, material, or equipment cost directly incurred by the Contractor as a result of performing or supplying a particular bid item that remains constant regardless of the item's quantity.

**frontage road:** Local street or road auxiliary to and located generally on the side of an arterial highway for service to abutting property and adjacent areas and for control of access.

**grading plane:** Basement material surface on which the lowest layer of subbase, base, pavement, surfacing, or other specified layer is placed.

**highway:** Whole right of way or area that is reserved for and secured for use in constructing the roadway and its appurtenances.

**holiday:**

1. Every Sunday
2. January 1st, New Year's Day
3. 3rd Monday in January, Birthday of Martin Luther King, Jr.
4. February 12th, Lincoln's Birthday
5. 3rd Monday in February, Washington's Birthday
6. March 31st, Cesar Chavez Day
7. Last Monday in May, Memorial Day
8. July 4th, Independence Day
9. 1st Monday in September, Labor Day
10. 2nd Monday in October, Columbus Day
11. November 11th, Veterans Day
12. 4th Thursday in November, Thanksgiving Day
13. Day after Thanksgiving Day
14. December 25th, Christmas Day

If January 1st, February 12th, March 31st, July 4th, November 11th, or December 25th falls on a Sunday, the Monday following is a holiday. If November 11th falls on a Saturday, the preceding Friday is a holiday. Interpret "legal holiday" as "holiday."

**idle equipment:** Equipment:

1. On the job site at the start of a delay
2. Idled because of the delay
3. Not operated during the delay

**informal-bid contract:** Contract that has "Informal Bid Authorized by Pub Cont Code §10122" on the cover of the Notice to Bidders and Special Provisions.

**Information Handout:** Supplemental project information furnished to bidders as a handout.

**laboratory:** Laboratory authorized by the Department to test materials.

**liquidated damages:** Amount prescribed in the specifications, pursuant to the authority of Pub Cont Code § 10226, to be paid to the State or to be deducted for each day's delay in completing the whole or any specified portion of the work beyond the time allowed in the specifications.

**listed species:** Any species listed as threatened or endangered under (1) Federal Endangered Species Act of 1973, 16 USC §1531 et seq., (2) California Endangered Species Act, Fish & Game Code §§ 2050–2115.5, (3) or both.

**material shortage:** Shortage of raw or produced material that is area-wide and caused by an unusual market condition, except if any of the following occurs:

1. Shortage relates to a produced, nonstandard material
2. Supplier's and the Contractor's priority for filling an order differs
3. Event outside the U.S. for a material produced outside the U.S.

**median:** Portion of a divided highway separating the traveled ways for traffic in opposite directions including inside shoulders.

**mobilization:** Preparatory work that must be performed or costs incurred before starting work on the various items on the job site (Pub Cont Code § 10104).

**Notice to Bidders:** Document that provides a general work description, bidder and bid specifications, and the time and location the Department receives bids.

**paleontological resources:** Fossils and the deposits they are found in. Fossils are evidence of ancient life preserved in sediments and rock. Examples of paleontological resources are remains of (1) animals, (2) animal tracks, (3) plants, and (4) other organisms. Archaeological resources are not paleontological and fossils found within an archaeological resource are generally considered archaeological resources, not paleontological resources.

**pavement:** Uppermost layer of material placed on the traveled way or shoulders. This term is used interchangeably with surfacing.

**permitted biological activities:** Monitoring, surveying, or other practices that require a take permit and project specific permission from U.S. Fish and Wildlife Service or NOAA Fisheries or a take permit or Memorandum of Understanding with Department of Fish and Game.

**plans:** Official project plans and Standard Plans, profiles, typical cross sections, working drawings and supplemental drawings, or reproductions thereof, approved by the Engineer, which show the location, character, dimensions and details of the work to be performed. These documents are to be considered as a part of the plans.

In the above definition, the following terms are defined as follows:

**Standard Plans:** Standard Plans issued by the Department.

**project plans:** Specific details and dimensions peculiar to the work supplemented by the Standard Plans insofar as the same may apply.

**protective radius:** Minimum distance between construction activities and regulated species.

**regulated species:** Any species protected by one or any combination of the following:

1. Federal Endangered Species Act of 1973, 16 USC §1531 et seq.
2. California Endangered Species Act, Fish & Game Code §§2050–2115.5
3. Fish & Game Code §§1600–1616
4. National Environmental Policy Act, 42 USC §4321 et seq.
5. California Environmental Quality Act, Pub Res Code § 21000 et.seq.
6. Other law or regulation that governs activities that affect species or their habitats.

**roadbed:** Area between the intersection of the upper surface of the roadway and the side slopes or curb lines. The roadbed rises in elevation as each increment or layer of subbase, base, surfacing or pavement is placed. Where the medians are so wide as to include areas of undisturbed land, a divided highway is considered as including 2 separate roadbeds.

**roadway:** Highway portion included between the outside lines of sidewalks, or curbs, slopes, ditches, channels, waterways, and including all the appertaining structures, and other features necessary to proper drainage and protection.

- routine biological activities:** Biological monitoring, surveying, or other activity that does not require a take permit from the U.S. Fish and Wildlife Service or NOAA Fisheries or a take permit or Memorandum of Understanding with Department of Fish and Game.
- service-approved biologist:** Biologist whose activities must be approved by a state or federal agency as provided in PLACs.
- shoulder:** Roadway portion contiguous with the traveled way for accommodation of stopped vehicles, for emergency use, and for lateral support of base and surface courses.
- small tool:** Tool or piece of equipment not listed in Labor Surcharge and Equipment Rental Rates that has a replacement value of \$500 or less.
- special provisions:** Specific clauses setting forth conditions or requirements peculiar to the work and supplementary to these Standard Specifications. The Department's publication titled "Labor Surcharge And Equipment Rental Rates" is part of the special provisions.
- specifications:** Directions, provisions, and requirements contained in these Standard Specifications, Amendments to the Standard Specifications, and the special provisions. Where the term "these specifications" or "these Standard Specifications" is used in this book, it means the provisions set forth in this book.
- State:** State of California, including its agencies, departments, or divisions, whose conduct or action is related to the work.
- Structure Design:** Offices of Structure Design of the Department.
- subbase:** Layer of specified material of planned thickness between a base and the basement material.
- subgrade:** Roadbed portion on which pavement, surfacing, base, subbase, or a layer of any other material is placed.
- substructure:** Bridge portions below the bridge seats, tops of piers, haunches of rigid frames, or below the spring lines of arches. Backwalls and parapets of abutments and wingwalls of bridges are portions of the substructure.
- superstructure:** Bridge portion except the bridge substructure.
- supplemental project information:** Information relevant to the project, specified as supplemental project information, and made available to bidders.
- surfacing:** Uppermost layer of material placed on the traveled way, or shoulders. This term is used interchangeably with pavement.
- take:** Legal definition regarding harm to listed species as defined in 16 USC §1532 and Fish & Game Code § 86.
- take permit:** Permit granted by the US Fish and Wildlife Service or by the NOAA Fisheries that allows take of federal listed species under 16 USC §1539 or by the Department of Fish & Game that allows take of state listed species under to Fish & Game Code § 2081.
- traffic lane:** Portion of a traveled way for the movement of a single line of vehicles.
- traveled way:** Portion of the roadway for the movement of vehicles, exclusive of shoulders.
- total bid:** Sum of the item totals as verified by the Department; original contract price.
- withhold:** Money temporarily or permanently taken from progress payment. Withholds are not retentions under Pub Cont Code § 7107.
- work:** All the work specified, indicated, shown or contemplated in the contract to construct the improvement, including all alterations, amendments, or extensions to it made by contract change order or other written orders of the Engineer.
- working day:** Time measure unit for work progress. A working day is any day except:
1. Saturdays and holidays
  2. A day when you cannot perform work on the controlling activity for at least 50 percent of the day with at least 50 percent of the normal labor and equipment due to any of the following:
    - 2.1. Adverse weather-related conditions that cause you to dismiss the crew
    - 2.2. Maintaining traffic under the contract
    - 2.3. The Engineer's direction to suspend the controlling activities for reasons unrelated to your performance
    - 2.4. An unanticipated event not caused by either party such as:
      - 2.4.1. Act of God (Pub Cont Code § 7105)
      - 2.4.2. Act of a public enemy
      - 2.4.3. Epidemic
      - 2.4.4. Fire
      - 2.4.5. Flood
      - 2.4.6. Governor-declared state of emergency
      - 2.4.7. Landslide
      - 2.4.8. Quarantine restriction

2.5. An issue involving a third-party, including:

- 2.5.1. Industry or area-wide labor strike
- 2.5.2. Material shortage
- 2.5.3. Freight embargo
- 2.5.4. Jurisdictional requirement of a law enforcement agency
- 2.5.5. Workforce labor dispute of a utility or non-highway facility owner resulting in a utility or non-highway facility reconstruction not described and not solely for the Contractor's convenience

## 1-5 DISTRICTS

### District Composition and Office Addresses

District	Counties	Location Address	Mailing Address
1	Del Norte (DN), Humboldt (Hum), Lake (Lak), Mendocino (Men)	1656 UNION ST EUREKA, CA	PO BOX 3700 EUREKA CA 95502
2	Lassen (Las), Modoc (Mod), Plumas (Plu), Shasta (Sha), Siskiyou (Sis), Tehama (Teh), Trinity (Tri)	1657 RIVERSIDE DR REDDING, CA	PO BOX 496073 REDDING CA 96049-6073
3	Butte (But), Colusa (Col), El Dorado (ED), Glenn (Gle), Nevada (Nev), Placer (Pla), Sacramento (Sac), Sierra (Sie), Sutter (Sut), Yolo (Yol), Yuba (Yub)	703 B ST MARYSVILLE, CA	PO BOX 911 MARYSVILLE CA 95901
4	Alameda (Ala), Contra Costa (CC), Marin (Mrn), Napa (Nap), San Francisco (SF), San Mateo (SM), Santa Clara (SCI), Solano (Sol), Sonoma (Son)	111 GRAND AVE OAKLAND, CA	PO BOX 23660 OAKLAND CA 94623-0660
5	Monterey (Mon), San Benito (SBt), San Luis Obispo (SLO), Santa Barbara (SB), Santa Cruz (SCr)	50 HIGUERA ST SAN LUIS OBISPO, CA	50 HIGUERA ST SAN LUIS OBISPO CA 93401-5415
6	Fresno (Fre), Kern (Ker), Kings (Kin), Madera (Mad), Tulare (Tul)	1352 W. OLIVE AVE FRESNO, CA	PO BOX 12616 FRESNO CA 93728-2616
7	Los Angeles (LA), Ventura (Ven)	100 S. MAIN ST LOS ANGELES	100 S MAIN ST LOS ANGELES CA 90012
8	Riverside (Riv), San Bernardino (SBd)	464 W 4TH ST SAN BERNARDINO, CA	464 W 4TH ST SAN BERNARDINO CA 92401-1400
9	Inyo (Iny), Mono (Mno)	500 S MAIN ST BISHOP, CA	500 S MAIN ST BISHOP CA 93514-3423
10	Alpine (Alp), Amador (Ama), Calaveras (Cal), Mariposa (Mpa), Merced (Mer), San Joaquin (SJ), Stanislaus (Sta), Tuolumne (Tuo)	1976 E CHARTER WAY STOCKTON, CA	PO BOX 2048 STOCKTON CA 95201
11	Imperial (Imp), San Diego (SD)	4050 TAYLOR ST SAN DIEGO, CA	4050 TAYLOR ST SAN DIEGO CA 92110-2737
12	Orange (Ora)	3347 MICHELSON DR STE 100 IRVINE, CA	3347 MICHELSON DR STE 100 IRVINE CA 92612-0661

A project with work in District 1, 2, or 3 is a North Region project. For Districts 1, 2, and 3, interpret each reference to the district office as the North Region office. The North Region office address is the District 3 address.

## 1-6 WEB SITES, ADDRESSES, AND TELEPHONE NUMBERS

**Web Sites, Addresses, and Telephone Numbers**

Agency, Department Unit, or Reference	Web Site	Address	Telephone No.
Bid Document Unit		MSC 26 BID DOCUMENT UNIT DEPARTMENT OF TRANSPORTATION 1120 N ST RM 200 SACRAMENTO CA 95814-5605	
Department	<a href="http://www.dot.ca.gov">www.dot.ca.gov</a>		
Department of General Services, Office of Small Business and DVBE Services	<a href="http://www.pd.dgs.ca.gov/smbus/default.htm">www.pd.dgs.ca.gov/smbus/default.htm</a>	OFFICE OF SMALL BUSINESS AND DVBE SERVICES DEPARTMENT OF GENERAL SERVICES 707 3RD ST WEST SACRAMENTO CA 95605-2811	(800) 559-5529 (916) 375-4940
Department of Industrial Relations	<a href="http://www.dir.ca.gov">www.dir.ca.gov</a>		
Department of Industrial Relations, Division of Apprenticeship Standards		455 GOLDEN GATE AVENUE SAN FRANCISCO, CA 94102	
Office Engineer		MSC 43 OFFICE ENGINEER DEPARTMENT OF TRANSPORTATION 1727 30TH ST SACRAMENTO CA 95816-7005	
Office Engineer– Verified Bid Results	<a href="http://www.dot.ca.gov/hq/esc/oe/awards/bidsum_html/6week_list.html">http://www.dot.ca.gov/hq/esc/oe/awards/bidsum_html/6week_list.html</a>		
Offices of Structure Design, Documents Unit		MSC 9-4/4I DOCUMENTS UNIT OFFICES OF STRUCTURE DESIGN DEPARTMENT OF TRANSPORTATION 1801 30TH ST SACRAMENTO CA 95816-7006	(916) 227-0716
Publication Distribution Unit		PUBLICATION UNIT DEPARTMENT OF TRANSPORTATION 1900 ROYAL OAKS DRIVE SACRAMENTO CA 95815-3800	
Transportation Laboratory		MATERIALS AND ENGINEERING TESTING SERVICES AND GEOTECHNICAL SERVICES DEPARTMENT OF TRANSPORTATION 5900 FOLSOM BLVD SACRAMENTO CA 95819-4612	(916) 227-7000
Department's Pre- Qualified Products List	<a href="http://www.dot.ca.gov/hq/esc/approved_products_list">http://www.dot.ca.gov/hq/esc/approved_products_list</a>		



If bridge as-built drawings are available:

1. For a project in District 1 through 6 or 10, you may request them from the Office of Structure Maintenance and Investigations, fax (916) 227-8357
2. For a project in District 7, 8, 9, 11, or 12, you may request them from the Office of Structure Maintenance and Investigations, fax (916) 227-8357, and are available at the Office of Structure Maintenance and Investigations, Los Angeles, CA, telephone (213) 897-0877

As-built drawings may not show existing dimensions and conditions. Where new construction dimensions are dependent on existing bridge dimensions, verify the field dimensions and adjust dimensions of the work to fit existing conditions.

## **2-1.04–2-1.10 RESERVED**

### **2-1.11 JOB SITE AND DOCUMENT EXAMINATION**

Examine the job site and bid documents.

Bid submission is your acknowledgment that you have examined the job site and bid documents and are satisfied with:

1. General and local conditions to be encountered
2. Character, quality, and scope of work to be performed
3. Quantities of materials to be furnished
4. Character, quality, and quantity of surface and subsurface materials or obstacles
5. Requirements of the contract

### **2-1.12 BID DOCUMENT COMPLETION**

#### **2-1.12A General**

Complete forms in the Bid book.

On the Subcontractor List you may either submit each subcontracted bid item number and corresponding percentage with your bid or fax this information to (916) 227-6282 within 24 hours after bid opening. If you fail to submit this information within the time specified, your bid is nonresponsive.

Except for the bid item number and the percentage of each item subcontracted, do not fax submittals.

#### **2-1.12B Bid Item List and Bid Comparison**

Submit a bid based on the work item quantities the Department shows in the Bid Item List.

For a lump sum based bid, the Department compares bids based on the total price.

For a unit price based bid, the Department compares bids based on the sum of the item totals.

For a cost plus time based bid, the Department compares bids based on the sum of the item totals and the total bid for time. If your bid for time exceeds the number of working days described in the Notice to Bidders, your bid is nonresponsive.

#### **2-1.12C Subcontractor List**

In the Subcontractor List, list each subcontractor to perform work in an amount in excess of 1/2 of 1 percent of the total bid or \$10,000, whichever is greater (Pub Cont Code § 4100 et seq.)

The Subcontractor List must show the name, address, and work portions to be performed by each subcontractor listed. Show work portion by bid item number, description, and percentage of each bid item subcontracted.

### **2-1.13 BIDDER'S SECURITY**

Submit your bid with one of the following forms of bidder's security equal to at least 10 percent of the bid:

1. Cash
2. Cashier's check
3. Certified check
4. Bidder's bond signed by a surety insurer who is licensed in California

Make checks and bonds payable to the Department of Transportation.

If using a bidder's bond, you may use the form in the Bid book. If you do not use the form in the Bid book, use a form containing the same information.



**3-1.02 CONTRACT AWARD**

Submit any bid protest to the Office Engineer.

If the Department awards the contract, the award is made to the lowest responsible bidder within the number of days shown in the following table:

<b>Contract Award Period</b>	
Days (after bid opening)	Project Estimated Cost shown in the Notice to Bidders
30	< \$200 million
60	≥ \$200 million

The Department may extend the specified award period if the bidder agrees.

**3-1.03 CONTRACT BONDS (PUB CONT CODE §§ 10221 AND 10222)**

The successful bidder must furnish 2 bonds:

1. Payment bond to secure the claim payments of laborers, workers, mechanics, or materialmen providing goods, labor, or services under the contract. This bond must be equal to at least 100 percent of the total bid.
2. Performance bond to guarantee the faithful performance of the contract. This bond must be equal to at least 50 percent of the total bid.

The Department furnishes the successful bidder with bond forms.

**3-1.04 CONTRACTOR LICENSE**

For a Federal-aid contract, the Contractor must be properly licensed as a contractor (Pub Cont Code § 10164) from contract award through contract acceptance.

For a non-Federal-aid contract:

1. The Contractor must be properly licensed as a contractor from bid opening through contract acceptance (Bus & Prof Code § 7028.15)
2. Joint venture bidders must obtain a joint venture license before contract award (Bus & Prof Code § 7029.1)

**3-1.05 INSURANCE POLICIES**

The successful bidder must submit:

1. Copy of its commercial general liability policy and its excess policy or binder until such time as a policy is available, including the declarations page, applicable endorsements, riders, and other modifications in effect at the time of contract execution. Standard ISO form No. CG 0001 or similar exclusions are allowed if not inconsistent with Section 7-1.12, "Indemnification and Insurance." Allowance of additional exclusions is at the discretion of the Department.
2. Certificate of insurance showing all other required coverages. Certificates of insurance, as evidence of required insurance for the auto liability and any other required policy, shall set forth deductible amounts applicable to each policy and all exclusions that are added by endorsement to each policy. The evidence of insurance shall provide that no cancellation, lapse, or reduction of coverage will occur without 10 days prior written notice to the Department.
3. A declaration under the penalty of perjury by a CPA certifying the accountant has applied GAAP guidelines confirming the successful bidder has sufficient funds and resources to cover any self-insured retentions if the self-insured retention is \$50,000 or higher.

If the successful bidder uses any form of self-insurance for workers compensation in lieu of an insurance policy, it shall submit a certificate of consent to self-insure under Labor Code § 3700.

**3-1.06 RESERVED**

**3-1.07 PAYEE DATA RECORD**

Complete and sign the Payee Data Record form included in the contract documents.

### **3-1.08 RESERVED**

### **3-1.09 CONTRACT EXECUTION**

The successful bidder must sign the contract.

Deliver to the Office Engineer:

1. Signed Contract form
2. Contract bonds
3. Documents identified in Section 3-1.05, "Insurance Policies"
4. Payee data record

For an informal-bid contract, the Office Engineer must receive these documents before the 5th business day after the bidder receives the contract. For all other contracts, the Office Engineer must receive these documents before the 10th business day after the bidder receives the contract.

The bidder's security may be forfeited for failure to execute the contract within the time specified (Pub Cont Code §§ 10181, 10182, and 10183).

The following is a copy of the Contract form:



STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION  
CONTRACT NO. \_\_\_\_\_

This contract is entered into between the State of California's Department of Transportation and the Contractor named below:

\_\_\_\_\_  
CONTRACTOR'S NAME

The parties agree to comply with the terms of the following exhibits that are by this reference made a part of this contract.

- Exhibit A - Bid book dated \_\_\_\_\_
- Exhibit B - Notice to Bidders and Special Provisions dated \_\_\_\_\_
- Exhibit C - Project Plans approved \_\_\_\_\_
- Exhibit D - Standard Specifications dated \_\_\_\_\_
- Exhibit E - Amendments to the Standard Specifications dated \_\_\_\_\_
- Exhibit F - Standard Plans dated \_\_\_\_\_
- Exhibit G - Addenda \_\_\_\_\_

Exhibits A, B, C, and G are those exhibits identified with the same contract number as this contract.

**This contract has been executed by the following parties:**

\_\_\_\_\_  
**CONTRACTOR**

CONTRACTOR'S NAME (if other than an individual, state whether a corporation, partnership, etc.)

BY (Authorized Signature)

DATE SIGNED (Do not type)

PRINTED NAME AND TITLE OF PERSON SIGNING

FEDERAL EMPLOYER IDENTIFICATION NUMBER

LICENSE NUMBER

\_\_\_\_\_  
**DEPARTMENT OF TRANSPORTATION**

BY (Authorized Signature)

DATE SIGNED (Do not type)

PRINTED NAME AND TITLE OF PERSON SIGNING

**This contract has been certified as complying with the State Contract Act:**

BY (Authorized Signature)

DATE SIGNED (Do not type)

PRINTED NAME AND TITLE OF PERSON SIGNING

**ADA Notice** For individuals with sensory disabilities, this document is available in alternate formats. For information call (916) 654-6410 or TDD (916) 654-3880 or write Records and Forms Management, 1120 N Street, MS-89, Sacramento, CA 95814.

**3-1.10 BIDDERS' SECURITIES**

The Department keeps the securities of the 1st, 2nd, and 3rd low bidders until the contract has been executed. The other bidders' securities, other than bidders' bonds, are returned upon determination of the 1st, 2nd, and 3rd low bidders, and their bidders' bonds are of no further effect (Pub Cont Code § 10184).



**Add:**

**4-1.035 VALUE ENGINEERING**

**4-1.035A General**

Reserved

**4-1.035B Value Engineering Change Proposal**

You may submit a VECP to reduce any of the following:

1. Total cost of construction
2. Construction activity duration
3. Traffic congestion

Before preparing a VECP, meet with the Engineer to discuss:

1. Proposal concept
2. Permit issues
3. Impact on other projects
4. Project impacts, including traffic, schedule, and later stages
5. Peer reviews
6. Overall proposal merits
7. Review times required by the Department and other agencies

The VECP must not impair the project's essential functions or characteristics, such as:

1. Service life
2. Operation economy
3. Maintenance ease
4. Desired appearance
5. Design and safety

The VECP must include:

1. Description of the contract specifications and drawing details for performing the work and the proposed changes.
2. Itemization of contract specifications and drawing details that would be changed.
3. Detailed cost estimate for performing the work under the existing contract and under the proposed change. Determine the estimates under Section 9-1.03, "Force Account Payment."
4. Deadline for the Engineer to decide on the changes.
5. Bid items affected and resulting quantity changes.

The Department is not required to consider a VECP. If a VECP is similar to a change in the plans or specifications being considered by the Department at the time the proposal is submitted or if the proposal is based on or similar to drawings or specifications adopted by the Department before Contract award, the Department does not accept the VECP and may make these changes without VECP payments.

Until the Department approves a change order incorporating the VECP or parts of it, continue to perform the work under the contract. If the Department does not approve a change order before the deadline stated in the VECP or other date you subsequently stated in writing, the VECP is rejected. The Department does not adjust time or payment for a rejected VECP.

The Department decides whether to accept a VECP and the estimated net construction-cost savings from adopting the VECP or parts of it.

The Department may require you to accept a share of the investigation cost as a condition of reviewing a VECP. After written acceptance, the Department considers the VECP and deducts the agreed cost.

If the Department accepts the VECP or parts of it, the Department issues a change order that:

1. Incorporates changes in the contract necessary to implement the VECP or the parts adopted
2. Includes the Department's acceptance conditions
3. States the estimated net construction-cost savings resulting from the VECP
4. Obligates the Department to pay you 50 percent of the estimated net savings



3. Certifications
4. Decisions
5. Notifications
6. Orders
7. Responses

The Contractor must furnish the following in writing:

1. Assignments
2. Notifications
3. Proposals
4. Reports
5. Requests, including RFIs, sequentially numbered
6. Subcontracts
7. Test results

The Department rejects a form if it has any error or any omission.

Convert foreign language documents to English.

Use contract administration forms available at the Department's Web site.

If the last day for submitting a document falls on a Saturday or holiday, it may be submitted on the next business day with the same effect as if it had been submitted on the day specified.

**Add to 5-1.01:**

Failure to enforce a contract provision does not waive enforcement of any contract provision.

**Add:**

**5-1.011 PROTESTS**

You may protest an Engineer's decision by submitting an RFI under Section 5-1.145, "Requests for Information."

**Add:**

**5-1.012 PARTNERING**

**5-1.012A General**

The Department strives to work cooperatively with all contractors; partnering is our way of doing business. The Department encourages project partnering among the project team, made up of significant contributors from the Department and the Contractor, and their invited stakeholders.

For a project with a total bid greater than \$1 million, professionally facilitated project partnering is encouraged.

For a project with a total bid greater than \$10 million, professionally facilitated project partnering is required.

In implementing project partnering, you and the Engineer manage the contract by:

1. Using early and regular communication with involved parties
2. Establishing and maintaining a relationship of shared trust, equity, and commitment
3. Identifying, quantifying, and supporting attainment of mutual goals
4. Developing strategies for using risk management concepts
5. Implementing timely communication and decision making
6. Resolving potential problems at the lowest possible level to avoid negative impacts
7. Holding periodic partnering meetings and workshops as appropriate to maintain partnering relationships and benefits throughout the life of the project
8. Establishing periodic joint evaluations of the partnering process and attainment of mutual goals

Partnering does not void any contract part.

The Department's "Field Guide to Partnering on Caltrans Construction Projects" current at the time of bid is available to the project team as reference. This guide provides structure, context, and clarity to the partnering process requirements. This guide is available at the Department's Partnering Program website:

In implementing project partnering, the project team must:

1. Create a partnering charter that includes:
  - 1.1. Mutual goals, including core project goals and may also include project-specific goals and mutually supported individual goals.
  - 1.2. Partnering maintenance and close-out plan.
  - 1.3. Dispute resolution plan that includes a dispute resolution ladder and may also include use of facilitated dispute resolution sessions.
  - 1.4. Team commitment statement and signatures.
2. Participate in monthly partnering evaluation surveys to measure progress on mutual goals and may also measure short-term key issues as they arise.
3. Evaluate the partnering facilitator on Forms CEM-5501 and CEM-5502. The Engineer provides the evaluation forms to the project team and collects the results. The Department makes evaluation results available upon request. Facilitator evaluations must be completed:
  - 3.1. At the end of the initial partnering workshop on Form CEM-5501.
  - 3.2. At the end of the project close-out partnering workshop on Form CEM-5502.
4. Conduct a project close-out partnering workshop.
5. Document lessons learned before contract acceptance.

#### **5-1.012B Partnering Facilitator, Workshops, and Monthly Evaluation Surveys**

The Engineer sends you a written invitation to enter into a partnering relationship after contract approval. Respond within 15 days to accept the invitation and request the initial and additional partnering workshops. After the Engineer receives the request, you and the Engineer cooperatively:

1. Select a partnering facilitator that offers the service of a monthly partnering evaluation survey with a 5-point rating and agrees to follow the Department's "Partnering Facilitator Standards and Expectations" available at the Department's Partnering Program website
2. Schedule initial partnering workshop
3. Determine initial workshop site and duration
4. Agree to other workshop administrative details

Additional partnering workshops and sessions are encouraged throughout the life of the project as determined necessary by you and the Engineer, recommended quarterly.

#### **5-1.012C Training in Partnering Skills Development**

For a project with a total bid of \$25 million or greater, training in partnering skills development is required.

For a project with a total bid between \$10 million and \$25 million, training in partnering skills is optional.

You and the Engineer cooperatively schedule the training session and select a professional trainer, training site, and 1 to 4 topics from the following list to be covered in the training:

1. Active Listening
2. Building Teams
3. Change Management
4. Communication
5. Conflict Resolution
6. Cultural Diversity
7. Dealing with Difficult People
8. Decision Making
9. Effective Escalation Ladders
10. Emotional Intelligence
11. Empathy
12. Ethics
13. Facilitation Skills

14. Leadership
15. Partnering Process and Concepts
16. Project Management
17. Project Organization
18. Problem Solving
19. Running Effective Meetings
20. Time Management
21. Win-Win Negotiation

Before the initial partnering workshop, the trainer conducts a 1-day training session in partnering skills development for the Contractor's and the Engineer's representatives. This training session must be a separate session from the initial partnering workshop and must be conducted locally. The training session must be consistent with the partnering principles under the Department's "Field Guide to Partnering on Caltrans Construction Projects."

Send at least 2 representatives to the training session. One of these must be your assigned representative as specified in Section 5-1.06, "Superintendence," of the Standard Specifications.

#### **5-1.012D Payment**

The Department pays you for:

1. 1/2 of partnering workshops and sessions based on facilitator and workshop site cost
2. 1/2 of monthly partnering evaluation survey service cost
3. Partnering skills development trainer and training site cost

The Department determines the costs based on invoice prices minus any available or offered discounts. The Department does not pay markups on these costs.

The Department does not pay for wages, travel expenses, or other costs associated with the partnering workshops and sessions, monthly partnering evaluation surveys, and training in partnering skills development.

#### **Add:**

#### **5-1.015 RECORDS**

##### **5-1.015A General**

Reserved

##### **5-1.015B Record Retention**

Retain project records from bid preparation through:

1. Final payment
2. Resolution of claims, if any

For at least 3 years after the later of these, retain cost records, including records of:

1. Bid preparation
2. Overhead
3. Payrolls
4. Payments to suppliers and subcontractors
5. Cost accounting

Maintain the records in an organized way in the original format, electronic and hard copy, conducive to professional review and audit.

##### **5-1.015C Record Inspection, Copying, and Auditing**

Make your records available for inspection, copying, and auditing by State representatives for the same time frame specified under Section 5-1.015B, "Record Retention." The records of subcontractors and suppliers must be made available for inspection, copying, and auditing by State representatives for the same period. Before contract acceptance, the State representative notifies the Contractor, subcontractor, or supplier 5 business days before inspection, copying, or auditing.

If an audit is to start more than 30 days after contract acceptance, the State representative notifies the Contractor, subcontractor, or supplier when the audit is to start.

### **5-1.015D Cost Accounting Records**

Maintain cost accounting records for the project distinguishing between the following work cost categories:

1. Work performed based on bid item prices
2. Work performed by change order other than extra work. Distinguish this work by:
  - 2.1. Bid item prices
  - 2.2. Force account
  - 2.3. Agreed price
3. Extra work. Distinguish extra work by:
  - 3.1. Bid item prices
  - 3.2. Force account
  - 3.3. Agreed price
  - 3.4. Specialist billing
4. Work performed under potential claim records
5. Overhead
6. Subcontractors, suppliers, owner-operators, and professional services

Cost accounting records must include:

1. Final cost code lists and definitions
2. Itemization of the materials used and corresponding vendor's invoice copies
3. Direct cost of labor
4. Equipment rental charges
5. Workers' certified payrolls
6. Equipment:
  - 6.1. Size
  - 6.2. Type
  - 6.3. Identification number
  - 6.4. Hours operated

### **5-1.015E Extra Work Bills**

Maintain separate records for costs of work performed by change order.

Submit extra work bills using the Department's Internet extra work billing system.

The Contractor submitting and the Engineer approving an extra work bill using the Internet force account work billing system is the same as each party signing the bill.

The Department provides billing system:

1. Training within 30 days of your written request
2. Accounts and user identification to your assigned representatives after a representative has received training

Each representative must maintain a unique password.

### **Replace Section 5-1.04 with:**

#### **5-1.04 CONTRACT COMPONENTS**

A component in one contract part applies as if appearing in each. The parts are complementary and describe and provide for a complete work.

If a discrepancy exists:

1. The governing ranking of contract parts in descending order is:
  - 1.1. Special provisions

- 1.2. Project plans
  - 1.3. Revised Standard Plans
  - 1.4. Standard Plans
  - 1.5. Amendments to the Standard Specifications
  - 1.6. Standard Specifications
  - 1.7. Supplemental project information
2. Written numbers and notes on a drawing govern over graphics
  3. A detail drawing governs over a general drawing
  4. A detail specification governs over a general specification
  5. A specification in a section governs over a specification referenced by that section

If a discrepancy is found or confusion arises, request correction or clarification.

**Add:**

**5-1.055 SUBCONTRACTING**

**5-1.055A General**

No subcontract releases you from the contract or relieves you of your responsibility for a subcontractor's work.

If you violate Pub Cont Code § 4100 et seq., the Department may exercise the remedies provided under Pub Cont Code § 4110. The Department may refer the violation to the Contractors State License Board as provided under Pub Cont Code § 4111.

Except for a building-construction non-federal-aid contract, perform work equaling at least 30 percent of the value of the original total bid with your employees and with equipment owned or rented by you, with or without operators.

Each subcontract must comply with the contract.

Each subcontractor must have an active and valid State contractor's license with a classification appropriate for the work to be performed (Bus & Prof Code, § 7000 et seq.).

Submit copies of subcontracts upon request.

Before subcontracted work starts, submit a Subcontracting Request form.

Do not use a debarred contractor; a current list of debarred contractors is available at the Department of Industrial Relations' Web site.

Upon request, immediately remove and not again use a subcontractor who fails to prosecute the work satisfactorily.

**Replace Section 5-1.07 with:**

**5-1.07 LINES AND GRADES**

The Engineer places stakes and marks under Chapter 12, "Construction Surveys," of the Department's Surveys Manual. Submit your request for Department-furnished stakes:

1. On a Request for Construction Stakes form. Ensure:
  - 1.1. Requested staking area is ready for stakes
  - 1.2. You use the stakes in a reasonable time
2. A reasonable time before starting an activity using the stakes

Establish priorities for stakes and note priorities on the request.

Preserve stakes and marks placed by the Engineer. If the stakes or marks are destroyed, the Engineer replaces them at the Engineer's earliest convenience and deducts the cost.

**Replace Section 5-1.10 with:**

**5-1.10 EQUIPMENT**

Clearly stencil or stamp at a clearly visible location on each piece of equipment except hand tools an identifying number and:

1. On compacting equipment, its make, model number, and empty gross weight that is either the producer's rated weight or the scale weight
2. On meters and on the load-receiving element and indicators of each scale, the make, model, serial number, and producer's rated capacity

Submit a list:

1. Describing each piece of equipment
2. Showing its identifying number

Upon request, submit producer's information that designates portable vehicle scale capacities.

For proportioning materials, use measuring devices, material plant controllers, and undersupports complying with Section 9-1.01B, "Weighing Equipment and Procedures."

Measuring devices must be tested and approved under California Test 109 in the Department's presence by any of the following:

1. County Sealer of Weights and Measures
2. Scale Service Agency
3. Division of Measurement Standards Official

The indicator over-travel must be at least 1/3 of the loading travel. The indicators must be enclosed against moisture and dust.

Group measuring system dials such that the smallest increment for each indicator can be read from the location at which proportioning is controlled.

**Replace Section 5-1.116 with:**

**5-1.116 DIFFERING SITE CONDITIONS (23 CFR 635.109)**

**5-1.116A Contractor's Notification**

Promptly notify the Engineer if you find either of the following:

1. Physical conditions differing materially from either of the following:
  - 1.1. Contract documents
  - 1.2. Job site examination
2. Physical conditions of an unusual nature, differing materially from those ordinarily encountered and generally recognized as inherent in the work provided for in the contract

Include details explaining the information you relied on and the material differences you discovered.

If you fail to notify the Engineer promptly, you waive the differing site condition claim for the period between your discovery of the differing site condition and your notification to the Engineer.

If you disturb the site after discovery and before the Engineer's investigation, you waive the differing site condition claim.

**5-1.116B Engineer's Investigation and Decision**

Upon your notification, the Engineer investigates job site conditions and:

1. Notifies you whether to resume affected work
2. Decides whether the condition differs materially and is cause for an adjustment of time, payment, or both

You may protest the Engineer's decision.

**Replace Section 5-1.14 with:**

**5-1.14 COST REDUCTION INCENTIVE**

Comply with Section 4-1.035B, "Value Engineering Change Proposal."

**Add:**

### **5-1.145 REQUESTS FOR INFORMATION**

Submit an RFI upon recognition of any event or question of fact arising under the Contract.

The Engineer responds to the RFI within 5 business days. Proceed with the work unless otherwise ordered. You may protest the Engineer's response by:

1. Submitting an Initial Potential Claim Record within 5 business days after receipt of the Engineer's response
2. Complying with Section 5-1.146, "Potential Claims and Dispute Resolution"

**Add:**

### **5-1.146 POTENTIAL CLAIMS AND DISPUTE RESOLUTION**

#### **5-1.146A General**

Minimize and mitigate impacts of potentially claimed work or event.

For each potential claim, assign an identification number determined by chronological sequencing and the 1st date of the potential claim.

Use the identification number for each potential claim on the:

1. Initial Potential Claim Record
2. Supplemental Potential Claim Record
3. Full and Final Potential Claim Record

Failure to comply with this procedure is:

1. Waiver of the potential claim and a waiver of the right to a corresponding claim for the disputed work in the administrative claim procedure
2. Bar to arbitration (Pub Cont Code § 10240.2)

#### **5-1.146B Initial Potential Claim Record**

Submit an Initial Potential Claim Record within 5 business days of the Engineer's response to the RFI. The Initial Potential Claim Record establishes the claim nature and circumstances. The claim nature and circumstances must remain consistent.

The Engineer responds within 5 business days of the date of the Initial Potential Claim Record. Proceed with the potentially claimed work unless ordered.

Within 20 days of a request, provide access to the project records determined necessary by the Engineer to evaluate the potential claim.

#### **5-1.146C Supplemental Potential Claim Record**

Within 15 days of submitting the Initial Potential Claim Record, submit a Supplemental Potential Claim Record including:

1. Complete nature and circumstances causing the potential claim or event
2. Contract specifications supporting the basis of a claim
3. Estimated claim cost and an itemized breakdown of individual costs stating how the estimate was determined
4. TIA

The Engineer evaluates the Supplemental Potential Claim Record and furnishes you a response within 20 days of submittal. If the estimated cost or effect on the scheduled completion date changes, update the Supplemental Potential Claim Record information as soon as the change is recognized and submit this information.

#### **5-1.146D Full and Final Potential Claim Record**

Notify the Engineer within 10 days of the completion date of the potentially claimed work. The Engineer approves this completion date or notifies you of a revised date.

Within 30 days of the completion of the potentially claimed work, submit a Full and Final Potential Claim Record including:

1. A detailed factual account of the events causing the potential claim, including:
  - 1.1. Necessary dates
  - 1.2. Locations
  - 1.3. Work items affected by the potential claim
2. The Contract documents supporting the potential claim and a statement of the reasons these parts support entitlement
3. If a payment adjustment is requested, an itemized cost breakdown. Segregate costs into the following categories:
  - 3.1. Labor, including:
    - 3.1.1. Individuals
    - 3.1.2. Classifications
    - 3.1.3. Regular and overtime hours worked
    - 3.1.4. Dates worked
  - 3.2. Materials, including:
    - 3.2.1. Invoices
    - 3.2.2. Purchase orders
    - 3.2.3. Location of materials either stored or incorporated into the work
    - 3.2.4. Dates materials were transported to the job site or incorporated into the work
  - 3.3. Equipment, including:
    - 3.3.1. Detailed descriptions, including make, model, and serial number
    - 3.3.2. Hours of use
    - 3.3.3. Dates of use
    - 3.3.4. Equipment rates at the rental rate listed in Labor Surcharge and Equipment Rental Rates in effect when the affected work related to the claim was performed
4. If a time adjustment is requested:
  - 4.1. Dates for the requested time.
  - 4.2. Reasons for a time adjustment.
  - 4.3. Contract documentation supporting the requested time adjustment.
  - 4.4. TIA. The TIA must demonstrate entitlement to a time adjustment.
5. Identification and copies of your documents and copies of communications supporting the potential claim, including certified payrolls, bills, cancelled checks, job cost reports, payment records, and rental agreements
6. Relevant information, references, and arguments that support the potential claim

The Department does not consider a Full and Final Potential Claim Record that does not have the same nature, circumstances, and basis of claim as those specified on the Initial Potential Claim Record and Supplemental Potential Claim Record.

The Engineer evaluates the information presented in the Full and Final Potential Claim Record and furnishes you a response within 30 days of its receipt unless the Full and Final Potential Claim Record is submitted after Contract acceptance; in which case, a response may not be furnished. The Engineer's receipt of the Full and Final Potential Claim Record must be evidenced by postal return receipt or the Engineer's written receipt if delivered by hand.

#### **5-1.146E Dispute Resolution**

Comply with Section 5-1.15, "Dispute Resolution."

**Add:**

## **5-1.15 DISPUTE RESOLUTION**

### **5-1.15A General**

Section 5-1.15, "Dispute Resolution," applies to a contract with 100 or more working days.

The dispute resolution process is not a substitute for filing an RFI and complying with the requirements of Section 5-1.146, "Potential Claims and Dispute Resolution."

### **5-1.15B Dispute Resolution Advisor**

Section 5-1.15B, "Dispute Resolution Advisor," applies to a contract with a total bid from \$3 million to \$10 million.

A dispute resolution advisor, hereinafter referred to as "DRA," is chosen by the Department and the Contractor to assist in the resolution of disputes.

The DRA shall be established by the Department and the Contractor within 30 days of contract approval.

The Department and the Contractor shall each propose 3 potential DRA candidates. Each potential candidate shall provide the Department and the Contractor with their disclosure statement. The disclosure statement shall include a resume of the potential candidate's experience and a declaration statement describing past, present, anticipated, and planned relationships with all parties involved in this contract.

The Department and the Contractor shall select one of the 6 nominees to be the DRA. If the Department and the Contractor cannot agree on one candidate, the Department and the Contractor shall each choose one of the 3 nominated by the other. The final selection of the DRA will be decided by a coin toss between the two candidates.

The Department and the Contractor shall complete and adhere to the Dispute Resolution Advisor Agreement. No DRA meeting shall take place until the Dispute Resolution Advisor Agreement has been signed by all parties, unless all parties agree to sign it at the first meeting.

If DRA needs outside technical services, technical services shall be preapproved by both the Department and the Contractor.

DRA recommendations are nonbinding.

The Contractor shall not use the DRA for disputes between subcontractors or suppliers that have no grounds for a lawsuit against the Department.

DRA replacement is selected in the same manner as the original selection. The appointment of a replacement DRA will begin promptly upon determination of the need for replacement. The Dispute Resolution Advisor Agreement shall be amended to reflect the change of the DRA.

Failure of the Contractor to participate in selecting DRA will result in the withhold of 25 percent of the estimated value of all work performed during each estimate period that the Contractor fails to comply. DRA withholds will be released for payment on the next monthly progress payment following the date that the Contractor has provided assistance in choosing the DRA and no interest will be due the Contractor.

The State and the Contractor shall bear the costs and expenses of the DRA equally.

The DRA shall be compensated at an agreed rate of \$1,500 per day for time spent per meeting either at the start of the project or for a dispute. A member serving on more than one State DRA or Dispute Resolution Board, regardless the number of meetings per day shall not be paid more than the agreed rate per day. The agreed rate shall be considered full compensation for on-site time, travel expenses, transportation, lodging, time for travel, and incidentals for each day or portion thereof that the DRA is at an authorized DRA meeting.

No additional compensation will be made for time spent by the DRA to review and research activities outside the official DRA meetings unless that time, such as time spent evaluating and preparing recommendations on specific issues presented to the DRA, has been specifically agreed to in advance by the State and Contractor. Time away from the project that has been specifically agreed to in advance by the Department and the Contractor will be compensated at an agreed rate of \$150 per hour. The agreed amount of \$150 per hour shall include all incidentals including expenses for telephone, fax, and computer services.

The State will provide conference facilities for DRA meetings at no cost to the Contractor.

The Contractor shall make direct payments to the DRA for participation in authorized meetings and approved hourly rate charges from invoices submitted.

The State will reimburse the Contractor for the State's share of the costs.

There will be no markups applied to expenses associated with the DRA, either by the DRA or by the Contractor when requesting payment of the State's share of DRA expenses. Regardless of the DRA recommendation, neither party will be entitled to reimbursement of DRA costs from the other party.

The Contractor shall submit extra work bills and include invoices with original supporting documents for reimbursement of the State's share.

The cost of technical services will be borne equally by the State and Contractor. There will be no markups for these costs.

A copy of the "Dispute Resolution Advisor Agreement" to be executed by the Contractor, State and the DRA is as follows:

**DISPUTE RESOLUTION ADVISOR AGREEMENT**

\_\_\_\_\_  
(Contract Identification)

Contract No. \_\_\_\_\_

**THIS DISPUTE RESOLUTION ADVISOR AGREEMENT, hereinafter called "AGREEMENT"**, made and entered into this \_\_\_\_\_ day of \_\_\_\_\_, \_\_\_\_\_, between the State of California, acting through the California Department of Transportation and the Director of Transportation, hereinafter called the "STATE," \_\_\_\_\_ hereinafter called the "CONTRACTOR," and \_\_\_\_\_, the Dispute Resolution Advisor, hereinafter called the "DRA."

WITNESSETH, that

WHEREAS, the STATE and the CONTRACTOR, hereinafter called the "parties," are now engaged in the construction on the State Highway project referenced above; and

WHEREAS, the Standard Specifications for the above referenced contract provides for the establishment and operation of the DRA to assist in resolving disputes; and

WHEREAS, the DRA is composed of one person, chosen by the CONTRACTOR and the STATE;

NOW THEREFORE, in consideration of the terms, conditions, covenants, and performance contained herein, or attached and incorporated and made a part hereof, the STATE, the CONTRACTOR, and the DRA hereto agree as follows:

**SECTION I DESCRIPTION OF WORK**

To assist in the timely resolution of disputes between the parties, the contract provides for the establishment and the operation of the DRA. The DRA is to fairly and impartially consider disputes placed before it and provide recommendations for resolution of these disputes to the parties. The DRA shall provide recommendations based on the facts related to the dispute, the contract and applicable laws and regulations. The DRA shall perform the services necessary to participate in the DRA's actions as designated in Section III, Scope of Work.

**SECTION II DRA QUALIFICATIONS**

The DRA shall be knowledgeable in the type of construction and contract documents anticipated by the contract and shall have completed training through the Dispute Review Board Foundation. In addition, it is desirable for the DRA to have served on several State Dispute Resolution Boards (DRB).

No DRA shall have prior direct involvement in this contract. No DRA shall have a financial interest in this contract or parties thereto, including but not limited to the CONTRACTOR, subcontractors, suppliers, consultants, and legal and business services, within a period 6 months prior to award and during this contract. Exceptions to above are compensation for services on this or other DRAs and DRBs or retirement payments or pensions received from a party that are not tied to, dependent on or affected by the net worth of the party.

The DRA shall fully disclose all direct or indirect professional or personal relationships with all key members of the contract.

**SECTION III SCOPE OF WORK**

The Scope of Work of the DRA includes, but is not limited to, the following:

**A. PROCEDURES**

The DRA shall meet with the parties at the start of the project to establish procedures that will govern the conduct of its business and reporting procedures in conformance with the requirements of the contract and the terms of this AGREEMENT. The DRA established procedures shall only be implemented upon approval by the parties. Subsequent meetings shall be held only to hear disputes between the parties.

The DRA shall not meet with, or discuss contract issues with individual parties.

The State shall provide the DRA with the contract and all written correspondence regarding the dispute between the parties and, if available, the Contractor's supplemental potential claim record, and the Engineer's response to the supplemental potential claim record.

The parties shall not call the DRA who served on this contract as a witness in arbitration proceedings, which may arise from this contract.

The DRA shall have no claim against the STATE or the CONTRACTOR, or both, from claimed harm arising out of the parties' evaluations of the DRA's opinions.

## **B. DISPUTE MEETING**

The term "dispute meeting" as used in this subsection shall refer to both the informal and traditional dispute meeting processes, unless otherwise noted.

If the CONTRACTOR requests a dispute meeting with the DRA, the Contractor must simultaneously notify the STATE. Upon being notified of the need for a dispute meeting, the DRA shall review and consider the dispute. The DRA shall determine the time and location of the dispute meeting with due consideration for the needs and preferences of the parties, while recognizing the importance of a speedy resolution to the dispute.

Dispute meetings shall be conducted at any location that would be convenient and provide required facilities and access to necessary documentation.

Only the STATE's Area Construction Engineer, Resident Engineer, and Structure Representative and the CONTRACTOR's or subcontractor's, Superintendent or Project Manager may present information at a dispute meeting. There shall be no participation of persons who are not directly involved in the contract or who do not have direct knowledge of the dispute. The exception to this is technical services, as described below:

The DRA, with approval of the parties, may obtain technical services necessary to adequately review the disputes presented, including audit, geotechnical, schedule analysis and other services. The parties' technical staff may supply those services as appropriate. The cost of technical services, as agreed to by the parties, shall be borne equally by the two parties as specified in an approved contract change order. The CONTRACTOR shall not be entitled to markups for the payments made for these services.

At the dispute meeting the DRA may ask questions, seek clarification, and request further clarification of data presented by either of the parties as may be necessary to assist in making a fully informed recommendation. However, the DRA shall refrain from expressing opinions on the merits of statements on matters under dispute during the parties' presentations. Each party will be given ample time to fully present its position, make rebuttals, provide relevant documents, and respond to DRA questions and requests.

There shall be no testimony under oath or cross-examination, during DRA dispute meetings. There shall be no reporting of the procedures by a shorthand reporter or by electronic means. Documents and verbal statements shall be received by the DRA in conformance with the rules and regulations established at the first meeting between the DRA and parties. These established rules and regulations need not comply with prescribed legal laws of evidence.

Failure to attend a dispute meeting by either of the parties shall be conclusively considered by the DRA as indication that the non-attending party considers all written documents and correspondence submitted as their entire and complete argument. The claimant shall discuss the dispute, followed by the other party. Each party shall then be allowed one or more rebuttals at the meeting until all aspects of the dispute are thoroughly covered.

### **1. TRADITIONAL DISPUTE MEETING:**

The following procedure shall be used for the traditional dispute meeting:

- a. Within 5 days after receiving the STATE's written response to the CONTRACTOR's supplemental potential claim record, the CONTRACTOR shall refer the dispute to the DRA, if the CONTRACTOR wishes to further pursue the dispute. The CONTRACTOR shall make the referral in writing to the DRA, simultaneously copied to the STATE. The written dispute referral shall describe the disputed matter in individual discrete segments, so that it will be clear to both parties and the DRA what discrete elements of the dispute have been resolved, and which remain unresolved, and shall include an estimate of the cost of the affected work and impacts, if any, on project completion.
- b. The parties shall each be afforded an opportunity to be present and to be heard by the DRA, and to offer evidence. Either party furnishing written evidence or documentation to the DRA must furnish copies of such information to the other party a minimum of 10 days prior to the date the DRA is scheduled to convene the meeting for the dispute. Either party shall produce such additional evidence as the DRA may deem necessary to reach an understanding and a determination of the dispute. The party furnishing additional evidence shall furnish copies of such additional evidence to the other party at the same time the evidence is provided to the DRA. The DRA shall not consider evidence not furnished in conformance with the terms specified herein.

- c. Upon receipt by the DRA of a written referral of a dispute, the DRA shall convene to review and consider the dispute. The dispute meeting shall be held no later than 25 days after receipt of the written referral unless otherwise agreed to by all parties.
- d. The DRA shall furnish a written report to both parties. The DRA may request clarifying information of either party within 5 days after the DRA dispute meeting. Requested information shall be submitted to the DRA within 5 days of the DRA request. The DRA shall complete its report and submit it to the parties within 10 days of the DRA dispute meeting, except that time extensions may be granted at the request of the DRA with the written concurrence of both parties. The report shall summarize the facts considered, the contract language, law or regulation viewed by the DRA as pertinent to the dispute, and the DRA's interpretation and philosophy in arriving at its conclusions and recommendations and, if appropriate, recommends guidelines for determining compensation. The DRA's written opinion shall stand on its own, without attachments or appendices.
- e. Within 10 days after receiving the DRA's report, both parties shall respond to the DRA in writing signifying that the dispute is either resolved or remains unresolved. Failure to provide the written response within the time specified, or a written rejection of the DRA's recommendation or response to a request for reconsideration presented in the report by either party, shall conclusively indicate that the party(s) failing to respond accepts the DRA recommendation. Immediately after responses have been received from both parties, the DRA shall provide copies of both responses to the parties simultaneously. Either party may request clarification of elements of the DRA's report from the DRA prior to responding to the report. The DRA shall consider any clarification request only if submitted within 5 days of receipt of the DRA's report, and if submitted simultaneously in writing to both the DRA and the other party. Each party may submit only one request for clarification for any individual DRA report. The DRA shall respond, in writing, to requests for clarification within 5 days of receipt of such requests.
- f. Either party may seek a reconsideration of the DRA's recommendation. The DRA shall only grant reconsideration based upon submission of new evidence and if the request is submitted within the 10 day time limit specified for response to the DRA's written report. Each party may submit only one request for reconsideration regarding an individual DRA recommendation.
- g. If the parties are able to settle their dispute with the aid of the DRA's report, the STATE and CONTRACTOR shall promptly accept and implement the settlement of the parties. If the parties cannot agree on compensation within 30 days of the acceptance by both parties of the settlement, either party may request the DRA to make a recommendation regarding compensation.

## **2. INFORMAL DISPUTE MEETING**

An informal dispute meeting shall be convened, only if, the parties and the DRA agree that this dispute resolution process is appropriate to settle the dispute.

The following procedure shall be used for the informal dispute meeting:

- a. The parties shall furnish the DRA with one copy of pertinent documents requested by the DRA that are or may become necessary for the DRA to perform its function. The party furnishing documents shall furnish such documents to the other party at the same time the document is provided to the DRA.
- b. After the dispute meeting has concluded, the DRA shall deliberate in private the same day, until a response to the parties is reached or as otherwise agreed to by the parties.
- c. The DRA then verbally delivers its recommendation with findings to the parties.
- d. After the recommendation is presented, the parties may ask for clarifications.
- e. Occasionally the DRA, on complex issues, may be unable to formulate a recommendation based on the information given at a dispute meeting. However, the DRA may provide the parties with advice on strengths and weaknesses of their prospective positions, in the hope of the parties reaching settlement.
- f. If the parties are able to settle their dispute with the aid of the DRA's opinion, the STATE and CONTRACTOR shall promptly accept and implement the settlement of the parties.
- g. The DRA will not be bound by its oral recommendation in the event that a dispute is later heard by the DRA in a traditional dispute meeting.

Unless the dispute is settled, use of the informal dispute meeting does not relieve the parties of their responsibilities under Section 5-1.15B, "Dispute Resolution Advisor," of the Standard Specifications or Subsection, "Traditional Dispute Meeting," of this AGREEMENT. There will be no extension of time allowed for the process to permit the use of the informal dispute meeting, unless otherwise agreed to by the parties.

## **SECTION IV TIME FOR BEGINNING AND COMPLETION**

Once established, the DRA shall be in operation until the day the Director accepts the contract. The DRA shall not begin work under the terms of this AGREEMENT until authorized in writing by the STATE or as agreed to by the parties.

## **SECTION V PAYMENT**

The DRA shall be compensated at an agreed rate of \$1,500 per day for time spent per meeting, either at the start of the project or for a dispute. A member serving on more than one State DRA or DRB, regardless the number of meetings per day, shall not be paid more than the agreed rate per day. The agreed rate shall be considered full compensation for onsite time, travel expenses, transportation, lodging, time for travel and incidentals for each day, or portion thereof that the DRA is at an authorized DRA meeting. No additional compensation will be made for time spent by the DRA to review and research activities outside the official DRA meetings unless that time, (such as time spent evaluating and preparing recommendations on specific issues presented to the DRA), has been specifically agreed to in advance by the parties. Time away from the project, which has been specifically agreed to in advance by the parties, will be compensated at an agreed rate of \$150 per hour. The agreed amount of \$150 per hour shall include all incidentals including expenses for telephone, fax, and computer services. The State will provide administrative services such as conference facilities to the DRA.

### **A. PAYMENT PROCESSING**

The CONTRACTOR shall make direct payments to the DRA for their participation in authorized meetings and approved hourly rate charges, from invoices submitted by the DRA, and technical services.

The DRA may submit invoices to the CONTRACTOR for partial payment for work performed and services rendered for their participation in authorized meetings not more often than once per month during the progress of the work. The invoices shall be in a format approved by the parties and accompanied by a general description of activities performed during that billing period. Payment for hourly fees, at the agreed rate, shall not be paid to the DRA until the amount and extent of those fees are approved by the STATE and CONTRACTOR.

### **B. INSPECTION OF COSTS RECORDS**

The DRA and the CONTRACTOR shall keep available for inspection by representatives of the STATE and the United States, for a period of 3 years after final payment, the cost records and accounts pertaining to this AGREEMENT. If any litigation, claim, or audit arising out of, in connection with, or related to this contract is initiated before the expiration of the 3-year period, the cost records and accounts shall be retained until such litigation, claim, or audit involving the records is completed.

## **SECTION VI ASSIGNMENT OF TASKS OF WORK**

The DRA shall not assign the work of this AGREEMENT.

## **SECTION VII TERMINATION OF DRA**

The DRA may resign after providing not less than 15 days written notice of the resignation to the STATE and CONTRACTOR. The DRA may be terminated, by either party, for failing to fully comply at all times with all required employment or financial disclosure conditions of DRA membership in conformance with the terms of the contract and this AGREEMENT. Each party shall document the need for replacement and substantiate the replacement request in writing to the other party and the DRA.

## **SECTION VIII LEGAL RELATIONS**

The parties hereto mutually understand and agree that the DRA in the performance of duties is acting in the capacity of an independent agent and not as an employee of either party.

No party to this AGREEMENT shall bear a greater responsibility for damages or personal injury than is normally provided by Federal or State of California Law.

Notwithstanding the provisions of this contract that require the CONTRACTOR to indemnify and hold harmless the STATE, the parties shall jointly indemnify and hold harmless the DRA from and against all claims, damages, losses, and expenses, including but not limited to attorney's fees, arising out of and resulting from the findings and recommendations of the DRA.

## **SECTION IX CONFIDENTIALITY**

The parties hereto mutually understand and agree that all documents and records provided by the parties in reference to issues brought before the DRA, which documents and records are marked "Confidential - for use by the DRA only," shall be kept in confidence and used only for the purpose of resolution of subject disputes, and for assisting in development of DRA findings and recommendations; that such documents and records will not be utilized or revealed to others, except to officials of the parties who are authorized to act on the subject disputes, for any purposes, during the life of this AGREEMENT. Upon termination of this AGREEMENT, said confidential documents and records, and all copies thereof, shall be returned to the parties who furnished them to the DRA. However, the parties understand that such documents may be subsequently

discoverable and admissible in court or arbitration proceedings unless a protective order has been obtained by the party seeking further confidentiality.

**SECTION X DISPUTES**

Disputes between the parties arising out of the work or other terms of this AGREEMENT that cannot be resolved by negotiation and mutual concurrence between the parties or through the administrative process provided in the contract shall be resolved by arbitration as provided in Section 9-1.10, "Arbitration," of the Standard Specifications. Disputes between the DRA and the parties that cannot be resolved by negotiation and mutual concurrence shall be resolved in the appropriate forum.

**SECTION XI VENUE, APPLICABLE LAW, AND PERSONAL JURISDICTION**

In the event that any party, including the DRA, deems it necessary to institute arbitration proceedings to enforce any right or obligation under this AGREEMENT, the parties hereto agree that such action shall be initiated in the Office of Administrative Hearings of the State of California. The parties hereto agree that all questions shall be resolved by arbitration by application of California law and that the parties to such arbitration shall have the right of appeal from such decisions to the Superior Court in conformance with the laws of the State of California. Venue for the arbitration shall be Sacramento or any other location as agreed to by the parties.

**SECTION XII FEDERAL REVIEW AND REQUIREMENTS**

On Federal-Aid contracts, the Federal Highway Administration shall have the right to review the work of the DRA in progress, except for private meetings or deliberations of the DRA.

Other Federal requirements in this agreement shall only apply to Federal-Aid contracts.

**SECTION XIII CERTIFICATION OF CONTRACTOR, DRA, AND STATE**

IN WITNESS WHEREOF, the parties hereto have executed this AGREEMENT as of the day and year first above written.

DRA

By: \_\_\_\_\_

Title: \_\_\_\_\_

CONTRACTOR

CALIFORNIA DEPARTMENT  
OF TRANSPORTATION

By: \_\_\_\_\_

By: \_\_\_\_\_

Title: \_\_\_\_\_

Title: \_\_\_\_\_

### **5-1.15C Dispute Resolution Board**

Section 5-1.15C, "Dispute Resolution Board," applies to a contract with a total bid of over \$10 million.

The Dispute Resolution Board, hereinafter referred to as "DRB," is a three member board established by the Department and Contractor to assist in the resolution of disputes.

The DRB shall be established by the Department and the Contractor within 45 days after contract approval.

The DRB shall consist of one member selected by the Department and approved by the Contractor, one member selected by the Contractor and approved by the Department, and a third member selected by the first 2 members and approved by both the Department and the Contractor.

The Department and Contractor shall provide the other written notification for approval of the name of their DRB nominee along with the nominee's disclosure statement.

Disclosure statements shall include a resume of the nominee's experience and a declaration statement describing past, present, anticipated, and planned relationships with all parties involved in this contract. Objections to nominees shall be based on a specific breach or violation of nominee responsibilities or on nominee qualifications. The Department or the Contractor may, on a one-time basis, object to the other's nominee without specifying a reason and this person shall not be selected for the DRB. Another person shall then be nominated within 15 days.

The 2 DRB members shall proceed with the selection of the third DRB member immediately after receiving written notification from the Department of their selection. The 2 DRB members shall provide their recommendation simultaneously to the parties within 15 days. The third member shall provide disclosure statement to the first 2 DRB members, to the Department, and the Contractor. The professional experience of the third DRB member shall complement that of the first 2 DRB members. The third DRB member shall be subject to mutual approval of the Department and the Contractor. If the 2 DRB members cannot agree on the third nominee, they shall submit a list of nominees to the Department and the Contractor for final selection and approval.

If the Department and the Contractor cannot agree on the third DRB member, or if the first 2 DRB members are unable to agree upon a recommendation, the Department and the Contractor shall select 6 names from the current list of arbitrators certified by the Public Works Contract Arbitration Committee created by Article 7.2 of the State Contract Act. The 2 DRB members shall then select one of the 6 names by a blind draw.

The 3 DRB members shall appoint one member as a chairperson to provide leadership for the DRB's activities. The chairperson shall be approved by the Department and the Contractor. In the event of an impasse, the third DRB member shall become the chairperson.

The Department and Contractor shall complete and adhere to the Dispute Resolution Board Agreement. No DRB meeting shall take place until the Dispute Resolution Board Agreement has been signed by all parties, unless all parties agree to sign it at the first meeting.

If the DRB needs outside technical services, technical services shall be preapproved by both the Department and the Contractor.

DRB recommendations are nonbinding.

The Contractor shall not use the DRB for disputes between the subcontractors or suppliers that have no grounds for a lawsuit against the Department.

DRB member replacements are selected in the same manner as the original selection. The appointment of a replacement DRB member will begin promptly upon determination of the need for replacement. The Dispute Resolution Board Agreement shall be amended to reflect the change in the DRB.

Failure of the Contractor to participate in establishing the DRB will result in the withholding of 25 percent of the estimated value of all work performed during each estimate period that the Contractor fails to comply. DRB withholds will be released for payment on the next monthly progress payment following the date that the Contractor has provided assistance in establishing the DRB and no interest will be due the Contractor.

The Department and the Contractor shall bear the costs and expenses of the DRB equally.

Each DRB member shall be compensated at an agreed rate of \$1,500 per day for time spent per meeting either at the start of the project, for scheduled progress, or dispute meetings. A member serving on more than one Department DRB or Dispute Resolution Advisor (DRA), regardless of the number of meetings per day shall not be paid more than the agreed rate per day. The agreed rate shall be considered full compensation for on-site time, travel expenses, transportation, lodging, time for travel, and incidentals for each day or portion thereof that the DRB member is at an authorized DRB meeting.

No additional compensation will be made for time spent by DRB members in review and research activities outside the official DRB meetings unless that time, such as time spent evaluating and preparing recommendations on specific issues presented to the DRB, has been specifically agreed to in advance by the Department and Contractor. Time away from the project, which has been specifically agreed to in advance by the Department and Contractor, will be compensated at an agreed rate of \$150 per hour. The agreed amount of \$150 per hour shall include all incidentals including expenses for telephone, fax, and computer services.

The Department will provide conference facilities for DRB meetings at no cost to the Contractor.

The Contractor shall make direct payments to each DRB member for their participation in authorized meetings and approved hourly rate charges from invoices submitted by each DRB member.

The Department will reimburse the Contractor for the Department's share of the costs.

There will be no markups applied to expenses connected with the DRB, either by the DRB members or by the Contractor when requesting payment of the Department's share of DRB expenses. Regardless of the DRB recommendation, neither party shall be entitled to reimbursement of DRB costs from the other party.

The Contractor shall submit extra work bills and include evidence of every payment to each DRB member in the form of a cancelled check or bank statement within 30 days of payment.

The cost of technical services requested by the DRB will be borne equally by the State and Contractor. There will be no markups for these costs.

A copy of the "Dispute Resolution Board Agreement" to be executed by the Department, Contractor, and the 3 DRB members after approval of the contract follows:

**DISPUTE RESOLUTION BOARD AGREEMENT**

\_\_\_\_\_  
(Contract Identification)

Contract No. \_\_\_\_\_

**THIS DISPUTE RESOLUTION BOARD AGREEMENT, hereinafter called "AGREEMENT",** made and entered into this \_\_\_\_\_ day of \_\_\_\_\_, \_\_\_\_\_, between the State of California, acting through the California Department of Transportation and the Director of Transportation, hereinafter called the "STATE," \_\_\_\_\_ hereinafter called the "CONTRACTOR," and the Dispute Resolution Board, hereinafter called the "DRB" consisting of the following members:

\_\_\_\_\_,  
(DRB Member)

\_\_\_\_\_,  
(DRB Member)

and \_\_\_\_\_  
(DRB Chairperson)

WITNESSETH, that

WHEREAS, the STATE and the CONTRACTOR, hereinafter called the "parties," are now engaged in the construction on the State Highway project referenced above; and

WHEREAS, the Standard Specifications for the above referenced contract provides for the establishment and operation of the DRB to assist in resolving disputes; and

WHEREAS, the DRB is composed of three members, one selected by the STATE, one selected by the CONTRACTOR, and the third member selected by the other two members and approved by the parties; and

NOW THEREFORE, in consideration of the terms, conditions, covenants, and performance contained herein, or attached and incorporated and made a part hereof, the STATE, the CONTRACTOR, and the DRB members hereto agree as follows:

**SECTION I DESCRIPTION OF WORK**

To assist in the timely resolution of disputes between the parties, the contract provides for the establishment and the operation of the DRB. The DRB is to fairly and impartially consider disputes placed before it and provide recommendations for resolution of these disputes to the parties. The DRB shall provide recommendations based on the facts related to the dispute, the contract and applicable laws and regulations. The DRB shall perform the services necessary to participate in the DRB's actions as designated in Section III, Scope of Work.

**SECTION II DRB QUALIFICATIONS**

DRB members shall be knowledgeable in the type of construction and contract documents anticipated by the contract and shall have completed training through the Dispute Review Board Foundation.

No DRB member shall have prior direct involvement in this contract. No DRB member shall have a financial interest in this contract or parties thereto, including but not limited to the CONTRACTOR, subcontractors, suppliers, consultants, and legal and business services, within a period 6 months prior to award and during this contract. Exceptions to above are compensation for services on this or other DRBs and DRAs or retirement payments or pensions received from a party that are not tied to, dependent on or affected by the net worth of the party.

DRB members shall fully disclose all direct or indirect professional or personal relationships with all key members of the contract.

**SECTION III SCOPE OF WORK**

The scope of work of the DRB includes, but is not limited to, the following:

## **A. PROCEDURES**

The DRB shall establish procedures that will govern the conduct of its business and reporting procedures in conformance with the requirements of the contract and the terms of this AGREEMENT. The DRB established procedures shall only be implemented upon approval of the parties.

The DRB Chairperson shall schedule progress and dispute meetings and any other DRB activities.

The parties shall not call on any of the DRB members, who served on this contract, as a witness in arbitration proceedings, which may arise from this contract.

DRB members shall have no claim against the STATE or the CONTRACTOR, or both, from claimed harm arising out of the parties' evaluations of the DRB's opinions.

During progress or dispute meetings, DRB members shall refrain from expressing opinions on the merits of statements on matters under dispute or potential dispute. Opinions of DRB members expressed in private sessions shall be kept strictly confidential. Individual DRB members shall not meet with, or discuss contract issues with individual parties. Discussions regarding the project between the DRB members and the parties shall be in the presence of all three members and both parties. Individual DRB members shall not undertake independent investigations of any kind pertaining to disputes or potential disputes, except with the knowledge of both parties and as expressly directed by the DRB Chairperson.

## **B. PROGRESS MEETINGS**

DRB members shall visit the project site and meet with representatives of the parties to keep abreast of construction activities and to develop familiarity with the work in progress. Scheduled progress meetings shall be held at or near the project site. The DRB shall meet at least once at the start of the project, and at least once every 4 months thereafter. The frequency, exact time, and duration of additional site visits and progress meetings shall be as recommended by the DRB and approved by the parties consistent with the construction activities or matters under consideration and dispute. Scheduled progress meetings may be waived, if the parties are in agreement, when the only work remaining is plant establishment work. Each meeting shall consist of a round table discussion and a field inspection of the work being performed on the contract, if necessary. Each meeting shall be attended by representatives of both parties. The agenda shall generally be as follows:

1. Meeting opened by the DRB Chairperson.
2. Remarks by the STATE's representative.
3. A description by the CONTRACTOR's representative of work accomplished since the last meeting; the current schedule status of the work; and a forecast for the coming period.
4. An outline by the STATE's representative of the status of the work as the STATE views it.
5. An outline by the CONTRACTOR's representative of potential problems and a description of proposed solutions.
6. A brief description by the CONTRACTOR's and the STATE's representative of potential claims and disputes that have surfaced since the last meeting.
7. A summary by the STATE's representative, the CONTRACTOR's representative, or the DRB of the status of past potential claims and disputes.

The STATE's representative will prepare minutes of all progress meetings and circulate them for revision and approval by all concerned within 10 days of the meeting.

## **C. DISPUTE MEETING**

The term "dispute meeting" as used in this subsection shall refer to both the informal and traditional dispute meeting processes, unless otherwise noted.

Either the STATE or the CONTRACTOR may request a dispute meeting with the DRB. The requesting party shall simultaneously notify the other party of each dispute meeting request. Upon being notified of the need for a dispute meeting, the DRB shall review and consider the dispute. The DRB shall determine the time and location of the dispute meeting with due consideration for the needs and preferences of the parties, while recognizing the importance of a speedy resolution to the dispute.

Dispute meetings shall be conducted at any location that would be convenient and provide required facilities and access to necessary documentation.

No DRB dispute meeting shall take place later than 30 days prior to acceptance of the contract.

Only the STATE's Area Construction Engineer, Resident Engineer, and Structure Representative and the CONTRACTOR's or subcontractor's, Superintendent or Project Manager may present information at a dispute meeting. There shall be no participation of persons who are not directly involved in the contract or who do not have direct knowledge of the dispute. The exception to this is technical services, as described below:

The DRB, with approval of the parties, may obtain technical services necessary to adequately review the disputes presented, including audit, geotechnical, schedule analysis and other services. The parties' technical staff may supply those services as appropriate. The cost of technical services, as agreed to by the parties, shall be borne equally by the two parties as specified in an approved contract change order. The CONTRACTOR shall not be entitled to markups for the payments made for these services.

At the dispute meeting the DRB may ask questions, seek clarification, and request further clarification of data presented by either of the parties as may be necessary to assist in making a fully informed recommendation. However, the DRB shall refrain from expressing opinions on the merits of statements on matters under dispute during the parties' presentations. The claimant shall discuss the dispute, followed by the other party. Each party shall then be allowed one or more rebuttals at the meeting until all aspects of the dispute are thoroughly covered. Each party will be given ample time to fully present its position, make rebuttals, provide relevant documents, and respond to DRB questions and requests.

There shall be no testimony under oath or cross-examination, during DRB dispute meetings. There shall be no reporting of the procedures by a shorthand reporter or by electronic means. Documents and verbal statements shall be received by the DRB in conformance with the procedures established at the first meeting between the DRB and the parties. These established procedures need not comply with prescribed legal laws of evidence.

Failure to attend a dispute meeting by either of the parties shall be conclusively considered by the DRB as indication that the non-attending party considers all written documents and correspondence submitted as their entire and complete argument.

After dispute meetings are concluded, the DRB shall meet in private and reach a conclusion supported by two or more members. Private sessions of the DRB may be held at a location other than the job site or by electronic conferencing as deemed appropriate, in order to expedite the process.

The DRB shall make every effort to reach a unanimous decision.

#### **1. TRADITIONAL DISPUTE MEETING:**

The following procedure shall be used for the traditional dispute meeting:

- a. Within 21 days after receiving the STATE's written response to the CONTRACTOR's supplemental potential claim record, the CONTRACTOR shall refer the dispute to the DRB if the CONTRACTOR wishes to further pursue the dispute. The CONTRACTOR shall make the referral in writing to the DRB, simultaneously copied to the STATE. The written dispute referral shall describe the disputed matter in individual discrete segments, so that it will be clear to both parties and the DRB what discrete elements of the dispute have been resolved, and which remain unresolved, and shall include an estimate of the cost of the affected work and impacts, if any, on project completion.
- b. The parties shall each be afforded an opportunity to be present and to be heard by the DRB, and to offer evidence. Either party furnishing written evidence or documentation to the DRB must furnish copies of such information to the other party a minimum of 15 days prior to the date the DRB is scheduled to convene the meeting for the dispute. Either party shall produce such additional evidence as the DRB may deem necessary to reach an understanding and a determination of the dispute. The party furnishing additional evidence shall furnish copies of such additional evidence to the other party at the same time the evidence is provided to the DRB. The DRB shall not consider evidence not furnished in conformance with the terms specified herein.
- c. Upon receipt by the DRB of a written referral of a dispute, the DRB shall convene to review and consider the dispute. The dispute meeting shall be held no earlier than 30 days and no later than 60 days after receipt of the written referral unless otherwise agreed to by all parties.
- d. The DRB may request clarifying information of either party within 10 days after the dispute meeting. Requested information shall be submitted to the DRB within 10 days of the DRB request.
- e. The DRB shall furnish a written report to the parties with its conclusion(s) and recommendation(s). The DRB shall complete its report, including minority opinion, if any, and submit it to the parties within 30 days of the dispute meeting, except that time extensions may be granted at the request of the DRB with the written concurrence of the parties. The report shall summarize the facts considered, the contract language, law or regulation viewed by the DRB as pertinent to the dispute, and the DRB's interpretation and reasoning in arriving at its conclusion(s) and recommendation(s) and, if appropriate, recommends guidelines for determining compensation. The DRB's written opinion shall stand on its own, without attachments or appendices. The DRB Chairperson shall furnish a copy of the written recommendation report to the DRB Coordinator, Division of Construction, MS 44, P.O. Box 942874, Sacramento, CA 94274.
- f. Within 30 days after receiving the DRB's report, the parties shall respond to the DRB in writing signifying that the dispute is either resolved or remains unresolved. Failure to provide the written response within the time specified, or a written rejection of the DRB's recommendation or a written response requesting the DRB reconsider their recommendation, shall conclusively indicate that the party(s) failing to respond accepts the DRB recommendation. Immediately after responses have been received from both parties, the DRB shall provide copies of both responses to the parties simultaneously. Either party may request clarification of elements of the DRB's report from the DRB

prior to responding to the report. The DRB shall consider any clarification request only if submitted within 10 days of receipt of the DRB's report, and if submitted simultaneously in writing to both the DRB and the other party. Each party may submit only one request for clarification for any individual DRB report. The DRB shall respond, in writing, to requests for clarification within 10 days of receipt of such requests.

- g. Either party may seek a reconsideration of the DRB's recommendation. The DRB shall only grant reconsideration based upon submission of new evidence and if the request is submitted within the 30 day time limit specified for response to the DRB's written report. Each party may submit only one request for reconsideration regarding an individual DRB recommendation.
- h. If the parties are able to settle their dispute with the aid of the DRB's report, the STATE and the CONTRACTOR shall promptly accept and implement the settlement of the parties. If the parties cannot agree on compensation within 60 days of the acceptance by both parties of the settlement, either party may request the DRB to make a recommendation regarding compensation.

## **2. INFORMAL DISPUTE MEETING**

An informal dispute meeting shall be convened, only if, the parties and the DRB agree that this dispute resolution process is appropriate to settle the dispute.

The following procedure shall be used for the informal dispute meeting:

- a. The parties shall furnish the DRB with one copy of pertinent documents requested by the DRB that are or may become necessary for the DRB to perform its function. The party furnishing documents shall furnish such documents to the other party at the same time the document is provided to the DRB.
- b. After the dispute meeting has concluded, the DRB members shall deliberate in private the same day until a response to the parties is reached or as otherwise agreed to by the parties.
- c. The DRB then verbally delivers its recommendation with findings, including minority opinion, if any, to the parties.
- d. After the recommendation is presented, the parties may ask for clarifications.
- e. Occasionally the DRB may be unable to formulate a recommendation based on the information given at a dispute meeting. However, the DRB may provide the parties with advice on strengths and weaknesses of their prospective positions, in the hope of the parties reaching settlement.
- f. If the parties are able to settle their dispute with the aid of the DRB's opinion, the STATE and the CONTRACTOR shall promptly accept and implement the settlement of the parties.
- g. The DRB will not be bound by its verbal recommendation in the event that a dispute is later heard by the DRB in a traditional dispute meeting.

Unless the dispute is settled, use of the informal dispute meeting does not relieve the parties of their responsibilities under Section 5-1.15C, "Dispute Resolution Board," of the Standard Specifications or subsection, "Traditional Dispute Meeting," of this AGREEMENT. There will be no extension of time allowed for the process to permit the use of the informal dispute meeting, unless otherwise agreed to by the parties.

## **SECTION IV TIME FOR BEGINNING AND COMPLETION**

DRB members shall not begin work under the terms of this AGREEMENT, until authorized in writing by the STATE or as agreed to by the parties. Once established, the DRB shall be in operation until the Director accepts the contract. If the contract is terminated in accordance with Section 8-1.08, "Termination of Control," of the Standard Specifications, the DRB will be dissolved.

## **SECTION V PAYMENT**

Each DRB member shall be compensated at an agreed rate of \$1,500 per day for time spent per meeting, either at start of project, or a scheduled progress or a dispute meeting. A member serving on more than one State DRB or DRA, regardless of the number of meetings per day, shall not be paid more than the agreed rate per day. The agreed rate shall be considered full compensation for on site time, travel expenses, transportation, lodging, time for travel and incidentals for each day, or portion thereof that the DRB member is at an authorized DRB meeting. No additional compensation will be made for time spent by DRB member to review and research activities outside the official DRB meetings unless that time, such as time spent evaluating and preparing recommendations on specific issues presented to the DRB, has been specifically agreed to in advance by the parties. Time away from the project, which has been specifically agreed to in advance by the parties, will be compensated at an agreed rate of \$150 per hour. The agreed amount of \$150 per hour shall include all incidentals including expenses for telephone, fax, and computer services. The State will provide administrative services such as conference facilities to the DRB.

## **A. PAYMENT PROCESSING**

The CONTRACTOR shall make direct payments to each DRB member for their participation in authorized meetings and approved hourly rate charges, from invoices submitted by each DRB member, and technical services.

DRB members may submit invoices to the CONTRACTOR for partial payment for work performed and services rendered for their participation in authorized meetings not more often than once per month during the progress of the work. The invoices shall be in a format approved by the parties and accompanied by a general description of activities performed during that billing period. Payment for hourly fees, at the agreed rate, shall not be paid to a DRB member until the amount and extent of those fees are approved by the STATE and the CONTRACTOR.

## **B. INSPECTION OF COSTS RECORDS**

DRB members and the CONTRACTOR shall keep available for inspection by representatives of the STATE and the United States federal government, for a period of 3 years after final payment, the cost records and accounts pertaining to this AGREEMENT. If any litigation, claim, or audit arising out of, in connection with, or related to this contract is initiated before the expiration of the 3-year period, the cost records and accounts shall be retained until such litigation, claim, or audit involving the records is completed.

## **SECTION VI ASSIGNMENT OF TASKS OF WORK**

DRB members shall not assign the work of this AGREEMENT.

## **SECTION VII TERMINATION OF A DRB MEMBER**

DRB members may resign after providing not less than 15 days written notice of their resignation to the STATE and the CONTRACTOR. A DRB member may be terminated, by either party, for failing to comply at all times with all required employment or financial disclosure conditions of DRB membership in conformance with the terms of the contract and this AGREEMENT.

Service of a DRB member may be terminated at any time with not less than 15 days notice as follows:

- A. The State may terminate service of the State appointed member.
- B. The Contractor may terminate service of the Contractor appointed member.
- C. Upon the written recommendation of the State and Contractor appointed members for the removal of the third member.
- D. Upon resignation of a member.

When a member of the DRB is replaced, the replacement member shall be appointed in the same manner as the replaced member was appointed. The appointment of a replacement DRB member will begin promptly upon determination of the need for replacement and shall be completed within 15 days. Changes in either of the DRB members chosen by the 2 parties will not require re-selection of the third member, unless both parties agree to such re-selection in writing. The Dispute Resolution Board Agreement shall be amended to reflect the change of a DRB member.

Each party shall document the need for replacement and substantiate the replacement request in writing to the other party and DRB members.

## **SECTION VIII LEGAL RELATIONS**

The parties hereto mutually understand and agree that each DRB member in the performance of duties is acting in the capacity of an independent agent and not as an employee of either party.

No party to this AGREEMENT shall bear a greater responsibility for damages or personal injury than is normally provided by Federal or State of California Law.

Notwithstanding the provisions of this contract that require the CONTRACTOR to indemnify and hold harmless the STATE, the parties shall jointly indemnify and hold harmless the DRB members from and against all claims, damages, losses, and expenses, including but not limited to attorney's fees, arising out of and resulting from the findings and recommendations of the DRB.

## **SECTION IX CONFIDENTIALITY**

The parties hereto mutually understand and agree that all documents and records provided by the parties in reference to issues brought before the DRB, which documents and records are marked "Confidential - for use by the DRB only," shall be kept in confidence and used only for the purpose of resolution of subject disputes, and for assisting in development of DRB findings and recommendations; that such documents and records will not be utilized or revealed to others, except to officials of the parties who are authorized to act on the subject disputes, for any purposes, during the life of this AGREEMENT. Upon termination of this AGREEMENT, said confidential documents and records, and all copies thereof, shall be returned to the parties who furnished them to the DRB. However, the parties understand that such documents may be subsequently

discoverable and admissible in court or arbitration proceedings unless a protective order has been obtained by the party seeking further confidentiality.

**SECTION X DISPUTES**

Disputes between the parties arising out of the work or other terms of this AGREEMENT, which cannot be resolved by negotiation and mutual concurrence between the parties, or through the administrative process provided in the contract, shall be resolved by arbitration as provided in Section 9-1.10, "Arbitration," of the Standard Specifications. Disputes between the DRB and either party, which cannot be resolved by negotiation and mutual concurrence, shall be resolved in the appropriate forum.

**SECTION XI VENUE, APPLICABLE LAW, AND PERSONAL JURISDICTION**

In the event that any party deems it necessary to institute arbitration proceedings to enforce any right or obligation under this AGREEMENT, the parties hereto agree that such action shall be initiated in the Office of Administrative Hearings of the State of California. The parties hereto agree that all questions shall be resolved by arbitration by application of California law and that the parties to such arbitration shall have the right of appeal from such decisions to the Superior Court in conformance with the laws of the State of California. Venue for the arbitration shall be Sacramento or any other location as agreed to by the parties.

**SECTION XII FEDERAL REVIEW AND REQUIREMENTS**

On Federal-Aid contracts, the Federal Highway Administration shall have the right to review the work of the DRB in progress, except for private meetings or deliberations of the DRB that do not become part of the project records.

Other Federal requirements in this agreement shall only apply to Federal-Aid contracts.

**SECTION XIII CERTIFICATION OF CONTRACTOR, DRB, AND STATE**

IN WITNESS WHEREOF, the parties hereto have executed this AGREEMENT as of the day and year first above written.

DRB MEMBER

DRB MEMBER

By: \_\_\_\_\_

By: \_\_\_\_\_

Title: \_\_\_\_\_

Title : \_\_\_\_\_

DRB CHAIRPERSON

By : \_\_\_\_\_

Title : \_\_\_\_\_

CONTRACTOR

CALIFORNIA DEPARTMENT  
OF TRANSPORTATION

By: \_\_\_\_\_

By: \_\_\_\_\_

Title: \_\_\_\_\_

Title: \_\_\_\_\_

**Add:**

**5-1.16-5-17 (BLANK)**

**Add:**

**5-1.18 PROPERTY AND FACILITY PRESERVATION**

**5-1.18A General**

Preserve property and facilities, including:

1. Adjacent property
2. Department's instrumentation
3. ESAs
4. Lands administered by other agencies
5. Railroads and railroad equipment
6. Roadside vegetation not to be removed
7. Utilities
8. Waterways

Immediately report damage to the Engineer.

If you cause damage, you are responsible.

Install sheet piling, cribbing, bulkheads, shores, or other supports necessary to support existing facilities or support material carrying the facilities.

Dispose of temporary facilities when they are no longer needed.

If you damage plants not to be removed:

1. Dispose of them outside the right of way unless the Engineer allows you to reduce them to chips and spread the chips within the highway at locations designated by the Engineer
2. Replace them

Replace plants with plants of the same species.

Replace trees with 24-inch-box trees.

Replace shrubs with No. 15 container shrubs.

Replace ground cover plants with plants from flats. Replace Carpobrotus ground cover plants with plants from cuttings.

Plant ground cover plants 1 foot on center.

If a plant establishment period is specified, replace plants before the start of the plant establishment period; otherwise, replace plants at least 30 days before Contract acceptance.

Water each plant immediately after planting and saturate the backfill soil around and below the roots or ball of earth around the roots of each plant. Water as necessary to maintain plants in a healthy condition until Contract acceptance.

The Department may make a temporary repair to restore service to a damaged facility.

If working on or adjacent to railroad property, do not interfere with railroad operations.

For an excavation on or affecting railroad property, submit work plans showing the system to be used to protect railroad facilities. Allow 65 days for the Engineer's review of the plans. Do not perform work based on the plans until the Engineer notifies you they are accepted.

**5-1.18B Nonhighway Facilities (Including Utilities)**

The Department may rearrange a nonhighway facility during the Contract. Rearrangement of a nonhighway facility includes installation, relocation, alteration, or removal of the facility. The Department may authorize facility owners and their agents to enter the highway to perform rearrangement work for their facilities or to make connections or repairs to their property. Coordinate activities to avoid delays.

Notify the Engineer at least 3 business days before you contact the regional notification center under Govt Code § 4216 et seq. Failure to contact the notification center prohibits excavation.

Before starting work that could damage or interfere with underground infrastructure, locate the infrastructure described in the Contract, including laterals and other appurtenances, and determine the presence of other underground infrastructure inferred from visible facilities such as buildings, meters, or junction boxes.



4. Abuse
5. Unauthorized change
6. Act of God

During the guarantee period, repair or replace each work portion having a substantial defect.

The Department does not pay for corrective work.

During corrective work activities, provide insurance coverage specified for coverage before contract acceptance.

The contract bonds must be in full force and effect until the later of:

1. Expiration of guarantee period
2. Completion of corrective work

If a warranty specification conflicts with Section 6-1.075, "Guarantee," comply with the warranty specification.

During the guarantee period, the Engineer monitors the completed work. If the Engineer finds work having a substantial defect, the Engineer lists work parts and furnishes you the list.

Within 10 days of receipt of the list, submit for authorization a detailed plan for correcting the work. Include a schedule that includes:

1. Start and completion dates
2. List of labor, equipment, materials, and any special services you plan to use
3. Work related to the corrective work, including traffic control and temporary and permanent pavement markings

The Engineer notifies you when the plan is authorized. Start corrective work and related work within 15 days of notice.

If the Engineer determines corrective work is urgently required to prevent injury or property damage:

1. The Engineer furnishes you a request to start emergency repair work and a list of parts requiring corrective work
2. Mobilize within 24 hours and start work
3. Submit a corrective work plan within 5 days of starting emergency repair work

If you fail to perform work as specified, the Department may perform the work and bill you.

**In Section 6-1.08 delete the 2nd paragraph.**

**Add:**

**6-1.085 BUY AMERICA (23 CFR 635.410)**

For a Federal-aid contract, furnish steel and iron materials to be incorporated into the work that are produced in the United States except:

1. Foreign pig iron and processed, pelletized, and reduced iron ore may be used in the domestic production of the steel and iron materials [60 Fed Reg 15478 (03/24/1995)]
2. If the total combined cost of the materials does not exceed the greater of 0.1 percent of the total bid or \$2,500, material produced outside the United States may be used

Production includes:

1. Processing steel and iron materials, including smelting or other processes that alter the physical form or shape (such as rolling, extruding, machining, bending, grinding, and drilling) or chemical composition
2. Coating application, including epoxy coating, galvanizing, and painting, that protects or enhances the value of steel and iron materials

For steel and iron materials to be incorporated into the work, submit a Certificate of Compliance under Section 6-1.07, "Certificates of Compliance," of the Standard Specifications that certifies all production processes occurred in the United States except for the above exceptions.



employees. Immediately report to the Engineer in writing a discrepancy or inconsistency between the contract and a law, regulation, order, decree, or PLAC.

**In Section 7-1.01A replace the 1st clause with:**

Work on the job site must comply with Labor Code §§ 1727 and 1770-1815 and 8 CA Code of Regs § 16000 et seq. Work includes roadside production and processing of materials.

**In Section 7-1.01A(2) in the 1st paragraph, replace item 3 with:**

3. Upon becoming aware of the subcontractor's failure to pay the specified prevailing rate of wages to the subcontractor's workers, the Contractor must diligently take corrective action to stop or rectify the failure, including withholding sufficient funds due the subcontractor for work performed on the public works project.

**In Section 7-1.01A(2), replace the 2nd paragraph with:**

Pursuant to Section 1775 of the Labor Code, the Division of Labor Standards Enforcement must notify the Contractor on a public works project within 15 days of the receipt by the Division of Labor Standards Enforcement of a complaint of the failure of a subcontractor on that public works project to pay workers the general prevailing rate of per diem wages. If the Division of Labor Standards Enforcement determines that employees of a subcontractor were not paid the general prevailing rate of per diem wages and if the Department did not withhold sufficient money under the contract to pay those employees the balance of wages owed under the general prevailing rate of per diem wages, the Contractor must withhold an amount of moneys due the subcontractor sufficient to pay those employees the general prevailing rate of per diem wages if requested by the Division of Labor Standards Enforcement. The Contractor must pay any money withheld from and owed to a subcontractor upon receipt of notification by the Division of Labor Standards Enforcement that the wage complaint has been resolved. If notice of the resolution of the wage complaint has not been received by the Contractor within 180 days of the filing of a valid notice of completion or acceptance of the public works project, whichever occurs later, the Contractor must pay all moneys withheld from the subcontractor to the Department. The Department withholds these moneys pending the final decision of an enforcement action.

**In Section 7-1.01A(2) replace 7th paragraph with:**

Changes in general prevailing wage determinations apply to the contract when the Director of Industrial Relations has issued them at least 10 days before advertisement (Labor Code § 1773.6 and 8 CA Code of Regs 16204).

**In Section 7-1.01A(3) replace the 2nd paragraph with:**

The Department withholds the penalties specified in subdivision (g) of Labor Code § 1776 for noncompliance with the requirements in Section 1776.

**In Section 7-1.01A(3) replace the 4th paragraph with:**

The Department withholds for delinquent or inadequate payroll records (Labor Code § 1771.5). If the Contractor has not submitted an adequate payroll record by the month's 15th day for the period ending on or before the 1st of that month, the Department withholds 10 percent of the monthly progress estimate, exclusive of mobilization. The Department does not withhold more than \$10,000 or less than \$1,000.

**In Section 7-1.01A(3) delete the 5th paragraph.**

**Replace Section 7-1.01A(6) with:**

**7-1.01A(6) (Blank)**

**Replace Section 7-1.01A(7) with:**

**7-1.01A(7) (Blank)**

**Replace Section 7-1.01F with:**

**7-1.01F Environmental Stewardship**

Comply with Section 14.

**Replace Section 7-1.01I with:**

**7-1.01I (Blank)**

**In Section 7-1.02 in the 2nd paragraph, replace the 4th sentence with:**

Trucks used to haul treated base, portland cement concrete, or hot mix asphalt shall enter onto the base to dump at the nearest practical entry point ahead of spreading equipment.

**In Section 7-1.02 between the 4th and 5th paragraphs, add:**

Loads imposed on existing, new, or partially completed structures shall not exceed the load carrying capacity of the structure or any portion of the structure as determined by AASHTO LRFD with interims and California Amendments, Design Strength Limit State II. The compressive strength of concrete ( $f_c$ ) to be used in computing the load carrying capacity shall be the smaller of the following:

1. Actual compressive strength at the time of loading
2. Value of  $f_c$  shown on the plans for that portion of the structure or 2.5 times the value of  $f_c$  (extreme fiber compressive stress in concrete at service loads) shown on the plans for portions of the structure where no  $f_c$  is shown

**Replace Section 7-1.04 with:**

**7-1.04 PERMITS, LICENSES, AGREEMENTS, AND CERTIFICATIONS**

**7-1.04A General**

Comply with PLACs. The Department makes PLAC changes under Section 4-1.03, "Changes."

**7-1.04B Before Award**

To make a change to a PLAC made available to you before award, submit the proposed change. The Department sends the proposed change to the appropriate authority for consideration.

**7-1.04C After Award**

Confirm with the Engineer which after-award PLACs are obtained by the Department and which are obtained by the Contractor.

To make a change to an after-award PLAC obtained by the Department, submit the proposed change. The Department sends the proposed change to the appropriate authority for consideration.

Obtain those PLACs to be issued to you and pay fees and costs associated with obtaining them. Submit copies of Contractor-obtained after-award PLACs for review.

**In Section 7-1.06 in the 1st paragraph, add:**

The Contractor's Injury and Illness Prevention Program shall be submitted to the Engineer. The program shall address the use of personal and company issued electronic devices during work. The use of entertainment and personal communication devices in the work zone shall not be allowed. Workers may use a communication device for business purposes in the work area, at a location where their safety and the safety of other workers and the traveling public is not compromised.

**Replace Section 7-1.07 with:**

**7-1.07 Lead Compliance Plan**

Section 7-1.07 applies if a bid item for a lead compliance plan is included in the Contract.

Prepare a work plan to prevent or minimize worker exposure to lead while managing and handling earth materials, paint system debris, traffic stripe residue, and pavement marking residue containing lead. Regulations containing specific Cal/OSHA requirements when working with lead include 8 CA Code of Regs § 1532.1.

The plan must contain the items listed in 8 CA Code of Regs § 1532.1(e)(2)(B). Before submittal, a CIH must sign and seal the plan. Submit the plan at least 7 days before starting any activity that presents the potential for lead exposure. The Engineer notifies you of the acceptability of the plan within 4 business days of receipt.

Before starting any activity that presents the potential for lead exposure to employees who have no prior training, including State employees, provide a safety training program to these employees that complies with 8 CA Code of Regs § 1532.1 and your lead compliance program.

Submit copies of air monitoring or job site inspection reports made by or under the direction of the CIH under 8 CA Code of Regs § 1532.1 within 10 days after the date of monitoring or inspection.

Supply personal protective equipment, training, and washing facilities required by your lead compliance plan for 5 State employees.

The contract lump sum price paid for lead compliance plan includes full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in preparing and implementing the plan as specified in this section.

**Replace Section 7-1.08 with:**

**7-1.08 PUBLIC CONVENIENCE**

Compliance with the provisions of this section does not relieve you of your responsibility for public safety.

Construction activities must not inconvenience the public or abutting property owners. Schedule and conduct work to avoid unnecessary inconvenience to the public and abutting property owners. Avoid undue delay in construction activities to reduce the public's exposure to construction.

Where possible, route traffic on new or existing paved surfaces.

Maintain convenient access to driveways, houses, and buildings. When the abutting property owner's access across the right of way line is to be eliminated or replaced under the contract, the existing access must not be closed until the replacement access facilities are usable. Construct temporary approaches to crossings and intersecting highways.

Provide a reasonably smooth and even surface for use by traffic at all time during excavation of roadways and construction of embankments. Before other grading activities, place fill at culverts and bridges to allow traffic to cross. If ordered, excavate roadway cuts in layers and construct embankments in partial widths at a time alternating construction from one side to the other and routing traffic over the side opposite the one under construction. Install or construct culverts on only 1/2 the width of the traveled way at a time; keep the traveled way portion being used by traffic open and unobstructed until the opposite side of the traveled way is ready for use by traffic.

Upon completion of rough grading or placing any subsequent layer, bring the surface of the roadbed to a smooth and even condition, free of humps and depressions and satisfactory for the use of the public.

After subgrade preparation for a specified layer of material has been completed, repair any damage to the roadbed or completed subgrade, including damage due to use by the public.

While subgrade and paving activities are underway, allow the public to use the shoulders. If half-width paving methods are used, allow the public to use the side of the roadbed opposite the one under construction. If enough width is available, keep open a passageway wide enough to accommodate at least 2 lanes of traffic at locations where subgrade and paving activities are underway. Shape shoulders or reshape subgrade as necessary to accommodate traffic during subgrade preparation and paving activities.

Apply water or dust palliative for the prevention or alleviation of dust nuisance.

Install signs, lights, flares, temporary railing (Type K), barricades and other facilities to direct traffic. Furnish flaggers whenever necessary to direct the movement of the public through or around the work.

You will be required to pay the cost of replacing or repairing all facilities installed under extra work for the convenience or direction or warning of the public which are lost while in your custody, or are damaged by your operations to such an extent as to require replacement or repair.

The Engineer may order or consent to your request to open a completed section of surfacing, pavement, or structure roadway surface for public use. You will not be compensated for any delay to your construction activities caused by the public. This does not relieve you from any other contractual responsibility.

**Replace Section 7-1.09 with:**

**7-1.09 PUBLIC SAFETY**

You are responsible to provide for public safety.

Do not construct a temporary facility that interferes with the safe passage of traffic.

Control dust resulting from the work, inside and outside the right-of-way.

Move workers, equipment, and materials without endangering traffic.

Whenever your operations create a condition hazardous to the public, furnish, erect and maintain those fences, temporary railing, barricades, lights, signs, and other devices and take any other necessary protective measures to prevent damage or injury to the public.

Any fences, temporary railing, barricades, lights, signs, or other devices furnished, erected and maintained by you are in addition to those for which payment is provided elsewhere in the specifications.

Provide flaggers whenever necessary to ensure that the public is given safe guidance through the work zone. Except as ordered, at locations where traffic is being routed through construction under one-way controls, move your equipment in compliance with the one-way controls.

Use of signs, lights, flags, or other protective devices must conform with the California MUTCD and as ordered. Signs, lights, flags or other protective devices must not obscure the visibility of, nor conflict in intent, meaning and function of either existing signs, lights and traffic control devices or any construction area signs or traffic control devices.

Keep existing traffic signals and highway lighting in operation. Other entities perform routine maintenance of these facilities during the work.

Cover signs that direct traffic to a closed area. Providing, maintaining, and removing the covers on construction area signs is paid as extra work under Section 4-1.03D, "Extra Work."

Install temporary illumination in a manner which the illumination and the illumination equipment does not interfere with public safety. The installation of general roadway illumination does not relieve you from furnishing and maintaining any protective devices.

Equipment must enter and leave the highway via existing ramps and crossovers and must move in the direction of public traffic. All movements of workmen and construction equipment on or across lanes open to public traffic must be performed in a manner that will not endanger the public. Your vehicles or other mobile equipment leaving an open traffic lane to enter the construction area, must slow down gradually in advance of the location of the turnoff to give traffic following an opportunity to slow down. When leaving a work area and entering a roadway carrying public traffic, your vehicles and equipment must yield to public traffic.

Immediately remove hauling spillage from roadway lanes or shoulders open to traffic. When hauling on roadways, trim loads and remove material from shelf areas to minimize spillage.

Notify the Engineer not less than 20 days and not more than 90 days before the anticipated start of an activity that will change the vertical or horizontal clearance available to public traffic, including shoulders.

If vertical clearance is temporarily reduced to 15.5 feet or less, place low clearance warning signs in accordance with the California MUTCD and as ordered. Signs must comply with the dimensions, color, and legend requirements of the California MUTCD and these specifications except that the signs must have black letters and numbers on an orange retroreflective background. W12-2P signs must be illuminated so that the signs are clearly visible.

Pave or provide full width continuous and cleared wood walks for pedestrian openings through falsework. Protect pedestrians from falling objects and curing water for concrete. Extend overhead protection for pedestrians not less than 4 feet beyond the edge of the bridge deck. Illuminate all pedestrian openings through falsework. Temporary pedestrian facilities must comply with the American with Disabilities Act of 1990 (ADA).

Do not store vehicles, material, or equipment in a way that:

1. Creates a hazard to the public
2. Obstructs traffic control devices

Do not install or place temporary facilities used to perform the work which interfere with the free and safe passage of public traffic.

If you appear to be neglectful or negligent in furnishing warning devices and taking protective measures, the Engineer may direct your attention to the existence of a hazard and the necessary warning devices must be furnished and installed and protective measures taken by you. If the Engineer points out the inadequacy of warning devices and protective measures, that action on the part of the Engineer does not relieve you from your responsibility for public safety or abrogate the obligation to furnish and pay for these devices and measures.

Install temporary railing (Type K) or other approved protection system under the following conditions:

1. Excavations: Where the near edge of the excavation is within 15 feet from the edge of an open traffic lane
2. Temporarily Unprotected Permanent Obstacles: When the work includes the installation of a fixed obstacle together with a protective system, such as a sign structure together with protective railing, and you elect to install the obstacle

before installing the protective system; or you, for your convenience and as authorized, remove a portion of an existing protective railing at an obstacle and do not replace such railing completely the same day

3. Storage Areas: When material or equipment is stored within 15 feet of the edge of an open traffic lane and the storage is not otherwise prohibited by the provisions of these Standard Specifications and the special provisions
4. Height Differentials: When construction operations create a height differential greater than 0.15 feet within 15 feet of the edge of traffic lane

Temporary railing (Type K) does not need to be installed where excavations within 15 feet from edge of an open traffic lane are:

1. Covered with steel plates or concrete covers of adequate thickness to prevent accidental entry by traffic or the public
2. In side slopes, where the downhill slope is 4:1 (horizontal:vertical) or less unless a naturally occurring condition
3. Protected by existing barrier or railing

Offset the approach end of temporary railing (Type K) a minimum of 15 feet from the edge of an open traffic lane. Install the temporary railing on a skew toward the edge of the traffic lane of not more than one foot transversely to 10 feet longitudinally with respect to the edge of the traffic lane. If the 15-foot minimum offset cannot be achieved, the temporary railing must be installed on the 10 to 1 skew to obtain the maximum available offset between the approach end of the railing and the edge of the traffic lane, and an array of temporary crash cushion modules must be installed at the approach end of the temporary railing.

Secure in place temporary railing (Type K) before starting work for which the temporary railing is required.

Where 2 or more lanes in the same direction are adjacent to the area where the work is being performed, including shoulders, the adjacent lane must be closed under any of the following conditions:

1. Work is off the traveled way but within 6 feet of the edge of traveled way, and approach speed is greater than 45 miles per hour
2. Work is off the traveled way but within 3 feet of the edge of traveled way, and approach speed is less than 45 miles per hour

Closure of the adjacent traffic lane is not required when:

1. Performing work behind a barrier
2. Paving, grinding, or grooving
3. Installing, maintaining, or removing traffic control devices except temporary railing (Type K)

Do not reduce an open traffic lane width to less than 10 feet. When traffic cones or delineators are used for temporary edge delineation, the line of cones or delineators is considered the edge of the traveled way.

If a traffic lane is closed with channelizers for excavation work, move the devices to the adjacent edge of the traveled way when not excavating. Space the devices the same as specified for the lane closure.

Do not move or temporarily suspend anything over a traffic lane open to the public unless the public is protected.

#### **Replace Section 7-1.11 with:**

##### **7-1.11 PRESERVATION OF PROPERTY**

Comply with Section 5-1.18, "Property and Facility Preservation."

#### **Replace Section 7-1.12 with:**

##### **7-1.12 INDEMNIFICATION AND INSURANCE**

The Contractor's obligations regarding indemnification of the State of California and the requirements for insurance shall conform to the provisions in Section 3-1.05, "Insurance Policies," and Sections 7-1.12A, "Indemnification," and 7-1.12B, "Insurance," of this Section 7-1.12.

###### **7-1.12A Indemnification**

The Contractor shall defend, indemnify, and save harmless the State, including its officers, employees, and agents (excluding agents who are design professionals) from any and all claims, demands, causes of action, damages, costs, expenses, actual attorneys' fees, losses or liabilities, in law or in equity (Section 7-1.12A Claims) arising out of or in connection with the Contractor's performance of this contract for:

1. Bodily injury including, but not limited to, bodily injury, sickness or disease, emotional injury or death to persons, including, but not limited to, the public, any employees or agents of the Contractor, the State, or any other contractor; and
2. Damage to property of anyone including loss of use thereof; caused or alleged to be caused in whole or in part by any negligent or otherwise legally actionable act or omission of the Contractor or anyone directly or indirectly employed by the Contractor or anyone for whose acts the Contractor may be liable.

Except as otherwise provided by law, these requirements apply regardless of the existence or degree of fault of the State. The Contractor is not obligated to indemnify the State for Claims arising from conduct delineated in Civil Code Section 2782 and to Claims arising from any defective or substandard condition of the highway that existed at or before the start of work, unless this condition has been changed by the work or the scope of the work requires the Contractor to maintain existing highway facilities and the Claim arises from the Contractor's failure to maintain. The Contractor's defense and indemnity obligation shall extend to Claims arising after the work is completed and accepted if the Claims are directly related to alleged acts or omissions by the Contractor that occurred during the course of the work. State inspection is not a waiver of full compliance with these requirements.

The Contractor's obligation to defend and indemnify shall not be excused because of the Contractor's inability to evaluate liability or because the Contractor evaluates liability and determine that the Contractor is not liable. The Contractor shall respond within 30 days to the tender of any Claim for defense and indemnity by the State, unless this time has been extended by the State. If the Contractor fails to accept or reject a tender of defense and indemnity within 30 days, in addition to any other remedy authorized by law, the Department may withhold such funds the State reasonably considers necessary for its defense and indemnity until disposition has been made of the Claim or until the Contractor accepts or rejects the tender of defense, whichever occurs first.

With respect to third-party claims against the Contractor, the Contractor waives all rights of any type to express or implied indemnity against the State, its officers, employees, or agents (excluding agents who are design professionals).

Nothing in the Contract is intended to establish a standard of care owed to any member of the public or to extend to the public the status of a third-party beneficiary for any of these indemnification specifications.

#### **7-1.12B Insurance**

##### **7-1.12B(1) General**

Nothing in the contract is intended to establish a standard of care owed to any member of the public or to extend to the public the status of a third-party beneficiary for any of these insurance specifications.

##### **7-1.12B(2) Casualty Insurance**

The Contractor shall procure and maintain insurance on all of its operations with companies acceptable to the State as follows:

1. The Contractor shall keep all insurance in full force and effect from the beginning of the work through contract acceptance.
2. All insurance shall be with an insurance company with a rating from A.M. Best Financial Strength Rating of A- or better and a Financial Size Category of VII or better.
3. The Contractor shall maintain completed operations coverage with a carrier acceptable to the State through the expiration of the patent deficiency in construction statute of repose set forth in Code of Civil Procedure Section 337.1.

##### **7-1.12B(3) Workers' Compensation and Employer's Liability Insurance**

In accordance with Labor Code Section 1860, the Contractor shall secure the payment of worker's compensation in accordance with Labor Code Section 3700.

In accordance with Labor Code Section 1861, the Contractor shall submit to the Department the following certification before performing the work:

I am aware of the provisions of Section 3700 of the Labor Code which require every employer to be insured against liability for workers' compensation or to undertake self-insurance in accordance with the provisions of that code, and I will comply with such provisions before commencing the performance of the work of this contract.

Contract execution constitutes certification submittal.

The Contractor shall provide Employer's Liability Insurance in amounts not less than:

1. \$1,000,000 for each accident for bodily injury by accident
2. \$1,000,000 policy limit for bodily injury by disease
3. \$1,000,000 for each employee for bodily injury by disease

If there is an exposure of injury to the Contractor's employees under the U.S. Longshoremen's and Harbor Workers' Compensation Act, the Jones Act, or under laws, regulations, or statutes applicable to maritime employees, coverage shall be included for such injuries or claims.

**7-1.12B(4) Liability Insurance**

**7-1.12B(4)(a) General**

The Contractor shall carry General Liability and Umbrella or Excess Liability Insurance covering all operations by or on behalf of the Contractor providing insurance for bodily injury liability and property damage liability for the following limits and including coverage for:

1. Premises, operations, and mobile equipment
2. Products and completed operations
3. Broad form property damage (including completed operations)
4. Explosion, collapse, and underground hazards
5. Personal injury
6. Contractual liability

**7-1.12B(4)(b) Liability Limits/Additional Insureds**

The limits of liability shall be at least the amounts shown in the following table:

Total Bid	For Each Occurrence <sup>1</sup>	Aggregate for Products/Completed Operation	General Aggregate <sup>2</sup>	Umbrella or Excess Liability <sup>3</sup>
≤\$1,000,000	\$1,000,000	\$2,000,000	\$2,000,000	\$5,000,000
>\$1,000,000 ≤\$10,000,000	\$1,000,000	\$2,000,000	\$2,000,000	\$10,000,000
>\$10,000,000 ≤\$25,000,000	\$2,000,000	\$2,000,000	\$4,000,000	\$15,000,000
>\$25,000,000	\$2,000,000	\$2,000,000	\$4,000,000	\$25,000,000
<ol style="list-style-type: none"> <li>1. Combined single limit for bodily injury and property damage.</li> <li>2. This limit shall apply separately to the Contractor's work under this contract.</li> <li>3. The umbrella or excess policy shall contain a clause stating that it takes effect (drops down) in the event the primary limits are impaired or exhausted.</li> </ol>				

The Contractor shall not require certified Small Business subcontractors to carry Liability Insurance that exceeds the limits in the table above. Notwithstanding the limits specified herein, at the option of the Contractor, the liability insurance limits for certified Small Business subcontractors of any tier may be less than those limits specified in the table. For Small Business subcontracts, "Total Bid" shall be interpreted as the amount of subcontracted work to a certified Small Business.

The State, including its officers, directors, agents (excluding agents who are design professionals), and employees, shall be named as additional insureds under the General Liability and Umbrella Liability Policies with respect to liability arising out of or connected with work or operations performed by or on behalf of the Contractor under this contract. Coverage for such additional insureds does not extend to liability:

1. Arising from any defective or substandard condition of the roadway which existed at or before the time the Contractor started work, unless such condition has been changed by the work or the scope of the work requires the Contractor to maintain existing roadway facilities and the claim arises from the Contractor's failure to maintain;
2. For claims occurring after the work is completed and accepted unless these claims are directly related to alleged acts or omissions of the Contractor that occurred during the course of the work; or
3. To the extent prohibited by Insurance Code Section 11580.04

Additional insured coverage shall be provided by a policy provision or by an endorsement providing coverage at least as broad as Additional Insured (Form B) endorsement form CG 2010, as published by the Insurance Services Office (ISO), or other form designated by the Department.

#### **7-1.12B(4)(c) Contractor's Insurance Policy is Primary**

The policy shall stipulate that the insurance afforded the additional insureds applies as primary insurance. Any other insurance or self-insurance maintained by the State is excess only and shall not be called upon to contribute with this insurance.

#### **7-1.12B(5) Automobile Liability Insurance**

The Contractor shall carry automobile liability insurance, including coverage for all owned, hired, and nonowned automobiles. The primary limits of liability shall be not less than \$1,000,000 combined single limit each accident for bodily injury and property damage. The umbrella or excess liability coverage required under Section 7-1.12B(4)(b) also applies to automobile liability.

#### **7-1.12B(6) Policy Forms, Endorsements, and Certificates**

The Contractor shall provide its General Liability Insurance under Commercial General Liability policy form No. CG0001 as published by the Insurance Services Office (ISO) or under a policy form at least as broad as policy form No. CG0001.

#### **7-1.12B(7) Deductibles**

The State may expressly allow deductible clauses, which it does not consider excessive, overly broad, or harmful to the interests of the State. Regardless of the allowance of exclusions or deductions by the State, the Contractor is responsible for any deductible amount and shall warrant that the coverage provided to the State is in accordance with Section 7-1.12B, "Insurance."

#### **7-1.12B(8) Enforcement**

The Department may assure the Contractor's compliance with its insurance obligations. Ten days before an insurance policy lapses or is canceled during the contract period, the Contractor shall submit to the Department evidence of renewal or replacement of the policy.

If the Contractor fails to maintain any required insurance coverage, the Department may maintain this coverage and withhold or charge the expense to the Contractor or terminate the Contractor's control of the work in accordance with Section 8-1.08, "Termination of Control."

The Contractor is not relieved of its duties and responsibilities to indemnify, defend, and hold harmless the State, its officers, agents, and employees by the Department's acceptance of insurance policies and certificates.

Minimum insurance coverage amounts do not relieve the Contractor for liability in excess of such coverage, nor do they preclude the State from taking other actions available to it, including the withholding of funds under this contract.

#### **7-1.12B(9) Self-Insurance**

Self-insurance programs and self-insured retentions in insurance policies are subject to separate annual review and approval by the State.

If the Contractor uses a self-insurance program or self-insured retention, the Contractor shall provide the State with the same protection from liability and defense of suits as would be afforded by first-dollar insurance. Execution of the contract is the Contractor's acknowledgement that the Contractor will be bound by all laws as if the Contractor were an insurer as defined under Insurance Code Section 23 and that the self-insurance program or self-insured retention shall operate as insurance as defined under Insurance Code Section 22.

#### **Replace Section 7-1.125 with:**

#### **7-1.125 Legal Actions Against the Department**

If legal action is brought against the Department over compliance with a State or Federal law, rule, or regulation applicable to highway work, then:

1. If the Department, in complying with a court order, prohibits you from performing work, the resulting delay is a suspension related to your performance, unless the Department terminates the contract.
2. If a court order other than an order to show cause or the final judgment in the action prohibits the Department from requiring you to perform work, the Department may delete the prohibited work or terminate the contract.

**In Section 7-1.13 delete the 5th and 6th paragraphs.**

**Add:**

**7-1.50 FEDERAL LAWS FOR FEDERAL-AID CONTRACTS**

**7-1.50A General**

Section 7-1.50, "Federal Laws for Federal-Aid Contracts," includes specifications required in a Federal-aid construction contract and applies to a Federal-aid contract.

Form FHWA-1273 is included in the contract in Section 7-1.50B, "FHWA-1273." Some contract terms on the form are different than those used in other contract parts as shown in the following table:

<b>FHWA-1273 Terms and Department Equivalencies</b>	
<b>FHWA-1273 Term</b>	<b>Equivalent Term Used in Other Contract Parts</b>
SHA	Department
SHA contracting officer	Engineer
SHA resident engineer	Engineer

**7-1.50B FHWA-1273**

FHWA-1273 Electronic version -- March 10, 1994  
with revised Section VI

**REQUIRED CONTRACT PROVISIONS FEDERAL-AID CONSTRUCTION CONTRACTS**

- I. General
- II. Nondiscrimination
- III. Nonsegregated Facilities
- IV. Payment of Predetermined Minimum Wage
- V. Statements and Payrolls
- VI. Record of Materials, Supplies, and Labor
- VII. Subletting or Assigning the Contract
- VIII. Safety: Accident Prevention
- IX. False Statements Concerning Highway Projects
- X. Implementation of Clean Air Act and Federal Water Pollution Control Act
- XI. Certification Regarding Debarment, Suspension, Ineligibility, and Voluntary Exclusion
- XII. Certification Regarding Use of Contract Funds for Lobbying

**ATTACHMENTS**

- A. Employment Preference for Appalachian Contracts (included in Appalachian contracts only)

**I. GENERAL**

- 1. These contract provisions shall apply to all work performed on the contract by the contractor's own organization and with the assistance of workers under the contractor's immediate superintendence and to all work performed on the contract by piecework, station work, or by subcontract.
- 2. Except as otherwise provided for in each section, the contractor shall insert in each subcontract all of the stipulations contained in these Required Contract Provisions, and further require their inclusion in any lower tier subcontract or purchase order that may in turn be made. The Required Contract Provisions shall not be incorporated by reference in any case. The prime contractor shall be responsible for compliance by any subcontractor or lower tier subcontractor with these Required Contract Provisions.
- 3. A breach of any of the stipulations contained in these Required Contract Provisions shall be sufficient grounds for termination of the contract.
- 4. A breach of the following clauses of the Required Contract Provisions may also be grounds for debarment as provided in 29 CFR 5.12:

- Section I, paragraph 2;
- Section IV, paragraphs 1, 2, 3, 4, and 7;
- Section V, paragraphs 1 and 2a through 2g.

- 5. Disputes arising out of the labor standards provisions of Section IV (except paragraph 5) and Section V of these Required Contract Provisions shall not be subject to the general disputes clause of this contract. Such disputes shall be resolved in accordance with the procedures of the U.S. Department of Labor (DOL) as set forth in 29 CFR 5, 6,

and 7. Disputes within the meaning of this clause include disputes between the contractor (or any of its subcontractors) and the contracting agency, the DOL, or the contractor's employees or their representatives.

6. **Selection of Labor:** During the performance of this contract, the contractor shall not:
  - a. discriminate against labor from any other State, possession, or territory of the United States (except for employment preference for Appalachian contracts, when applicable, as specified in Attachment A), or
  - b. employ convict labor for any purpose within the limits of the project unless it is labor performed by convicts who are on parole, supervised release, or probation.

## II. NONDISCRIMINATION

(Applicable to all Federal-aid construction contracts and to all related subcontracts of \$10,000 or more.)

1. **Equal Employment Opportunity:** Equal employment opportunity (EEO) requirements not to discriminate and to take affirmative action to assure equal opportunity as set forth under laws, executive orders, rules, regulations (28 CFR 35, 29 CFR 1630 and 41 CFR 60) and orders of the Secretary of Labor as modified by the provisions prescribed herein, and imposed pursuant to 23 U.S.C. 140 shall constitute the EEO and specific affirmative action standards for the contractor's project activities under this contract. The Equal Opportunity Construction Contract Specifications set forth under 41 CFR 60-4.3 and the provisions of the American Disabilities Act of 1990 (42 U.S.C. 12101 *et seq.*) set forth under 28 CFR 35 and 29 CFR 1630 are incorporated by reference in this contract. In the execution of this contract, the contractor agrees to comply with the following minimum specific requirement activities of EEO:
  - a. The contractor will work with the State highway agency (SHA) and the Federal Government in carrying out EEO obligations and in their review of his/her activities under the contract.
  - b. The contractor will accept as his operating policy the following statement:

"It is the policy of this Company to assure that applicants are employed, and that employees are treated during employment, without regard to their race, religion, sex, color, national origin, age or disability. Such action shall include: employment, upgrading, demotion, or transfer; recruitment or recruitment advertising; layoff or termination; rates of pay or other forms of compensation; and selection for training, including apprenticeship, preapprenticeship, and/or on-the-job training."
2. **EEO Officer:** The contractor will designate and make known to the SHA contracting officers an EEO Officer who will have the responsibility for and must be capable of effectively administering and promoting an active contractor program of EEO and who must be assigned adequate authority and responsibility to do so.
3. **Dissemination of Policy:** All members of the contractor's staff who are authorized to hire, supervise, promote, and discharge employees, or who recommend such action, or who are substantially involved in such action, will be made fully cognizant of, and will implement, the contractor's EEO policy and contractual responsibilities to provide EEO in each grade and classification of employment. To ensure that the above agreement will be met, the following actions will be taken as a minimum:
  - a. Periodic meetings of supervisory and personnel office employees will be conducted before the start of work and then not less often than once every six months, at which time the contractor's EEO policy and its implementation will be reviewed and explained. The meetings will be conducted by the EEO Officer.
  - b. All new supervisory or personnel office employees will be given a thorough indoctrination by the EEO Officer, covering all major aspects of the contractor's EEO obligations within thirty days following their reporting for duty with the contractor.
  - c. All personnel who are engaged in direct recruitment for the project will be instructed by the EEO Officer in the contractor's procedures for locating and hiring minority group employees.
  - d. Notices and posters setting forth the contractor's EEO policy will be placed in areas readily accessible to employees, applicants for employment and potential employees.
  - e. The contractor's EEO policy and the procedures to implement such policy will be brought to the attention of employees by means of meetings, employee handbooks, or other appropriate means.
4. **Recruitment:** When advertising for employees, the contractor will include in all advertisements for employees the notation: "An Equal Opportunity Employer." All such advertisements will be placed in publications having a large circulation among minority groups in the area from which the project work force would normally be derived.
  - a. The contractor will, unless precluded by a valid bargaining agreement, conduct systematic and direct recruitment through public and private employee referral sources likely to yield qualified minority group

- applicants. To meet this requirement, the contractor will identify sources of potential minority group employees, and establish with such identified sources procedures whereby minority group applicants may be referred to the contractor for employment consideration.
- b. In the event the contractor has a valid bargaining agreement providing for exclusive hiring hall referrals, he is expected to observe the provisions of that agreement to the extent that the system permits the contractor's compliance with EEO contract provisions. (The DOL has held that where implementation of such agreements have the effect of discriminating against minorities or women, or obligates the contractor to do the same, such implementation violates Executive Order 11246, as amended.)
  - c. The contractor will encourage his present employees to refer minority group applicants for employment. Information and procedures with regard to referring minority group applicants will be discussed with employees.
5. **Personnel Actions:** Wages, working conditions, and employee benefits shall be established and administered, and personnel actions of every type, including hiring, upgrading, promotion, transfer, demotion, layoff, and termination, shall be taken without regard to race, color, religion, sex, national origin, age or disability. The following procedures shall be followed:
- a. The contractor will conduct periodic inspections of project sites to insure that working conditions and employee facilities do not indicate discriminatory treatment of project site personnel.
  - b. The contractor will periodically evaluate the spread of wages paid within each classification to determine any evidence of discriminatory wage practices.
  - c. The contractor will periodically review selected personnel actions in depth to determine whether there is evidence of discrimination. Where evidence is found, the contractor will promptly take corrective action. If the review indicates that the discrimination may extend beyond the actions reviewed, such corrective action shall include all affected persons.
  - d. The contractor will promptly investigate all complaints of alleged discrimination made to the contractor in connection with his obligations under this contract, will attempt to resolve such complaints, and will take appropriate corrective action within a reasonable time. If the investigation indicates that the discrimination may affect persons other than the complainant, such corrective action shall include such other persons. Upon completion of each investigation, the contractor will inform every complainant of all of his avenues of appeal.
6. **Training and Promotion:**
- a. The contractor will assist in locating, qualifying, and increasing the skills of minority group and women employees, and applicants for employment.
  - b. Consistent with the contractor's work force requirements and as permissible under Federal and State regulations, the contractor shall make full use of training programs, i.e., apprenticeship, and on-the-job training programs for the geographical area of contract performance. Where feasible, 25 percent of apprentices or trainees in each occupation shall be in their first year of apprenticeship or training. In the event a special provision for training is provided under this contract, this subparagraph will be superseded as indicated in the special provision.
  - c. The contractor will advise employees and applicants for employment of available training programs and entrance requirements for each.
  - d. The contractor will periodically review the training and promotion potential of minority group and women employees and will encourage eligible employees to apply for such training and promotion.
7. **Unions:** If the contractor relies in whole or in part upon unions as a source of employees, the contractor will use his/her best efforts to obtain the cooperation of such unions to increase opportunities for minority groups and women within the unions, and to effect referrals by such unions of minority and female employees. Actions by the contractor either directly or through a contractor's association acting as agent will include the procedures set forth below:
- a. The contractor will use best efforts to develop, in cooperation with the unions, joint training programs aimed toward qualifying more minority group members and women for membership in the unions and increasing the skills of minority group employees and women so that they may qualify for higher paying employment.
  - b. The contractor will use best efforts to incorporate an EEO clause into each union agreement to the end that such union will be contractually bound to refer applicants without regard to their race, color, religion, sex, national origin, age or disability.

- c. The contractor is to obtain information as to the referral practices and policies of the labor union except that to the extent such information is within the exclusive possession of the labor union and such labor union refuses to furnish such information to the contractor, the contractor shall so certify to the SHA and shall set forth what efforts have been made to obtain such information.
  - d. In the event the union is unable to provide the contractor with a reasonable flow of minority and women referrals within the time limit set forth in the collective bargaining agreement, the contractor will, through independent recruitment efforts, fill the employment vacancies without regard to race, color, religion, sex, national origin, age or disability; making full efforts to obtain qualified and/or qualifiable minority group persons and women. (The DOL has held that it shall be no excuse that the union with which the contractor has a collective bargaining agreement providing for exclusive referral failed to refer minority employees.) In the event the union referral practice prevents the contractor from meeting the obligations pursuant to Executive Order 11246, as amended, and these specifications, such contractor shall immediately notify the SHA.
8. **Selection of Subcontractors, Procurement of Materials and Leasing of Equipment:** The contractor shall not discriminate on the grounds of race, color, religion, sex, national origin, age or disability in the selection and retention of subcontractors, including procurement of materials and leases of equipment.
- a. The contractor shall notify all potential subcontractors and suppliers of his/her EEO obligations under this contract.
  - b. Disadvantaged business enterprises (DBE), as defined in 49 CFR 23, shall have equal opportunity to compete for and perform subcontracts which the contractor enters into pursuant to this contract. The contractor will use his best efforts to solicit bids from and to utilize DBE subcontractors or subcontractors with meaningful minority group and female representation among their employees. Contractors shall obtain lists of DBE construction firms from SHA personnel.
  - c. The contractor will use his best efforts to ensure subcontractor compliance with their EEO obligations.
9. **Records and Reports:** The contractor shall keep such records as necessary to document compliance with the EEO requirements. Such records shall be retained for a period of three years following completion of the contract work and shall be available at reasonable times and places for inspection by authorized representatives of the SHA and the FHWA.
- a. The records kept by the contractor shall document the following:
    - 1. The number of minority and non-minority group members and women employed in each work classification on the project;
    - 2. The progress and efforts being made in cooperation with unions, when applicable, to increase employment opportunities for minorities and women;
    - 3. The progress and efforts being made in locating, hiring, training, qualifying, and upgrading minority and female employees; and
    - 4. The progress and efforts being made in securing the services of DBE subcontractors or subcontractors with meaningful minority and female representation among their employees.
  - b. The contractors will submit an annual report to the SHA each July for the duration of the project, indicating the number of minority, women, and non-minority group employees currently engaged in each work classification required by the contract work. This information is to be reported on Form FHWA-1391. If on-the-job training is being required by special provision, the contractor will be required to collect and report training data.

### III. NONSEGREGATED FACILITIES

(Applicable to all Federal-aid construction contracts and to all related subcontracts of \$10,000 or more.)

- a. By submission of this bid, the execution of this contract or subcontract, or the consummation of this material supply agreement or purchase order, as appropriate, the bidder, Federal-aid construction contractor, subcontractor, material supplier, or vendor, as appropriate, certifies that the firm does not maintain or provide for its employees any segregated facilities at any of its establishments, and that the firm does not permit its employees to perform their services at any location, under its control, where segregated facilities are maintained. The firm agrees that a breach of this certification is a violation of the EEO provisions of this contract. The firm further certifies that no employee will be denied access to adequate facilities on the basis of sex or disability.
- b. As used in this certification, the term "segregated facilities" means any waiting rooms, work areas, restrooms and washrooms, restaurants and other eating areas, timeclocks, locker rooms, and other storage or dressing areas, parking lots, drinking fountains, recreation or entertainment areas, transportation, and housing facilities provided for

employees which are segregated by explicit directive, or are, in fact, segregated on the basis of race, color, religion, national origin, age or disability, because of habit, local custom, or otherwise. The only exception will be for the disabled when the demands for accessibility override (e.g. disabled parking).

- c. The contractor agrees that it has obtained or will obtain identical certification from proposed subcontractors or material suppliers prior to award of subcontracts or consummation of material supply agreements of \$10,000 or more and that it will retain such certifications in its files.

#### **IV. PAYMENT OF PREDETERMINED MINIMUM WAGE**

(Applicable to all Federal-aid construction contracts exceeding \$2,000 and to all related subcontracts, except for projects located on roadways classified as local roads or rural minor collectors, which are exempt.)

##### **1. General:**

- a. All mechanics and laborers employed or working upon the site of the work will be paid unconditionally and not less often than once a week and without subsequent deduction or rebate on any account [except such payroll deductions as are permitted by regulations (29 CFR 3) issued by the Secretary of Labor under the Copeland Act (40 U.S.C. 276c)] the full amounts of wages and bona fide fringe benefits (or cash equivalents thereof) due at time of payment. The payment shall be computed at wage rates not less than those contained in the wage determination of the Secretary of Labor (hereinafter "the wage determination") which is attached hereto and made a part hereof, regardless of any contractual relationship which may be alleged to exist between the contractor or its subcontractors and such laborers and mechanics. The wage determination (including any additional classifications and wage rates conformed under paragraph 2 of this Section IV and the DOL poster (WH-1321) or Form FHWA-1495) shall be posted at all times by the contractor and its subcontractors at the site of the work in a prominent and accessible place where it can be easily seen by the workers. For the purpose of this Section, contributions made or costs reasonably anticipated for bona fide fringe benefits under Section 1(b) (2) of the Davis- Bacon Act (40 U.S.C. 276a) on behalf of laborers or mechanics are considered wages paid to such laborers or mechanics, subject to the provisions of Section IV, paragraph 3b, hereof. Also, for the purpose of this Section, regular contributions made or costs incurred for more than a weekly period (but not less often than quarterly) under plans, funds, or programs, which cover the particular weekly period, are deemed to be constructively made or incurred during such weekly period. Such laborers and mechanics shall be paid the appropriate wage rate and fringe benefits on the wage determination for the classification of work actually performed, without regard to skill, except as provided in paragraphs 4 and 5 of this Section IV.
- b. Laborers or mechanics performing work in more than one classification may be compensated at the rate specified for each classification for the time actually worked therein, provided, that the employer's payroll records accurately set forth the time spent in each classification in which work is performed.
- c. All rulings and interpretations of the Davis-Bacon Act and related acts contained in 29 CFR 1, 3, and 5 are herein incorporated by reference in this contract.

##### **2. Classification:**

- a. The SHA contracting officer shall require that any class of laborers or mechanics employed under the contract, which is not listed in the wage determination, shall be classified in conformance with the wage determination.
- b. The contracting officer shall approve an additional classification, wage rate and fringe benefits only when the following criteria have been met:
  1. the work to be performed by the additional classification requested is not performed by a classification in the wage determination;
  2. the additional classification is utilized in the area by the construction industry;
  3. the proposed wage rate, including any bona fide fringe benefits, bears a reasonable relationship to the wage rates contained in the wage determination; and
  4. with respect to helpers, when such a classification prevails in the area in which the work is performed.
- c. If the contractor or subcontractors, as appropriate, the laborers and mechanics (if known) to be employed in the additional classification or their representatives, and the contracting officer agree on the classification and wage rate (including the amount designated for fringe benefits where appropriate), a report of the action taken shall be sent by the contracting officer to the DOL, Administrator of the Wage and Hour Division, Employment Standards Administration, Washington, D.C. 20210. The Wage and Hour Administrator, or an authorized representative, will approve, modify, or disapprove every additional classification action within 30 days of receipt and so advise the contracting officer or will notify the contracting officer within the 30-day period that additional time is necessary.

- d. In the event the contractor or subcontractors, as appropriate, the laborers or mechanics to be employed in the additional classification or their representatives, and the contracting officer do not agree on the proposed classification and wage rate (including the amount designated for fringe benefits, where appropriate), the contracting officer shall refer the questions, including the views of all interested parties and the recommendation of the contracting officer, to the Wage and Hour Administrator for determination. Said Administrator, or an authorized representative, will issue a determination within 30 days of receipt and so advise the contracting officer or will notify the contracting officer within the 30-day period that additional time is necessary.
- e. The wage rate (including fringe benefits where appropriate) determined pursuant to paragraph 2c or 2d of this Section IV shall be paid to all workers performing work in the additional classification from the first day on which work is performed in the classification.

**3. Payment of Fringe Benefits:**

- a. Whenever the minimum wage rate prescribed in the contract for a class of laborers or mechanics includes a fringe benefit which is not expressed as an hourly rate, the contractor or subcontractors, as appropriate, shall either pay the benefit as stated in the wage determination or shall pay another bona fide fringe benefit or an hourly case equivalent thereof.
- b. If the contractor or subcontractor, as appropriate, does not make payments to a trustee or other third person, he/she may consider as a part of the wages of any laborer or mechanic the amount of any costs reasonably anticipated in providing bona fide fringe benefits under a plan or program, provided, that the Secretary of Labor has found, upon the written request of the contractor, that the applicable standards of the Davis-Bacon Act have been met. The Secretary of Labor may require the contractor to set aside in a separate account assets for the meeting of obligations under the plan or program.

**4. Apprentices and Trainees (Programs of the U.S. DOL) and Helpers:**

a. Apprentices:

- 1. Apprentices will be permitted to work at less than the predetermined rate for the work they performed when they are employed pursuant to and individually registered in a bona fide apprenticeship program registered with the DOL, Employment and Training Administration, Bureau of Apprenticeship and Training, or with a State apprenticeship agency recognized by the Bureau, or if a person is employed in his/her first 90 days of probationary employment as an apprentice in such an apprenticeship program, who is not individually registered in the program, but who has been certified by the Bureau of Apprenticeship and Training or a State apprenticeship agency (where appropriate) to be eligible for probationary employment as an apprentice.
- 2. The allowable ratio of apprentices to journeyman-level employees on the job site in any craft classification shall not be greater than the ratio permitted to the contractor as to the entire work force under the registered program. Any employee listed on a payroll at an apprentice wage rate, who is not registered or otherwise employed as stated above, shall be paid not less than the applicable wage rate listed in the wage determination for the classification of work actually performed. In addition, any apprentice performing work on the job site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the work actually performed. Where a contractor or subcontractor is performing construction on a project in a locality other than that in which its program is registered, the ratios and wage rates (expressed in percentages of the journeyman-level hourly rate) specified in the contractor's or subcontractor's registered program shall be observed.
- 3. Every apprentice must be paid at not less than the rate specified in the registered program for the apprentice's level of progress, expressed as a percentage of the journeyman-level hourly rate specified in the applicable wage determination. Apprentices shall be paid fringe benefits in accordance with the provisions of the apprenticeship program. If the apprenticeship program does not specify fringe benefits, apprentices must be paid the full amount of fringe benefits listed on the wage determination for the applicable classification. If the Administrator for the Wage and Hour Division determines that a different practice prevails for the applicable apprentice classification, fringes shall be paid in accordance with that determination.
- 4. In the event the Bureau of Apprenticeship and Training, or a State apprenticeship agency recognized by the Bureau, withdraws approval of an apprenticeship program, the contractor or subcontractor will no longer be permitted to utilize apprentices at less than the applicable predetermined rate for the comparable work performed by regular employees until an acceptable program is approved.

b. Trainees:

1. Except as provided in 29 CFR 5.16, trainees will not be permitted to work at less than the predetermined rate for the work performed unless they are employed pursuant to and individually registered in a program which has received prior approval, evidenced by formal certification by the DOL, Employment and Training Administration.
2. The ratio of trainees to journeyman-level employees on the job site shall not be greater than permitted under the plan approved by the Employment and Training Administration. Any employee listed on the payroll at a trainee rate who is not registered and participating in a training plan approved by the Employment and Training Administration shall be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed. In addition, any trainee performing work on the job site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the work actually performed.
3. Every trainee must be paid at not less than the rate specified in the approved program for his/her level of progress, expressed as a percentage of the journeyman-level hourly rate specified in the applicable wage determination. Trainees shall be paid fringe benefits in accordance with the provisions of the trainee program. If the trainee program does not mention fringe benefits, trainees shall be paid the full amount of fringe benefits listed on the wage determination unless the Administrator of the Wage and Hour Division determines that there is an apprenticeship program associated with the corresponding journeyman-level wage rate on the wage determination which provides for less than full fringe benefits for apprentices, in which case such trainees shall receive the same fringe benefits as apprentices.
4. In the event the Employment and Training Administration withdraws approval of a training program, the contractor or subcontractor will no longer be permitted to utilize trainees at less than the applicable predetermined rate for the work performed until an acceptable program is approved.

c. **Helpers:**

Helpers will be permitted to work on a project if the helper classification is specified and defined on the applicable wage determination or is approved pursuant to the conformance procedure set forth in Section IV.2. Any worker listed on a payroll at a helper wage rate, who is not a helper under an approved definition, shall be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed.

5. **Apprentices and Trainees (Programs of the U.S. DOT):**

Apprentices and trainees working under apprenticeship and skill training programs which have been certified by the Secretary of Transportation as promoting EEO in connection with Federal-aid highway construction programs are not subject to the requirements of paragraph 4 of this Section IV. The straight time hourly wage rates for apprentices and trainees under such programs will be established by the particular programs. The ratio of apprentices and trainees to journeymen shall not be greater than permitted by the terms of the particular program.

6. **Withholding:**

The SHA shall upon its own action or upon written request of an authorized representative of the DOL withhold, or cause to be withheld, from the contractor or subcontractor under this contract or any other Federal contract with the same prime contractor, or any other Federally-assisted contract subject to Davis-Bacon prevailing wage requirements which is held by the same prime contractor, as much of the accrued payments or advances as may be considered necessary to pay laborers and mechanics, including apprentices, trainees, and helpers, employed by the contractor or any subcontractor the full amount of wages required by the contract. In the event of failure to pay any laborer or mechanic, including any apprentice, trainee, or helper, employed or working on the site of the work, all or part of the wages required by the contract, the SHA contracting officer may, after written notice to the contractor, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds until such violations have ceased.

7. **Overtime Requirements:**

No contractor or subcontractor contracting for any part of the contract work which may require or involve the employment of laborers, mechanics, watchmen, or guards (including apprentices, trainees, and helpers described in paragraphs 4 and 5 above) shall require or permit any laborer, mechanic, watchman, or guard in any workweek in which he/she is employed on such work, to work in excess of 40 hours in such workweek unless such laborer, mechanic, watchman, or guard receives compensation at a rate not less than one-and-one-half times his/her basic rate of pay for all hours worked in excess of 40 hours in such workweek.

8. **Violation:**

Liability for Unpaid Wages; Liquidated Damages: In the event of any violation of the clause set forth in paragraph 7 above, the contractor and any subcontractor responsible thereof shall be liable to the affected employee for his/her unpaid wages. In addition, such contractor and subcontractor shall be liable to the United States (in the case of work done under contract for the District of Columbia or a territory, to such District or to such territory) for liquidated damages. Such liquidated damages shall be computed with respect to each individual laborer, mechanic, watchman, or guard employed in violation of the clause set forth in paragraph 7, in the sum of \$10 for each calendar day on which such employee was required or permitted to work in excess of the standard work week of 40 hours without payment of the overtime wages required by the clause set forth in paragraph 7.

**9. Withholding for Unpaid Wages and Liquidated Damages:**

The SHA shall upon its own action or upon written request of any authorized representative of the DOL withhold, or cause to be withheld, from any monies payable on account of work performed by the contractor or subcontractor under any such contract or any other Federal contract with the same prime contractor, or any other Federally-assisted contract subject to the contract Work Hours and Safety Standards Act, which is held by the same prime contractor, such sums as may be determined to be necessary to satisfy any liabilities of such contractor or subcontractor for unpaid wages and liquidated damages as provided in the clause set forth in paragraph 8 above.

**V. STATEMENTS AND PAYROLLS**

(Applicable to all Federal-aid construction contracts exceeding \$2,000 and to all related subcontracts, except for projects located on roadways classified as local roads or rural collectors, which are exempt.)

**1. Compliance with Copeland Regulations (29 CFR 3):**

The contractor shall comply with the Copeland Regulations of the Secretary of Labor which are herein incorporated by reference.

**2. Payrolls and Payroll Records:**

- a. Payrolls and basic records relating thereto shall be maintained by the contractor and each subcontractor during the course of the work and preserved for a period of 3 years from the date of completion of the contract for all laborers, mechanics, apprentices, trainees, watchmen, helpers, and guards working at the site of the work.
- b. The payroll records shall contain the name, social security number, and address of each such employee; his or her correct classification; hourly rates of wages paid (including rates of contributions or costs anticipated for bona fide fringe benefits or cash equivalent thereof the types described in Section 1(b)(2)(B) of the Davis Bacon Act); daily and weekly number of hours worked; deductions made; and actual wages paid. In addition, for Appalachian contracts, the payroll records shall contain a notation indicating whether the employee does, or does not, normally reside in the labor area as defined in Attachment A, paragraph 1. Whenever the Secretary of Labor, pursuant to Section IV, paragraph 3b, has found that the wages of any laborer or mechanic include the amount of any costs reasonably anticipated in providing benefits under a plan or program described in Section 1(b)(2)(B) of the Davis Bacon Act, the contractor and each subcontractor shall maintain records which show that the commitment to provide such benefits is enforceable, that the plan or program is financially responsible, that the plan or program has been communicated in writing to the laborers or mechanics affected, and show the cost anticipated or the actual cost incurred in providing benefits. Contractors or subcontractors employing apprentices or trainees under approved programs shall maintain written evidence of the registration of apprentices and trainees, and ratios and wage rates prescribed in the applicable programs.
- c. Each contractor and subcontractor shall furnish, each week in which any contract work is performed, to the SHA resident engineer a payroll of wages paid each of its employees (including apprentices, trainees, and helpers, described in Section IV, paragraphs 4 and 5, and watchmen and guards engaged on work during the preceding weekly payroll period). The payroll submitted shall set out accurately and completely all of the information required to be maintained under paragraph 2b of this Section V. This information may be submitted in any form desired. Optional Form WH-347 is available for this purpose and may be purchased from the Superintendent of Documents (Federal stock number 029- 005-0014-1), U.S. Government Printing Office, Washington, D.C. 20402. The prime contractor is responsible for the submission of copies of payrolls by all subcontractors.
- d. Each payroll submitted shall be accompanied by a "Statement of Compliance," signed by the contractor or subcontractor or his/her agent who pays or supervises the payment of the persons employed under the contract and shall certify the following:
  1. that the payroll for the payroll period contains the information required to be maintained under paragraph 2b of this Section V and that such information is correct and complete;

2. that such laborer or mechanic (including each helper, apprentice, and trainee) employed on the contract during the payroll period has been paid the full weekly wages earned, without rebate, either directly or indirectly, and that no deductions have been made either directly or indirectly from the full wages earned, other than permissible deductions as set forth in the Regulations, 29 CFR 3;
  3. that each laborer or mechanic has been paid not less than the applicable wage rate and fringe benefits or cash equivalent for the classification of work performed, as specified in the applicable wage determination incorporated into the contract.
- e. The weekly submission of a properly executed certification set forth on the reverse side of Optional Form WH-347 shall satisfy the requirement for submission of the "Statement of Compliance" required by paragraph 2d of this Section V.
  - f. The falsification of any of the above certifications may subject the contractor to civil or criminal prosecution under 18 U.S.C. 1001 and 31 U.S.C. 231.
  - g. The contractor or subcontractor shall make the records required under paragraph 2b of this Section V available for inspection, copying, or transcription by authorized representatives of the SHA, the FHWA, or the DOL, and shall permit such representatives to interview employees during working hours on the job. If the contractor or subcontractor fails to submit the required records or to make them available, the SHA, the FHWA, the DOL, or all may, after written notice to the contractor, sponsor, applicant, or owner, take such actions as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds. Furthermore, failure to submit the required records upon request or to make such records available may be grounds for debarment action pursuant to 29 CFR 5.12.

## **VI. RECORD OF MATERIALS, SUPPLIES, AND LABOR**

(As of May 22, 2007, Form FHWA-47 is no longer required.)

## **VII. SUBLETTING OR ASSIGNING THE CONTRACT**

1. The contractor shall perform with its own organization contract work amounting to not less than 30 percent (or a greater percentage if specified elsewhere in the contract) of the total original contract price, excluding any specialty items designated by the State. Specialty items may be performed by subcontract and the amount of any such specialty items performed may be deducted from the total original contract price before computing the amount of work required to be performed by the contractor's own organization (23 CFR 635).
  - a. "Its own organization" shall be construed to include only workers employed and paid directly by the prime contractor and equipment owned or rented by the prime contractor, with or without operators. Such term does not include employees or equipment of a subcontractor, assignee, or agent of the prime contractor.
  - b. "Specialty Items" shall be construed to be limited to work that requires highly specialized knowledge, abilities, or equipment not ordinarily available in the type of contracting organizations qualified and expected to bid on the contract as a whole and in general are to be limited to minor components of the overall contract.
2. The contract amount upon which the requirements set forth in paragraph 1 of Section VII is computed includes the cost of material and manufactured products which are to be purchased or produced by the contractor under the contract provisions.
3. The contractor shall furnish (a) a competent superintendent or supervisor who is employed by the firm, has full authority to direct performance of the work in accordance with the contract requirements, and is in charge of all construction operations (regardless of who performs the work) and (b) such other of its own organizational resources (supervision, management, and engineering services) as the SHA contracting officer determines is necessary to assure the performance of the contract.
4. No portion of the contract shall be sublet, assigned or otherwise disposed of except with the written consent of the SHA contracting officer, or authorized representative, and such consent when given shall not be construed to relieve the contractor of any responsibility for the fulfillment of the contract. Written consent will be given only after the SHA has assured that each subcontract is evidenced in writing and that it contains all pertinent provisions and requirements of the prime contract.

## **VIII. SAFETY: ACCIDENT PREVENTION**

1. In the performance of this contract the contractor shall comply with all applicable Federal, State, and local laws governing safety, health, and sanitation (23 CFR 635). The contractor shall provide all safeguards, safety devices and protective equipment and take any other needed actions as it determines, or as the SHA contracting officer may

determine, to be reasonably necessary to protect the life and health of employees on the job and the safety of the public and to protect property in connection with the performance of the work covered by the contract.

2. It is a condition of this contract, and shall be made a condition of each subcontract, which the contractor enters into pursuant to this contract, that the contractor and any subcontractor shall not permit any employee, in performance of the contract, to work in surroundings or under conditions which are unsanitary, hazardous or dangerous to his/her health or safety, as determined under construction safety and health standards (29 CFR 1926) promulgated by the Secretary of Labor, in accordance with Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C. 333).
3. Pursuant to 29 CFR 1926.3, it is a condition of this contract that the Secretary of Labor or authorized representative thereof, shall have right of entry to any site of contract performance to inspect or investigate the matter of compliance with the construction safety and health standards and to carry out the duties of the Secretary under Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C. 333).

#### **IX. FALSE STATEMENTS CONCERNING HIGHWAY PROJECTS**

In order to assure high quality and durable construction in conformity with approved plans and specifications and a high degree of reliability on statements and representations made by Engineers, contractors, suppliers, and workers on Federal-aid highway projects, it is essential that all persons concerned with the project perform their functions as carefully, thoroughly, and honestly as possible. Willful falsification, distortion, or misrepresentation with respect to any facts related to the project is a violation of Federal law. To prevent any misunderstanding regarding the seriousness of these and similar acts, the following notice shall be posted on each Federal-aid highway project (23 CFR 635) in one or more places where it is readily available to all persons concerned with the project:

#### **NOTICE TO ALL PERSONNEL ENGAGED ON FEDERAL-AID HIGHWAY PROJECTS**

18 U.S.C. 1020 reads as follows:

"Whoever, being an officer, agent, or employee of the United States, or of any State or Territory, or whoever, whether a person, association, firm, or corporation, knowingly makes any false statement, false representation, or false report as to the character, quality, quantity, or cost of the material used or to be used, or the quantity or quality of the work performed or to be performed, or the cost thereof in connection with the submission of plans, maps, specifications, contracts, or costs of construction on any highway or related project submitted for approval to the Secretary of Transportation; or

Whoever knowingly makes any false statement, false representation, false report or false claim with respect to the character, quality, quantity, or cost of any work performed or to be performed, or materials furnished or to be furnished, in connection with the construction of any highway or related project approved by the Secretary of Transportation; or

Whoever knowingly makes any false statement or false representation as to material fact in any statement, certificate, or report submitted pursuant to provisions of the Federal-aid Roads Act approved July 1, 1916, (39 Stat. 355), as amended and supplemented;

Shall be fined not more than \$10,000 or imprisoned not more than 5 years or both."

#### **X. IMPLEMENTATION OF CLEAN AIR ACT AND FEDERAL WATER POLLUTION CONTROL ACT**

(Applicable to all Federal-aid construction contracts and to all related subcontracts of \$100,000 or more.)

By submission of this bid or the execution of this contract, or subcontract, as appropriate, the bidder, Federal-aid construction contractor, or subcontractor, as appropriate, will be deemed to have stipulated as follows:

1. That any facility that is or will be utilized in the performance of this contract, unless such contract is exempt under the Clean Air Act, as amended (42 U.S.C. 1857 *et seq.*, as amended by Pub.L. 91-604), and under the Federal Water Pollution Control Act, as amended (33 U.S.C. 1251 *et seq.*, as amended by Pub.L. 92-500), Executive Order 11738, and regulations in implementation thereof (40 CFR 15) is not listed, on the date of contract award, on the U.S. Environmental Protection Agency (EPA) List of Violating Facilities pursuant to 40 CFR 15.20.
2. That the firm agrees to comply and remain in compliance with all the requirements of Section 114 of the Clean Air Act and Section 308 of the Federal Water Pollution Control Act and all regulations and guidelines listed thereunder.
3. That the firm shall promptly notify the SHA of the receipt of any communication from the Director, Office of Federal Activities, EPA, indicating that a facility that is or will be utilized for the contract is under consideration to be listed on the EPA List of Violating Facilities.
4. That the firm agrees to include or cause to be included the requirements of paragraph 1 through 4 of this Section X in every nonexempt subcontract, and further agrees to take such action as the government may direct as a means of enforcing such requirements.

**XI. CERTIFICATION REGARDING DEBARMENT, SUSPENSION, INELIGIBILITY AND VOLUNTARY EXCLUSION**

**1. Instructions for Certification - Primary Covered Transactions:**

(Applicable to all Federal-aid contracts - 49 CFR 29)

- a. By signing and submitting this proposal, the prospective primary participant is providing the certification set out below.
- b. The inability of a person to provide the certification set out below will not necessarily result in denial of participation in this covered transaction. The prospective participant shall submit an explanation of why it cannot provide the certification set out below. The certification or explanation will be considered in connection with the department or agency's determination whether to enter into this transaction. However, failure of the prospective primary participant to furnish a certification or an explanation shall disqualify such a person from participation in this transaction.
- c. The certification in this clause is a material representation of fact upon which reliance was placed when the department or agency determined to enter into this transaction. If it is later determined that the prospective primary participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the department or agency may terminate this transaction for cause of default.
- d. The prospective primary participant shall provide immediate written notice to the department or agency to whom this proposal is submitted if any time the prospective primary participant learns that its certification was erroneous when submitted or has become erroneous by reason of changed circumstances.
- e. The terms "covered transaction," "debarred," "suspended," "ineligible," "lower tier covered transaction," "participant," "person," "primary covered transaction," "principal," "proposal," and "voluntarily excluded," as used in this clause, have the meanings set out in the Definitions and Coverage sections of rules implementing Executive Order 12549. You may contact the department or agency to which this proposal is submitted for assistance in obtaining a copy of those regulations.
- f. The prospective primary participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency entering into this transaction.
- g. The prospective primary participant further agrees by submitting this proposal that it will include the clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transaction," provided by the department or agency entering into this covered transaction, without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions.
- h. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A participant may decide the method and frequency by which it determines the eligibility of its principals. Each participant may, but is not required to, check the nonprocurement portion of the "Lists of Parties Excluded From Federal Procurement or Nonprocurement Programs" (Nonprocurement List) which is compiled by the General Services Administration.
- i. Nothing contained in the foregoing shall be construed to require establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.
- j. Except for transactions authorized under paragraph f of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the department or agency may terminate this transaction for cause or default.

\* \* \* \* \*

**Certification Regarding Debarment, Suspension, Ineligibility and  
Voluntary Exclusion--Primary Covered Transactions**

- 1. The prospective primary participant certifies to the best of its knowledge and belief, that it and its principals:
  - a. Are not presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from covered transactions by any Federal department or agency;

- b. Have not within a 3-year period preceding this proposal been convicted of or had a civil judgement rendered against them for commission of fraud or a criminal offense in connection with obtaining, attempting to obtain, or performing a public (Federal, State or local) transaction or contract under a public transaction; violation of Federal or State antitrust statutes or commission of embezzlement, theft, forgery, bribery, falsification or destruction of records, making false statements, or receiving stolen property;
  - c. Are not presently indicted for or otherwise criminally or civilly charged by a governmental entity (Federal, State or local) with commission of any of the offenses enumerated in paragraph 1b of this certification; and
  - d. Have not within a 3-year period preceding this application/proposal had one or more public transactions (Federal, State or local) terminated for cause or default.
2. Where the prospective primary participant is unable to certify to any of the statements in this certification, such prospective participant shall attach an explanation to this proposal.

\* \* \* \* \*

**2. Instructions for Certification - Lower Tier Covered Transactions:**

- (Applicable to all subcontracts, purchase orders and other lower tier transactions of \$25,000 or more - 49 CFR 29)
- a. By signing and submitting this proposal, the prospective lower tier is providing the certification set out below.
  - b. The certification in this clause is a material representation of fact upon which reliance was placed when this transaction was entered into. If it is later determined that the prospective lower tier participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the department, or agency with which this transaction originated may pursue available remedies, including suspension and/or debarment.
  - c. The prospective lower tier participant shall provide immediate written notice to the person to which this proposal is submitted if at any time the prospective lower tier participant learns that its certification was erroneous by reason of changed circumstances.
  - d. The terms "covered transaction," "debarred," "suspended," "ineligible," "primary covered transaction," "participant," "person," "principal," "proposal," and "voluntarily excluded," as used in this clause, have the meanings set out in the Definitions and Coverage sections of rules implementing Executive Order 12549. You may contact the person to which this proposal is submitted for assistance in obtaining a copy of those regulations.
  - e. The prospective lower tier participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency with which this transaction originated.
  - f. The prospective lower tier participant further agrees by submitting this proposal that it will include this clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transaction," without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions.
  - g. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A participant may decide the method and frequency by which it determines the eligibility of its principals. Each participant may, but is not required to, check the Nonprocurement List.
  - h. Nothing contained in the foregoing shall be construed to require establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.
  - i. Except for transactions authorized under paragraph e of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the department or agency with which this transaction originated may pursue available remedies, including suspension and/or debarment.

\* \* \* \* \*

**Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion--Lower Tier Covered Transactions:**

1. The prospective lower tier participant certifies, by submission of this proposal, that neither it nor its principals is presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participation in this transaction by any Federal department or agency.
2. Where the prospective lower tier participant is unable to certify to any of the statements in this certification, such prospective participant shall attach an explanation to this proposal.

\* \* \* \* \*

**XII. CERTIFICATION REGARDING USE OF CONTRACT FUNDS FOR LOBBYING**

(Applicable to all Federal-aid construction contracts and to all related subcontracts which exceed \$100,000 - 49 CFR 20)

1. The prospective participant certifies, by signing and submitting this bid or proposal, to the best of his or her knowledge and belief, that:
  - a. No Federal appropriated funds have been paid or will be paid, by or on behalf of the undersigned, to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with the awarding of any Federal contract, the making of any Federal grant, the making of any Federal loan, the entering into of any cooperative agreement, and the extension, continuation, renewal, amendment, or modification of any Federal contract, grant, loan, or cooperative agreement.
  - b. If any funds other than Federal appropriated funds have been paid or will be paid to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with this Federal contract, grant, loan, or cooperative agreement, the undersigned shall complete and submit Standard Form-LLL, "Disclosure Form to Report Lobbying," in accordance with its instructions.
2. This certification is a material representation of fact upon which reliance was placed when this transaction was made or entered into. Submission of this certification is a prerequisite for making or entering into this transaction imposed by 31 U.S.C. 1352. Any person who fails to file the required certification shall be subject to a civil penalty of not less than \$10,000 and not more than \$100,000 for each such failure.
3. The prospective participant also agrees by submitting his or her bid or proposal that he or she shall require that the language of this certification be included in all lower tier subcontracts, which exceed \$100,000 and that all such recipients shall certify and disclose accordingly.

**7-1.50C Female and Minority Goals**

To comply with Section II, "Nondiscrimination," of "Required Contract Provisions Federal-Aid Construction Contracts," the Department is including in Section 7-1.50C, "Female and Minority Goals," female and minority utilization goals for Federal-aid construction contracts and subcontracts that exceed \$10,000.

The nationwide goal for female utilization is 6.9 percent.

The goals for minority utilization [45 Fed Reg 65984 (10/3/1980)] are as follows:

**Minority Utilization Goals**

Economic Area		Goal (Percent)
174	Redding CA: Non-SMSA Counties: CA Lassen; CA Modoc; CA Plumas; CA Shasta; CA Siskiyou; CA Tehama	6.8
175	Eureka, CA Non-SMSA Counties: CA Del Norte; CA Humboldt; CA Trinity	6.6
176	San Francisco-Oakland-San Jose, CA: SMSA Counties: 7120 Salinas-Seaside-Monterey, CA CA Monterey 7360 San Francisco-Oakland CA Alameda; CA Contra Costa; CA Marin; CA San Francisco; CA San Mateo 7400 San Jose, CA CA Santa Clara, CA 7485 Santa Cruz, CA CA Santa Cruz 7500 Santa Rosa CA Sonoma 8720 Vallejo-Fairfield-Napa, CA CA Napa; CA Solano Non-SMSA Counties: CA Lake; CA Mendocino; CA San Benito	28.9  25.6   19.6  14.9  9.1  17.1  23.2
177	Sacramento, CA: SMSA Counties: 6920 Sacramento, CA CA Placer; CA Sacramento; CA Yolo Non-SMSA Counties CA Butte; CA Colusa; CA El Dorado; CA Glenn; CA Nevada; CA Sierra; CA Sutter; CA Yuba	16.1  14.3
178	Stockton-Modesto, CA: SMSA Counties: 5170 Modesto, CA CA Stanislaus 8120 Stockton, CA CA San Joaquin Non-SMSA Counties CA Alpine; CA Amador; CA Calaveras; CA Mariposa; CA Merced; CA Toulumne	12.3  24.3  19.8
179	Fresno-Bakersfield, CA SMSA Counties: 0680 Bakersfield, CA CA Kern 2840 Fresno, CA CA Fresno Non-SMSA Counties: CA Kings; CA Madera; CA Tulare	19.1  26.1  23.6
180	Los Angeles, CA: SMSA Counties: 0360 Anaheim-Santa Ana-Garden Grove, CA CA Orange 4480 Los Angeles-Long Beach, CA CA Los Angeles 6000 Oxnard-Simi Valley-Ventura, CA CA Ventura 6780 Riverside-San Bernardino-Ontario, CA	11.9  28.3  21.5  19.0

	CA Riverside; CA San Bernardino 7480 Santa Barbara-Santa Maria-Lompoc, CA	19.7
	CA Santa Barbara Non-SMSA Counties CA Inyo; CA Mono; CA San Luis Obispo	24.6
181	San Diego, CA: SMSA Counties 7320 San Diego, CA	16.9
	CA San Diego Non-SMSA Counties CA Imperial	18.2

For each July during which work is performed under the contract, you and each non-material-supplier subcontractor with a subcontract of \$10,000 or more must complete Form FHWA PR-1391 (Appendix C to 23 CFR 230). Submit the forms by August 15.

### 7-1.50D Training

Section 7-1.50D, "Training," applies if a number of trainees or apprentices is specified in the special provisions.

As part of your equal opportunity affirmative action program, provide on-the-job training to develop full journeymen in the types of trades or job classifications involved.

You have primary responsibility for meeting this training requirement.

If you subcontract a contract part, determine how many trainees or apprentices are to be trained by the subcontractor.

Include these training requirements in your subcontract.

Where feasible, 25 percent of apprentices or trainees in each occupation must be in their 1st year of apprenticeship or training.

Distribute the number of apprentices or trainees among the work classifications on the basis of your needs and the availability of journeymen in the various classifications within a reasonable recruitment area.

Before starting work, submit to the Department:

1. Number of apprentices or trainees to be trained for each classification
2. Training program to be used
3. Training starting date for each classification

Obtain the Department's approval for this submitted information before you start work. The Department credits you for each apprentice or trainee you employ on the work who is currently enrolled or becomes enrolled in an approved program.

The primary objective of Section 7-1.50D, "Training," is to train and upgrade minorities and women toward journeyman status. Make every effort to enroll minority and women apprentices or trainees, such as conducting systematic and direct recruitment through public and private sources likely to yield minority and women apprentices or trainees, to the extent they are available within a reasonable recruitment area. Show that you have made the efforts. In making these efforts, do not discriminate against any applicant for training.

Do not employ as an apprentice or trainee an employee:

1. In any classification in which the employee has successfully completed a training course leading to journeyman status or in which the employee has been employed as a journeyman
2. Who is not registered in a program approved by the US Department of Labor, Bureau of Apprenticeship and Training

Ask the employee if the employee has successfully completed a training course leading to journeyman status or has been employed as a journeyman. Your records must show the employee's answers to the questions.

In your training program, establish the minimum length and training type for each classification. The Department and FHWA approves a program if one of the following is met:

1. It is calculated to:
  - 1.1. Meet the your equal employment opportunity responsibilities
  - 1.2. Qualify the average apprentice or trainee for journeyman status in the classification involved by the end of the training period



**8-1.025 PRECONSTRUCTION CONFERENCE**

Attend a preconstruction conference with key personnel, including your assigned representative, at a time and location determined by the Engineer. Submit documents as required before the preconstruction conference. You may begin work before the preconstruction conference.

Be prepared to discuss the following topics and documents:

Topics	Document
Potential claim and dispute resolution	Potential claim forms
Contractor's representation	Assignment of Contractor's representative
DBE and DVBE	Final utilization reports
Equipment	Equipment list
Labor compliance and equal employment opportunity	Job site posters and benefit and payroll reports
Material inspection	Notice of Materials to be Used
Materials on hand	Request for Payment for Materials on Hand
Measurements	--
Partnering	Field Guide to Partnering on Caltrans Construction Projects
Quality control	QC plans
Safety	Injury and Illness Prevention Program and job site posters
Schedule	Baseline schedule and Weekly Statement of Working Days
Subcontracting	Subcontracting Request
Surveying	Survey Request
Traffic control	Traffic contingency plan and traffic control plans
Utility work	--
Weight limitations	--
Water pollution control	SWPPP or WPCP
Work restrictions	PLACs
Working drawings	--

**8-1.03 BEGINNING OF WORK**

Begin work within 15 days after receiving notice that the contract has been approved by the Attorney General or the attorney appointed and authorized to represent the Department. Submit a written notice 72 hours before beginning work. If the project has more than one location of work, submit a separate notice for each location.

You may begin work before receiving the notice of contract approval if you:

1. Deliver the signed contract, bonds, and evidence of insurance to the Department
2. Submit 72-hour notice
3. Obtain an encroachment permit from the Department
4. Are authorized by the Department to begin
5. Perform work at your own risk
6. Perform work under the contract

The Engineer does not count working days for days worked before contract approval.

If the contract is approved, work already performed that complies with the contract is authorized.

If the contract does not get approved, leave the job site in a neat condition. If a facility has been changed, restore it to its former or equivalent condition at your expense.

The Department does not adjust time for beginning before the approval date.

**8-1.04 PROGRESS SCHEDULE**

**8-1.04A General**

Reserved

**8-1.04B Critical Path Method Schedule**

The following definitions apply to critical path method schedules:

**activity:** Task, event, or other project element on a schedule that contributes to completing the project. Activities have a description, start date, finish date, duration, and one or more logic ties.

**baseline schedule:** The initial schedule showing the original work plan beginning on the date of contract approval. This schedule shows no completed work to date and no negative float or negative lag to any activity.

**controlling activity:** Construction activity that extends the scheduled completion date if delayed.

**critical path:** Longest continuous chain of activities for the project that has the least amount of total float of all chains.

In general, a delay on the critical path extends the scheduled completion date.

**critical path method (CPM):** Network based planning technique using activity durations and relationships between activities to calculate a schedule for the entire project.

**revised schedule:** Schedule that incorporates a proposed or past change to logic or activity durations.

**scheduled completion date:** Planned project completion date shown on the current schedule.

**updated schedule:** Current schedule developed from the accepted baseline and any subsequent accepted updated or revised schedules through regular monthly review to incorporate actual past progress.

Before or at the preconstruction conference, submit a CPM baseline schedule.

Submit a monthly updated schedule that includes the status of work completed to date and the work yet to be performed as planned.

On each schedule, show:

1. Planned and actual start and completion date of each work activity, including applicable:
  - 1.1. Submittal development
  - 1.2. Submittal review and approval
  - 1.3. Material procurement
  - 1.4. Contract milestones and constraints
  - 1.5. Equipment and plant setup
  - 1.6. Interfaces with outside entities
  - 1.7. Erection and removal of falsework and shoring
  - 1.8. Test periods
  - 1.9. Major traffic stage change
  - 1.10. Final cleanup
2. Order that you propose to prosecute the work
3. Logical links between the time-scaled work activities
4. All controlling activities
5. Legible description of each activity
6. At least one predecessor and one successor to each activity, except for project start and project end milestones
7. Duration of not less than one working day for each activity
8. Start milestone date as the contract approval date

You may include changes on updated schedules that do not alter the critical path or extend the schedule completion date compared to the current schedule. Changes may include:

1. Adding or deleting activities
2. Changing activity constraints
3. Changing durations
4. Changing logic

If any proposed change in planned work results in altering the critical path or extending the scheduled completion date, submit a revised schedule within 15 days of the proposed change.

For each schedule submittal:

1. Submit a plotted original, time-scaled network diagram on a sheet of at least 8.5" x 11" with a title block and timeline
2. If a computer program is used to make the schedule, submit a read-only compact disc or diskette containing the schedule data. Label the compact disc or diskette with:
  - 2.1. Contract number
  - 2.2. CPM schedule number and date produced
  - 2.3. File name

If there is no contract item for progress schedule (critical path method), full compensation for this work is included in the contract prices paid for the items of work involved, and no additional compensation will be allowed therefor.

## **8-1.05 TEMPORARY SUSPENSION OF WORK**

### **8-1.05A General**

The Engineer may suspend work wholly or in part due to any of the following:

1. Conditions are unsuitable for work progress.
2. You fail to do any of the following:
  - 2.1. Fulfill the Engineer's orders.
  - 2.2. Fulfill a contract part.
  - 2.3. Perform weather-dependent work when conditions are favorable so that weather-related unsuitable conditions are avoided or do not occur.

Upon the Engineer's written order of suspension, suspend work immediately. Provide for public safety and a smooth and unobstructed passageway through the work zone during the suspension as specified in Sections 7-1.08, "Public Convenience," and 7-1.09, "Public Safety." Resume work when ordered.

### **8-1.05B Suspensions Unrelated to Contractor Performance**

For a suspension unrelated to your performance, providing for a smooth and unobstructed passageway through the work during the suspension will be paid for as extra work as specified in Section 4-1.03D, "Extra Work."

The days during a suspension unrelated to your performance are non-working days.

### **8-1.05C Suspensions Related to Contractor Performance**

For a suspension related to your performance, the Department may provide for a smooth and unobstructed passageway through the work during the suspension and deduct the cost from payments.

The days during a suspension related to your performance are working days.

## **8-1.06 TIME OF COMPLETION**

The time to complete the work is specified in the special provisions.

The Engineer issues a Weekly Statement of Working Days by the end of the following week unless the contract is suspended for reasons unrelated to your performance.

The Weekly Statement of Working Days shows:

1. Working days and non-working days during the reporting week
2. Time adjustments
3. Work completion date computations, including working days remaining
4. Controlling activities

You may protest a Weekly Statement of Working Days.

## **8-1.07 LIQUIDATED DAMAGES**

### **8-1.07A General**

The Department specifies liquidated damages (Pub Cont Code § 10226). Liquidated damages, if any, accrue starting on the 1st day after the expiration of the working days through the day of contract acceptance except as specified in Sections 8-1.07B, "Failure to Complete Work Parts within Specified Times," and 8-1.07C, "Failure to Complete Work Parts by Specified Dates."

The Department withholds liquidated damages before the accrual date if the anticipated liquidated damages may exceed the value of the remaining work.

Liquidated damages for all work, except plant establishment, are:

Liquidated Damages		
Total Bid		Liquidated Damages per Day
From over	To	
\$0	\$50,000	\$1,200
\$50,000	\$120,000	\$1,500
\$120,000	\$1,000,000	\$1,900
\$1,000,000	\$5,000,000	\$3,000
\$5,000,000	\$10,000,000	\$5,400
\$10,000,000	\$30,000,000	\$8,300
\$30,000,000	\$100,000,000	\$10,500
\$100,000,000	\$250,000,000	\$28,500

If all work, except plant establishment, is complete and the total number of working days has expired, liquidated damages are \$950 per day.

**8-1.07B Failure to Complete Work Parts within Specified Times**

The Department may deduct specified damages from payments for each day in completing a work part beyond the time specified for completing the work part.

Damages for untimely completion of work parts may not be equal to the daily amount specified as liquidated damages for the project as a whole, but the Department does not simultaneously assess damages for untimely completion of work parts and for the whole work.

Damages accrue starting the 1st day after a work part exceeds the specified time through the day the specified work part is complete.

**8-1.07C Failure to Complete Work Parts by Specified Dates**

The Department may deduct specified damages from payments for each day in completing a work part beyond the specified completion date for the work part.

Damages for untimely work part completion may not be equal to the daily amount specified as liquidated damages for the project as a whole, but the Department does not simultaneously assess damages for untimely work part completion and the whole work.

Damages accrue starting the 1st day after an unmet completion date through the day the work part is complete.

**8-1.07D Director Days**

If the work is not completed within the working days, the Director may grant director days if it serves the State's best interest.

By granting director days, the Director adds working days to the contract. The Director may either grant enough days to eliminate the liquidated damages or fewer. In the latter case, the Department deducts liquidated damages for the remaining overrun in contract time. The Director may deduct the Department's engineering, inspection, and overhead costs incurred during the period of extension granted as director days.

**8-1.08 TERMINATION OF CONTROL**

The Department may terminate your control of the work for failure to do any of the following (Pub Cont Code § 10253):

1. Supply an adequate workforce
2. Supply material as described
3. Pay subcontractors (Pub Cont Code §10262)
4. Prosecute the work as described in the contract

The Department may also terminate your control for failure to maintain insurance coverage.

For a Federal-aid contract, the Department may terminate your control of the work for failure to include "Required Contract Provisions, Federal-Aid Construction Contracts" in subcontracts.

The Department gives you and your surety notice at least 5 days before terminating control. The notice describes the failures and the time allowed to remedy the failures. If failures are not remedied within the time provided, the Department takes control of the work.

The Department may complete the work if the Department terminates your control or you abandon the project (Pub Cont Code § 10255). The Department determines the unpaid balance under Pub Cont Code § 10258 and the contract.

At any time before final payment of all claims, the Department may convert a termination of control to a termination of contract.

## **8-1.09 DELAYS**

### **8-1.09A General**

An excusable delay is a delay of a controlling activity beyond your control, not foreseeable when the work began such as:

1. Change in the work
2. Department action that is not part of the contract
3. Presence of an underground utility main not described in the contract or in a location different from that specified
4. Described facility reconstruction not reconstructed as described, by the utility owner by the date specified, unless the reconstruction is solely for your convenience
5. Department's failure to obtain timely access to the right-of-way
6. Department's failure to perform an action in the time specified

A critical delay is a delay that extends the schedule completion date.  
To request a delay-related time or payment adjustment, submit an RFI.

### **8-1.09B Time Adjustments**

For an excusable critical delay, the Department may make a time adjustment. The Engineer uses information from the schedule to evaluate requests for time adjustments.

If requesting an adjustment, submit a revised schedule showing the delay's effect on the controlling activity. If the delay has:

1. Occurred, submit records of dates and what work was performed during the delayed activity
2. Not occurred, submit the expected dates or duration of the delayed activity

If the Engineer requests, update the schedule to the last working day before the start of the delay.

### **8-1.09C Payment Adjustments**

The Department may make a payment adjustment for an excusable delay that affects your costs.

Only losses for idle equipment, idle workers, and equipment moving or transporting are eligible for delay-related payment adjustments.

The Engineer determines payment for idle time of equipment in the same manner as determinations are made for equipment used in the performance of force account work under Section 9-1.03, "Force Account," with the following exceptions:

1. Delay factor in the Labor Surcharge and Equipment Rental Rates applies to each equipment rental rate.
2. Daily number of payable hours equals the normal working hours during the delay, not to exceed 8 hours per day.
3. Delay days exclude non-working days.
4. Markups are not added.

The Engineer determines payment adjustment for idle workers under Section 9-1.03B, "Labor," but does not add markups.

The Engineer includes costs due to necessary extra equipment moving or transporting.

## **8-1.10 (BLANK)**

## **8-1.11 TERMINATION OF CONTRACT**

### **8-1.11A General**

The Director may terminate the contract if it serves the State's best interest. The Department issues you a written notice, implements the termination, and pays you.

### **8-1.11B Relief from Responsibility for Work**

On receiving a termination notice:



**Replace Section 9 with:**

**SECTION 9 MEASUREMENT AND PAYMENT**

**9-1.01 MEASUREMENT OF QUANTITIES**

**9-1.01A General**

The Department determines bid item quantities under U.S. customary units.

**9-1.01B Weighing Equipment and Procedures**

**9-1.01B(1) General**

The Engineer measures material quantities for payment with devices that comply with:

1. 4 CA Code of Regs § 4000 et seq.
2. Bus & Prof Code § 12001 et seq.

To determine the material payment quantities, use measuring devices that have been sealed by the Department of Food and Agriculture's Division of Measurement Standards or its designated representative.

If a device is not type approved by the Division of Measurement Standards, type approve it under California Test 109.

Notify the Engineer at least 1 business day in advance of equipment testing.

Use material plant controllers having elements affecting the data accuracy and delivery that have been sealed by the Engineer. Make these elements available to the Engineer for inspection. If the elements are adequate for use, the Engineer seals them. If security seal manipulation occurs, stop material production. Do not resume production until the Engineer reinspects and reseals the device.

The Engineer measures material paid for by weight on Contractor-furnished sealed scales regularly inspected by the Department of Food and Agriculture's Division of Measurement Standards or its designated representative.

Obtain authorization of portable vehicle scale installations before sealing.

Proportioning scales must comply with Section 5-1.10, "Equipment."

**9-1.01B(2) Equipment**

Each scale must be long enough to fit an entire vehicle or a combination vehicle on the scale deck. The Department allows you to weigh a combination vehicle separately if you disconnect the vehicles.

Construct scale undersupports:

1. Using portland cement concrete containing at least 470 pounds of cement per cubic yard produced from commercial quality materials
2. Such that footing heights are at least 20 inches thick
3. With a bearing surface at least 30 inches wide and bearing pressure on the footing not over 4000 pounds per square foot

In constructing a scale:

1. Furnish drainage to prevent water from saturating the ground under the scale
2. Use bulkheads that prevent displacement
3. If shimming is necessary:
  - 3.1. Use securely attached metal shims or grout
  - 3.2. Do not use wedges to shim the supports
  - 3.3. Do not use shim material in excess of 3 inches
4. Install mechanical indicating elements level, plumb, and rigidly mounted on the concrete undersupports
5. For a hopper scale, rigidly attach hopper scale lever systems and mechanical indicating elements so no weight is lost from bending or support distortion

Each scale used to determine material payment quantities must be operated by a licensed weighmaster (Bus & Prof Code § 12700 et seq.).

Submit a public weighmaster's certificate or certified daily summary weigh sheets for each weighed material quantity. The Department may witness material weighing and check and compile the daily scale weight record.

Each vehicle operator must obtain weight or load slips from the weighmaster. Submit these records at the delivery point.

**9-1.01B(3) Procedures**

Daily, weigh empty vehicles used to haul material paid for by weight. Each vehicle must have a legible identification mark. The Department may verify material weight by having an empty and loaded vehicle weighed on any scale the Engineer designates.

For imported topsoil measured by volume, soil amendment, and mulch:

1. Each vehicle must allow a ready and accurate contents determination
2. Unless vehicles are of uniform capacity, each vehicle must have a legible identification mark showing its volume capacity
3. Load vehicles to at least the volume capacity
4. Level vehicle loads on arrival at the delivery point

If determining a quantity paid on a volume basis is impractical or if you request and the Engineer authorizes the request, the Engineer weighs the material and converts the result to a volume measurement. The Engineer determines the conversion factors and, if you agree, adopts this method of measurement.

**9-1.01C Final Pay Items**

The Department shows a bid item quantity as a final pay item for payment purposes only. For a final pay item, accept payment based on the verified Bid Item List quantity, regardless of actual quantity used unless dimensions are changed by the Engineer.

**9-1.01D Quantities of Aggregate and Other Roadway Materials**

The Engineer determines the weight of aggregate and other roadway materials that are being paid for by weight as shown and does not include the deducted weight of water in their payment quantities.

Material	Quantity Determination
Aggregate or other roadway material except as otherwise shown in this table	By deducting the weight of water in the material <sup>a</sup> in excess of 3 percent of the dry weight of the material from the weight of the material
Imported borrow, imported topsoil, aggregate subbase	By deducting the weight of water in the material <sup>a</sup> in excess of 6 percent of the dry weight of the material from the weight of the material
Straw	By deducting the weight of water in the material <sup>a</sup> in excess of 15 percent of the dry weight of the material from the weight of the material
Fiber <sup>b</sup>	Engineer does not deduct the weight of water
Aggregate base and aggregate for cement treated bases	As specified in Section 26, "Aggregate Bases," and Section 27, "Cement Treated Bases"

NOTE: Percentage of water is determined by California Test 226.

<sup>a</sup>At the time of weighing

<sup>b</sup>Weight of water in the fiber<sup>a</sup> must not exceed 15 percent of the dry weight of the fiber.

**9-1.02 SCOPE OF PAYMENT**

The Department pays you for furnishing the resources and activities required to complete the Contract work. The Department's payment is full compensation for furnishing the resources and activities, including:

1. Risk, loss, damage repair, or cost of whatever character arising from or relating to the work and performance of the work
2. PLACs and taxes

Full compensation for work specified in Sections 1 through 9 is included in the payment for the bid items involved unless:

1. Bid item for the work is shown on the verified Bid Item List
2. Work is specified as paid for as extra work

The Department does not pay for your loss, damage, repair, or extra costs of whatever character arising from or relating to the work that is a direct or indirect result of your choice of construction methods, materials, equipment, or manpower, unless specifically mandated by the Contract.

Payment is:

1. Full compensation for each bid item specified by the description and measurement unit shown on the verified Bid Item List
2. For the price bid for each bid item shown on the verified Bid Item List or as changed by change order with a specified price adjustment

If an alternative is described in the Contract, the Department pays based on the bid items for the details and specifications not described as an alternative.

The Department pays for work performed by change order based on one or a combination of the following:

1. Bid item prices
2. Force account
3. Agreed price
4. Specialist billing

If the Engineer chooses to pay for work performed by change order based on an agreed price, but you and the Engineer cannot agree on the price, the Department pays by force account.

If a portion of extra work is covered by bid items, the Department pays for this work as changed quantities in those items. The Department pays for the remaining portion of the extra work by force account or agreed price.

The Department pays 10 percent annual interest for unpaid and undisputed:

1. Progress payments
2. After-acceptance payment except for claims

For these payments, interest starts to accrue 30 days after the 1st working day following the 20th day of the month payment is due.

The Department pays 6 percent annual interest for unpaid and undisputed claims. Interest starts to accrue 61 days after the Department accepts a claim statement.

The Department pays 6 percent annual interest for awards in arbitration (Civ Code § 3289).

If the amount of a deduction or withhold exceeds final payment, the Department invoices you for the difference, to be paid upon receipt.

### **9-1.03 FORCE ACCOUNT PAYMENT**

#### **9-1.03A General**

For work paid by force account, the Engineer compares the Department's records to your daily force account work report. When you and the Engineer agree on the contents of the daily force account work reports, the Engineer accepts the report and the Department pays for the work. If the records differ, the Department pays for the work based only on the information shown on the Department's records.

If a subcontractor performs work at force account, accept an additional 10 percent markup to the total cost of that work paid at force account, including markups specified in Section 9-1.03, as reimbursement for additional administrative costs.

The markups specified in labor, materials, and equipment include compensation for all delay costs, overhead costs, and profit.

If an item's payment is adjusted for work-character changes, the Department excludes your cost of determining the adjustment.

Payment for owner-operated labor and equipment is made at the market-priced invoice submitted.

#### **9-1.03B Labor**

Labor payment is full compensation for the cost of labor used in the direct performance of the work plus a 35 percent markup. Force account labor payment consists of:

1. Employer payment to the worker for:
  - 1.1. Basic hourly wage
  - 1.2. Health and welfare

- 1.3. Pension
  - 1.4. Vacation
  - 1.5. Training
  - 1.6. Other State and federal recognized fringe benefit payments
2. Labor surcharge percentage in Labor Surcharge and Equipment Rental Rates current during the work paid at force account for:
    - 2.1. Workers' compensation insurance
    - 2.2. Social security
    - 2.3. Medicare
    - 2.4. Federal unemployment insurance
    - 2.5. State unemployment insurance
    - 2.6. State training taxes
  3. Subsistence and travel allowances paid to the workers
  4. Employer payment to supervisors, if authorized

The 35 percent markup consists of payment for all overhead costs related to labor but not designated as costs of labor used in the direct performance of the work including:

1. Home office overhead
2. Field office overhead
3. Bond costs
4. Profit
5. Labor liability insurance
6. Other fixed or administrative costs that are not costs of labor used in the direct performance of the work

#### **9-1.03C Materials**

Material payment is full compensation for materials you furnish and use in the work. The Engineer determines the cost based on the material purchase price, including delivery charges, except:

1. A 15 percent markup is added.
2. Supplier discounts are subtracted whether you took them or not.
3. If the Engineer believes the material purchase prices are excessive, the Department pays the lowest current wholesale price for a similar material quantity.
4. If you procured the materials from a source you wholly or partially own, the determined cost is based on the lower of the:
  - 4.1. Price paid by the purchaser for similar materials from that source on Contract items
  - 4.2. Current wholesale price for those materials
5. If you do not submit a material cost record within 30 days of billing, the determined cost is based on the lowest wholesale price:
  - 5.1. During that period
  - 5.2. In the quantities used

#### **9-1.03D Equipment Rental**

##### **9-1.03D(1) General**

Equipment rental payment is full compensation for:

1. Rental equipment costs, including moving rental equipment to and from the site of work performed by change order using its own power.
2. Transport equipment costs for rental equipment that cannot be transported economically using its own power. No payment is made during transport for the transported equipment.
3. 15 percent markup.

If you want to return the equipment to a location other than its original location, the payment to move the equipment must not exceed the cost of returning the equipment to its original location. If you use the equipment for work other than work paid by force account, the transportation cost is included in the other work.

Before moving or loading the equipment, obtain authorization for the equipment rental's original location.

The Engineer determines rental costs:

1. Using rates in Labor Surcharge and Equipment Rental Rates:
  - 1.1. By classifying equipment using manufacturer's ratings and manufacturer-approved changes.
  - 1.2. Current during the work paid by force account.
  - 1.3. Regardless of equipment ownership; but the Department uses the rental document rates or minimum rental cost terms if:
    - 1.3.1. Rented from equipment business you do not own.
    - 1.3.2. The Labor Surcharge and Equipment Rental Rates hourly rate is \$10.00 per hour or less.
2. Using rates established by the Engineer for equipment not listed in Labor Surcharge and Equipment Rental Rates. You may submit cost information that helps the Engineer establish the rental rate; but the Department uses the rental document rates or minimum rental cost terms if:
  - 2.1. Rented from equipment business you do not own.
  - 2.2. The Engineer establishes a rate of \$10.00 per hour or less.
3. Using rates for transport equipment not exceeding the hourly rates charged by established haulers.

Equipment rental rates include the cost of:

1. Fuel
2. Oil
3. Lubrication
4. Supplies
5. Small tools that are not consumed by use
6. Necessary attachments
7. Repairs and maintenance
8. Depreciation
9. Storage
10. Insurance
11. Incidentals

The Department pays for small tools consumed by use. The Engineer determines payment for small tools consumed by use based on Contractor-submitted invoices.

#### **9-1.03D(2) Equipment On the Job Site**

For equipment on the job site at the time required to perform work paid by force account, the time paid is the time:

1. To move the equipment to the location of work paid by force account plus an equal amount of time to move the equipment to another location on the job site when the work paid by force account is completed
2. To load and unload equipment
3. Equipment is operated to perform work paid by force account and:
  - 3.1. Hourly rates are paid in 1/2-hour increments
  - 3.2. Daily rates are paid in 1/2-day increments

When rented equipment on the job site is used to perform work at force account not required by the original contract work, the Engineer may authorize rates in excess of those in Labor Surcharge and Equipment Rental Rates if:

1. You submit a request to use rented equipment
2. Equipment is not available from your owned equipment fleet or from your subcontractors
3. Rented equipment is from an independent rental company

4. Proposed equipment rental rate is reasonable
5. Engineer authorizes the equipment source and the rental rate before you use the equipment

The Department pays for fuel consumed during operation of rented equipment not included in the invoiced rental rate.

**9-1.03D(3) Equipment Not On the Job Site Required for Original Contract Work**

For equipment not on the job site at the time required to perform work paid by force account and required for original Contract work, the time paid is the time the equipment is operated to perform work paid by force account and the time to move the equipment to a location on the job site when the work paid by force account is completed.

The minimum total time paid is:

1. 1 day if daily rates are paid
2. 8 hours if hourly rates are paid

If daily rates are recorded, equipment:

1. Idled is paid as 1/2 day
2. Operated 4 hours or less is paid as 1/2 day
3. Operated 4 hours or more is paid as 1 day

If the minimum total time exceeds 8 hours and if hourly rates are listed, the Department rounds up hours operated to the nearest 1/2-hour increment and pays based on the following table. The table does not apply when equipment is not operated due to breakdowns; in which case rental hours are the hours the equipment was operated.

<b>Equipment Rental Hours</b>	
Hours operated	Hours paid
0.0	4.00
0.5	4.25
1.0	4.50
1.5	4.75
2.0	5.00
2.5	5.25
3.0	5.50
3.5	5.75
4.0	6.00
4.5	6.25
5.0	6.50
5.5	6.75
6.0	7.00
6.5	7.25
7.0	7.5
7.5	7.75
>8.0	hours used

**9-1.03D(4) Equipment Not On the Job Site Not Required for Original Contract Work**

For equipment not on the job site at the time required to perform work paid by force account and not required for original Contract work, the time paid is the time:

1. To move the equipment to the location of work paid by force account plus an equal amount of time to return the equipment to its source when the work paid by force account is completed
2. To load and unload equipment
3. Equipment is operated to perform work paid by force account

For this equipment, the Engineer may authorize rates in excess of those in Labor Surcharge and Equipment Rental Rates subject to the following:

1. Equipment is not available from your normal sources or from one of your subcontractors
2. Proposed equipment rental rate is reasonable

3. Engineer authorizes the equipment source and the rental rate before you use the equipment

#### **9-1.03D(5) Non-Owner-Operated Dump Truck Rental**

Submit the rental rate for non-owner-operated dump truck rental. The Engineer determines the payment rate. Payment for non-owner-operated dump truck rental is for the cost of renting a dump truck, including its driver. For the purpose of markup payment only, the non-owner-operated dump truck is rental equipment and the owner is a subcontractor.

#### **9-1.04 EXTRA WORK PERFORMED BY SPECIALISTS**

If the Engineer determines that you or your subcontractors are not capable of performing specialty extra work, a specialist may be used. Itemize the labor, material, and equipment rental costs unless it is not the special service industry's established practice to provide itemization; in which case, the Engineer accepts current market-priced invoices for the work.

The Engineer may accept an invoice as a specialist billing for work performed at an off-job site manufacturing plant or machine shop.

The Engineer determines the cost based on the specialist invoice price minus any available or offered discounts plus a 10 percent markup.

#### **9-1.05 CHANGED QUANTITY PAYMENT ADJUSTMENTS**

##### **9-1.05A General**

The unit prices specified in Section 9-1.05 are adjusted under Section 9-1.03, "Force Account."

##### **9-1.05B Increases of More Than 25 Percent**

If the total bid item quantity exceeds 125 percent of the quantity shown on the verified Bid Item List and if no approved Contract Change Order addresses payment for the quantity exceeding 125 percent, the Engineer may adjust the unit price for the excess quantity under Section 9-1.03, "Force Account," or the following:

1. The adjustment is the difference between the unit price and the unit cost of the total item pay quantity.
2. In determining the unit cost, the Engineer excludes the item's fixed costs. You have recovered the fixed costs in the payment for 125 percent shown on the verified Bid Item List.
3. After excluding fixed costs, the Engineer determines the item unit cost under Section 9-1.03, "Force Account."

If the payment for the number of units of a bid item in excess of 125 percent of the verified Bid Item List is less than \$5,000 at the unit price, the Engineer may not adjust the unit price unless you request it.

##### **9-1.05C Decreases of More Than 25 Percent**

If the total item pay quantity is less than 75 percent of the quantity shown on the verified Bid Item List and if no approved Contract Change Order addresses payment for the quantity less than 75 percent, you may request a unit price adjustment. The Engineer may adjust the unit price for the decreased quantity under Section 9-1.03, "Force Account" or the following:

1. The adjustment is the difference between the unit price and the unit cost of the total pay quantity.
2. In determining the unit cost, the Engineer includes the item's fixed costs.
3. After including fixed costs, the Engineer determines the item unit cost under Section 9-1.03, "Force Account."

The Department does not pay more than 75 percent of the item total in the verified Bid Item List.

##### **9-1.05D Eliminated Items**

If the Engineer eliminates an item, the Department pays your costs incurred before the Engineer's elimination notification date.

If you order authorized material for an eliminated item before the notification date and the order cannot be canceled, either of the following occurs:

1. If the material is returnable to the vendor, the Engineer orders you to return the material and the Department pays your handling costs and vendor charges.
2. The Department pays your cost for the material and its handling and becomes the material owner.

The Engineer determines the payment for the eliminated bid item under Section 9-1.03, "Force Account."

## **9-1.06 WORK-CHARACTER CHANGES**

The Department adjusts a bid item unit price based on the difference between the cost to perform the work as planned and the cost to perform the work as changed. The Engineer determines the payment adjustment under Section 9-1.03, "Force Account." The Department adjusts payment for only the work portion that changed in character.

## **9-1.07 PROGRESS PAYMENTS**

### **9-1.07A General**

The Department pays you based on Engineer-prepared monthly progress estimates. Each estimate reflects:

1. Total work completed during the pay period
2. Change order bills if approved by the 20th of a month
3. Amount for materials on hand
4. Amount earned for mobilization
5. Deductions
6. Withholds
7. Resolved potential claims
8. Payment adjustments

Submit certification stating the work complies with the QC procedures. The Engineer does not process a progress estimate without a signed certification.

You may protest a progress payment.

### **9-1.07B Schedule of Values**

Section 9-1.07B applies to a lump sum bid item for which a schedule of values is specified to be submitted.

The sum of the amounts for the work units listed in the schedule of values must equal the lump sum price bid for the bid item.

Obtain authorization of a schedule of values before you perform work shown on the schedule. The Department does not process a progress payment for the bid item without an authorized schedule of values.

Accept progress payments for overhead, profit, bond costs, and other fixed or administrative costs as distributed proportionally among the items listed except that for a contract with a bid item for mobilization, accept progress payments for bond costs as included in the mobilization bid item.

For changed quantities of the work units listed, the Department adjusts payments in the same manner as specified for changed quantities of bid items under Section 9-1.05, "Changed Quantity Payment Adjustments."

### **9-1.07C Materials On Hand**

A material on hand but not incorporated into the work is eligible for progress payment if:

1. Listed in a special provision as eligible and is in compliance with other Contract parts
2. Purchased
3. An invoice is submitted
4. Stored within the State and you submit evidence that the stored material is subject to the Department's control
5. Requested on the Department-furnished form

### **9-1.07D Mobilization**

Mobilization is eligible for partial payments if the Contract includes a bid item for mobilization. The Department makes the partial payments under Pub Cont Code § 10264. If the Contract does not include a mobilization bid item, mobilization is included in the payment for the various bid items.

The Department pays the item total for mobilization in excess of 10 percent of the total bid in the 1st payment after Contract acceptance.

### **9-1.07E Withholds**

#### **9-1.07E(1) General**

The Department may withhold payment for noncompliance.

The Department returns the noncompliance withhold in the progress payment following correction of noncompliance.

Withholds are not retentions under Pub Cont Code § 7107 and do not accrue interest under Pub Cont Code § 10261.5.

Withholds are cumulative and independent of deductions.

Section 9-1.07E does not include all withholds that may be taken; the Department may withhold other payments as specified.

**9-1.07E(2) Progress Withholds**

The Department withholds 10 percent of a partial payment for noncompliant progress. Noncompliant progress occurs when:

1. Total days to date exceed 75 percent of the revised Contract working days
2. Percent of working days elapsed exceeds the percent of value of work completed by more than 15 percent

The Engineer determines the percent of working days elapsed by dividing the total days to date by the revised Contract working days and converting the quotient to a percentage.

The Engineer determines the percent of value of work completed by summing payments made to date and the amount due on the current progress estimate, dividing this sum by the current total estimated value of the work, and converting the quotient to a percentage. These amounts are shown on the Progress Payment Voucher.

When the percent of working days elapsed minus the percent of value of work completed is less than or equal to 15 percent, the Department returns the withhold in the next progress payment.

**9-1.07E(3) Performance Failure Withholds**

During each estimate period you fail to comply with a Contract part, including submittal of a document as specified, the Department withholds a part of the progress payment. The documents include QC plans, schedules, traffic control plans, and water pollution control submittals.

For 1 performance failure, the Department withholds 25 percent of the progress payment but does not withhold more than 10 percent of the total bid.

For multiple performance failures, the Department withholds 100 percent of the progress payment but does not withhold more than 10 percent of the total bid.

**9-1.07E(4) Stop Notice Withholds**

The Department may withhold payments to cover claims filed under Civ Code § 3179 et seq.

**9-1.07E(5) Penalty Withholds**

Penalties include fines and damages that are proposed, assessed, or levied against you or the Department by a governmental agency or private lawsuit. Penalties are also payments made or costs incurred in settling alleged violations of federal, state, or local laws, regulations, requirements, or PLACs. The cost incurred may include the amount spent for mitigation or correcting a violation.

If you or the Department is assessed a penalty, the Department may withhold the penalty amount until the penalty disposition has been resolved. The Department may withhold penalty funds without notifying you.

Instead of the withhold, you may provide a bond equal to the highest estimated liability for any disputed penalties proposed.

**9-1.07E(6)–9-1.07E(10) Reserved**

**9-1.07F Retentions**

The Department does not retain moneys from progress payments due to the Contractor for work performed (Pub Cont Code § 7202).

**9-1.07G–9-1.07K Reserved**

**9-1.08 PAYMENT AFTER CONTRACT ACCEPTANCE**

**9-1.08A General**

Reserved

**9-1.08B Payment Before Final Estimate**

After Contract acceptance, the Department pays you based on the Engineer-prepared estimate that includes withholds and the balance due after deduction of previous payments.

### **9-1.08C Proposed Final Estimate**

The Engineer estimates the amount of work completed and shows the amount payable in a proposed final estimate based on:

1. Contract items
2. Payment adjustments
3. Work paid by force account or agreed price
4. Extra work
5. Deductions

Submit either a written final estimate acceptance or a claim statement no later than the 30th day after receiving the proposed final estimate. Evidence of the Contractor's receipt of the final estimate and the Engineer's receipt of the Contractor's written acceptance or claim statement is a delivery service's proof of delivery or Engineer's written receipt if hand delivered.

If you claim that the final estimate is less than 90 percent of your total bid, the Department adjusts the final payment to cover your overhead. The adjustment is 10 percent of the difference between the total bid and the final estimate. The Department does not make this adjustment on a terminated contract.

### **9-1.08D Final Payment and Claims**

#### **9-1.08D(1) General**

If you accept the proposed final estimate or do not submit a claim statement within 30 days of receiving the estimate, the Engineer furnishes the final estimate to you and the Department pays the amount due within 30 days. This final estimate and payment is conclusive except as specified in Sections 5-1.015, "Records," 6-1.075, "Guarantee," and 9-1.09, "Clerical Errors."

If you submit a claim statement within 30 days of receiving the Engineer's proposed final estimate, the Engineer furnishes a semifinal estimate to the Contractor and the Department pays the amount due within 30 days. The semifinal estimate is conclusive as to the amount of work completed and the amount payable except as affected by the claims or as specified in Sections 5-1.015, "Records," 6-1.075, "Guarantee," and 9-1.09, "Clerical Errors."

#### **9-1.08D(2) Claim Statement**

##### **9-1.08D(2)(a) General**

For each claim, submit a claim statement showing only the identification number that corresponds to the Full and Final Potential Claim Record and the final amount of additional payment requested except:

1. If the final amount of requested payment differs from the amount requested in the Full and Final Potential Claim Record
2. For a claim for quantities, withholds, deductions, liquidated damages, or change order bills
3. For an overhead claim

If the final amount of requested payment differs from the amount requested in the Full and Final Potential Claim Record, submit:

1. Identification number that corresponds to the Full and Final Potential Claim Record
2. Final amount of additional payment requested
3. Basis for the changed amount
4. Contract documentation that supports the changed amount
5. Statement of the reasons the Contract documentation supports the claim

The Engineer notifies you of an omission of or a disparity in the exclusive identification number. Within 15 days of the notification, correct the omission or disparity. If the omission or disparity is not resolved after the 15 days, the Engineer assigns a new number.

For a claim for quantities, withholds, deductions, or change order bills submit:

1. Final amount of additional payment requested
2. Enough detail to enable the Engineer to determine the basis and amounts of the additional payment requested

##### **9-1.08D(2)(b) Overhead Claims**

Include with an overhead claim:

1. Final amount of additional payment requested
2. Independent CPA audit report

Failure to submit the audit report with an overhead claim with the claim statement is a waiver of the overhead claim and operates as a bar to arbitration on the claim (Pub Cont Code § 10240.2).

The Department deducts an amount for field and home office overhead paid on added work from any claim for overhead. The value of the added work equals the value of the work completed minus the total bid. The home office overhead deduction equals 5 percent of the added work. The field office overhead deduction equals 5-1/2 percent of the added work.

If you intend to pursue a claim for reimbursement for field or home office overhead beyond that provided expressly by the Contract:

1. Notify the Engineer within 30 days of receipt of the proposed final estimate of your intent to seek reimbursement for specific overhead costs beyond that provided by the Contract
2. Specifically identify each claim and each date associated with each claim from which you seek reimbursement for specific overhead costs beyond that provided by the Contract
3. Timely submit all other claims
4. Within 30 days of receipt of the proposed final estimate, submit an audit report prepared by an independent CPA
  - 4.1. The audit report must show calculations with supporting documentation of actual home office and project field overhead costs
  - 4.2. The calculations must specify the actual daily rates for both field and home office overhead for the entire duration of the project expressed as a rate per working day
  - 4.3. The start and end dates of the actual project performance period, number of working days, overhead cost pools, and all allocation bases must be disclosed in the calculations of your actual field and home office overhead daily rates
  - 4.4. Neither daily rate may include a markup for profit
5. Field overhead costs from which the daily rate is calculated must be:
  - 5.1. Allowable under 48 CFR 31
  - 5.2. Supported by reliable records
  - 5.3. Related solely to the project
  - 5.4. Incurred during the actual project performance period
  - 5.5. Comprised of only time-related field overhead costs
  - 5.6. Not a direct cost
6. Home office overhead costs from which the daily rate is calculated must be:
  - 6.1. Allowable under 48 CFR 31
  - 6.2. Supported by reliable records
  - 6.3. Incurred during the actual project performance period
  - 6.4. Comprised of only fixed home office overhead costs
  - 6.5. Not a direct cost

The actual rate of time-related overhead is subject to authorization by the Engineer.

The CPA's audit must be performed under the Attestation Standards published by the American Institute of Certified Public Accountants. The CPA's audit report must express an opinion whether or not your calculations of your actual field and home office overhead daily rates comply with Section 9-1.08D(2)(b), "Overhead Claims." The attest documentation prepared by the CPA in connection with the audit must be reproduced and submitted for review with the audit report.

The Department provides markups for all work paid by force account. Overhead for field and home office costs are included in the markups. Overhead claims in excess of Contract markups are not allowed under the Contract. If you seek reimbursement for costs not allowed under the Contract, the Department does not pay your cost of performing the independent CPA examination specified in section 9-1.08D(2)(b), "Overhead Claims," including preparation of the audit report.

#### **9-1.08D(2)(c) Declaration**

Submit a declaration that includes the following language with the claim statement:





1. The boundaries shown are approximate; the Department marks the exact boundaries on the ground
2. Do not enter the ESA unless authorized
3. If the ESA is breached, immediately:
  - 3.1. Secure the area and stop all operations within 60 feet of the ESA boundary
  - 3.2. Notify the Engineer
4. If the ESA is damaged, the Department determines what efforts are necessary to remedy the damage and who performs the remedy; you are responsible for remedies and charges.

## **14-2 CULTURAL RESOURCES**

### **14-2.01 GENERAL**

Reserved

### **14-2.02 ARCHAEOLOGICAL RESOURCES**

If archaeological resources are discovered at the job site, do not disturb the resources and immediately:

1. Stop all work within a 60-foot radius of the discovery
2. Protect the discovery area
3. Notify the Engineer

The Department investigates. Do not take archaeological resources from the job site. Do not resume work within the discovery area until authorized.

If, in the opinion of the Engineer, completion of the work is delayed or interfered with by reason of an archaeological find, or investigation or recovery of archeological materials, you will be compensated for resulting losses, and an extension of time will be granted, in the same manner as provided for in Section 8-1.09, "Right of Way Delays."

If ordered, furnish resources to assist in the investigation or recovery of archaeological resources. This work will be paid for as extra work as specified in Section 4-1.03D, "Extra Work."

### **14-2.03 ARCHAEOLOGICAL MONITORING AREA**

Section 14-2.03 applies if an AMA is described in the Contract.

The Department assigns an archaeological monitor to monitor job site activities within the AMA. Do not work within the AMA unless the archeological monitor is present.

The Engineer and the Department archaeological monitor conduct an AMA location field review with you at least 5 business days before start of work. The Department marks the exact boundaries of the AMA on the ground.

If temporary fence (Type ESA) for an AMA is described in the Contract, install temporary fence (Type ESA) to define the boundaries of the AMA during the AMA location field review.

At least 5 business days before starting work within an AMA, submit a schedule of days and hours to be worked for the Engineer's approval. If you require changes in the schedule, submit an update for the Engineer's approval at least 5 business days before any changed work day.

If archaeological resources are discovered within an AMA, comply with Section 14-2.02, "Archaeological Resources."

### **14-2.04 HISTORIC STRUCTURES**

Reserved

## **14-3 COMMUNITY IMPACTS AND ENVIRONMENTAL JUSTICE**

Reserved

## **14-4 NATIVE AMERICAN CONCERNS**

Reserved

## **14-5 AESTHETICS**

Reserved

## **14-6 BIOLOGICAL RESOURCES**

### **14-6.01 GENERAL**

Reserved

## **14-6.02 BIRD PROTECTION**

Protect migratory and nongame birds, their occupied nests, and their eggs.

The Department anticipates nesting or attempted nesting from February 15 to September 1.

The federal Migratory Bird Treaty Act, 16 USC § 703–711, and 50 CFR Pt 10 and Fish & Game Code §§ 3503, 3513, and 3800 protect migratory and nongame birds, their occupied nests, and their eggs.

The federal Endangered Species Act of 1973, 16 USC §§ 1531 and 1543, and the California Endangered Species Act, Fish & Game Code §§ 2050–2115.5, prohibit the take of listed species and protect occupied and unoccupied nests of threatened and endangered bird species.

The Bald and Golden Eagle Protection Act, 16 USC § 668, prohibits the destruction of bald and golden eagles and their occupied and unoccupied nests.

If migratory or nongame bird nests are discovered that may be adversely affected by construction activities or an injured or killed bird is found, immediately:

1. Stop all work within a 100-foot radius of the discovery.
2. Notify the Engineer.

The Department investigates. Do not resume work within the specified radius of the discovery until authorized.

When ordered, use exclusion devices, take nesting prevention measures, remove and dispose of partially constructed and unoccupied nests of migratory or nongame birds on a regular basis to prevent their occupation, or perform any combination of these. This work will be paid for as extra work as specified in Section 4-1.03D, "Extra Work."

Prevent nest materials from falling into waterways.

Bird protection that causes a delay to the controlling activity is a condition unfavorable to the suitable prosecution of work as specified in Section 8-1.05, "Temporary Suspension of Work."

## **14-7 PALEONTOLOGICAL RESOURCES**

If paleontological resources are discovered at the job site, do not disturb the material and immediately:

1. Stop all work within a 60-foot radius of the discovery
2. Protect the area
3. Notify the Engineer

The Department investigates and modifies the dimensions of the protected area if necessary. Do not take paleontological resources from the job site. Do not resume work within the specified radius of the discovery until authorized.

## **14-8 NOISE AND VIBRATION**

### **14-8.01 GENERAL**

Reserved

### **14-8.02 NOISE CONTROL**

Do not exceed 86 dBA at 50 feet from the job site activities from 9 p.m. to 6 a.m.

Equip an internal combustion engine with the manufacturer-recommended muffler. Do not operate an internal combustion engine on the job site without the appropriate muffler.

## **14-9 AIR QUALITY**

### **14-9.01 AIR POLLUTION CONTROL**

Comply with air pollution control rules, regulations, ordinances, and statutes that apply to work performed under the Contract, including air pollution control rules, regulations, ordinances, and statutes provided in Govt Code § 11017 (Pub Cont Code § 10231).

Do not burn material to be disposed of.

### **14-9.02 DUST CONTROL**

Prevent and alleviate dust by applying water, dust palliative, or both under Section 14-9.01.

Apply water under Section 17, "Watering."

Apply dust palliative under Section 18, "Dust Palliative."

If ordered, apply water, dust palliative, or both to control dust caused by public traffic. This work will be paid for as extra work as specified in Section 4-1.03D, "Extra Work."





1. Green material consisting of chipped, shredded, or ground vegetation; or clean processed recycled wood products
2. Biosolids
3. Manure
4. Mixed food waste

Soil amendment feedstock materials shall be composted to reduce weed seeds, pathogens and deleterious materials as specified under Title 14, California Code of Regulations, Division 7, Chapter 3.1, Article 7, Section 17868.3.

Soil amendment shall not be derived from mixed municipal solid waste and must be reasonably free of visible contaminants. Soil amendment must not contain paint, petroleum products, pesticides or any other chemical residues harmful to animal life or plant growth. Soil amendment must not possess objectionable odors.

Metal concentrations in soil amendment must not exceed the maximum metal concentrations listed in Title 14, California Code of Regulations, Division 7, Chapter 3.1, Section 17868.2.

Soil amendment must comply with the following:

Physical/Chemical Requirements		
Property	Test Method	Requirement
pH	*TMECC 04.11-A, Elastometric pH 1:5 Slurry Method, pH Units	6.0–8.0
Soluble Salts	TMECC 04.10-A, Electrical Conductivity 1:5 Slurry Method dS/m (mmhos/cm)	0-10.0
Moisture Content	TMECC 03.09-A, Total Solids & Moisture at 70+/- 5 deg C, % Wet Weight Basis	30–60
Organic Matter Content	TMECC 05.07-A, Loss-On-Ignition Organic Matter Method (LOI), % Dry Weight Basis	30–65
Maturity	TMECC 05.05-A, Germination and Vigor Seed Emergence Seedling Vigor % Relative to Positive Control	80 or Above 80 or Above
Stability	TMECC 05.08-B, Carbon Dioxide Evolution Rate mg CO <sub>2</sub> -C/g OM per day	8 or below
Particle Size	TMECC 02.02-B Sample Sieving for Aggregate Size Classification % Dry Weight Basis	95% Passing 5/8 inch 70% Passing 3/8 inch
Pathogen	TMECC 07.01-B, Fecal Coliform Bacteria < 1000 MPN/gram dry wt.	Pass
Pathogen	TMECC 07.01-B, Salmonella < 3 MPN/4 grams dry wt.	Pass
Physical Contaminants	TMECC 02.02-C, Man Made Inert Removal and Classification: Plastic, Glass and Metal, % > 4mm fraction	Combined Total: < 1.0
Physical Contaminants	TMECC 02.02-C, Man Made Inert Removal and Classification: Sharps (Sewing needles, straight pins and hypodermic needles), % > 4mm fraction	None Detected

\*TMECC refers to "Test Methods for the Examination of Composting and Compost," published by the United States Department of Agriculture and the United States Compost Council (USCC).

Prior to application, the Contractor shall provide the Engineer with a copy of the soil amendment producer's Compost Technical Data Sheet and a copy of the compost producers STA certification. The Compost Technical Data Sheet shall include laboratory analytical test results, directions for product use, and a list of product ingredients.

Prior to application, the Contractor shall provide the Engineer with a Certificate of Compliance in conformance with the provisions in Section 6-1.07, "Certificates of Compliance," of the Standard Specifications.

**In Section 20-2.10 delete the 8th, 9th, and 10th paragraphs.**



## **Preparing Soil**

After you prepare an area for lime soil stabilization, test the soil to be stabilized every 500 cubic yards for relative compaction under California Test 231 and moisture content under California Test 226, and verify the surface grades.

## **Applying Lime**

The Engineer determines the final application rate for each lime product proposed from the samples submitted. If the soil being stabilized changes, the Engineer changes the application rate. Based on California Test 373, the Engineer reports the application rates as the percent of lime by dry weight of soil. The Engineer provides the optimum moisture content determined under California Test 373 for each application rate.

Before applying lime, measure the temperature at the ground surface.

If lime in dry form is used, the Engineer verifies the application rate using the drop pan method once per 40,000 square feet stabilized, or twice per day, whichever is greater.

If lime in slurry form is used, report the quantity of slurry placed by measuring the volume of slurry in the holding tank once per 40,000 square feet stabilized, or twice per day, whichever is greater.

## **Mixing**

For each day of initial mixing, test the moisture content. Sample the material immediately after initial mixing.

Randomly test the adequacy of the final mixing with a phenolphthalein indicator solution.

During mixing operations, measure the ground temperature at full mixing depth.

After mixing and before compacting, determine maximum density under California Test 216 from composite samples of the mixed material and at each distinct change in material. Test the moisture content of the mixed material under California Test 226. Test the gradation for compliance with "Materials."

## **Compaction**

Test relative compaction on a wet weight basis.

After initial compaction, determine in-place density under California Test 231 and moisture content under California Test 226 at the same locations. The testing frequency must be 1 test per 250 cubic yards of lime stabilized soil. Test in 0.50-foot depth intervals.

Before requesting to compact material in layers greater than 0.50 foot, construct a test strip in the production area and demonstrate the test strip passes compaction tests using the proposed thickness. The test strip must contain no more material than 1 day's production. The Engineer tests at not more than 0.50-foot depth intervals regardless of the thickness of your layers.

Construct test pads by scraping away material to the depth ordered by the Engineer. If a compaction test fails corrective action must include the layers of material already placed above the test pad elevation.

## **Finish Grading**

Do not proceed with construction activities for subsequent layers of material until the Engineer verifies the final grades of the lime stabilized soil.

## **Dispute Resolution**

You and the Engineer must work together to avoid potential conflicts and to resolve disputes regarding test result discrepancies. Notify the Engineer within 5 days of receiving a test result if you dispute the test result.

If you or the Engineer dispute each other's test results, submit written quality control test results and copies of paperwork including worksheets used to determine the disputed test results to the Engineer. An Independent Third Party (ITP) performs referee testing. Before the ITP participates in a dispute resolution, the ITP must be accredited under the Department's Independent Assurance Program. The ITP must be independent of the project. By mutual agreement, the ITP is chosen from:

1. A Department laboratory
2. A Department laboratory in a district or region not in the district or region the project is located
3. The Transportation Laboratory
4. A laboratory not currently employed by you or your lime producer

If split quality control or acceptance samples are not available, the ITP uses any available material representing the disputed material for evaluation.

## 24-1.02 MATERIALS

### 24-1.02A Lime

Lime must comply with ASTM C 977 and the following:

<b>Lime</b>		
Quality Characteristic	ASTM	Specification
Available Calcium and Magnesium Oxide(min., %)	C 25 <sup>a</sup>	High Calcium Quicklime: CaO > 90 Dolomitic Quicklime: CaO > 55 and CaO + MgO > 90
Loss on ignition (max., %)	C 25	7 (total loss) 5 (carbon dioxide) 2 (free moisture)
Slaking rate	C 110	30 °C rise in 8 minutes

Notes:

<sup>a</sup> You may use ASTM C25 or ASTM C1301 and ASTM C1271.

A 0.5-pound sample of lime dry-sieved in a mechanical sieve shaker for 10 minutes ±30 seconds must comply with:

Sieve Sizes	Percentage Passing
3/8-inch	98-100

Slurry must:

1. Be free of contaminants
2. Contain at least the minimum dry solids
3. Have uniform consistency

If you prepare lime slurry, prepare it at the jobsite.

### 24-1.02B Water

If available, use potable water. Inform the Engineer if a water source other than potable water is used. If not using potable water, water for mixing soil and lime must:

1. Contain no more than 650 parts per million of chlorides as Cl, and no more than 1,300 parts per million of sulfates as SO<sub>4</sub>
2. Not contain an amount of impurities that will cause a reduction in the strength of the stabilize soil

### 24-1.02C Mixed Material

Take a composite sample from 5 random locations after initial mixing. The moisture content of the composite sample tested under California Test 226 must be a minimum of 3 percent greater than optimum. Determine the moisture versus density relationship of the composite sample material determined under California Test 216, except Part 2, Section E, Paragraph 6 is modified as follows:

After adjustment of the moisture content, compact each of the remaining test specimens in the mold, then record the water adjustment, tamper reading, and the corresponding adjusted wet density from the chart on Table 1 using the column corresponding to the actual wet weight of the test specimen compacted. Note each of these wet weights on Line I.

The mixed material before compaction excluding rock must comply with:

Sieve Sizes	Percentage Passing
1"	98 - 100
No. 4	60 - 100

#### **24-1.02D Curing Treatment**

Curing treatment may be any of the following:

1. Water cure
2. Curing seal
3. Moist material blanket

Curing seal must be SS or CSS grade asphaltic emulsion under Section 94, "Asphaltic Emulsions."

### **24-1.03 CONSTRUCTION**

#### **24-1.03A General**

If using different types of lime or lime from more than one source, do not mix them. The Engineer determines separate application rates.

Deliver lime in full loads unless it is the last load needed for a work shift.

Apply lime at ground temperatures above 35 °F. Do not apply lime if you expect the ground temperature to drop below 35 °F before you complete mixing and compacting.

During mixing, maintain the in-place moisture of the soil to be stabilized a minimum 3 percent above the optimum moisture determined under California Test 216 as modified in "Mixed Material." During compaction and finish grading, add water to the surface to prevent drying until the next layer of mixed material is placed, or until you apply curing treatment.

Scarify the surface of lime stabilized soil at least 2 inches between each layer. Do not scarify the final surface of the lime stabilized soil.

Between the time of applying lime and 3 days after applying curing treatment, only allow equipment or vehicles on the soil being stabilized that are essential to the work.

#### **24-1.03B Preparing Soil**

Except for soil clods, remove rocks or solids larger than 1/3 of the layer thickness. Regardless of the layer thickness, remove rocks and solids greater than 4 inches. Notify the Engineer if you encounter rocks or solids greater than 1/3 of the layer thickness.

Before adding lime, place the soil to be stabilized to within 0.08 foot of the specified lines and grades and compact to not less than 90 percent relative compaction.

#### **24-1.03C Applying Lime**

Apply lime uniformly over the area to be stabilized using a vane spreader.

The Engineer determines the final application rate. Do not vary from this application rate by more than 5 percent.

Apply lime in dry form. If you request and the Engineer approves, you may apply lime in slurry form.

Lime slurry must be in suspension during application. Apply lime slurry uniformly making successive passes over a measured section or roadway until the specified lime content is reached. Apply the residue from lime slurry over the length of the roadway being processed.

#### **24-1.03D Mixing**

Lime and soil to be stabilized must be mixed uniformly at least twice to within 0.10 foot of the specified depth at any point. If the mixing depth exceeds the specified depth by more than 10 percent, add lime in proportion to the exceeded depth. The Department does not pay for this added lime.

Mix lime on the same day it is applied. After the initial mixing, allow a mellowing period for at least 36 hours before final mixing. Moisture content during the mellowing period determined under California Test 226 must be at least 3 percent higher than the optimum moisture content. You may add water and mix during the mellowing period.

Remix until the mixture is uniform with no streaks or pockets of lime.

Except for clods larger than 1 inch, mixed material must have a color reaction with sprayed phenolphthalein alcohol indicator solution.

Complete all the mixing work within 7 days of the initial application of lime.

### **24-1.03E Compaction**

Begin compacting immediately after final mixing, but not less than 36 hours after the beginning of initial mixing.

Compact by using sheepsfoot or segmented wheel rollers immediately followed by steel drum or pneumatic-tired rollers. Do not use vibratory rollers.

If you request and the Engineer approves, you may compact mixed material in layers greater than 0.50 foot.

If the specified thickness is 0.50 foot or less, compact in one layer. If the specified thickness is more than 0.50 foot, compact in 2 or more layers of approximately equal thickness. The maximum compacted thickness of any one layer must not exceed 0.50 foot unless you first demonstrate your equipment and methods provide uniform distribution of lime and achieve the specified compaction.

Use other compaction methods in areas inaccessible to rollers.

Compact the lime stabilized soil to at least 95 percent relative compaction determined under California Test 216 as modified under "Mixed Material." The relative compaction is determined on a wet weight basis.

### **24-1.03F Finish Grading**

Maintain the moisture content of the lime stabilized soil through the entire finish grading operation at a minimum of 3 percent above optimum moisture content.

The finished surface of the lime stabilized soil must not vary more than 0.08 foot above or below the grade established by the Engineer unless the lime stabilized soil is to be covered by material paid for by the cubic yard, in which case the finished surface may not vary above the grade established by the Engineer.

If lime stabilized soil is above the allowable tolerance, trim, remove, and dispose of the excess material. Do not leave loose material on the finished surface. If finish rolling cannot be completed within 2 hours of trimming, defer trimming.

If lime stabilized soil is below the allowable tolerance, you may use trimmed material to fill low areas only if final grading and final compaction occurs within 48 hours of beginning initial compaction. Before placing trimmed material, scarify the surface of the area to be filled at least 2 inches deep.

Finish rolling of trimmed surfaces must be performed with at least 1 complete coverage with steel drum or pneumatic-tired rollers.

### **24-1.03G Curing**

#### **General**

Choose the method of curing.

Apply the chosen cure method within 48 hours of completing the sheepsfoot or segmented wheel compaction. Apply the chosen cure method within the same day of any trimming and finish grading.

#### **Water Cure**

Water may be used to cure the finished surface before you place a moist material blanket, or apply curing seal. Keep the surface above the optimum moisture content of the lime stabilized soil. Use this method for no more than 3 days, after which you must place a curing seal or moist material blanket.

#### **Curing Seal**

Curing seal equipment must have a gage indicating the volume of curing seal in the storage tank.

If curing seal is used, apply it:

1. To the finished surface of lime stabilized soil under Section 94-1.06, "Applying," of the Standard Specifications
2. At a rate from 0.10 to 0.20 gallon per square yard. The Engineer determines the exact rate
3. When the lime stabilized soil is at optimum moisture
4. When the ambient temperature is above 40 °F and rising

Repair damaged curing seal the same day the damage occurs.

#### **Moist Material Blanket**

Moist material blanket consists of moist structural material. Moist material blanket may be a temporary or permanent layer of material of sufficient thickness to prevent drying of the lime stabilized soil. You may use moist material blanket if the lime stabilized soil can bear the weight of construction equipment. Maintain the moist material blanket above the optimum moisture content, as appropriate, until the next structural layer is placed.













**39-1.02B Tack Coat**

Tack coat must comply with the specifications for asphaltic emulsion in Section 94, "Asphaltic Emulsion," or asphalt binder in Section 92, "Asphalts." Choose the type and grade.

Notify the Engineer if you dilute asphaltic emulsion with water. The weight ratio of added water to asphaltic emulsion must not exceed 1 to 1.

Measure added water either by weight or volume in compliance with the specifications for weighing, measuring, and metering devices under Section 9-1.01, "Measurement of Quantities," or you may use water meters from water districts, cities, or counties. If you measure water by volume, apply a conversion factor to determine the correct weight.

With each dilution, submit in writing:

1. The weight ratio of water to bituminous material in the original asphaltic emulsion
2. The weight of asphaltic emulsion before diluting
3. The weight of added water
4. The final dilution weight ratio of water to asphaltic emulsion

**39-1.02C Asphalt Binder**

Asphalt binder in HMA must comply with Section 92, "Asphalts," or Section 39-1.02D, "Asphalt Rubber Binder." The special provisions specify the grade.

Asphalt binder for geosynthetic pavement interlayer must comply with Section 92, "Asphalts." Choose from Grades PG 64-10, PG 64-16, or PG 70-10.

**39-1.02D Asphalt Rubber Binder**

**General**

Use asphalt rubber binder in RHMA-G, RHMA-O, and RHMA-O-HB. Asphalt rubber binder must be a combination of:

1. Asphalt binder
2. Asphalt modifier
3. Crumb rubber modifier (CRM)

The combined asphalt binder and asphalt modifier must be 80.0 ± 2.0 percent by weight of the asphalt rubber binder.

**Asphalt Modifier**

Asphalt modifier must be a resinous, high flash point, and aromatic hydrocarbon, and comply with:

**Asphalt Modifier for Asphalt Rubber Binder**

Quality Characteristic	ASTM	Specification
Viscosity, m <sup>2</sup> /s (x 10 <sup>-6</sup> ) at 100 °C	D 445	X ± 3 <sup>a</sup>
Flash Point, CL.O.C., °C	D 92	207 minimum
Molecular Analysis		
Asphaltenes, percent by mass	D 2007	0.1 maximum
Aromatics, percent by mass	D 2007	55 minimum

Note:

<sup>a</sup> The symbol "X" is the proposed asphalt modifier viscosity. "X" must be between 19 and 36. A change in "X" requires a new asphalt rubber binder design.

Asphalt modifier must be from 2.0 percent to 6.0 percent by weight of the asphalt binder in the asphalt rubber binder.

**Crumb Rubber Modifier**

CRM consists of a ground or granulated combination of scrap tire CRM and high natural CRM. CRM must be 75.0 ± 2.0 percent scrap tire CRM and 25.0 ± 2.0 percent high natural CRM by total weight of CRM. Scrap tire CRM must be from any combination of automobile tires, truck tires, or tire buffings.

Sample and test scrap tire CRM and high natural CRM separately. CRM must comply with:

### Crumb Rubber Modifier for Asphalt Rubber Binder

Quality Characteristic	Test Method	Specification
Scrap tire CRM gradation (% passing No. 8 sieve)	LP-10	100
High natural CRM gradation (% passing No. 10 sieve)	LP-10	100
Wire in CRM (% max.)	LP-10	0.01
Fabric in CRM (% max.)	LP-10	0.05
CRM particle length (inch max.) <sup>a</sup>	--	3/16
CRM specific gravity <sup>a</sup>	CT 208	1.1 – 1.2
Natural rubber content in high natural CRM (%) <sup>a</sup>	ASTM D 297	40.0 – 48.0

Note:

<sup>a</sup> Test at mix design and for Certificate of Compliance.

Only use CRM ground and granulated at ambient temperature. If steel and fiber are cryogenically separated, it must occur before grinding and granulating. Only use cryogenically produced CRM particles that can be ground or granulated and not pass through the grinder or granulator.

CRM must be dry, free-flowing particles that do not stick together. CRM must not cause foaming when combined with the asphalt binder and asphalt modifier. You may add calcium carbonate or talc up to 3 percent by weight of CRM.

#### Asphalt Rubber Binder Design and Profile

Submit in writing an asphalt rubber binder design and profile that complies with the asphalt rubber binder specifications. In the design, designate the asphalt, asphalt modifier, and CRM and their proportions. The profile must include the same component sources for the asphalt rubber binder used.

Design the asphalt rubber binder from testing you perform for each quality characteristic and for the reaction temperatures expected during production. The 24-hour (1,440-minute) interaction period determines the design profile. At a minimum, mix asphalt rubber binder components, take samples, and perform and record the following tests:

#### Asphalt Rubber Binder Reaction Design Profile

Test	Minutes of Reaction <sup>a</sup>							Limits
	45	60	90	120	240	360	1440	
Cone penetration @ 77 °F, 0.10-mm (ASTM D 217)	X <sup>b</sup>				X		X	25 - 70
Resilience @ 77 °F, percent rebound (ASTM D 5329)	X				X		X	18 min.
Field softening point, °F (ASTM D 36)	X				X		X	125 - 165
Viscosity, centipoises (LP-11)	X	X	X	X	X	X	X	1,500 - 4,000

Notes:

<sup>a</sup> Six hours (360 minutes) after CRM addition, reduce the oven temperature to 275 °F for a period of 16 hours. After the 16-hour (1320 minutes) cool-down after CRM addition, reheat the binder to the reaction temperature expected during production for sampling and testing at 24 hours (1440 minutes).

<sup>b</sup> "X" denotes required testing

#### Asphalt Rubber Binder

After interacting for a minimum of 45 minutes, asphalt rubber binder must comply with:

#### Asphalt Rubber Binder

Quality Characteristic	Test for Quality Control or Acceptance	Test Method	Specification	
			Minimum	Maximum
Cone penetration @ 77 °F, 0.10-mm	Acceptance	ASTM D 217	25	70
Resilience @ 77 °F, percent rebound	Acceptance	ASTM D 5329	18	--
Field softening point, °F	Acceptance	ASTM D 36	125	165
Viscosity @ 375 °F, centipoises	Quality Control	LP-11	1,500	4,000

#### 39-1.02E Aggregate

Aggregate must be clean and free from deleterious substances. Aggregate:

1. Retained on the No. 4 sieve is coarse
2. Passing the No. 4 sieve is fine

3. Added and passing the No. 30 sieve is supplemental fine, including:

- 3.1. Hydrated lime
- 3.2. Portland cement
- 3.3. Fines from dust collectors

The special provisions specify the aggregate gradation for each HMA type.

The specified aggregate gradation is before the addition of asphalt binder and includes supplemental fines. The Engineer tests for aggregate grading under California Test 202, modified by California Test 105 if there is a difference in specific gravity of 0.2 or more between the coarse and fine parts of different aggregate blends.

Choose a sieve size target value (TV) within each target value limit presented in the aggregate gradation tables.

**Aggregate Gradation  
(Percentage Passing)  
HMA Types A and B**

3/4-inch HMA Types A and B

Sieve Sizes	Target Value Limits	Allowable Tolerance
1"	100	—
3/4"	90 - 100	TV ±5
1/2"	70 - 90	TV ±6
No. 4	45 - 55	TV ±7
No. 8	32 - 40	TV ±5
No. 30	12 - 21	TV ±4
No. 200	2 - 7	TV ±2

1/2-inch HMA Types A and B

Sieve Sizes	Target Value Limits	Allowable Tolerance
3/4"	100	—
1/2"	95 - 99	TV ±6
3/8"	75 - 95	TV ±6
No. 4	55 - 66	TV ±7
No. 8	38 - 49	TV ±5
No. 30	15 - 27	TV ±4
No. 200	2 - 8	TV ±2

3/8-inch HMA Types A and B

Sieve Sizes	Target Value Limits	Allowable Tolerance
1/2"	100	—
3/8"	95 - 100	TV ±6
No. 4	58 - 72	TV ±7
No. 8	34 - 48	TV ±6
No. 30	18 - 32	TV ±5
No. 200	2 - 9	TV ±2

No. 4 HMA Types A and B

Sieve Sizes	Target Value Limits	Allowable Tolerance
3/8"	100	—
No. 4	95 - 100	TV ±7
No. 8	72 - 77	TV ±7
No. 30	37 - 43	TV ±7
No. 200	2 - 12	TV ±4

**Rubberized Hot Mix Asphalt - Gap Graded (RHMA-G)**

3/4-inch RHMA-G

Sieve Sizes	Target Value Limits	Allowable Tolerance
1"	100	—
3/4"	95 - 100	TV ±5
1/2"	83 - 87	TV ±6
3/8"	65 - 70	TV ±6
No. 4	28 - 42	TV ±7
No. 8	14 - 22	TV ±5
No. 200	0 - 6	TV ±2

1/2-inch RHMA-G

Sieve Sizes	Target Value Limits	Allowable Tolerance
3/4"	100	—
1/2"	90 - 100	TV ±6
3/8"	83 - 87	TV ±6
No. 4	28 - 42	TV ±7
No. 8	14 - 22	TV ±5
No. 200	0 - 6	TV ±2

**Open Graded Friction Course (OGFC)**

1-inch OGFC

Sieve Sizes	Target Value Limits	Allowable Tolerance
1 1/2"	100	—
1"	99 - 100	TV ±5
3/4"	85 - 96	TV ±5
1/2"	55 - 71	TV ±6
No. 4	10 - 25	TV ±7
No. 8	6 - 16	TV ±5
No. 200	1 - 6	TV ±2

1/2-inch OGFC

Sieve Sizes	Target Value Limits	Allowable Tolerance
3/4"	100	—
1/2"	95 - 100	TV ±6
3/8"	78 - 89	TV ±6
No. 4	28 - 37	TV ±7
No. 8	7 - 18	TV ±5
No. 30	0 - 10	TV ±4
No. 200	0 - 3	TV ±2

3/8-inch OGFC

Sieve Sizes	Target Value Limits	Allowable Tolerance
1/2"	100	—
3/8"	90 - 100	TV ±6
No. 4	29 - 36	TV ±7
No. 8	7 - 18	TV ±6
No. 30	0 - 10	TV ±5
No. 200	0 - 3	TV ±2

Before the addition of asphalt binder and lime treatment, aggregate must comply with:

### Aggregate Quality

Quality Characteristic	Test Method	HMA Type			
		A	B	RHMA-G	OGFC
Percent of crushed particles Coarse aggregate (% min.) One fractured face	CT 205	90	25	--	90
Two fractured faces		75	--	90	75
Fine aggregate (% min.) (Passing No. 4 sieve and retained on No. 8 sieve.) One fractured face	CT 211	70	20	70	90
Los Angeles Rattler (% max.) Loss at 100 Rev.		12	--	12	12
Loss at 500 Rev.	45	50	40	40	
Sand equivalent (min.) <sup>a</sup>	CT 217	47	42	47	--
Fine aggregate angularity (% min.) <sup>b</sup>	AASHTO T 304 Method A	45	45	45	--
Flat and elongated particles (% max. by weight @ 5:1)	ASTM D 4791	10	10	10	10

Notes:

<sup>a</sup> Reported value must be the average of 3 tests from a single sample.

<sup>b</sup> The Engineer waives this specification if HMA contains less than 10 percent of nonmanufactured sand by weight of total aggregate. Manufactured sand is fine aggregate produced by crushing rock or gravel.

#### 39-1.02F Reclaimed Asphalt Pavement

You may produce HMA using reclaimed asphalt pavement (RAP). HMA produced using RAP must comply with the specifications for HMA except aggregate quality specifications do not apply to RAP. You may substitute RAP aggregate for a part of the virgin aggregate in HMA in a quantity not exceeding 15.0 percent of the aggregate blend. Do not use RAP in OGFC and RHMA-G.

Assign the substitution rate of RAP aggregate for virgin aggregate with the job mix formula (JMF) submittal. The JMF must include the percent of RAP used. If you change your assigned RAP aggregate substitution rate by more than 5 percent (within the 15.0 percent limit), submit a new JMF.

Process RAP from asphalt concrete. You may process and stockpile RAP throughout the project's life. Prevent material contamination and segregation. Store RAP in stockpiles on smooth surfaces free of debris and organic material. Processed RAP stockpiles must consist only of homogeneous RAP.

#### 39-1.03 HOT MIX ASPHALT MIX DESIGN REQUIREMENTS

##### 39-1.03A General

A mix design consists of performing California Test 367 and laboratory procedures on combinations of aggregate gradations and asphalt binder contents to determine the optimum binder content (OBC) and HMA mixture qualities. If RAP is used, use Laboratory Procedure LP-9. The result of the mix design becomes the proposed JMF.

Use Form CEM-3512 to document aggregate quality and mix design data. Use Form CEM-3511 to present the JMF.

Laboratories testing aggregate qualities and preparing the mix design and JMF must be qualified under the Department's Independent Assurance Program. Take samples under California Test 125.

The Engineer reviews the aggregate qualities, mix design, and JMF and verifies and accepts the JMF.

You may change the JMF during production. Do not use the changed JMF until the Engineer accepts it. Except when adjusting the JMF in compliance with Section 39-1.03E, "Job Mix Formula Verification," perform a new mix design and submit in writing a new JMF submittal for changing any of the following:

1. Target asphalt binder percentage
2. Asphalt binder supplier
3. Asphalt rubber binder supplier
4. Component materials used in asphalt rubber binder or percentage of any component materials
5. Combined aggregate gradation
6. Aggregate sources
7. Substitution rate for RAP aggregate of more than 5 percent
8. Any material in the JMF

For OGFC, submit in writing a complete JMF submittal except asphalt binder content. The Engineer determines the asphalt binder content under California Test 368 within 20 days of your complete JMF submittal and provides you a Form CEM-3513.

**39-1.03B Hot Mix Asphalt Mix Design**

Perform a mix design that produces HMA in compliance with:

**Hot Mix Asphalt Mix Design Requirements**

Quality Characteristic	Test Method	HMA Type		
		A	B	RHMA-G
Air voids content (%)	CT 367 <sup>a</sup>	4.0	4.0	Special Provisions
Voids in mineral aggregate (% min.)	LP-2			
No. 4 grading		17.0	17.0	--
3/8" grading		15.0	15.0	--
1/2" grading		14.0	14.0	18.0 – 23.0 <sup>b</sup>
3/4" grading	13.0	13.0	18.0 – 23.0 <sup>b</sup>	
Voids filled with asphalt (%)	LP-3			
No. 4 grading		76.0 – 80.0	76.0 – 80.0	Note d
3/8" grading		73.0 – 76.0	73.0 – 76.0	
1/2" grading		65.0 – 75.0	65.0 – 75.0	
3/4" grading	65.0 – 75.0	65.0 – 75.0		
Dust proportion	LP-4			
No. 4 and 3/8" gradings		0.9 – 2.0	0.9 – 2.0	Note d
1/2" and 3/4" gradings	0.6 – 1.3	0.6 – 1.3		
Stabilometer value (min.) <sup>c</sup>	CT 366			
No. 4 and 3/8" gradings		30	30	--
1/2" and 3/4" gradings	37	35	23	

Notes:

<sup>a</sup> Calculate the air voids content of each specimen using California Test 309 and Lab Procedure LP-1. Modify California Test 367, Paragraph C5, to use the exact air voids content specified in the selection of OBC.

<sup>b</sup> Voids in mineral aggregate for RHMA-G must be within this range.

<sup>c</sup> Modify California Test 304, Part 2.B.2.c: "After compaction in the compactor, cool to 140 °± 5 °F by allowing the briquettes to cool at room temperature for 0.5-hour, then place the briquettes in the oven at 140 °F for a minimum of 2 hours and not more than 3 hours."

<sup>d</sup> Report this value in the JMF submittal.

For stability and air voids content, prepare 3 briquettes at the OBC and test for compliance. Report the average of 3 tests. Prepare new briquettes and test if the range of stability for the 3 briquettes is more than 8 points. The average air void content may vary from the specified air void content by ±0.5 percent.

You may use the briquettes used for stability testing to determine bulk specific gravity under CT 308. If you use the same briquettes and tests using bulk specific gravity fail, you may prepare 3 new briquettes and determine a new bulk specific gravity.

**39-1.03C Job Mix Formula Submittal**

Each JMF submittal must consist of:

1. Proposed JMF on Form CEM-3511
2. Mix design documentation on Form CEM-3512 dated within 12 months of submittal
3. JMF verification on Form CEM-3513, if applicable
4. JMF renewal on Form CEM-3514, if applicable
5. Materials Safety Data Sheets (MSDS) for:
  - 5.1. Asphalt binder
  - 5.2. Base asphalt binder used in asphalt rubber binder
  - 5.3. CRM and asphalt modifier used in asphalt rubber binder
  - 5.4. Blended asphalt rubber binder mixture

- 5.5. Supplemental fine aggregate except fines from dust collectors
- 5.6. Antistripping additives

If the Engineer requests in writing, sample the following materials in the presence of the Engineer and place in labeled containers weighing no more than 50 pounds each:

1. Coarse, fine, and supplemental fine aggregate from stockpiles, cold feed belts, or hot bins. Samples must include at least 120 pounds for each coarse aggregate, 80 pounds for each fine aggregate, and 10 pounds for each type of supplemental fines. The Department combines these aggregate samples to comply with the JMF target values submitted on Form CEM-3511.
2. RAP from stockpiles or RAP system. Samples must be at least 60 pounds.
3. Asphalt binder from the binder supplier. Samples must be in two 1-quart cylindrical shaped cans with open top and friction lids.
4. Asphalt rubber binder with the components blended in the proportions to be used. Samples must be in four 1-quart cylindrical shaped cans with open top and friction lids.

Notify the Engineer in writing at least 2 business days before sampling materials. For aggregate and RAP, split the samples into at least 4 parts. Submit 3 parts to the Engineer and use 1 part for your testing.

#### **39-1.03D Job Mix Formula Review**

The Engineer reviews each mix design and proposed JMF within 5 business days from the complete JMF submittal. The review consists of reviewing the mix design procedures and comparing the proposed JMF with the specifications.

The Engineer may verify aggregate qualities during this review period.

#### **39-1.03E Job Mix Formula Verification**

If you cannot submit a Department-verified JMF on Form CEM-3513 dated within 12 months before HMA production, the Engineer verifies the JMF.

Based on your testing and production experience, you may submit on Form CEM-3511 an adjusted JMF before the Engineer's verification testing. JMF adjustments may include a change in the:

1. Asphalt binder content target value up to  $\pm 0.6$  percent from the optimum binder content value submitted on Form CEM-3512 except do not adjust the target value for asphalt rubber binder for RHMA-G below 7.0 percent
2. Aggregate gradation target values within the target value limits specified in the aggregate gradation tables

For HMA Type A, Type B, and RHMA-G, the Engineer verifies the JMF from samples taken from HMA produced by the plant to be used. Notify the Engineer in writing at least 2 business days before sampling materials.

In the Engineer's presence and from the same production run, take samples of:

1. Aggregate
2. Asphalt binder
3. RAP
4. HMA

Sample aggregate from cold feed belts or hot bins. Sample RAP from the RAP system. Sample HMA under California Test 125 except if you request in writing and the Engineer approves, you may sample from any of the following locations:

1. The plant
2. A truck
3. A windrow
4. The paver hopper
5. The mat behind the paver

You may sample from a different project including a non-Department project if you make arrangements for the Engineer to be present during sampling.

For aggregate, RAP, and HMA, split the samples into at least 4 parts and label their containers. Submit 3 split parts to the Engineer and use 1 part for your testing.

The Engineer verifies each proposed JMF within 20 days of receiving verification samples. If you request in writing, the Engineer verifies RHMA-G quality requirements within 3 business days of sampling. Verification is testing for compliance with the specifications for:

1. Aggregate quality
2. Aggregate gradation (JMF TV  $\pm$  tolerance)
3. Asphalt binder content (JMF TV  $\pm$  tolerance)
4. HMA quality specified in the table Hot Mix Asphalt Mix Design Requirements except:
  - 4.1. Air voids content (design value  $\pm$  2.0 percent)
  - 4.2. Voids filled with asphalt (report only if an adjustment for asphalt binder content target value is less than or equal to  $\pm$  0.3 percent from OBC)
  - 4.3. Dust proportion (report only if an adjustment for asphalt binder content target value is less than or equal to  $\pm$  0.3 percent from OBC)

The Engineer prepares 3 briquettes from a single split sample. To verify the JMF for stability and air voids content, the Engineer tests the 3 briquettes and reports the average of 3 tests. The Engineer prepares new briquettes if the range of stability for the 3 briquettes is more than 8 points.

The Engineer may use the briquettes used for stability testing to determine bulk specific gravity under CT 308. If the Engineer uses the same briquettes and the tests using bulk specific gravity fail, the Engineer prepares 3 new briquettes and determines a new bulk specific gravity.

If the Engineer verifies the JMF, the Engineer provides you a Form CEM-3513.

If the Engineer's tests on plant-produced samples do not verify the JMF, the Engineer notifies you in writing and you must submit a new JMF submittal or submit an adjusted JMF based on your testing. JMF adjustments may include a change in the:

1. Asphalt binder content target value up to  $\pm$ 0.6 percent from the optimum binder content value submitted on Form CEM-3512 except do not adjust the target value for asphalt rubber binder for RHMA-G below 7.0 percent
2. Aggregate gradation target values within the target value limits specified in the aggregate gradation tables

You may adjust the JMF only once due to a failed verification test. An adjusted JMF requires a new Form CEM-3511 and verification of a plant-produced sample.

The Engineer re verifies the JMF if HMA production has stopped for longer than 30 days and the verified JMF is older than 12 months.

For each HMA type and aggregate size specified, the Engineer verifies at the State's expense up to 2 proposed JMF including a JMF adjusted after verification failure. The Engineer deducts \$3,000 from payments for each verification exceeding this limit. This deduction does not apply to verifications initiated by the Engineer or if a JMF expires while HMA production is stopped longer than 30 days.

### **39-1.03F Job Mix Formula Renewal**

You may request a JMF renewal by submitting the following:

1. Proposed JMF on Form CEM-3511
2. A previously verified JMF documented on Form CEM-3513 dated within 12 months
3. Mix design documentation on Form CEM-3512 used for the previously verified JMF

If the Engineer requests in writing, sample the following materials in the presence of the Engineer and place in labeled containers weighing no more than 50 pounds each:

1. Coarse, fine, and supplemental fine aggregate from stockpiles, cold feed belts, or hot bins. Samples must include at least 120 pounds for each coarse aggregate, 80 pounds for each fine aggregate, and 10 pounds for each type of supplemental fines. The Department combines these aggregate samples to comply with the JMF target values submitted on Form CEM-3511.
2. RAP from stockpiles or RAP system. Samples must be at least 60 pounds.
3. Asphalt binder from the binder supplier. Samples must be in two 1-quart cylindrical shaped cans with open top and friction lids.
4. Asphalt rubber binder with the components blended in the proportions to be used. Samples must be in four 1-quart cylindrical shaped cans with open top and friction lids.

Notify the Engineer in writing at least 2 business days before sampling materials. For aggregate and RAP, split samples into at least 4 parts. Submit 3 parts to the Engineer and use 1 part for your testing.

The Engineer reviews each complete JMF renewal submittal within 5 business days.

The Engineer may verify aggregate qualities during this review period.

Notify the Engineer in writing at least 2 business days before sampling materials. For aggregate, RAP, and HMA, split the samples into at least 4 parts. Submit 3 parts to the Engineer and use 1 part for your testing.

The Engineer verifies the JMF renewal submittal under Section 39-1.03E, "Job Mix Formula Verification," except:

1. The Engineer retains samples until you provide test results for your part on Form CEM-3514.
2. The Engineer tests samples of materials obtained from the HMA production unit after you submit test results that comply with the specifications for the quality characteristics under Section 39-1.03E, "Job Mix Formula Verification."
3. The Engineer verifies each proposed JMF within 30 days of receiving verification samples.
4. You may not adjust the JMF due to a failed verification.
5. For each HMA type and aggregate gradation specified, the Engineer verifies at the State's expense 1 proposed JMF.

If the Engineer verifies the JMF renewal, the Engineer provides you a Form CEM-3513.

### **39-1.03G Job Mix Formula Acceptance**

You may start HMA production if:

1. The Engineer's review of the JMF shows compliance with the specifications.
2. The Department has verified the JMF within 12 months before HMA production.
3. The Engineer accepts the verified JMF.

## **39-1.04 CONTRACTOR QUALITY CONTROL**

### **39-1.04A General**

Establish, maintain, and change a quality control system to ensure materials and work comply with the specifications. Submit quality control test results to the Engineer within 3 days of a request except when QC / QA is specified.

You must identify the HMA sampling location in your Quality Control Plan. During production, take samples under California Test 125 except if you request in writing and the Engineer approves, you may sample HMA from:

1. The plant
2. The truck
3. A windrow
4. The paver hopper
5. The mat behind the paver

### **39-1.04B Prepaving Conference**

Meet with the Engineer at a prepaving conference at a mutually agreed time and place. Discuss methods of performing the production and paving work.

### **39-1.04C Asphalt Rubber Binder**

Take asphalt rubber binder samples from the feed line connecting the asphalt rubber binder tank to the HMA plant. Sample and test asphalt rubber binder under Laboratory Procedure LP-11.

Test asphalt rubber binder for compliance with the viscosity specifications in Section 39-1.02, "Materials." During asphalt rubber binder production and HMA production using asphalt rubber binder, measure viscosity every hour with not less than 1 reading for each asphalt rubber binder batch. Log measurements with corresponding time and asphalt rubber binder temperature. Submit the log daily in writing.

Submit a Certificate of Compliance under Section 6-1.07, "Certificates of Compliance." With the Certificate of Compliance, submit test results in writing for CRM and asphalt modifier with each truckload delivered to the HMA plant. A Certificate of Compliance for asphalt modifier must not represent more than 5,000 pounds. Use an AASHTO-certified laboratory for testing.

Sample and test gradation and wire and fabric content of CRM once per 10,000 pounds of scrap tire CRM and once per 3,400 pounds of high natural CRM. Sample and test scrap tire CRM and high natural CRM separately.

Submit certified weight slips in writing for the CRM and asphalt modifier furnished.

### **39-1.04D Aggregate**

Determine the aggregate moisture content and RAP moisture content in continuous mixing plants at least twice a day during production and adjust the plant controller. Determine the RAP moisture content in batch mixing plants at least twice a day during production and adjust the plant controller.

### **39-1.04E Reclaimed Asphalt Pavement**

Perform RAP quality control testing each day.

Sample RAP once daily and determine the RAP aggregate gradation under Laboratory Procedure LP-9 and submit the results to the Engineer in writing with the combined aggregate gradation.

### **39-1.04F Density Cores**

To determine density for Standard and QC / QA projects, take 4-inch or 6-inch diameter density cores at least once every 5 business days. Take 1 density core for every 250 tons of HMA from random locations the Engineer designates. Take density cores in the Engineer's presence and backfill and compact holes with material authorized by the Engineer. Before submitting a density core to the Engineer, mark it with the density core's location and place it in a protective container.

If a density core is damaged, replace it with a density core taken within 1 foot longitudinally from the original density core. Relocate any density core located within 1 foot of a rumble strip to 1 foot transversely away from the rumble strip.

### **39-1.04G Briquettes**

Prepare 3 briquettes for each stability and air voids content determination. Report the average of 3 tests. Prepare new briquettes and test if the range of stability for the 3 briquettes is more than 12 points.

You may use the briquettes used for stability testing to determine bulk specific gravity under CT 308. If you use these briquettes and tests using bulk specific gravity fail, you may prepare 3 new briquettes and determine a new bulk specific gravity.

### **39-1.05 ENGINEER'S ACCEPTANCE**

The Engineer's acceptance of HMA is specified in the sections for each HMA construction process.

The Engineer samples materials for testing under California Test 125 and the applicable test method except samples may be taken from:

1. The plant from:
  - 1.1. A truck
  - 1.2. An automatic sampling device
2. The mat behind the paver

Sampling must be independent of Contractor quality control, statistically-based, and random.

If you request, the Engineer splits samples and provides you with a part.

The Engineer accepts HMA based on:

1. Accepted JMF
2. Accepted QCP for Standard and QC / QA
3. Compliance with the HMA Acceptance tables
4. Acceptance of a lot for QC / QA
5. Visual inspection

The Engineer prepares 3 briquettes for each stability and air voids content determination. The Engineer reports the average of 3 tests. The Engineer prepares new briquettes and test if the range of stability for the 3 briquettes is more than 8 points.

The Engineer may use the briquettes used for stability testing to determine bulk specific gravity under CT 308. If the Engineer uses the same briquettes and the tests using bulk specific gravity fail, the Engineer prepares 3 new briquettes and determines a new bulk specific gravity.

### **39-1.06 DISPUTE RESOLUTION**

You and the Engineer must work together to avoid potential conflicts and to resolve disputes regarding test result discrepancies. Notify the Engineer in writing within 5 days of receiving a test result if you dispute the test result.

If you or the Engineer dispute each other's test results, submit written quality control test results and copies of paperwork including worksheets used to determine the disputed test results to the Engineer. An Independent Third Party (ITP) performs referee testing. Before the ITP participates in a dispute resolution, the ITP must be accredited under the Department's

Independent Assurance Program. The ITP must be independent of the project. By mutual agreement, the ITP is chosen from:

1. A Department laboratory
2. A Department laboratory in a district or region not in the district or region the project is located
3. The Transportation Laboratory
4. A laboratory not currently employed by you or your HMA producer

If split quality control or acceptance samples are not available, the ITP uses any available material representing the disputed HMA for evaluation.

### **39-1.07 PRODUCTION START-UP EVALUATION**

The Engineer evaluates HMA production and placement at production start-up.

Within the first 750 tons produced on the first day of HMA production, in the Engineer's presence and from the same production run, take samples of:

1. Aggregate
2. Asphalt binder
3. RAP
4. HMA

Sample aggregate from cold feed belts or hot bins. Take RAP samples from the RAP system. Sample HMA under California Test 125 except if you request in writing and the Engineer approves, you may sample HMA from:

1. The plant
2. The truck
3. A windrow
4. The paver hopper
5. The mat behind the paver

For aggregate, RAP, and HMA, split the samples into at least 4 parts and label their containers. Submit 3 split parts to the Engineer and keep 1 part.

For Standard and QC / QA projects, you and the Engineer must test the split samples and report test results in writing within 3 business days of sampling. If you proceed before receipt of the test results, the Engineer may consider the HMA placed to be represented by these test results.

For Standard and QC / QA projects, take 4-inch or 6-inch diameter density cores within the first 750 tons on the first day of HMA production. For each density core, the Engineer reports the bulk specific gravity determined under California Test 308, Method A in addition to the percent of maximum theoretical density. You may test for in-place density at the density core locations and include them in your production tests for percent of maximum theoretical density.

### **39-1.08 PRODUCTION**

#### **39-1.08A General**

Produce HMA in a batch mixing plant or a continuous mixing plant. Proportion aggregate by hot or cold feed control.

HMA plants must be Department-qualified. Before production, the HMA plant must have a current qualification under the Department's Materials Plant Quality Program.

During production, you may adjust:

1. Hot or cold feed proportion controls for virgin aggregate and RAP
2. The set point for asphalt binder content

#### **39-1.08B Mixing**

Mix HMA ingredients into a homogeneous mixture of coated aggregates.

Asphalt binder must be between 275 °F and 375 °F when mixed with aggregate.

Asphalt rubber binder must be between 375 °F and 425 °F when mixed with aggregate.

When mixed with asphalt binder, aggregate must not be more than 325 °F except aggregate for OGFC with unmodified asphalt binder must be not more than 275 °F. Aggregate temperature specifications do not apply when you use RAP.

HMA with or without RAP must not be more than 325 °F.

### 39-1.08C Asphalt Rubber Binder

Deliver scrap tire CRM and high natural CRM in separate bags.

Either proportion and mix asphalt binder, asphalt modifier, and CRM simultaneously or premix the asphalt binder and asphalt modifier before adding CRM. If you premix asphalt binder and asphalt modifier, mix them for at least 20 minutes. When you add CRM, the asphalt binder and asphalt modifier must be between 375 °F and 440 °F.

Do not use asphalt rubber binder during the first 45 minutes of the reaction period. During this period, the asphalt rubber binder mixture must be between 350 °F and the lower of 425 °F or 25 °F below the asphalt binder's flash point indicated in the MSDS.

If any asphalt rubber binder is not used within 4 hours after the reaction period, discontinue heating. If the asphalt rubber binder drops below 375 °F, reheat before use. If you add more scrap tire CRM to the reheated asphalt rubber binder, the binder must undergo a 45-minute reaction period. The added scrap tire CRM must not exceed 10 percent of the total asphalt rubber binder weight. Reheated and reacted asphalt rubber binder must comply with the viscosity specifications for asphalt rubber binder in Section 39-1.02, "Materials." Do not reheat asphalt rubber binder more than twice.

### 39-1.09 SUBGRADE, TACK COAT, AND GEOSYNTHETIC PAVEMENT INTERLAYER

#### 39-1.09A General

Prepare subgrade or apply tack coat to surfaces receiving HMA. If specified, place geosynthetic pavement interlayer over a coat of asphalt binder.

#### 39-1.09B Subgrade

Subgrade to receive HMA must comply with the compaction and elevation tolerance specifications in the sections for the material involved. Subgrade must be free of loose and extraneous material. If HMA is paved on existing base or pavement, remove loose paving particles, dirt, and other extraneous material by any means including flushing and sweeping.

#### 39-1.09C Tack Coat

Apply tack coat:

1. To existing pavement including planed surfaces
2. Between HMA layers
3. To vertical surfaces of:
  - 3.1. Curbs
  - 3.2. Gutters
  - 3.3. Construction joints

Before placing HMA, apply tack coat in 1 application at the minimum residual rate specified for the condition of the underlying surface:

**Tack Coat Application Rates for HMA Type A, Type B, and RHMA-G**

HMA over:	Minimum Residual Rates (gallons per square yard)		
	CSS1/CSS1h, SS1/SS1h and QS1h/CQS1h Asphaltic Emulsion	CRS1/CRS2, RS1/RS2 and QS1/CQS1 Asphaltic Emulsion	Asphalt Binder and PMRS2/PMCRS2 and PMRS2h/PMCRS2h Asphaltic Emulsion
New HMA (between layers)	0.02	0.03	0.02
Existing AC and PCC pavement	0.03	0.04	0.03
Planed pavement	0.05	0.06	0.04

**Tack Coat Application Rates for OGFC**

OGFC over:	Minimum Residual Rates (gallons per square yard)		
	CSS1/CSS1h, SS1/SS1h and QS1h/CQS1h Asphaltic Emulsion	CRS1/CRS2, RS1/RS2 and QS1/CQS1 Asphaltic Emulsion	Asphalt Binder and PMRS2/PMCRS2 and PMRS2h/PMCRS2h Asphaltic Emulsion
New HMA	0.03	0.04	0.03
Existing AC and PCC pavement	0.05	0.06	0.04
Planed pavement	0.06	0.07	0.05

If you dilute asphaltic emulsion, mix until homogeneous before application.

Apply to vertical surfaces with a residual tack coat rate that will thoroughly coat the vertical face without running off.

If you request in writing and the Engineer authorizes, you may:

1. Change tack coat rates
2. Omit tack coat between layers of new HMA during the same work shift if:
  - 2.1. No dust, dirt, or extraneous material is present
  - 2.2. The surface is at least 140 °F

Immediately in advance of placing HMA, apply additional tack coat to damaged areas or where loose or extraneous material is removed.

Close areas receiving tack coat to traffic. Do not track tack coat onto pavement surfaces beyond the job site.

Asphalt binder tack coat must be between 285 °F and 350 °F when applied.

**39-1.09D Geosynthetic Pavement Interlayer**

Place geosynthetic pavement interlayer in compliance with the manufacturer's recommendations.

Before placing the geosynthetic pavement interlayer and asphalt binder:

1. Repair cracks 1/4 inch and wider, spalls, and holes in the pavement. The State pays for this repair work under Section 4-1.03D, "Extra Work."
2. Clean the pavement of loose and extraneous material.

Immediately before placing the interlayer, apply 0.25 gallon ± 0.03 gallon of asphalt binder per square yard of interlayer or until the fabric is saturated. Apply asphalt binder the width of the geosynthetic pavement interlayer plus 3 inches on each side. At interlayer overlaps, apply asphalt binder on the lower interlayer the same overlap distance as the upper interlayer.

Align and place the interlayer with no overlapping wrinkles, except a wrinkle that overlaps may remain if it is less than 1/2 inch thick. If the overlapping wrinkle is more than 1/2 inch thick, cut the wrinkle out and overlap the interlayer no more than 2 inches.

The minimum HMA thickness over the interlayer must be 0.12 foot thick including conform tapers. Do not place the interlayer on a wet or frozen surface.

Overlap the interlayer borders between 2 inches and 4 inches. In the direction of paving, overlap the following roll with the preceding roll at any break.

You may use rolling equipment to correct distortions or wrinkles in the interlayer.

If asphalt binder tracked onto the interlayer or brought to the surface by construction equipment causes interlayer displacement, cover it with a small quantity of HMA.

Before placing HMA on the interlayer, do not expose the interlayer to:

1. Traffic except for crossings under traffic control and only after you place a small HMA quantity
2. Sharp turns from construction equipment
3. Damaging elements

Pave HMA on the interlayer during the same work shift.

**39-1.10 SPREADING AND COMPACTING EQUIPMENT**

Paving equipment for spreading must be:

1. Self-propelled
2. Mechanical
3. Equipped with a screed or strike-off assembly that can distribute HMA the full width of a traffic lane
4. Equipped with a full-width compacting device
5. Equipped with automatic screed controls and sensing devices that control the thickness, longitudinal grade, and transverse screed slope

Install and maintain grade and slope references.

The screed must produce a uniform HMA surface texture without tearing, shoving, or gouging.

The paver must not leave marks such as ridges and indentations unless you can eliminate them by rolling.

Rollers must be equipped with a system that prevents HMA from sticking to the wheels. You may use a parting agent that does not damage the HMA or impede the bonding of layers.

In areas inaccessible to spreading and compacting equipment:

1. Spread the HMA by any means to obtain the specified lines, grades and cross sections.
2. Use a pneumatic tamper, plate compactor, or equivalent to achieve thorough compaction.

### **39-1.11 TRANSPORTING, SPREADING, AND COMPACTING**

Do not pave HMA on a wet pavement or frozen surface.

You may deposit HMA in a windrow and load it in the paver if:

1. Paver is equipped with a hopper that automatically feeds the screed
2. Loading equipment can pick up the windrowed material and deposit it in the paver hopper without damaging base material
3. Activities for deposit, pick-up, loading, and paving are continuous
4. HMA temperature in the windrow does not fall below 260 °F

You may pave HMA in 1 or more layers on areas less than 5 feet wide and outside the traveled way including shoulders. You may use mechanical equipment other than a paver for these areas. The equipment must produce a uniform smoothness and texture.

HMA handled, spread, or windrowed must not stain the finished surface of any improvement including pavement.

Do not use petroleum products such as kerosene or diesel fuel to release HMA from trucks, spreaders, or compactors.

HMA must be free of:

1. Segregation
2. Coarse or fine aggregate pockets
3. Hardened lumps

Longitudinal joints in the top layer must match specified lane edges. Alternate longitudinal joint offsets in lower layers at least 0.5 foot from each side of the specified lane edges. You may request in writing other longitudinal joint placement patterns.

Until the adjoining through lane's top layer has been paved, do not pave the top layer of:

1. Shoulders
2. Tapers
3. Transitions
4. Road connections
5. Driveways
6. Curve widenings
7. Chain control lanes
8. Turnouts
9. Turn pockets

If the number of lanes change, pave each through lane's top layer before paving a tapering lane's top layer. Simultaneous to paving a through lane's top layer, you may pave an adjoining area's top layer including shoulders. Do not operate spreading equipment on any area's top layer until completing final compaction.

If HMA (leveling) is specified, fill and level irregularities and ruts with HMA before spreading HMA over base, existing surfaces, or bridge decks. You may use mechanical equipment other than a paver for these areas. The equipment must

produce a uniform smoothness and texture. HMA used to change an existing surface's cross slope or profile is not HMA (leveling).

If placing HMA against the edge of existing pavement, sawcut or grind the pavement straight and vertical along the joint and remove extraneous material without damaging the surface remaining in place. If placing HMA against the edge of a longitudinal or transverse construction joint and the joint is damaged or not placed to a neat line, sawcut or grind the pavement straight and vertical along the joint and remove extraneous material without damaging the surface remaining in place. Repair or remove and replace damaged pavement at your expense.

Rolling must leave the completed surface compacted and smooth without tearing, cracking, or shoving. Complete finish rolling activities before the pavement surface temperature is:

1. Below 150 °F for HMA with unmodified binder
2. Below 140 °F for HMA with modified binder
3. Below 200 °F for RHMA-G

If a vibratory roller is used as a finish roller, turn the vibrator off.

Do not use a pneumatic tired roller to compact RHMA-G.

For Standard and QC/QA, if a 3/4-inch aggregate grading is specified, you may use a 1/2-inch aggregate grading if the specified paved thickness is from 0.15 foot to 0.20 foot thick.

Spread and compact HMA under Section 39-3.03, "Spreading and Compacting Equipment," and Section 39-3.04, "Transporting, Spreading, and Compacting," for any of the following:

1. Specified paved thickness is less than 0.15 foot.
2. Specified paved thickness is less than 0.20 foot and a 3/4-inch aggregate grading is specified and used.
3. You spread and compact at:
  - 3.1. Asphalt concrete surfacing replacement areas
  - 3.2. Leveling courses
  - 3.3. Areas the Engineer determines conventional compaction and compaction measurement methods are impeded

Do not allow traffic on new HMA pavement until its mid-depth temperature is below 160 °F.

If you request in writing and the Engineer authorizes, you may cool HMA Type A and Type B with water when rolling activities are complete. Apply water under Section 17, "Watering."

Spread sand at a rate between 1 pound and 2 pounds per square yard on new RHMA-G, RHMA-O, and RHMA-O-HB pavement when finish rolling is complete. Sand must be free of clay or organic matter. Sand must comply with Section 90-3.03, "Fine Aggregate Grading." Keep traffic off the pavement until spreading sand is complete.

### **39-1.12 SMOOTHNESS**

#### **39-1.12A General**

Determine HMA smoothness with a profilograph and a straightedge.

Smoothness specifications do not apply to OGFC placed on existing pavement not constructed under the same project.

If portland cement concrete is placed on HMA:

1. Cold plane the HMA finished surface to within specified tolerances if it is higher than the grade specified by the Engineer.
2. Remove and replace HMA if the finished surface is lower than 0.05 foot below the grade specified by the Engineer.

#### **39-1.12B Straightedge**

The HMA pavement top layer must not vary from the lower edge of a 12-foot long straightedge:

1. More than 0.01 foot when the straight edge is laid parallel with the centerline
2. More than 0.02 foot when the straightedge is laid perpendicular to the centerline and extends from edge to edge of a traffic lane
3. More than 0.02 foot when the straightedge is laid within 24 feet of a pavement conform

#### **39-1.12C Profilograph**

Under California Test 526, determine the zero (null) blanking band Profile Index ( $PI_0$ ) and must-grinds on the top layer of HMA Type A, Type B, and RHMA-G pavement. Take 2 profiles within each traffic lane, 3 feet from and parallel with the edge of each lane.

A must-grind is a deviation of 0.3 inch or more in a length of 25 feet. You must correct must-grinds.

For OGFC, only determine must-grinds when placed over HMA constructed under the same project. The top layer of the underlying HMA must comply with the smoothness specifications before placing OGFC.

Profile pavement in the Engineer's presence. Choose the time of profiling.

On tangents and horizontal curves with a centerline radius of curvature 2,000 feet or more, the  $PI_0$  must be at most 3 inches per 0.1-mile section.

On horizontal curves with a centerline radius of curvature between 1,000 feet and 2,000 feet including pavement within the superelevation transitions, the  $PI_0$  must be at most 6 inches per 0.1-mile section.

Before the Engineer accepts HMA pavement for smoothness, submit written final profilograms.

Submit 1 electronic copy of profile information in Microsoft Excel and 1 electronic copy of longitudinal pavement profiles in ".erd" format or other ProVAL compatible format to the Engineer and to:

Smoothness@dot.ca.gov

The following HMA pavement areas do not require a  $PI_0$ . You must measure these areas with a 12-foot straightedge and determine must-grinds with a profilograph:

1. New HMA with a total thickness less than or equal to 0.25 foot
2. HMA sections of city or county streets and roads, turn lanes and collector lanes that are less than 1,500 feet in length

The following HMA pavement areas do not require a  $PI_0$ . You must measure these areas with a 12-foot straightedge:

1. Horizontal curves with a centerline radius of curvature less than 1,000 feet including pavement within the superelevation transitions of those curves
2. Within 12 feet of a transverse joint separating the pavement from:
  - 2.1. Existing pavement not constructed under the same project
  - 2.2. A bridge deck or approach slab
3. Exit ramp termini, truck weigh stations, and weigh-in-motion areas
4. If steep grades and superelevation rates greater than 6 percent are present on:
  - 4.1. Ramps
  - 4.2. Connectors
5. Turn lanes
6. Areas within 15 feet of manholes or drainage transitions
7. Acceleration and deceleration lanes for at-grade intersections
8. Shoulders and miscellaneous areas
9. HMA pavement within 3 feet from and parallel to the construction joints formed between curbs, gutters, or existing pavement

### **39-1.12D Smoothness Correction**

If the top layer of HMA Type A, Type B, or RHMA-G pavement does not comply with the smoothness specifications, grind the pavement to within tolerances, remove and replace it, or place a layer of HMA. The Engineer must authorize your choice of correction before the work begins.

Remove and replace the areas of OGFC not in compliance with the must-grind and straightedge specifications, except you may grind OGFC for correcting smoothness:

1. At a transverse joint separating the pavement from pavement not constructed under the same project
2. Within 12 feet of a transverse joint separating the pavement from a bridge deck or approach slab

Corrected HMA pavement areas must be uniform rectangles with edges:

1. Parallel to the nearest HMA pavement edge or lane line
2. Perpendicular to the pavement centerline

Measure the corrected HMA pavement surface with a profilograph and a 12-foot straightedge and correct the pavement to within specified tolerances. If a must-grind area or straightedged pavement cannot be corrected to within specified tolerances, remove and replace the pavement.

On ground areas not overlaid with OGFC, apply fog seal coat under Section 37-1, "Seal Coats."

### **39-1.13 MISCELLANEOUS AREAS AND DIKES**

Miscellaneous areas are outside the traveled way and include:

1. Median areas not including inside shoulders
2. Island areas
3. Sidewalks
4. Gutters
5. Gutter flares
6. Ditches
7. Overside drains
8. Aprons at the ends of drainage structures

Spread miscellaneous areas in 1 layer and compact to the specified lines and grades.

For miscellaneous areas and dikes:

1. Do not submit a JMF.
2. Choose the 3/8-inch or 1/2-inch HMA Type A and Type B aggregate gradations.
3. Minimum asphalt binder content must be 6.8 percent for 3/8-inch aggregate and 6.0 percent for 1/2-inch aggregate. If you request in writing and the Engineer authorizes, you may reduce the minimum asphalt binder content.
4. Choose asphalt binder Grade PG 70-10 or the same grade specified for HMA.

## **39-2 STANDARD**

### **39-2.01 DESCRIPTION**

If HMA is specified as Standard, construct it under Section 39-1, "General," this Section 39-2, "Standard," and Section 39-5, "Measurement and Payment."

### **39-2.02 CONTRACTOR QUALITY CONTROL**

#### **39-2.02A Quality Control Plan**

Establish, implement, and maintain a Quality Control Plan (QCP) for HMA. The QCP must describe the organization and procedures you will use to:

1. Control the quality characteristics
2. Determine when corrective actions are needed (action limits)
3. Implement corrective actions

When you submit the proposed JMF, submit the written QCP. You and the Engineer must discuss the QCP during the prepaving conference.

The QCP must address the elements affecting HMA quality including:

1. Aggregate
2. Asphalt binder
3. Additives
4. Production
5. Paving

The Engineer reviews each QCP within 5 business days from the submittal. Hold HMA production until the Engineer accepts the QCP in writing. The Engineer's QCP acceptance does not mean your compliance with the QCP will result in acceptable HMA. Section 39-1.05, "Engineer's Acceptance," specifies HMA acceptance.

#### **39-2.02B Quality Control Testing**

Perform sampling and testing at the specified frequency for the following quality characteristics:

**Minimum Quality Control – Standard**

Quality Characteristic	Test Method	Minimum Sampling and Testing Frequency	HMA Type			
			A	B	RHMA-G	OGFC
Aggregate gradation <sup>a</sup>	CT 202	1 per 750 tons and any remaining part	JMF ± Tolerance <sup>b</sup>			
Sand equivalent (min.) <sup>c</sup>	CT 217		47	42	47	--
Asphalt binder content (%)	CT 379 or 382		JMF ± 0.45	JMF ± 0.45	JMF ± 0.50	JMF ± 0.50
HMA moisture content (% max.)	CT 226 or CT 370	1 per 2,500 tons but not less than 1 per paving day	1.0	1.0	1.0	1.0
Percent of maximum theoretical density (%) <sup>d,e</sup>	Quality control plan	2 per business day (min.)	91 - 97	91 - 97	91 - 97	--
Stabilometer value (min.) <sup>e,f</sup> No. 4 and 3/8" gradings 1/2" and 3/4" gradings	CT 366	One per 4,000 tons or 2 per 5 business days, whichever is more	30	30	--	--
			37	35	23	--
Air voids content (%) <sup>c,g</sup>	CT 367		4 ± 2	4 ± 2	Specification ± 2	--
Aggregate moisture content at continuous mixing plants and RAP moisture content at continuous mixing plants and batch mixing plants <sup>h</sup>	CT 226 or CT 370	2 per day during production	--	--	--	--
Percent of crushed particles coarse aggregate (% min.) One fractured face Two fractured faces Fine aggregate (% min) (Passing No. 4 sieve and retained on No. 8 sieve.) One fractured face	CT 205	As necessary and designated in the QCP. At least once per project	90	25	--	90
			75	--	90	75
			70	20	70	90
Los Angeles Rattler (% max.) Loss at 100 rev. Loss at 500 rev.	CT 211		12 45	-- 50	12 40	12 40

Flat and elongated particles (% max. by weight @ 5:1)	ASTM D 4791		Report only	Report only	Report only	Report only
Fine aggregate angularity (% min.)	AASHTO T 304, Method A		45	45	45	--
Voids filled with asphalt (%) <sup>i</sup> No. 4 grading 3/8" grading 1/2" grading 3/4" grading	LP-3		76.0 – 80.0 73.0 – 76.0 65.0 – 75.0 65.0 – 75.0	76.0 – 80.0 73.0 – 76.0 65.0 – 75.0 65.0 – 75.0	Report only	--
Voids in mineral aggregate (% min.) <sup>i</sup> No. 4 grading 3/8" grading 1/2" grading 3/4" grading	LP-2		17.0 15.0 14.0 13.0	17.0 15.0 14.0 13.0	-- -- 18.0 – 23.0 <sup>j</sup> 18.0 – 23.0 <sup>j</sup>	--
Dust proportion <sup>1</sup> No. 4 and 3/8" gradings 1/2" and 3/4" gradings	LP-4		0.9 – 2.0 0.6 – 1.3	0.9 – 2.0 0.6 – 1.3	Report only	--
Smoothness	Section 39-1.12	--	12-foot straightedge, must-grind, and PI <sub>0</sub>	12-foot straightedge, must-grind, and PI <sub>0</sub>	12-foot straightedge, must-grind, and PI <sub>0</sub>	12-foot straightedge and must-grind
Asphalt rubber binder viscosity @ 350 °F, centipoises	Section 39-1.02D	Section 39-1.04C	--	--	1,500 – 4,000	1,500 – 4,000
Asphalt modifier	Section 39-1.02D	Section 39-1.04C	--	--	Section 39-1.02D	Section 39-1.02D
Crumb rubber modifier	Section 39-1.02D	Section 39-1.04C	--	--	Section 39-1.02D	Section 39-1.02D

Notes:

<sup>a</sup> Determine combined aggregate gradation containing RAP under Laboratory Procedure LP-9.

<sup>b</sup> The tolerances must comply with the allowable tolerances in Section 39-1.02E, "Aggregate."

<sup>c</sup> Report the average of 3 tests from a single split sample.

<sup>d</sup> Required for HMA Type A, Type B, and RHMA-G if the specified paved thickness is at least 0.15 foot.

<sup>e</sup> Determine maximum theoretical density (California Test 309) at the frequency specified for Test Maximum Density under California Test 375, Part 5.D.

<sup>f</sup> Modify California Test 304, Part 2.B.2.c: "After compaction in the mechanical compactor, cool to 140 °F ± 5 °F by allowing the briquettes to cool at room temperature for 0.5 hour, then place the briquettes in the oven at 140 °F for a minimum of 2 hours and not more than 3 hours."

<sup>g</sup> Determine the bulk specific gravity of each lab-compacted briquette under California Test 308, Method A, and theoretical maximum specific gravity under California Test 309.

<sup>h</sup> For adjusting the plant controller at the HMA plant.

<sup>i</sup> Report only if the adjustment for asphalt binder content target value is less than or equal to ± 0.3 percent from OBC.

<sup>j</sup> Voids in mineral aggregate for RHMA-G must be within this range.

For any single quality characteristic except smoothness, if 2 consecutive quality control test results do not comply with the action limits or specifications:

1. Stop production.
2. Notify the Engineer in writing.
3. Take corrective action.
4. Demonstrate compliance with the specifications before resuming production and placement on the State highway.

**39-2.03 ENGINEER'S ACCEPTANCE**

**39-2.03A Testing**

The Engineer samples for acceptance testing and tests for:

**HMA Acceptance - Standard**

Quality Characteristic	Test Method	HMA Type			
		A	B	RHMA-G	OGFC
Aggregate gradation <sup>a</sup>	CT 202	JMF ± Tolerance <sup>c</sup>	JMF ± Tolerance <sup>c</sup>	JMF ± Tolerance <sup>c</sup>	JMF ± Tolerance <sup>c</sup>
Sieve 3/4" 1/2" 3/8"					
1/2" X <sup>b</sup>					
3/8" X					
No. 4 X					
No. 8 X X X					
No. 200 X X X					
Sand equivalent (min.) <sup>d</sup>	CT 217	47	42	47	--
Asphalt binder content (%)	CT 379 or 382	JMF ± 0.45	JMF ± 0.45	JMF ± 0.50	JMF ± 0.50
HMA moisture content (% max.)	CT 226 or CT 370	1.0	1.0	1.0	1.0
Percent of maximum theoretical density (%) <sup>e, f</sup>	CT 375	91 – 97	91 – 97	91 – 97	--
Stabilometer value (min.) <sup>d, g</sup>	CT 366	30	30	--	--
No. 4 and 3/8" gradings					
1/2" and 3/4" gradings		37	35	23	--
Air voids content (%) <sup>d, h</sup>	CT 367	4 ± 2	4 ± 2	Specification ± 2	--
Percent of crushed particles Coarse aggregate (% min.)	CT 205	90	25	--	90
One fractured face					
Two fractured faces					
Fine aggregate (% min) (Passing No. 4 sieve and retained on No. 8 sieve.)		75	--	90	75
One fractured face		70	20	70	90
Percent of crushed particles Coarse aggregate (% min.)	CT 205	90	25	--	90
One fractured face					
Two fractured faces					
Los Angeles Rattler (% max.)		75	--	90	75
Loss at 100 rev.	CT 211	12	--	12	12
Loss at 500 rev.		45	50	40	40
Fine aggregate angularity (% min.)	AASHTO T 304, Method A	45	45	45	--
Flat and elongated particles (% max. by weight @ 5:1)	ASTM D 4791	Report only	Report only	Report only	Report only
Voids filled with asphalt (%) <sup>i</sup>	LP-3	76.0 – 80.0	76.0 – 80.0	Report only	--
No. 4 grading					
3/8" grading					
1/2" grading					
3/4" grading					
Voids in mineral aggregate (% min.) <sup>i</sup>	LP-2	17.0	17.0	--	--
No. 4 grading					
3/8" grading					
1/2" grading					
3/4" grading					
Dust proportion <sup>1</sup>	LP-4	0.9 – 2.0	0.9 – 2.0	Report only	--
No. 4 and 3/8" gradings					
1/2" and 3/4" gradings					
		0.6 – 1.3	0.6 – 1.3		

Smoothness	Section 39-1.12	12-foot straightedge, must-grind, and PI <sub>0</sub>	12-foot straightedge, must-grind, and PI <sub>0</sub>	12-foot straightedge, must-grind, and PI <sub>0</sub>	12-foot straightedge and must-grind
Asphalt binder	Various	Section 92	Section 92	Section 92	Section 92
Asphalt rubber binder	Various	--	--	Section 92-1.02(C) and Section 39-1.02D	Section 92-1.02(C) and Section 39-1.02D
Asphalt modifier	Various	--	--	Section 39-1.02D	Section 39-1.02D
Crumb rubber modifier	Various	--	--	Section 39-1.02D	Section 39-1.02D

<sup>a</sup> The Engineer determines combined aggregate gradations containing RAP under Laboratory Procedure LP-9.

<sup>b</sup> "X" denotes the sieves the Engineer considers for the specified aggregate gradation.

<sup>c</sup> The tolerances must comply with the allowable tolerances in Section 39-1.02E, "Aggregate."

<sup>d</sup> The Engineer reports the average of 3 tests from a single split sample.

<sup>e</sup> The Engineer determines percent of maximum theoretical density if the specified paved thickness is at least 0.15 foot under California Test 375 except the Engineer uses:

1. California Test 308, Method A, to determine in-place density of each density core instead of using the nuclear gauge in Part 4, "Determining In-Place Density By The Nuclear Density Device."
2. California Test 309 to determine maximum theoretical density instead of calculating test maximum density in Part 5, "Determining Test Maximum Density."

<sup>f</sup> The Engineer determines maximum theoretical density (California Test 309) at the frequency specified for Test Maximum Density under California Test 375, Part 5.D.

<sup>g</sup> Modify California Test 304, Part 2.B.2.c: "After compaction in the mechanical compactor, cool to 140 °F ±5 °F by allowing the briquettes to cool at room temperature for 0.5 hour, then place the briquettes in the oven at 140 °F for a minimum of 2 hours and not more than 3 hours."

<sup>h</sup> The Engineer determines the bulk specific gravity of each lab-compacted briquette under California Test 308, Method A, and theoretical maximum specific gravity under California Test 309.

<sup>i</sup> Report only if the adjustment for asphalt binder content target value is less than or equal to ± 0.3 percent from OBC.

<sup>j</sup> Voids in mineral aggregate for RHMA-G must be within this range.

No single test result may represent more than the smaller of 750 tons or 1 day's production.

For any single quality characteristic except smoothness, if 2 consecutive acceptance test results do not comply with the specifications:

1. Stop production.
2. Take corrective action.
3. In the Engineer's presence, take samples and split each sample into 4 parts. Test 1 part for compliance with the specifications and submit 3 parts to the Engineer. The Engineer tests 1 part for compliance with the specifications and reserves and stores 2 parts.
4. Demonstrate compliance with the specifications before resuming production and placement on the State highway.

The Engineer tests the density core you take from each 250 tons of HMA production. The Engineer determines the percent of maximum theoretical density for each density core by determining the density core's density and dividing by the maximum theoretical density.

If the specified total paved thickness is at least 0.15 foot and any layer is less than 0.15 foot, the Engineer determines the percent of maximum theoretical density from density cores taken from the final layer measured the full depth of the total paved HMA thickness.

For percent of maximum theoretical density, the Engineer determines a deduction for each test result outside the specifications in compliance with:

**Reduced Payment Factors for Percent of Maximum Theoretical Density**

HMA Type A and B and RHMA-G Percent of Maximum Theoretical Density	Reduced Payment Factor	HMA Type A and B and RHMA-G Percent of Maximum Theoretical Density	Reduced Payment Factor
91.0	0.0000	97.0	0.0000
90.9	0.0125	97.1	0.0125
90.8	0.0250	97.2	0.0250
90.7	0.0375	97.3	0.0375
90.6	0.0500	97.4	0.0500
90.5	0.0625	97.5	0.0625
90.4	0.0750	97.6	0.0750
90.3	0.0875	97.7	0.0875
90.2	0.1000	97.8	0.1000
90.1	0.1125	97.9	0.1125
90.0	0.1250	98.0	0.1250
89.9	0.1375	98.1	0.1375
89.8	0.1500	98.2	0.1500
89.7	0.1625	98.3	0.1625
89.6	0.1750	98.4	0.1750
89.5	0.1875	98.5	0.1875
89.4	0.2000	98.6	0.2000
89.3	0.2125	98.7	0.2125
89.2	0.2250	98.8	0.2250
89.1	0.2375	98.9	0.2375
89.0	0.2500	99.0	0.2500
< 89.0	Remove and Replace	> 99.0	Remove and Replace

**39-2.04 TRANSPORTING, SPREADING, AND COMPACTING**

Determine the number of rollers needed to obtain the specified density and surface finish.

**39-3 METHOD**

**39-3.01 DESCRIPTION**

If HMA is specified as Method, construct it under Section 39-1, "General," this Section 39-3, "Method," and Section 39-5, "Measurement and Payment."

**39-3.02 ENGINEER'S ACCEPTANCE**

**39-3.02A Testing**

The Engineer samples for acceptance testing and tests for:

**HMA Acceptance - Method**

Quality Characteristic	Test Method	HMA Type			
		A	B	RHMA-G	OGFC
Aggregate gradation <sup>a</sup>	CT 202	JMF ± Tolerance <sup>b</sup>			
Sand equivalent (min.) <sup>c</sup>	CT 217	47	42	47	--
Asphalt binder content (%)	CT 379 or 382	JMF ± 0.45	JMF ± 0.45	JMF ± 0.50	JMF ± 0.50
HMA moisture content (% max.)	CT 226 or CT 370	1.0	1.0	1.0	1.0
Stabilometer value (min.) <sup>c, d</sup>	CT 366				
No. 4 and 3/8" gradings		30	30	--	--
1/2" and 3/4" gradings		37	35	23	--
Percent of crushed particles	CT 205				
Coarse aggregate (% min.)					
One fractured face		90	25	--	90
Two fractured faces		75	--	90	75
Fine aggregate (% min) (Passing No. 4 sieve and retained on No. 8 sieve.)					
One fractured face		70	20	70	90
Los Angeles Rattler (% max.)	CT 211				
Loss at 100 rev.		12	--	12	12
Loss at 500 rev.		45	50	40	40
Air voids content (%) <sup>c, e</sup>	CT 367	4 ± 2	4 ± 2	Specification ± 2	--
Fine aggregate angularity (% min.)	AASHTO T 304, Method A	45	45	45	--
Flat and elongated particles (% max. by weight @ 5:1)	ASTM D 4791	Report only	Report only	Report only	Report only
Voids filled with asphalt (%) <sup>f</sup>	LP-3			Report only	
No. 4 grading		76.0 – 80.0	76.0 – 80.0		--
3/8" grading		73.0 – 76.0	73.0 – 76.0		
1/2" grading		65.0 – 75.0	65.0 – 75.0		
3/4" grading		65.0 – 75.0	65.0 – 75.0		
Voids in mineral aggregate (% min.) <sup>f</sup>	LP-2				
No. 4 grading		17.0	17.0	--	--
3/8" grading		15.0	15.0	--	--
1/2" grading		14.0	14.0	18.0 – 23.0 <sup>g</sup>	
3/4" grading		13.0	13.0	18.0 – 23.0 <sup>g</sup>	
Dust proportion <sup>f</sup>	LP-4				
No. 4 and 3/8" gradings		0.9 – 2.0	0.9 – 2.0	Report only	--
1/2" and 3/4" gradings		0.6 – 1.3	0.6 – 1.3		
Smoothness	Section 39-1.12	12-foot straightedge and must-grind			
Asphalt binder	Various	Section 92	Section 92	Section 92	Section 92
Asphalt rubber binder	Various	--	--	Section 92-1.02(C) and	Section 92-1.02(C) and

				Section 39-1.02D	Section 39-1.02D
Asphalt modifier	Various	--	--	Section 39-1.02D	Section 39-1.02D
Crumb rubber modifier	Various	--	--	Section 39-1.02D	Section 39-1.02D

<sup>a</sup> The Engineer determines combined aggregate gradations containing RAP under Laboratory Procedure LP-9.

<sup>b</sup> The tolerances must comply with the allowable tolerances in Section 39-1.02E, "Aggregate."

<sup>c</sup> The Engineer reports the average of 3 tests from a single split sample.

<sup>d</sup> Modify California Test 304, Part 2.B.2.c: "After compaction in the mechanical compactor, cool to 140 °F ±5 °F by allowing the briquettes to cool at room temperature for 0.5 hour, then place the briquettes in the oven at 140 °F for a minimum of 2 hours and not more than 3 hours."

<sup>e</sup> The Engineer determines the bulk specific gravity of each lab-compacted briquette under California Test 308, Method A, and theoretical maximum specific gravity under California Test 309.

<sup>f</sup> Report only if the adjustment for asphalt binder content target value is less than or equal to ± 0.3 percent from OBC.

<sup>g</sup> Voids in mineral aggregate for RHMA-G must be within this range.

No single test result may represent more than the smaller of 750 tons or 1 day's production.

For any single quality characteristic except smoothness, if 2 consecutive acceptance test results do not comply with the specifications:

1. Stop production.
2. Take corrective action.
3. In the Engineer's presence, take samples and split each sample into 4 parts. Test 1 part for compliance with the specifications and submit 3 parts to the Engineer. The Engineer tests 1 part for compliance with the specifications and reserves and stores 2 parts.
4. Demonstrate compliance with the specifications before resuming production and placement on the State highway.

### 39-3.03 SPREADING AND COMPACTING EQUIPMENT

Each paver spreading HMA Type A and Type B must be followed by 3 rollers:

1. One vibratory roller specifically designed to compact HMA. The roller must be capable of at least 2,500 vibrations per minute and must be equipped with amplitude and frequency controls. The roller's gross static weight must be at least 7.5 tons.
2. One oscillating type pneumatic-tired roller at least 4 feet wide. Pneumatic tires must be of equal size, diameter, type, and ply. The tires must be inflated to 60 psi minimum and maintained so that the air pressure does not vary more than 5 psi.
3. One steel-tired, 2-axle tandem roller. The roller's gross static weight must be at least 7.5 tons.

Each roller must have a separate operator. Rollers must be self-propelled and reversible.

Compact RHMA-G under the specifications for compacting HMA Type A and Type B except do not use pneumatic-tired rollers.

Compact OGFC with steel-tired, 2-axle tandem rollers. If placing over 300 tons of OGFC per hour, use at least 3 rollers for each paver. If placing less than 300 tons of OGFC per hour, use at least 2 rollers for each paver. Each roller must weigh between 126 pounds to 172 pounds per linear inch of drum width. Turn the vibrator off.

### 39-3.04 TRANSPORTING, SPREADING, AND COMPACTING

Pave HMA in maximum 0.25-foot thick compacted layers.

If the surface to be paved is both in sunlight and shade, pavement surface temperatures are taken in the shade.

Spread HMA Type A and Type B only if atmospheric and surface temperatures are:

**Minimum Atmospheric and Surface Temperatures**

Compacted Layer Thickness, feet	Minimum Atmospheric and Surface Temperatures			
	Atmospheric, ° F		Surface, ° F	
	Unmodified Asphalt Binder	Modified Asphalt Binder <sup>a</sup>	Unmodified Asphalt Binder	Modified Asphalt Binder <sup>a</sup>
< 0.15	55	50	60	55
0.15 – 0.25	45	45	50	50

Note:

<sup>a</sup> Except asphalt rubber binder.

If the asphalt binder for HMA Type A and Type B is:

1. Unmodified asphalt binder, complete:
  - 1.1. First coverage of breakdown compaction before the surface temperature drops below 250 °F
  - 1.2. Breakdown and intermediate compaction before the surface temperature drops below 200 °F
  - 1.3. Finish compaction before the surface temperature drops below 150 °F
2. Modified asphalt binder, complete:
  - 2.1. First coverage of breakdown compaction before the surface temperature drops below 240 °F
  - 2.2. Breakdown and intermediate compaction before the surface temperature drops below 180 °F
  - 2.3. Finish compaction before the surface temperature drops below 140 °F

For RHMA-G:

1. Only spread and compact if the atmospheric temperature is at least 55 °F and the surface temperature is at least 60 °F.
2. Complete the first coverage of breakdown compaction before the surface temperature drops below 280 °F.
3. Complete breakdown and intermediate compaction before the surface temperature drops below 250 °F.
4. Complete finish compaction before the surface temperature drops below 200 °F.
5. If the atmospheric temperature is below 70 °F, cover loads in trucks with tarpaulins. The tarpaulins must completely cover the exposed load until you transfer the mixture to the paver's hopper or to the pavement surface.

For OGFC with unmodified asphalt binder:

1. Only spread and compact if the atmospheric temperature is at least 55 °F and the surface temperature is at least 60 °F.
2. Complete first coverage using 2 rollers before the surface temperature drops below 240 °F.
3. Complete all compaction before the surface temperature drops below 200 °F.
4. If the atmospheric temperature is below 70 °F, cover loads in trucks with tarpaulins. The tarpaulins must completely cover the exposed load until you transfer the mixture to the paver's hopper or to the pavement surface.

For OGFC with modified asphalt binder except asphalt rubber binder:

1. Only spread and compact if the atmospheric temperature is at least 50 °F and the surface temperature is at least 50 °F.
2. Complete first coverage using 2 rollers before the surface temperature drops below 240 °F.
3. Complete all compaction before the surface temperature drops below 180 °F.
4. If the atmospheric temperature is below 70 °F, cover loads in trucks with tarpaulins. The tarpaulins must completely cover the exposed load until you transfer the mixture to the paver's hopper or to the pavement surface.

For RHMA-O and RHMA-O-HB:

1. Only spread and compact if the atmospheric temperature is at least 55 °F and surface temperature is at least 60 °F.
2. Complete the 1st coverage using 2 rollers before the surface temperature drops below 280 °F.
3. Complete compaction before the surface temperature drops below 250 °F.
4. If the atmospheric temperature is below 70 °F, cover loads in trucks with tarpaulins. The tarpaulins must completely cover the exposed load until the mixture is transferred to the paver's hopper or to the pavement surface.

For RHMA-G and OGFC, tarpaulins are not required if the time from discharge to truck until transfer to the paver's hopper or the pavement surface is less than 30 minutes.

HMA compaction coverage is the number of passes needed to cover the paving width. A pass is 1 roller's movement parallel to the paving in either direction. Overlapping passes are part of the coverage being made and are not a subsequent coverage. Do not start a coverage until completing the prior coverage.

Start rolling at the lower edge and progress toward the highest part.

Perform breakdown compaction of each layer of HMA Type A, Type B, and RHMA-G with 3 coverages using a vibratory roller. The speed of the vibratory roller in miles per hour must not exceed the vibrations per minute divided by 1,000. If the HMA layer thickness is less than 0.08 foot, turn the vibrator off. The Engineer may order fewer coverages if the HMA layer thickness is less than 0.15 foot.

Perform intermediate compaction of each layer of HMA Type A and Type B with 3 coverages using a pneumatic-tired roller at a speed not to exceed 5 mph.

Perform finish compaction of HMA Type A, Type B, and RHMA-G with 1 coverage using a steel-tired roller.

Compact OGFC with 2 coverages using steel-tired rollers.

## **39-4 QUALITY CONTROL / QUALITY ASSURANCE**

### **39-4.01 DESCRIPTION**

If HMA is specified as Quality Control / Quality Assurance, construct it under Section 39-1, "General," this Section 39-4, "Quality Control / Quality Assurance," and Section 39-5, "Measurement and Payment."

### **39-4.02 GENERAL**

The QC / QA construction process consists of:

1. Establishing, maintaining, and changing if needed a quality control system providing assurance the HMA complies with the specifications
2. Sampling and testing at specified intervals, or sublots, to demonstrate compliance and to control process
3. The Engineer sampling and testing at specified intervals to verify testing process and HMA quality
4. The Engineer using test results, statistical evaluation of verified quality control tests, and inspection to accept HMA for payment

A lot is a quantity of HMA. The Engineer designates a new lot when:

1. 20 sublots are complete
2. The JMF changes
3. Production stops for more than 30 days

Each lot consists of no more than 20 sublots. A subplot is 750 tons except HMA paved at day's end greater than 250 tons is a subplot. If HMA paved at day's end is less than 250 tons, you may either make this quantity a subplot or include it in the previous subplot's test results for statistical evaluation.

### **39-4.03 CONTRACTOR QUALITY CONTROL**

#### **39-4.03A General**

Use a composite quality factor,  $QF_C$ , and individual quality factors,  $QF_{QC_i}$ , to control your process and evaluate your quality control program. For quality characteristics without quality factors, use your quality control plan's action limits to control process.

Control HMA quality including:

1. Materials
2. Proportioning
3. Spreading and compacting
4. Finished roadway surface

Develop, implement, and maintain a quality control program that includes:

1. Inspection
2. Sampling
3. Testing

### **39-4.03B Quality Control Plan**

With the JMF submittal, submit a written Quality Control Plan (QCP). The QCP must comply with the Department's Quality Control Manual for Hot Mix Asphalt Production and Placement. Discuss the QCP with the Engineer during the prepaving conference.

The Engineer reviews each QCP within 5 business days from the submittal. Hold HMA production until the Engineer accepts the QCP in writing. The Engineer's QCP acceptance does not mean your compliance with the QCP will result in acceptable HMA. Section 39-1.05, "Engineer's Acceptance," specifies HMA acceptance.

The QCP must include the name and qualifications of a Quality Control Manager. The Quality Control Manager administers the QCP and during paving must be at the job site within 3 hours of receiving notice. The Quality Control Manager must not be any of the following on the project:

1. Foreman
2. Production or paving crewmember
3. Inspector
4. Tester

The QCP must include action limits and details of corrective action you will take if a test result for any quality characteristic falls outside an action limit.

As work progresses, you must submit a written QCP supplement to change quality control procedures, personnel, tester qualification status, or laboratory accreditation status.

### **39-4.03C Quality Control Inspection, Sampling, And Testing**

Sample, test, inspect, and manage HMA quality control.

Provide a roadway inspector while HMA paving activities are in progress. Provide a plant inspector during HMA production.

Inspectors must comply with the Department's Quality Control Manual for Hot Mix Asphalt Production and Placement.

Provide a testing laboratory and personnel for quality control testing. Provide the Engineer unrestricted access to the quality control activities. Before providing services for the project, the Engineer reviews, accredits, and qualifies the testing laboratory and personnel under the Department's Independent Assurance Program.

The minimum random sampling and testing for quality control is:

**Minimum Quality Control – QC / QA**

Quality Characteristic	Test Method	Minimum Sampling and Testing Frequency	HMA Type			Location of Sampling	Max. Reporting Time Allowance
			A	B	RHMA-G		
Aggregate gradation <sup>a</sup>	CT 202	1 per 750 tons	JMF ± Tolerance <sup>b</sup>	JMF ± Tolerance <sup>b</sup>	JMF ± Tolerance <sup>b</sup>	CT 125	24 hours
Asphalt binder content (%)	CT 379 or 382		JMF ±0.45	JMF ±0.45	JMF ±0.5	Loose Mix Behind Paver See CT 125	
Percent of maximum theoretical density (%) <sup>c, d</sup>	QC Plan		92 - 96	92 - 96	91 - 96	QC Plan	
Aggregate moisture content at continuous mixing plants and RAP moisture content at continuous mixing plants and batch mixing plants <sup>e</sup>	CT 226 or CT 370	2 per day during production	--	--	--	Stock-piles or cold feed belts	--
Sand equivalent (min.) <sup>f</sup>	CT 217	1 per 750 tons	47	42	47	CT 125	24 hours
HMA moisture content (% max.)	CT 226 or CT 370	1 per 2,500 tons but not less than 1 per paving day	1.0	1.0	1.0	Loose Mix Behind Paver See CT 125	24 hours
Stabilometer Value (min.) <sup>f, g</sup> No. 4 and 3/8" gradings 1/2" and 3/4" gradings	CT 366	1 per 4,000 tons or 2 per 5 business days, whichever is more	30	30	--		48 hours
			37	35	23		
Air voids content (%) <sup>f, h</sup>	CT 367		4 ± 2	4 ± 2	Specification ± 2		

Percent of crushed particles coarse aggregate (% min.) One fractured face Two fractured faces	CT 205	As necessary and designated in QCP. At least once per project.	90	25	--	CT 125	48 hours	
Fine aggregate (% min) (Passing No. 4 sieve and retained on No. 8 sieve.) One fractured face			75	--	90			
Los Angeles Rattler (% max.) Loss at 100 rev. Loss at 500 rev.	CT 211		12 45	-- 50	12 40			CT 125
Fine aggregate angularity (% min.)	AASHTO T 304, Method A		45	45	45	CT 125		
Flat and elongated particle (% max. by weight @ 5:1)	ASTM D 4791		Report only	Report only	Report only	CT 125		
Voids filled with asphalt (%) <sup>i</sup> No. 4 grading 3/8" grading 1/2" grading 3/4" grading	LP-3		76.0 – 80.0 73.0 – 76.0 65.0 – 75.0 65.0 – 75.0	76.0 – 80.0 73.0 – 76.0 65.0 – 75.0 65.0 – 75.0	Report only	LP-3		
Voids in mineral aggregate (% min.) <sup>i</sup> No. 4 grading 3/8" grading 1/2" grading 3/4" grading	LP-2		17.0 15.0 14.0 13.0	17.0 15.0 14.0 13.0	-- -- 18.0 – 23.0 <sup>j</sup> 18.0 – 23.0 <sup>j</sup>	LP-2		
Dust proportion <sup>1</sup> No. 4 and 3/8" gradings 1/2" and 3/4" gradings	LP-4		0.9 – 2.0 0.6 – 1.3	0.9 – 2.0 0.6 – 1.3	Report only	LP-4		
Smoothness	Section 39-1.12		--	12-foot straight-edge, must-grind, and PI <sub>0</sub>	12-foot straight-edge, must-grind, and PI <sub>0</sub>	12-foot straight-edge, must-grind, and PI <sub>0</sub>		--
Asphalt rubber binder viscosity @ 350 °F, centipoises	Section 39-1.02D		--	--	--	1,500 – 4,000		Section 39-1.02D
Crumb rubber modifier	Section 39-1.02D	--	--	--	Section 39-1.02D	Section 39-1.02D	48 hours	

Notes:

<sup>a</sup> Determine combined aggregate gradation containing RAP under Laboratory Procedure LP-9.

<sup>b</sup> The tolerances must comply with the allowable tolerances in Section 39-1.02E, "Aggregate."

<sup>c</sup> Required for HMA Type A, Type B, and RHMA-G if the specified paved thickness is at least 0.15 foot.

<sup>d</sup> Determine maximum theoretical density (California Test 309) at the frequency specified for test maximum density under California Test 375, Part 5 D.

<sup>e</sup> For adjusting the plant controller at the HMA plant.

<sup>f</sup> Report the average of 3 tests from a single split sample.

<sup>g</sup> Modify California Test 304, Part 2.B.2.c: "After compaction in the mechanical compactor, cool to 140 °F ± 5 °F by allowing the briquettes to cool at room temperature for 0.5 hour, then place the briquettes in the oven at 140 °F for a minimum of 2 hours and not more than 3 hours."

<sup>h</sup> Determine the bulk specific gravity of each lab-compacted briquette under California Test 308, Method A, and theoretical maximum specific gravity under California Test 309.

<sup>i</sup> Report only if the adjustment for asphalt binder content target value is less than or equal to ± 0.3 percent from OBC.

<sup>j</sup> Voids in mineral aggregate for RHMA-G must be within this range.

Within the specified reporting time, submit written test results including:

1. Sampling location, quantity, and time
2. Testing results
3. Supporting data and calculations

If test results for any quality characteristic are beyond the action limits in the QCP, take corrective actions. Document the corrective actions taken in the inspection records under Section 39-4.03E, "Records of Inspection and Testing."

Stop production, notify the Engineer in writing, take corrective action, and demonstrate compliance with the specifications before resuming production and placement on the State highway if:

1. A lot's composite quality factor,  $Q_{FC}$ , or an individual quality factor,  $Q_{FCi}$  for  $i = 3, 4, \text{ or } 5$ , is below 0.90 determined under Section 39-4.03F, "Statistical Evaluation"
2. An individual quality factor,  $Q_{FCi}$  for  $i = 1 \text{ or } 2$ , is below 0.75
3. Quality characteristics for which a quality factor,  $Q_{FCi}$ , is not determined has 2 consecutive acceptance or quality control tests not in compliance with the specifications

#### **39-4.03D Charts And Records**

Record sampling and testing results for quality control on forms provided in the "Quality Control Manual for Hot Mix Asphalt," or on forms you submit with the QCP. The QCP must also include form posting locations and submittal times.

Submit quality control test results using the Department's statistical evaluation program, HMAPay, available at

[www.dot.ca.gov/hq/construc/hma/index.htm](http://www.dot.ca.gov/hq/construc/hma/index.htm)

#### **39-4.03E Records Of Inspection And Testing**

During HMA production, submit in writing a daily:

1. HMA Construction Daily Record of Inspection. Also make this record available at the HMA plant and job site each day.
2. HMA Inspection and Testing Summary. Include in the summary:
  - 2.1. Test forms with the testers' signatures and Quality Control Manager's initials.
  - 2.2. Inspection forms with the inspectors' signatures and Quality Control Manager's initials.
  - 2.3. A list and explanation of deviations from the specifications or regular practices.
  - 2.4. A signed statement by the Quality Control Manager that says:

"It is hereby certified that the information contained in this record is accurate, and that information, tests, or calculations documented herein comply with the specifications of the contract and the standards set forth in the testing procedures. Exceptions to this certification are documented as part of this record."

Retain for inspection the records generated as part of quality control including inspection, sampling, and testing for at least 3 years after final acceptance.

#### **39-4.03F Statistical Evaluation**

##### **General**

Determine a lot's composite quality factor,  $Q_{FC}$ , and the individual quality factors,  $Q_{FCi}$ . Perform statistical evaluation calculations to determine these quality factors based on quality control test results for:

1. Aggregate gradation
2. Asphalt binder content
3. Percent of maximum theoretical density

The Engineer grants a waiver and you must use 1.0 as the individual quality factor for percent of maximum theoretical density,  $QF_{QC5}$ , for HMA paved in:

1. Areas where the specified paved thickness is less than 0.15 foot
2. Areas where the specified paved thickness is less than 0.20 foot and a 3/4-inch grading is specified and used
3. Dig outs
4. Leveling courses
5. Areas where, in the opinion of the Engineer, compaction or compaction measurement by conventional methods is impeded

### Statistical Evaluation Calculations

Use the Variability-Unknown / Standard Deviation Method to determine the percentage of a lot not in compliance with the specifications. The number of significant figures used in the calculations must comply with AASHTO R-11, Absolute Method.

Determine the percentage of work not in compliance with the specification limits for each quality characteristic as follows:

1. Calculate the arithmetic mean ( $\bar{X}$ ) of the test values

$$\bar{X} = \frac{\sum X}{n}$$

where:

x = individual test values  
n = number of test values

2. Calculate the standard deviation

$$s = \sqrt{\frac{n(\sum x^2) - (\sum x)^2}{n(n-1)}}$$

where:

$\sum(x^2)$  = sum of the squares of individual test values  
 $(\sum x)^2$  = sum of the individual test values squared  
n = number of test values

3. Calculate the upper quality index ( $Q_u$ )

$$Q_u = \frac{USL - \bar{X}}{s}$$

where:

USL = target value plus the production tolerance or upper specification limit  
s = standard deviation  
 $\bar{X}$  = arithmetic mean

4. Calculate the lower quality index ( $Q_L$ );

$$Q_L = \frac{\bar{X} - LSL}{s}$$

where:

LSL = target value minus production tolerance or lower specification limit

$s =$  standard deviation  
 $\bar{X} =$  arithmetic mean

5. From the table, Upper Quality Index  $Q_U$  or Lower Quality Index  $Q_L$ , of this Section 39-4.03F, "Statistical Evaluation", determine  $P_U$ ;

where:

$P_U =$  the estimated percentage of work outside the USL.  
 $P_U = 0$ , when USL is not specified.

6. From the table, Upper Quality Index  $Q_U$  or Lower Quality Index  $Q_L$ , of this Section 39-4.03F, "Statistical Evaluation," determine  $P_L$ ;

where:

$P_L =$  the estimated percentage of work outside the LSL.  
 $P_L = 0$ , when LSL is not specified.

7. Calculate the total estimated percentage of work outside the USL and LSL, percent defective

$$\text{Percent defective} = P_U + P_L$$

$P_U$  and  $P_L$  are determined from:

P <sub>U</sub> or P <sub>L</sub>	Upper Quality Index Q <sub>U</sub> or Lower Quality Index Q <sub>L</sub>												
	Sample Size (n)												
	5	6	7	8	9	10-11	12-14	15-17	18-22	23-29	30-42	43-66	>66
0	1.72	1.88	1.99	2.07	2.13	2.20	2.28	2.34	2.39	2.44	2.48	2.51	2.56
1	1.64	1.75	1.82	1.88	1.91	1.96	2.01	2.04	2.07	2.09	2.12	2.14	2.16
2	1.58	1.66	1.72	1.75	1.78	1.81	1.84	1.87	1.89	1.91	1.93	1.94	1.95
3	1.52	1.59	1.63	1.66	1.68	1.71	1.73	1.75	1.76	1.78	1.79	1.80	1.81
4	1.47	1.52	1.56	1.58	1.60	1.62	1.64	1.65	1.66	1.67	1.68	1.69	1.70
5	1.42	1.47	1.49	1.51	1.52	1.54	1.55	1.56	1.57	1.58	1.59	1.59	1.60
6	1.38	1.41	1.43	1.45	1.46	1.47	1.48	1.49	1.50	1.50	1.51	1.51	1.52
7	1.33	1.36	1.38	1.39	1.40	1.41	1.41	1.42	1.43	1.43	1.44	1.44	1.44
8	1.29	1.31	1.33	1.33	1.34	1.35	1.35	1.36	1.36	1.37	1.37	1.37	1.38
9	1.25	1.27	1.28	1.28	1.29	1.29	1.30	1.30	1.30	1.31	1.31	1.31	1.31
10	1.21	1.23	1.23	1.24	1.24	1.24	1.25	1.25	1.25	1.25	1.25	1.26	1.26
11	1.18	1.18	1.19	1.19	1.19	1.19	1.20	1.20	1.20	1.20	1.20	1.20	1.20
12	1.14	1.14	1.15	1.15	1.15	1.15	1.15	1.15	1.15	1.15	1.15	1.15	1.15
13	1.10	1.10	1.10	1.10	1.10	1.10	1.11	1.11	1.11	1.11	1.11	1.11	1.11
14	1.07	1.07	1.07	1.06	1.06	1.06	1.06	1.06	1.06	1.06	1.06	1.06	1.06
15	1.03	1.03	1.03	1.03	1.02	1.02	1.02	1.02	1.02	1.02	1.02	1.02	1.02
16	1.00	0.99	0.99	0.99	0.99	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98
17	0.97	0.96	0.95	0.95	0.95	0.95	0.94	0.94	0.94	0.94	0.94	0.94	0.94
18	0.93	0.92	0.92	0.92	0.91	0.91	0.91	0.91	0.90	0.90	0.90	0.90	0.90
19	0.90	0.89	0.88	0.88	0.88	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87
20	0.87	0.86	0.85	0.85	0.84	0.84	0.84	0.83	0.83	0.83	0.83	0.83	0.83
21	0.84	0.82	0.82	0.81	0.81	0.81	0.80	0.80	0.80	0.80	0.80	0.80	0.79
22	0.81	0.79	0.79	0.78	0.78	0.77	0.77	0.77	0.76	0.76	0.76	0.76	0.76
23	0.77	0.76	0.75	0.75	0.74	0.74	0.74	0.73	0.73	0.73	0.73	0.73	0.73
24	0.74	0.73	0.72	0.72	0.71	0.71	0.70	0.70	0.70	0.70	0.70	0.70	0.70
25	0.71	0.70	0.69	0.69	0.68	0.68	0.67	0.67	0.67	0.67	0.67	0.67	0.66
26	0.68	0.67	0.67	0.65	0.65	0.65	0.64	0.64	0.64	0.64	0.64	0.64	0.63
27	0.65	0.64	0.63	0.62	0.62	0.62	0.61	0.61	0.61	0.61	0.61	0.61	0.60
28	0.62	0.61	0.60	0.59	0.59	0.59	0.58	0.58	0.58	0.58	0.58	0.58	0.57
29	0.59	0.58	0.57	0.57	0.56	0.56	0.55	0.55	0.55	0.55	0.55	0.55	0.54
30	0.56	0.55	0.54	0.54	0.53	0.53	0.52	0.52	0.52	0.52	0.52	0.52	0.52
31	0.53	0.52	0.51	0.51	0.50	0.50	0.50	0.49	0.49	0.49	0.49	0.49	0.49
32	0.50	0.49	0.48	0.48	0.48	0.47	0.47	0.47	0.46	0.46	0.46	0.46	0.46
33	0.47	0.48	0.45	0.45	0.45	0.44	0.44	0.44	0.44	0.43	0.43	0.43	0.43
34	0.45	0.43	0.43	0.42	0.42	0.42	0.41	0.41	0.41	0.41	0.41	0.41	0.40
35	0.42	0.40	0.40	0.39	0.39	0.39	0.38	0.38	0.38	0.38	0.38	0.38	0.38
36	0.39	0.38	0.37	0.37	0.36	0.36	0.36	0.36	0.36	0.36	0.36	0.36	0.36
37	0.36	0.35	0.34	0.34	0.34	0.33	0.33	0.33	0.33	0.33	0.33	0.33	0.32
38	0.33	0.32	0.32	0.31	0.31	0.31	0.30	0.30	0.30	0.30	0.30	0.30	0.30
39	0.30	0.30	0.29	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28
40	0.28	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25
41	0.25	0.23	0.23	0.23	0.23	0.23	0.23	0.23	0.23	0.23	0.23	0.23	0.23
42	0.23	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
43	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.18
44	0.16	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15
45	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13
46	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10
47	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08
48	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05
49	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

1. If the value of Q<sub>U</sub> or Q<sub>L</sub> does not correspond to a value in the table, use the next lower value.
2. If Q<sub>U</sub> or Q<sub>L</sub> are negative values, P<sub>U</sub> or P<sub>L</sub> is equal to 100 minus the table value for P<sub>U</sub> or P<sub>L</sub>.

### Quality Factor Determination

Determine individual quality factors,  $QF_{QC_i}$ , using percent defective =  $P_U + P_L$  and:

Quality Factor	Quality Factors												
	Maximum Allowable Percent Defective ( $P_U + P_L$ )												
	Sample Size (n)												
	5	6	7	8	9	10-11	12-14	15-17	18-22	23-29	30-42	43-66	>66
1.05				0	0	0	0	0	0	0	0	0	0
1.04			0	1	3	5	4	4	4	3	3	3	3
1.03		0	2	4	6	8	7	7	6	5	5	4	4
1.02		1	3	6	9	11	10	9	8	7	7	6	6
1.01	0	2	5	8	11	13	12	11	10	9	8	8	7
1.00	22	20	18	17	16	15	14	13	12	11	10	9	8
0.99	24	22	20	19	18	17	16	15	14	13	11	10	9
0.98	26	24	22	21	20	19	18	16	15	14	13	12	10
0.97	28	26	24	23	22	21	19	18	17	16	14	13	12
0.96	30	28	26	25	24	22	21	19	18	17	16	14	13
0.95	32	29	28	26	25	24	22	21	20	18	17	16	14
0.94	33	31	29	28	27	25	24	22	21	20	18	17	15
0.93	35	33	31	29	28	27	25	24	22	21	20	18	16
0.92	37	34	32	31	30	28	27	25	24	22	21	19	18
0.91	38	36	34	32	31	30	28	26	25	24	22	21	19
0.90	39	37	35	34	33	31	29	28	26	25	23	22	20
0.89	41	38	37	35	34	32	31	29	28	26	25	23	21
0.88	42	40	38	36	35	34	32	30	29	27	26	24	22
0.87	43	41	39	38	37	35	33	32	30	29	27	25	23
0.86	45	42	41	39	38	36	34	33	31	30	28	26	24
0.85	46	44	42	40	39	38	36	34	33	31	29	28	25
0.84	47	45	43	42	40	39	37	35	34	32	30	29	27
0.83	49	46	44	43	42	40	38	36	35	33	31	30	28
0.82	50	47	46	44	43	41	39	38	36	34	33	31	29
0.81	51	49	47	45	44	42	41	39	37	36	34	32	30
0.80	52	50	48	46	45	44	42	40	38	37	35	33	31
0.79	54	51	49	48	46	45	43	41	39	38	36	34	32
0.78	55	52	50	49	48	46	44	42	41	39	37	35	33
0.77	56	54	52	50	49	47	45	43	42	40	38	36	34
0.76	57	55	53	51	50	48	46	44	43	41	39	37	35
0.75	58	56	54	52	51	49	47	46	44	42	40	38	36
Reject	60	57	55	53	52	51	48	47	45	43	41	40	37
	61	58	56	55	53	52	50	48	46	44	43	41	38
	62	59	57	56	54	53	51	49	47	45	44	42	39
	63	61	58	57	55	54	52	50	48	47	45	43	40
	64	62	60	58	57	55	53	51	49	48	46	44	41

Reject Values Greater Than Those Shown Above

Notes:

- To obtain a quality factor when the estimated percent outside specification limits from table, "Upper Quality Index  $Q_U$  or Lower Quality Index  $Q_L$ ," does not correspond to a value in the table, use the next larger value.

Compute the composite of single quality factors,  $QF_C$ , for a lot using:

$$QF_C = \sum_{i=1}^5 w_i QF_{QC_i}$$

where:

- $QF_C$  = the composite quality factor for the lot rounded to 2 decimal places.  
 $QF_{QC_i}$  = the quality factor for the individual quality characteristic.  
 $w$  = the weighting factor listed in the table HMA Acceptance – QC / QA.

$i =$  the quality characteristic index number in the table HMA Acceptance – QC / QA.

### 39-4.04 ENGINEER'S QUALITY ASSURANCE

#### 39-4.04A General

The Engineer assures quality by:

1. Reviewing mix designs and proposed JMF
2. Inspecting procedures
3. Conducting oversight of quality control inspection and records
4. Verification sampling and testing during production and paving

#### 39-4.04B Verification Sampling And Testing

##### General

The Engineer samples:

1. Aggregate to verify gradation
2. HMA to verify asphalt binder content

##### Verification

For aggregate gradation and asphalt binder content, the ratio of verification testing frequency to the minimum quality control testing frequency is 1:5. The Engineer performs at least 3 verification tests per lot.

Using the t-test, the Engineer compares quality control tests results for aggregate gradation and asphalt binder content with corresponding verification test results. The Engineer uses the average and standard deviation of up to 20 sequential sublots for the comparison. The Engineer uses production start-up evaluation tests to represent the first subplot. When there are less than 20 sequential sublots, the Engineer uses the maximum number of sequential sublots available. The 21st subplot becomes the 1st subplot ( $n = 1$ ) in the next lot.

The t-value for a group of test data is computed as follows:

$$t = \frac{|\bar{X}_c - \bar{X}_v|}{S_p \sqrt{\frac{1}{n_c} + \frac{1}{n_v}}} \quad \text{and} \quad S_p^2 = \frac{S_c^2(n_c - 1) + S_v^2(n_v - 1)}{n_c + n_v - 2}$$

where:

$n_c =$  Number of quality control tests (2 minimum, 20 maximum).

$n_v =$  Number of verification tests (minimum of 1 required).

$\bar{X}_c =$  Mean of quality control tests.

$\bar{X}_v =$  Mean of verification tests.

$S_p =$  Pooled standard deviation (When  $n_v = 1$ ,  $S_p = S_c$ ).

$S_c =$  Standard deviation of quality control tests.

$S_v =$  Standard deviation of verification tests (when  $n_v > 1$ ).

The comparison of quality control test results and the verification test results is at a level of significance of  $\alpha = 0.025$ . The Engineer computes t and compares it to the critical t-value,  $t_{crit}$ , from:

**Critical T-Value**

Degrees of freedom ( $n_c+n_v-2$ )	$t_{crit}$ (for $\alpha = 0.025$ )	Degrees of freedom ( $n_c+n_v-2$ )	$t_{crit}$ (for $\alpha = 0.025$ )
1	24.452	18	2.445
2	6.205	19	2.433
3	4.177	20	2.423
4	3.495	21	2.414
5	3.163	22	2.405
6	2.969	23	2.398
7	2.841	24	2.391
8	2.752	25	2.385
9	2.685	26	2.379
10	2.634	27	2.373
11	2.593	28	2.368
12	2.560	29	2.364
13	2.533	30	2.360
14	2.510	40	2.329
15	2.490	60	2.299
16	2.473	120	2.270
17	2.458	$\infty$	2.241

If the t-value computed is less than or equal to  $t_{crit}$ , quality control test results are verified.

If the t-value computed is greater than  $t_{crit}$  and both  $\bar{X}_v$  and  $\bar{X}_c$  comply with acceptance specifications, the quality control tests are verified. You may continue to produce and place HMA with the following allowable differences:

1.  $|\bar{X}_v - \bar{X}_c| \leq 1.0$  percent for any grading
2.  $|\bar{X}_v - \bar{X}_c| \leq 0.1$  percent for asphalt binder content

If the t-value computed is greater than  $t_{crit}$  and the  $|\bar{X}_v - \bar{X}_c|$  for grading and asphalt binder content are greater than the allowable differences, quality control test results are not verified and:

1. The Engineer notifies you in writing.
2. You and the Engineer must investigate why the difference exist.
3. If the reason for the difference cannot be found and corrected, the Engineer's test results are used for acceptance and pay.

**39-4.05 ENGINEER'S ACCEPTANCE**

**39-4.05A Testing**

The Engineer samples for acceptance testing and tests for:

**HMA Acceptance – QC / QA**

Index (i)	Quality Characteristic				Weight -ing Factor (w)	Test Method	HMA Type		
							A	B	RHMA-G
	Aggregate gradation <sup>a</sup>					CT 202	JMF ± Tolerance <sup>c</sup>		
	Sieve	3/4"	1/2"	3/8"					
1	1/2"	X <sup>b</sup>	--	--	0.05				
1	3/8"	--	X	--	0.05				
1	No. 4	--	--	X	0.05				
2	No. 8	X	X	X	0.10				
3	No. 200	X	X	X	0.15				
4	Asphalt binder content (%)				0.30	CT 379 or 382	JMF ± 0.45	JMF ± 0.45	JMF ± 0.5
5	Percent of maximum theoretical density (%) <sup>d, e</sup>				0.40	CT 375	92 – 96	92 – 96	91 – 96
	Sand equivalent (min.) <sup>f</sup>					CT 217	47	42	47
	Stabilometer value (min.) <sup>f, g</sup>					CT 366			
	No. 4 and 3/8" gradings						30	30	--
	1/2" and 3/4" gradings						37	35	23
	Air voids content (%) <sup>f, h</sup>					CT 367	4 ± 2	4 ± 2	Specification ± 2
	Percent of crushed particles coarse aggregate (% min.)					CT 205			
	One fractured face						90	25	--
	Two fractured faces						70	--	90
	Fine aggregate (% min)								
	(Passing No. 4 sieve and retained on No. 8 sieve.)								
	One fractured face						70	20	70
	HMA moisture content (% max.)					CT 226 or CT 370	1.0	1.0	1.0
	Los Angeles Rattler (% max.)					CT 211			
	Loss at 100 rev.						12	--	12
	Loss at 500 rev.						45	50	45
	Fine aggregate angularity (% min.)					AASHTO T 304, Method A	45	45	45
	Flat and elongated particle (% max. by weight @ 5:1)					ASTM D 4791	Report only	Report only	Report only
	Voids in mineral aggregate (% min.) <sup>1</sup>								(Note j)
	No. 4 grading						17.0	17.0	--
	3/8" grading					LP-2	15.0	15.0	--
	1/2" grading						14.0	14.0	18.0 - 23.0
	3/4" grading						13.0	13.0	18.0 - 23.0
	Voids filled with asphalt (%) <sup>1</sup>								
	No. 4 grading					LP-3	76.0 - 80.0	76.0 - 80.0	Report only
	3/8" grading						73.0 - 76.0	73.0 - 76.0	
	1/2" grading						65.0 - 75.0	65.0 - 75.0	
	3/4" grading						65.0 - 75.0	65.0 - 75.0	
	Dust proportion <sup>1</sup>					LP-4			
	No. 4 and 3/8" gradings						0.9 - 2.0	0.9 - 2.0	Report only
	1/2" and 3/4" gradings						0.6 - 1.3	0.6 - 1.3	

	Smoothness		Section 39-1.12	12-foot straight-edge, must-grind, and PI <sub>0</sub>	12-foot straight-edge, must-grind, and PI <sub>0</sub>	12-foot straight-edge, must-grind, and PI <sub>0</sub>
	Asphalt binder		Various	Section 92	Section 92	Section 92
	Asphalt rubber binder		Various	--	--	Section 92-1.02(C) and Section 39-1.02D
	Asphalt modifier		Various	--	--	Section 39-1.02D
	Crumb rubber modifier		Various	--	--	Section 39-1.02D

Notes:

<sup>a</sup> The Engineer determines combined aggregate gradations containing RAP under Laboratory Procedure LP-9.

<sup>b</sup> "X" denotes the sieves the Engineer considers for the specified aggregate gradation.

<sup>c</sup> The tolerances must comply with the allowable tolerances in Section 39-1.02E, "Aggregate."

<sup>d</sup> The Engineer determines percent of maximum theoretical density if the specified paved thickness is at least 0.15 foot under California Test 375 except the Engineer uses:

1. California Test 308, Method A, to determine in-place density of each density core instead of using the nuclear gauge in Part 4, "Determining In-Place Density By The Nuclear Density Device."
2. California Test 309 to determine maximum theoretical density instead of calculating test maximum density in Part 5, "Determining Test Maximum Density."

<sup>e</sup> The Engineer determines maximum theoretical density (California Test 309) at the frequency specified for Test Maximum Density under California Test 375, Part 5.D.

<sup>f</sup> The Engineer reports the average of 3 tests from a single split sample.

<sup>g</sup> Modify California Test 304, Part 2.B.2.c: "After compaction in the mechanical compactor, cool to 140 °F ± 5 °F by allowing the briquettes to cool at room temperature for 0.5 hour, then place the briquettes in the oven at 140 °F for a minimum of 2 hours and not more than 3 hours."

<sup>h</sup> The Engineer determines the bulk specific gravity of each lab-compacted briquette under California Test 308, Method A, and theoretical maximum specific gravity under California Test 309.

<sup>i</sup> Report only if the adjustment for asphalt binder content target value is less than or equal to ± 0.3 percent from OBC.

<sup>j</sup> Voids in mineral aggregate for RHMA-G must be within this range.

The Engineer determines the percent of maximum theoretical density from the average density of 3 density cores you take from every 750 tons of production or part thereof divided by the maximum theoretical density.

If the specified total paved thickness is at least 0.15 foot and any layer is less than 0.15 foot, the Engineer determines the percent of maximum theoretical density from density cores taken from the final layer measured the full depth of the total paved HMA thickness.

The Engineer stops production and terminates a lot if:

1. The lot's composite quality factor, Q<sub>FC</sub>, or an individual quality factor, QF<sub>QC<sub>i</sub></sub> for i = 3, 4, or 5, is below 0.90 determined under Section 39-4.03F, "Statistical Evaluation"
2. An individual quality factor, QF<sub>QC<sub>i</sub></sub> for i = 1 or 2, is below 0.75
3. Quality characteristics for which a quality factor, QF<sub>QC<sub>i</sub></sub>, is not determined has 2 consecutive acceptance or quality control tests not in compliance with the specifications

For any single quality characteristic for which a quality factor, QF<sub>QC<sub>i</sub></sub>, is not determined, except smoothness, if 2 consecutive acceptance test results do not comply with specifications:

1. Stop production.
2. Take corrective action.

3. In the Engineer's presence, take samples and split each sample into 4 parts. Test 1 part for compliance with the specifications and submit 3 parts to the Engineer. The Engineer tests 1 part for compliance with the specifications and reserves and stores 2 parts.
4. Demonstrate compliance with the specifications before resuming production and placement on the State highway.

### 39-4.05B Statistical Evaluation, Determination Of Quality Factors And Acceptance

#### Statistical Evaluation and Determination of Quality Factors

To determine the individual quality factor,  $QF_{QC_i}$ , for any quality factor  $i = 1$  through 5 or a lot's composite quality factor,  $QF_C$ , for acceptance and payment adjustment, the Engineer uses the evaluation specifications under Section 39-4.03F, "Statistical Evaluation," and:

1. Verified quality control test results for aggregate gradation
2. Verified quality control test results for asphalt binder content
3. The Engineer's test results for percent of maximum theoretical density

#### Lot Acceptance Based on Quality Factors

The Engineer accepts a lot based on the quality factors determined for aggregate gradation and asphalt binder content,  $QF_{QC_i}$  for  $i = 1$  through 4, using the total number of verified quality control test result values and the total percent defective ( $P_U + P_L$ ).

The Engineer accepts a lot based on the quality factor determined for maximum theoretical density,  $QF_{QC_5}$ , using the total number of test result values from density cores and the total percent defective ( $P_U + P_L$ ).

The Engineer calculates the quality factor for the lot,  $QF_C$ , which is a composite of weighted individual quality factors,  $QF_{QC_i}$ , determined for each quality characteristic in the HMA Acceptance – QC / QA table in Section 39-4.05A, "Testing."

The Engineer accepts a lot based on quality factors if:

1. The current composite quality factor,  $QF_C$ , is 0.90 or greater
2. Each individual quality factor,  $QF_{QC_i}$  for  $i = 3, 4,$  and  $5$ , is 0.90 or greater
3. Each individual quality factor,  $QF_{QC_i}$  for  $i = 1$  and  $2$ , is 0.75 or greater

No single quality characteristic test may represent more than the smaller of 750 tons or 1 day's production.

#### Payment Adjustment

If a lot is accepted, the Engineer adjusts payment with the following formula:

$$PA = \sum_{i=1}^n HMA CP * w_i * [QF_{QC_i} * (HMATT - WHMATT_i) + WHMATT_i] - (HMA CP * HMATT)$$

where:

$PA =$	Payment adjustment rounded to 2 decimal places.
$HMA CP =$	HMA contract price.
$HMATT =$	HMA total tons represented in the lot.
$WHMATT_i =$	Total tons of waived quality characteristic HMA.
$QF_{QC_i} =$	Running quality factor for the individual quality characteristic. $QF_{QC_i}$ for $i = 1$ through 4 must be from verified Contractor's QC results. $QF_{QC_5}$ must be determined from the Engineer's results on density cores taken for percent of maximum theoretical density determination.
$w =$	Weighting factor listed in the HMA acceptance table.
$i =$	Quality characteristic index number in the HMA acceptance table.

If the payment adjustment is a negative value, the Engineer deducts this amount from payment. If the payment adjustment is a positive value, the Engineer adds this amount to payment.

The 21st subplot becomes the 1st subplot ( $n = 1$ ) in the next lot. When the 21st sequential subplot becomes the 1st subplot, the previous 20 sequential sublots become a lot for which the Engineer determines a quality factor. The Engineer uses this quality factor to pay for the HMA in the lot. If the next lot consists of less than 8 sublots, these sublots must be added to the previous lot for quality factor determination using 21 to 27 sublots.

### **39-4.05C Dispute Resolution**

For a lot, if you or the Engineer dispute any quality factor,  $QF_{QCi}$ , or verification test result, every subplot in that lot must be retested.

Referee tests must be performed under the specifications for acceptance testing.

Any quality factor,  $QF_{QCi}$ , must be determined using the referee tests.

For any quality factor,  $QF_{QCi}$ , for  $i = 1$  through 5, dispute resolution:

1. If the difference between the quality factors for  $QF_{QCi}$  using the referee test result and the disputed test result is less than or equal to 0.01, the original test result is correct.
2. If the difference between the quality factor for  $QF_{QCi}$  using the referee test result and the disputed test result is more than 0.01, the quality factor determined from the referee tests supersedes the previously determined quality factor.

## **39-5 MEASUREMENT AND PAYMENT**

### **39-5.01 MEASUREMENT**

The contract item for HMA is measured by weight. The weight of each HMA mixture designated in the Engineer's Estimate must be the combined mixture weight.

If tack coat, asphalt binder, and asphaltic emulsion are paid with separate contract items, their contract items are measured under Section 92, "Asphalts," or Section 94, "Asphaltic Emulsions," as the case may be.

If recorded batch weights are printed automatically, the contract item for HMA is measured by using the printed batch weights, provided:

1. Total aggregate and supplemental fine aggregate weight per batch is printed. If supplemental fine aggregate is weighed cumulatively with the aggregate, the total aggregate batch weight must include the supplemental fine aggregate weight.
2. Total asphalt binder weight per batch is printed.
3. Each truckload's zero tolerance weight is printed before weighing the first batch and after weighing the last batch.
4. Time, date, mix number, load number and truck identification is correlated with a load slip.
5. A copy of the recorded batch weights is certified by a licensed weighmaster and submitted to the Engineer.

The contract item for placing HMA dike is measured by the linear foot along the completed length. The contract item for placing HMA in miscellaneous areas is measured as the in-place compacted area in square yards. In addition to the quantities measured on a linear foot or square yard basis, the HMA for dike and miscellaneous areas are measured by weight.

The contract item for geosynthetic pavement interlayer is measured by the square yard for the actual pavement area covered.

### **39-5.02 PAYMENT**

The contract prices paid per ton for hot mix asphalt as designated in the Engineer's Estimate include full compensation for furnishing all labor, materials, tools, equipment, and incidentals for doing all the work involved in constructing hot mix asphalt, complete in place, as shown on the plans, as specified in these specifications and the special provisions, and as directed by the Engineer.

If HMA is specified to comply with Section 39-4, "Quality Control / Quality Assurance," the Engineer adjusts payment under that section.

Full compensation for the Quality Control Plan and prepaving conference is included in the contract prices paid per ton for hot mix asphalt as designated in the Engineer's Estimate and no additional compensation will be allowed therefor.

Full compensation for performing and submitting mix designs and for Contractor sampling, testing, inspection, testing facilities, and preparation and submittal of results is included in the contract prices paid per ton for HMA as designated in the Engineer's Estimate and no additional compensation will be allowed therefor.

Full compensation for reclaimed asphalt pavement is included in the contract prices paid per ton for HMA as designated in the Engineer's Estimate and no additional compensation will be allowed therefor.

The contract price paid per ton for hot mix asphalt (leveling) includes full compensation for furnishing all labor, materials, tools, equipment, and incidentals for doing all the work involved in hot mix asphalt (leveling), complete in place, as shown on the plans, as specified in these specifications and the special provisions, and as directed by the Engineer.

The State pays for HMA dike at the contract price per linear foot for place HMA dike and by the ton for HMA. The contract prices paid per linear foot for place hot mix asphalt dike as designated in the Engineer's Estimate include full compensation for furnishing all labor, tools, equipment, and incidentals, and for doing all the work involved in placing HMA dike, complete in place, including excavation, backfill, and preparation of the area to receive the dike, as shown on the plans, as specified in these specifications and the special provisions, and as directed by the Engineer.



## 40-1 GENERAL

### 40-1.01 SUMMARY

Section 40 includes specifications for constructing concrete pavement on a prepared subgrade.

### 40-1.02 SUBMITTALS

#### 40-1.02A Certificates of Compliance

Submit Certificates of Compliance under Section 6-1.07, "Certificates of Compliance." Include a test result report for any specified test with certification that test was performed within 12 months before the tested material's use.

Submit Certificates of Compliance for:

1. Tie bars
2. Threaded tie bar splice couplers
3. Dowel bars
4. Tie bar baskets
5. Dowel bar baskets
6. Chemical adhesive (drill and bond)
7. Silicone joint sealant
8. Asphalt rubber joint sealant
9. Preformed compression seal
10. Backer rods. Include the manufacturer's statement of compatibility with the sealant to be used.
11. Joint filler material
12. Curing compound. For each delivery to the job site, submit a copy of the Certificate of Compliance to the Engineer and the Transportation Laboratory. Each Certificate of Compliance must not represent more than 10,000 gallons and must include a test result report for:
  - 12.1. Moisture loss at 24 hours under California Test 534
  - 12.2. Reflectance under ASTM E 1347
  - 12.3. Viscosity under ASTM D 2196
  - 12.4. Nonvolatile content under ASTM D 3723
  - 12.5. Pigment content under ASTM D 3723

13. Epoxy powder coating

#### 40-1.02B Curing Compound Samples

Submit split curing compound samples to the Transportation Laboratory.

#### 40-1.02C Drilled Corings

Submit each core taken for Engineer's acceptance in a plastic bag. Mark each core with a location description.

#### 40-1.02D Independent Third Party Air Content Testing Laboratory

Before testing, submit for the Engineer's approval the name of a laboratory that will test drilled core specimens for air content in cases of dispute.

#### 40-1.02E Dowel Bars

Before placing dowel bars, submit a procedure for identifying transverse contraction joint locations relative to the dowel bars' longitudinal center and a procedure for consolidating concrete around the dowel bars.

#### 40-1.02F Concrete Field Qualification

Submit field qualification data and test reports including:

1. Mixing date
2. Mixing equipment and procedures used
3. Batch volume in cubic yards
4. Type and source of ingredients used
5. Penetration of the concrete
6. Air content of the plastic concrete
7. Age and strength at time of concrete beam testing

Field qualification test reports must be certified with a signature by an official in responsible charge of the laboratory performing the tests.

#### **40-1.02G Frequency Measuring Device (Tachometer)**

Submit calibration documentation and operational guidelines for frequency measuring devices for concrete consolidation vibrators.

#### **40-1.02H Manufacturer's Recommendations and Instructions**

If used and at least 15 days before delivery to the job site, submit manufacturer's recommendations and instructions for storage and installation of:

1. Threaded tie bar splice couplers
2. Chemical adhesive (drill and bond)
3. Silicone liquid sealant
4. Asphalt rubber liquid sealant
5. Preformed compression seals
6. Joint filler material

#### **40-1.02I Mix Proportions**

At least 15 days before starting testing for mix proportions under California Test 559, submit a copy of the AASHTO accreditation for your laboratory determining the mix proportions. At least 30 days before starting field qualification, submit under California Test 559 the proposed concrete mix proportions, the corresponding mix identifications, and laboratory test reports including the modulus of rupture for each trial mixture at 10, 21, 28, and 42 days.

#### **40-1.02J Preformed Compression Seal**

Submit the manufacturer's data sheet used to develop the recommended preformed compression seal based on the joint dimensions.

#### **40-1.02K Concrete Pavement Early Age Crack Mitigation System**

At least 24 hours before each paving shift, submit:

1. Early age stress and strength predictions
2. Scheduled sawing and curing activities
3. Contingency plan if volunteer cracking occurs

At least 24 hours before paving, meet with the Engineer to review the submittals for the early age crack mitigation system.

During paving, update the system with current weather data obtained from a portable weather station. Before paving concrete pavement with these updates, submit new stress and strength predictions and curing and sawing activity schedules.

#### **40-1.02L Profilograms**

Submit profilograms within 5 business days of initial profiling and within 2 business days of profiling corrected sections. Submit 1 electronic copy of profile information in ".erd" format or other ProVAL compatible format to the Engineer and to:

Smoothness@dot.ca.gov

Submit the original of final profilograms before the Engineer accepts the contract. Submitted profilograms become the Department's property.

#### **40-1.02M Protecting Concrete Pavement During Cold Weather**

Submit a plan for protecting concrete pavement when the average ambient daily temperature is below 40 °F and daytime ambient temperature is less than 50 °F during the initial 72 hours after paving.

#### **40-1.02N Quality Control Charts**

Submit updated quality control charts each paving day.

#### **40-1.02O Quality Control Plan**

At least 30 days before the start of field qualification, submit a concrete pavement quality control plan (QCP).

#### **40-1.03 QUALITY CONTROL AND ASSURANCE**

##### **40-1.03A Contractor Quality Control Plan**

Establish, implement, and maintain a QCP for concrete pavement. The QCP must describe the organization and procedures you use to:

1. Control the production process
2. Determine if changes to the production process are needed
3. Implement changes

The QCP must address the elements affecting concrete pavement quality including:

1. Mix proportions
2. Aggregate gradation
3. Materials quality
4. Stockpile management
5. Line and grade control
6. Proportioning
7. Mixing and transportation
8. Placing and consolidation
9. Contraction and construction joints
10. Dowel bar placement, alignment, and anchorage
11. Tie bar placement
12. Modulus of rupture
13. Finishing and curing
14. Surface smoothness
15. Joint sealant and compression seal installation

The QCP must include details of corrective action to be taken if any process is out of control. As a minimum, a process is out of control if any of the following occurs:

1. For fine and coarse aggregate gradation, 2 consecutive running averages of 4 tests are outside the specification limits
2. For fine and coarse aggregates, the moisture content of either aggregate changes by more than 0.5 percentage point from any reading
3. For individual penetration or air content measurements:
  - 3.1. One point falls outside the suspension limit line
  - 3.2. Two points in a row fall outside the action limit line

Stop production and take corrective action for out of control processes except fine and coarse aggregate moisture content or the Engineer rejects subsequent material.

##### **40-1.03B Quality Control Testing**

Select random locations and perform sampling and testing in compliance with:

**Quality Control Testing**

Test	Frequency	Test Method
Cleanness value	2 per day	CT 227
Sand equivalent	2 per day	CT 217
Aggregate gradation	2 per day	CT 202
Air content (freeze thaw) <sup>a</sup>	1 per hour	CT 504
Air content (non-freeze thaw)	1 per 4 hours	CT 504
Density	1 per 4 hours	CT 518
Penetration	1 per 4 hours	CT 533
Calibration of moisture meter <sup>b, c</sup>	1 per day	CT 223 or CT 226

Notes:

<sup>a</sup> If air entrainment is specified, make at least 1 air content measurement per hour. If air entrainment is not specified, make at least 1 air content measurement per 4 hours.

<sup>b</sup> Make at least 1 measurement of moisture content per week to check the calibration of an electronically actuated moisture meter.

<sup>c</sup> Random location sampling and testing is not applicable.

If air entrainment is specified, the testing laboratory and tester must be qualified under the Department's Independent Assurance Manual. The manual is available from the Transportation Laboratory.

**40-1.03C Control Charts**

Maintain control charts to identify potential problems and assignable causes. Post a copy of each control chart at a location determined by the Engineer.

Individual measurement control charts must use the target values in the mix proportions as indicators of central tendency.

Develop linear control charts for:

1. Cleanness value
2. Sand equivalent
3. Fine and coarse aggregate gradation
4. Air content
5. Penetration

Control charts must include:

1. Contract number
2. Mix proportions
3. Test number
4. Each test parameter
5. Action and suspension limits
6. Specification limits
7. Quality control test results

For fine and coarse aggregate gradation control charts, record the running average of the previous 4 consecutive gradation tests for each sieve and superimpose the specification limits.

For penetration and air content control charts, record the individual measurements and superimpose the following action and suspension limits:

**Penetration and Air Content Action and Suspension Limits**

Control Parameter	Individual Measurements	
	Action Limit	Suspension Limit
Penetration, CT 533	1 inch	1-1/2 inch
Air content, CT 504	±1.0 percent	±1.5 percent

**40-1.03D Contractor's Laboratory**

Use a laboratory that complies with ASTM C 1077 to determine the mix proportions for concrete pavement. The laboratory must have a current AASHTO accreditation for:

1. AASHTO T 97 or ASTM C 78

## 2. ASTM C 192/C 192M

### **40-1.03E Joint Sealant and Compression Seal Installation Training**

Before installing joint sealant or compression seals, arrange for a representative from the joint sealant or compression seal manufacturer to provide training on the cleaning and preparation of the joint and installing the sealant or seal. Until your personnel and the Department's personnel have been trained, do not install joint sealant or compression seals.

### **40-1.03F Frequency Measuring Device (Tachometer)**

Before each day's concrete pavement placement and at intervals not to exceed 4 hours of production, test and record vibration frequency and amplitude for concrete consolidation vibrators.

### **40-1.03G Early Age Concrete Pavement Crack Mitigation System**

Develop and implement a system for predicting concrete pavement stresses and strength during the initial 72 hours after paving. The system must include:

1. Subscribing to a weather service to obtain forecasts for wind speed, ambient temperatures, humidity, and cloud cover
2. Portable weather station with anemometer, temperature and humidity sensors, located at the paving site
3. Early age concrete pavement stress and strength prediction computer program
4. Analyzing, monitoring, updating, and reporting the system's predictions

### **40-1.03H Curing Compound**

Sample curing compound from shipping containers at the manufacturer's source of supply. Split the samples.

### **40-1.03I Concrete Pavement Smoothness**

Within 10 days after paving, measure the Profile Index ( $PI_0$ ) of the concrete pavement surface using a zero (null) blanking band under California Test 526.

For the following concrete pavement areas, the Engineer does not require a profilograph and you must test and correct high points determined by a 12-foot straightedge placed parallel with and perpendicular to the centerline:

1. Horizontal curves with a centerline radius of curvature less than 1,000 feet including concrete pavement within the superelevation transitions of those curves.
2. Exit ramp termini, truck weigh stations, and weigh-in-motion areas
3. Where steep grades and superelevation rates greater than 6 percent are present on:
  - 3.1. Ramps
  - 3.2. Connectors
4. Turn lanes and areas around manholes or drainage transitions
5. Acceleration and deceleration lanes for at-grade intersections
6. Shoulders and miscellaneous gore areas

Use a California Profilograph or equivalent to determine the concrete pavement profile. If the profilograph uses a mechanical recorder, use an electronic scanner to reduce the profilogram.

The profilograph operator must be qualified under the Department's Independent Assurance Manual. The manual is available from the Transportation Laboratory.

### **40-1.03J Profilograph Test Procedure**

Notify the Engineer at least 2 business days before performing profilograph testing. Each day before performing profilograph testing, notify the Engineer of the start location. Perform profilograph testing in the Engineer's presence.

Before starting profilograph testing, remove foreign objects from the concrete pavement surface.

Before starting profilograph testing, calibrate the profilograph in the Engineer's presence. If the Engineer chooses not to be present during profilograph testing, you may perform the testing with the Engineer's written approval. Note the Engineer's absence on the profilogram.

Determine  $PI_0$  values for the final concrete pavement surface of each 0.1-mile section of a traffic lane. Take 2 profiles within each traffic lane, 3 feet from and parallel with the edge of each lane. Each section's  $PI_0$  is the average of the  $PI_0$  values for the measurements within that traffic lane. A section that is less than 0.01 mile and is the result of an interruption to

continuous concrete pavement surface must comply with the PI<sub>0</sub> specifications for a full section. Adjust the PI<sub>0</sub> for a partial section to reflect a full section.

Use stationing to locate vertical deviations greater than 0.3 inches. The profilogram stationing must be the same as the project stationing. Note 0.1-mile segments on the profilogram.

Label the profilogram with:

1. Contract number
2. County and route number
3. Stationing
4. Operator's name
5. Test date
6. Test number
7. Traffic direction
8. Traffic lane (numbered from left to right in direction of travel)
9. Test wheel path (left or right in direction of travel)
10. Test direction
11. Paving direction

**40-1.03K Smoothness Corrective Action**

Correct concrete pavement not complying with the Engineer's acceptance specifications for smoothness by grinding under Section 42-2, "Grinding."

Do not grind before:

1. Ten days after concrete pavement placement
2. The concrete has developed a modulus of rupture of at least 550 psi

Grind the entire lane width. When completed, the lane width must be uniform in texture and appearance. Square the corrected area's start and end normal to the paved surface's centerline.

Retest sections where corrections were made.

**40-1.03L Engineer's Acceptance**

**General**

The Engineer accepts concrete pavement based on the Department's testing for the following concrete pavement quality characteristics. A single test represents no more than the quantity specified:

**Concrete Pavement Acceptance**

Quality Characteristic	Quantity	Test
28-day modulus of rupture	1,000 cubic yards	CT 523
Thickness	1,200 square yards for primary area measurements	CT 531
Dowel bar placement	700 square yards	Measurement
Tie bar placement	4,000 square yards	Measurement
Coefficient of friction	One day's paving	CT 342
Air content (freeze-thaw) <sup>a</sup>	One day's paving	CT 504

Note:

<sup>a</sup> Air content tests must be performed under California Test 504 if air entrainment is specified.

At the Department's option, the Engineer also accepts concrete pavement based on your or the Department's testing for smoothness. A single test represents no more than 0.1 mile.

The Engineer considers other concrete pavement quality characteristics in determining final acceptance. The Engineer's acceptance of modulus of rupture, thickness, dowel bar and tie bar placement, coefficient of friction, smoothness, and air content does not constitute final concrete pavement acceptance.

**Modulus of Rupture**

The Engineer accepts concrete pavement for modulus of rupture on a lot basis. The minimum modulus of rupture for each lot is 570 psi at 28 days.

For each lot of concrete for concrete pavement:

1. Quantity must not exceed 1,000 cubic yards.
2. Department determines the modulus of rupture of test beams aged 10 days and 28 days.
3. Department calculates the modulus of rupture by averaging the individual test results of 2 beams aged for 28 days.
4. Difference in the individual test results of beams aged 28 days must not exceed 12 percent when tested by Method 1, or 16 percent when tested by Method 2. The Engineer calculates the difference relative to the average of the 2 test results.

The Department provides molds and machines for modulus of rupture acceptance testing. Provide material and labor the Engineer may require.

### **Concrete Pavement Smoothness**

If the Department tests for smoothness, the tests are performed under Section 40-1.03I, "Concrete Pavement Smoothness."

The Engineer accepts concrete pavement for smoothness in compliance with the following:

1. For tangents and horizontal curves having a centerline radius of curvature 2,000 feet or more, the  $PI_0$  must be at most 3 inches per 0.1-mile section.
2. For horizontal curves having a centerline radius of curvature from 1,000 to 2,000 feet including concrete pavement within the superelevation transitions of those curves, the  $PI_0$  must be at most 6 inches per 0.1-mile section.
3. If using a profilograph to measure smoothness, the surface must not have individual high points greater than 0.3 inch.
4. If using a straightedge to measure smoothness, the surface must be within 0.02 foot of the straightedge's lower edge.

Profile index specifications apply to existing pavement within 50 feet of the transverse joint separating new concrete pavement and the existing pavement.

If the Department's profilograph test results do not match yours, the Engineer may order you to recalibrate your profilograph equipment and perform a retest. If your test results are inaccurate due to operator error, the Engineer may disqualify your profilograph operator. If the Engineer determines your test results are inaccurate, the Engineer does not make adjustments to payment or contract time for recalibrating, retesting, and delays.

### **Concrete Pavement Thickness**

The Engineer accepts concrete pavement for thickness based on coring in the primary area, which is the area placed in 1 day for each thickness. Concrete pavement thickness must not be deficient by more than 0.05 foot.

After corrective grinding has been completed, core concrete pavement in the primary area under Section 40-3.16, "Obtaining Drilled Cores," at locations determined by the Engineer and in the Engineer's presence. The core specimen diameter must be 4 inches. To identify the limits of concrete pavement deficient in thickness by more than 0.05 foot, you may divide primary areas into secondary areas. Specifications that may affect concrete pavement thickness such as allowable tolerances for subgrade construction do not change the thickness specified for concrete pavement.

In each primary area, the Engineer measures concrete pavement thickness every 1,200 square yards and any remaining area. The Engineer measures cores under California Test 531 to the nearest 0.01 foot. Core at least 1 foot from existing, contiguous, and parallel concrete pavement not constructed as part of this contract.

You may request the Engineer make additional thickness measurements and use them to determine the average thickness variation. The Engineer determines the locations with random sampling methods.

If each thickness measurement in a primary area is less than 0.05 foot deficient, the Engineer calculates the average thickness deficiency in that primary area. The Engineer uses 0.02 foot for a thickness difference more than 0.02 foot over the specified thickness.

For each thickness measurement in a primary area deficient by more than 0.05 foot, the Engineer determines a secondary area where the thickness deficiency is more than 0.05 foot. The Engineer determines this secondary area by measuring the thickness of each concrete pavement slab adjacent to the measurement found to be more than 0.05 foot deficient. The Engineer continues to measure the thickness until an area that is bound by slabs with thickness deficient by 0.05 foot or less is determined.

Slabs without bar reinforcement are defined as the areas bound by longitudinal and transverse joints and concrete pavement edges. Slabs with bar reinforcement are defined as the areas bound by longitudinal joints and concrete pavement edges and 15-foot lengths. Secondary area thickness measurements in a slab determine that entire slab's thickness.

The Engineer measures the remaining primary area thickness after removing the secondary areas from consideration for determining the average thickness deficiency.

The Engineer determines the slabs to remove and replace.

### Required Use of Air-Entraining Admixtures

If air-entraining admixtures are specified, the Engineer may choose to accept concrete pavement for air content based on your air content quality control tests. The Engineer decides to use your air content quality control tests based on a  $t$ -test that determines the difference in the means of your test and the Engineer's verification tests. The Engineer calculates the  $t$ -value of the test data as follows:

$$t = \frac{|\bar{X}_c - \bar{X}_v|}{S_p \sqrt{\frac{1}{n_c} + \frac{1}{n_v}}} \quad \text{and} \quad S_p^2 = \frac{S_c^2(n_c - 1) + S_v^2(n_v - 1)}{n_c + n_v - 2}$$

where:

- $n_c$  = Number of your quality control tests (minimum of 2 required)
- $n_v$  = Number of verification tests (minimum of 1 required)
- $\bar{X}_c$  = Mean of your quality control tests
- $\bar{X}_v$  = Mean of the verification tests
- $S_p$  = Pooled standard deviation  
(When  $n_v = 1$ ,  $S_p = S_c$ )
- $S_c$  = Standard deviation of your quality control tests
- $S_v$  = Standard deviation of the verification tests (when  $n_v > 1$ )

The Engineer compares your quality control test results with the Department's verification test results at a level of significance of  $\alpha = 0.01$ . The Engineer compares the  $t$ -value to  $t_{crit}$ , determined from:

$t_{crit}$	
degrees of freedom ( $n_c + n_v - 2$ )	$t_{crit}$ (for $\alpha = 0.01$ )
1	63.657
2	9.925
3	5.841
4	4.604
5	4.032
6	3.707
7	3.499
8	3.355
9	3.250
10	3.169

If the  $t$ -value calculated is less than or equal to  $t_{crit}$ , your quality control test results are verified. If the  $t$ -value calculated is greater than  $t_{crit}$ , quality control test results are not verified.

If your quality control test results are not verified, core at least 3 specimens from concrete pavement under Section 40-3.16, "Obtaining Drilled Cores." The Engineer selects the core locations. Your approved third party independent testing laboratory must test these specimens for air content under ASTM C 457. The Engineer compares these test results with your quality control test results using the  $t$ -test method. If your quality control test results are verified based on this comparison, the Engineer uses the quality control test results for acceptance of concrete pavement for air content. If your quality control test results are not verified based on this comparison, the Engineer uses the air content of core specimens determined under ASTM C 457 for acceptance.

### Dowel Bar and Tie Bar Placement

The Engineer uses core specimens to evaluate and accept concrete pavement for:

1. Dowel bar placement
2. Tie bar placement
3. Concrete consolidation

Obtain cores under Section 40-3.16, "Obtaining Drilled Cores." The Engineer determines the core locations. Each core must have a nominal diameter of 4 inches. Core each day's paving within 2 business days in compliance with:

1. One test for every 700 square yards of doweled concrete pavement or remaining fraction of that area. Each dowel bar test consists of 2 cores, 1 on each dowel bar end to expose both ends and allow measurement.
2. One test for every 4,000 square yards of concrete pavement with tie bars or remaining fraction of that area

If the tests indicate dowel or tie bars are not placed within the specified tolerances or if there are air voids around the dowel or tie bars, core additional specimens to determine the limits of unacceptable work.

The Engineer determines the slabs to remove and replace.

If the Engineer approves your request, slabs may remain in place with an adjustment in payment for:

1. Dowel bars with centers from  $\pm 2$  inches to  $\pm 3$  inches from the saw cut of a transverse contraction joint or with deficient concrete consolidation around the dowel bars
2. Tie bars placed outside their specified placement and position or with deficient concrete consolidation around the tie bars

### **Bar Reinforcing Steel**

The Engineer accepts concrete pavement for bar reinforcing steel based on inspection before concrete placement.

### **Curing Compound**

The Engineer accepts curing compound based on test results submitted with the Certificate of Compliance for moisture loss, reflectance, viscosity, nonvolatile content, and pigment content. Curing compound sampled from shipping containers from the manufacturer's supply source or from the job site must match these test results within the specified tolerances listed in the precision and bias statements for the test methods.

## **40-2 MATERIALS**

### **40-2.01 CONCRETE**

#### **40-2.01A General**

Concrete must comply with Section 90, "Portland Cement Concrete."

#### **40-2.01B Aggregate**

The specifications for reduction in Operating Range and Contract Compliance for cleanness value and sand equivalent specified under Section 90-2.02A, "Coarse Aggregate," and Section 90-2.02B, "Fine Aggregate," do not apply to concrete pavement.

Combined aggregate gradings must comply with Section 90-3, "Aggregate Gradings," and the difference between the percent passing the 3/8-inch sieve and the percent passing the No. 8 sieve must not be less than 16 percent of the total aggregate.

#### **40-2.01C Cementitious Material**

Concrete for concrete pavement must contain from 505 pounds to 675 pounds cementitious material per cubic yard. The specifications for reducing cementitious material content in Section 90-4.05, "Optional Use of Chemical Admixtures," do not apply to concrete pavement.

#### **40-2.01D Mix Proportions**

Your laboratory determining mix proportions must determine the minimum cementitious materials content or the maximum water to cementitious materials ratio under California Test 559 and:

1. You must make trial mixtures no more than 24 months before field qualification.
2. Modulus of rupture used to determine the minimum cementitious materials content or maximum water to cementitious materials ratio must be 570 psi at 28 days age and 650 psi at 42 days age.
3. Your laboratory must determine an increase in the cementitious materials content or a decrease in the water to cementitious materials ratio from the trial mixtures to ensure concrete pavement complies with the specifications.

If changing an aggregate supply source or the mix proportions, produce a trial batch and field-qualify the new concrete. The Engineer does not adjust contract time for performing sampling, testing, and qualifying new mix proportions or changing an aggregate supply source.

#### **40-2.01E Field Qualification**

Proposed mix proportions must be field qualified before you place concrete pavement. Use an American Concrete Institute (ACI) certified "Concrete Laboratory Technician, Grade I" to perform field qualification tests and calculations.

The Engineer accepts field qualification if five beams made and tested under California Test 523 comply with the following:

1. At a minimum, beams are tested at 10, 21, and 28 days of age
2. At your choice of age not later than 28 days, no single beam's modulus of rupture is less than 550 psi and the average modulus of rupture is at least 570 psi

#### **40-2.02 TIE BARS**

Unless specified as smooth, tie bars must be deformed.

Deformed tie bars must be:

1. Deformed steel reinforcing bars under any of the following:
  - 1.1. ASTM A 615/A 615M, Grade 40 or 60
  - 1.2. ASTM A 996/A 996M
  - 1.3. ASTM A 706/A 706M
2. Epoxy-coated under Section 52-1.02B, "Epoxy-coated Reinforcement," and the following:
  - 2.1. Epoxy-coated tie bars must comply with either ASTM A 775/ A 775M or ASTM A 934/ A 934 M.
  - 2.2. Epoxy coating under ASTM A 934/ A 934M must be purple or gray.

Smooth tie bars must be:

1. Plain, round, and smooth steel under ASTM A 615/A 615M, Grade 40 or 60
2. Epoxy-coated under Section 52-1.02B, "Epoxy-coated Reinforcement," and the following:
  - 2.1. Epoxy-coated smooth tie bars must comply with ASTM A 884/A 884M, Class A, Type 1 or Type 2.
  - 2.2. Epoxy coating under ASTM A 884/A 884 M, Class A, Type 2 must be purple or gray.
  - 2.3. Bend test does not apply.

Fabricate, sample, and handle epoxy-coated smooth and deformed tie bars at the job site under ASTM D 3963/D 3963M and Section 52-1.02B, "Epoxy-coated Reinforcement."

Do not bend epoxy-coated tie bars.

#### **40-2.03 DOWEL BARS**

##### **40-2.03A General**

Dowel bars must be:

1. Plain, round, and smooth steel under ASTM A 615/A 615M, Grade 40 or 60
2. Epoxy-coated under Section 52-1.02B, "Epoxy-coated Reinforcement," and the following:
  - 2.1. Epoxy-coated dowel bars must comply with ASTM A 884/A 884M, Class A, Type 1 or Type 2.
  - 2.2. Epoxy coating under ASTM A 884/ A 884M, Class A, Type 2 must be purple or gray.
  - 2.3. Specifications for bend test do not apply.

Fabricate, sample, and handle epoxy-coated dowel bars at the job site under ASTM D 3963/D 3963M and Section 52-1.02B, "Epoxy-coated Reinforcement," except each sample must be 18 inches long. Sample each load delivered to the job site.

#### **40-2.03B Dowel Bar Lubricant**

Dowel bar lubricant must be petroleum paraffin-based or curing compound. Paraffin-based lubricant must be Dayton Superior DSC BB-Coat or Valvoline Tectyl 506 or an approved equal and must be factory-applied. Curing compound must be curing compound (3) under Section 90-7.01B, "Curing Compound Method," of the Standard Specifications.

#### **40-2.04 CURING COMPOUND**

Curing compound must be curing compound (1) or (2) with white pigment under Section 90-7.01B, "Curing Compound Method."

Reflectance must be at least 60 percent when tested under ASTM E 1347.

#### **40-2.05 CHEMICAL ADHESIVE (DRILL AND BOND)**

Chemical adhesive for drilling and bonding dowels and tie bars must be prequalified. A list of prequalified chemical adhesives is available on the Department's Materials Engineering and Testing Services website. The prequalified list indicates the appropriate chemical adhesive system for the concrete temperature and installation conditions.

Each chemical adhesive system must clearly and permanently show the manufacturer's name, model number of the system, manufacturing date, lot number, shelf life or expiration date, and current International Conference of Building Officials (ICBO) Evaluation Report number. Each chemical adhesive carton must include the manufacturer's recommended installation procedures and warning or precautions required by State or Federal laws and regulations.

#### **40-2.06 DOWEL AND TIE BAR BASKETS**

Dowel and tie bar baskets must be:

1. Minimum W10 wire size number under ASTM A 82/A 82M
2. Either U-frame or A-frame shape
3. Welded under Section 7.4 of ASTM A 185/A 185M

You may epoxy-coat dowel and tie bar baskets under Section 52-1.02B, "Epoxy-coated Reinforcement," and the following:

1. Epoxy-coated dowel and tie bar baskets must comply with ASTM A 884/A 884M, Class A, Type 1 or Type 2.
2. Epoxy-coating under ASTM A 884/ A 884M, Class A, Type 2 must be purple or gray.

Handle epoxy-coated dowel and tie-bar baskets at the manufacturing plant and job site under ASTM D 3963/D 3963M and Section 52-1.02B, "Epoxy-coated Reinforcement."

Fasteners must be driven fasteners under ASTM F 1667. Fasteners on lean concrete base or asphalt concrete must have a minimum shank diameter of 3/16 inch and a minimum shank length of 2 1/2 inches. For asphalt treated permeable base or cement treated permeable base, the shank diameter must be at least 3/16 inch and the shank length must be at least 5 inches.

Fasteners, clips, and washers must have a minimum 0.2-mil thick zinc coating applied either by electroplating or galvanizing.

#### **40-2.07 BACKER RODS**

Backer rods must be Type 1 under ASTM D 5249. Backer rod diameter must be at least 25 percent greater than the sawcut joint width. Backer rod material must be expanded, crosslinked, closed-cell polyethylene foam. No bond or adverse reaction may occur between the backer rod and sealant.

#### **40-2.08 JOINT FILLER MATERIAL**

Joint filler for isolation joints must be preformed expansion joint filler for concrete (bituminous type) under ASTM D 994.

#### **40-2.09 HYDRAULIC CEMENT GROUT (NON-SHRINK)**

Hydraulic cement grout (non-shrink) must comply with ASTM C 1107/ C 1107M. Use clean, uniform, rounded aggregate filler to extend the grout. Aggregate filler must not exceed 60 percent of the grout mass or the maximum recommended by the manufacturer, whichever is less. Aggregate filler moisture content must not exceed 0.5 percent. Aggregate filler must comply with:

**Aggregate Filler Grading**

Sieve Size	Percentage Passing
1/2-inch	100
3/8-inch	85 - 100
No. 4	10 - 30
No. 8	0 - 10
No. 16	0 - 5

**40-2.10 BAR REINFORCEMENT**

Bar reinforcement must comply with Section 52, "Reinforcement."

**40-2.11 JOINT SEALANT**

**40-2.11A General**

Do not use hot-pour sealant that will melt the backer rod.

**40-2.11B Silicone Joint Sealant**

Silicone joint sealant must be low modulus furnished in a one-part silicone formulation. Do not use acid cure sealant. Silicone joint sealant must be compatible with the surface it is applied to and comply with:

**Silicone Joint Sealant**

Property	Test Method	Specification
Tensile stress, 150% elongation, 7-day cure at 77 °F ± 2 °F and 45% to 55% R.H. °	ASTM D 412 (Die C)	45 psi max.
Flow at 77 °F ± °F	ASTM C 639 <sup>a</sup>	Must not flow from channel
Extrusion Rate at 77 °F ± 2 °F	ASTM C 603 <sup>b</sup>	3 to 9 oz/min.
Specific Gravity	ASTM D 792 Method A	1.01 to 1.51
Durometer Hardness, at 0 °F, Shore A, cured 7 days at 77 °F ±2 °F	ASTM C 661	10 to 25
Ozone and Ultraviolet Resistance, after 5,000 hours	ASTM C 793	No chalking, cracking or bond loss
Tack-free at 77 °F ±2 °F and 45% to 55% R.H. °	ASTM C 679	Less than 75 minutes
Elongation, 7 day cure at 77 °F ±2 °F and 45% to 55% R.H. °	ASTM D 412 (Die C)	500 percent min.
Set to Touch, at 77 °F ±2 °F and 45% to 55% R.H. °	ASTM D 1640	Less than 75 minutes
Shelf Life, from date of shipment	—	6 months min.
Bond, to concrete mortar-concrete briquettes, air cured 7 days at 77 °F ±2 °F	AASHTO T 132 °	50 psi min.
Movement Capability and Adhesion, 100% extension at 0 °F after, air cured 7 days at 77 °F ±2 °F , and followed by 7 days in water at 77 °F ±2 °F	ASTM C 719 <sup>d</sup>	No adhesive or cohesive failure after 5 cycles

Notes:

<sup>a</sup> ASTM C 639 Modified (15 percent slope channel A).

<sup>b</sup> ASTM C 603, through 0.12-inch opening at 50 psi.

<sup>c</sup> Mold briquettes under AASHTO T 132, saw in half and bond with a 0.60-inch maximum thickness of sealant and test under AASHTO T 132. Briquettes must be dried to constant mass at 212 °F ±10 °F.

<sup>d</sup> Prepare 12" x 1" x 3" concrete blocks under ASTM C 719. Use a sawed face for bond surface. Seal 2 inches of block leaving 0.50 inch on each end of specimen unsealed. The depth of sealant must be 0.40 inch and the width 0.50 inch.

<sup>e</sup> R.H. equals relative humidity.

After application, silicone joint sealant must not flow on grades up to 15 percent.

**40-2.11C Asphalt Rubber Joint Sealant**

Asphalt rubber joint sealant must:

1. Be a mixture of paving asphalt and ground rubber containing not less than 22 percent ground rubber by weight. One hundred percent of ground rubber must pass a No. 8 sieve. Ground rubber must be vulcanized or a combination of vulcanized and devulcanized materials.
2. Comply with ASTM D 6690, Type II except:
  - 2.1. The cone penetration requirement must not exceed 120 at 77 F, 5 ounces, 5 seconds.
  - 2.2. The resilience requirement must be a minimum 50 percent recovery when tested at 77 F.
3. Have a Ring and Ball softening point of 135 °F minimum when tested under AASHTO T 53.
4. Be capable of being melted and applied to cracks and joints at temperatures below 400 °F.
5. Not be applied when the concrete pavement surface temperature is below 50 °F.

#### **40-2.11D Preformed Compression Joint Seals**

Preformed compression joint seals must comply with ASTM D 2628. Lubricant adhesive used with the seals must comply with ASTM D 2835. Preformed compression joint seals must have 5 or 6 cells, except seals for Type A2 and Type B joints may have 4 cells. Install preformed compression joint seals in compliance with the manufacturer's recommendations. Show evidence that the seals are compressed from 40 to 50 percent for the joint width and depth.

#### **40-2.12 WATER**

Water for core drilling must be from a local domestic water supply. Water must not contain:

1. More than 1,000 parts per million of chlorides as CL
2. More than 1,300 parts per million of sulfates as SO<sub>4</sub>
3. Impurities in a quantity to cause concrete discoloration or surface etching

### **40-3 CONSTRUCTION**

#### **40-3.01 WATER SUPPLY**

Before placing concrete pavement, develop enough water supply for the work.

#### **40-3.02 SUBGRADE PREPARATION**

Immediately before placing concrete, the subgrade to receive concrete pavement must be:

1. In compliance with the specified compaction and elevation tolerances
2. Free of loose and extraneous material
3. Uniformly moist, but free of standing or flowing water
4. Excavated for thickened parts of concrete pavement end anchors with no disturbed compaction outside the end anchor dimensions

If cement treated permeable base is specified, cover the base surface with asphaltic emulsion before placing concrete pavement. Apply the asphaltic emulsion uniformly at a rate of 0.1 gallons per square yard. Asphaltic emulsion must comply with anionic slow-setting type, SS1h grade in Section 94, "Asphaltic Emulsions." Repair damaged asphaltic emulsion before placing concrete pavement.

#### **40-3.03 PROPORTIONING**

Proportion aggregate and bulk cementitious materials under Section 90-5, "Proportioning."

#### **40-3.04 PLACING CONCRETE**

##### **40-3.04A General**

Place concrete pavement with stationary side forms or slip-form paving equipment.

Place consecutive concrete loads within 30 minutes of each other. Construct a transverse construction joint when concrete placement is interrupted by more than 30 minutes. The transverse construction joint must coincide with the next contraction joint location, or you must remove fresh concrete pavement to the preceding transverse joint location.

Place concrete pavement in full slab widths separated by construction joints or monolithically in multiples of full lane widths with a longitudinal contraction joint at each traffic lane line.

Do not retemper concrete.

If the concrete pavement surface width is constructed as specified, you may construct concrete pavement sides on a batter not flatter than 6:1 (vertical:horizontal).

#### **40-3.04B Concrete Pavement Widening**

If concrete pavement is placed adjacent to existing pavement not constructed as part of the contract, grind the existing concrete pavement lane or shoulder adjacent to the new concrete pavement. Perform the grinding before new concrete pavement is placed. The new concrete pavement must match the elevation of the existing concrete pavement after grinding. Grind existing concrete pavement under Section 42-2, "Grinding," except profile index must comply with the pavement smoothness specifications in Section 40-1.03, "Quality Control and Assurance."

Use paving equipment with padded crawler tracks or rubber-tired wheels on the existing concrete pavement with enough offset to avoid breaking or cracking the existing concrete pavement's edge.

#### **40-3.04C Concrete Pavement Transition Panel**

For concrete pavement placed in a transition panel, texture the surface with a drag strip of burlap, a broom, or a spring steel tine device that produces scoring in the finished surface. The scoring must be either parallel with or transverse to the centerline. For the method you choose, texture at the time that produces the coarsest texture.

#### **40-3.04D Stationary Side Form Construction**

Stationary side forms must be straight and without defects including warps, bends, and indentations. Side forms must be metal except at end closures and transverse construction joints where other materials may be used.

You may build up side forms by attaching a section to the top or bottom. If attached to the top of metal forms, the attached section must be metal.

The side form's base width must be at least 80 percent of the specified concrete pavement thickness.

Side forms including interlocking connections with adjoining forms must be rigid enough to prevent springing from subgrading and paving equipment and concrete pressure.

Construct subgrade to final grade before placing side forms. Side forms must bear fully on the foundation throughout their length and base width. Place side forms to the specified grade and alignment of the finished concrete pavement's edge. Support side forms during concrete placing, compacting, and finishing.

After subgrade work is complete and immediately before placing concrete, true side forms and set to line and grade for a distance that avoids delays due to form adjustment.

Clean and oil side forms before each use.

Side forms must remain in place for at least 1 day after placing concrete and until the concrete pavement edge no longer requires protection from the forms.

Spread, screed, shape, and consolidate concrete with 1 or more machines. The machine must uniformly distribute and consolidate the concrete. The machines must operate to place the concrete pavement to the specified cross section with minimal hand work.

Consolidate the concrete without segregation. If vibrators are used:

1. The vibration rate must be at least 3,500 cycles per minute for surface vibrators and 5,000 cycles per minute for internal vibrators
2. Amplitude of vibration must cause perceptible concrete surface movement at least 1 foot from the vibrating element
3. Use a calibrated tachometer for measuring frequency of vibration
4. Vibrators must not rest on side forms or new concrete pavement
5. Power to vibrators must automatically cease when forward or backward motion of the paving machine is stopped

Use high-frequency internal vibrators within 15 minutes of depositing concrete on the subgrade to uniformly consolidate the concrete across the paving width including adjacent to forms. Do not use vibrators to shift the mass of concrete.

#### **40-3.04E Slip-Form Construction**

If slip-form construction is used, spread, screed, shape, and consolidate concrete to the specified cross section with slip-form machines and minimal hand work. Slip-form paving machines must be equipped with traveling side forms and must not segregate the concrete.

Do not deviate from the specified concrete pavement alignment by more than 0.1 foot.

Slip-form paving machines must use high frequency internal vibrators to consolidate concrete. You may mount vibrators with their axes parallel or normal to the concrete pavement alignment. If mounted with axes parallel to the concrete pavement alignment, space vibrators no more than 2.5 feet measured center to center. If mounted with axes normal to the concrete pavement alignment, space the vibrators with a maximum 0.5-foot lateral clearance between individual vibrators.

Each vibrator must have a vibration rate from 5,000 cycles per minute to 8,000 cycles per minute. The amplitude of vibration must cause perceptible concrete surface movement at least 1 foot from the vibrating element. Use a calibrated tachometer to measure frequency of vibration.

#### **40-3.05 TIE BAR PLACEMENT**

Place tie bars:

1. Perpendicular to the longitudinal concrete pavement joint
2. Parallel with the concrete pavement surface at mid-slab depth
3. Not less than 1/2-inch below the saw cut depth of joints
4. With not less than 2 inches clearance from the concrete pavement's surface and bottom
5. With embedment length tolerance of  $\pm 2$  inches
6. For smooth tie bars, with horizontal and vertical skew not more than 1/2 inch per foot of bar length

Install tie bars at longitudinal joints by 1 of the following methods:

1. Drill concrete and bond tie bars with chemical adhesive in compliance with the manufacturer's instructions. Clean and dry drilled holes before placing chemical adhesive and tie bars. After inserting tie bars into chemical adhesive, support the bars to prevent movement during curing. If the Engineer rejects a tie bar installation, cut the tie bar flush with the joint face and coat the exposed end of the tie bar with chemical adhesive under Section 40-2, "Materials." Offset new holes 3 inches horizontally from the rejected hole's center.
2. Insert tie bars into plastic slip-formed concrete before finishing. Inserted tie bars must have full contact between the bar and the concrete. If tie bars are inserted through the plastic concrete surface, eliminate evidence of the insertion by reworking the concrete over the tie bars.
3. Use threaded tie bar splice couplers fabricated from deformed bar reinforcement free of external welding or machining.
4. Use tie bar baskets. Anchor baskets at least 200 feet in advance of the concrete placement activity. If you request a waiver, describe the construction limitations or restricted access preventing the advanced anchoring. After the baskets are anchored and before the concrete is placed, cut and remove temporary spacer wires and demonstrate the tie bars do not move from their specified depth and alignment during concrete placement. Use fasteners to anchor tie bar baskets.

If tie bars are not placed correctly, stop paving activities until you demonstrate to the Engineer correction of the cause.

#### **40-3.06 DOWEL BAR PLACEMENT**

Center dowel bars within 2 inches in the longitudinal direction on transverse contraction joints or construction joints.

If using curing compound as lubricant, apply the curing compound to dowels in 2 separate applications. Lubricate each dowel bar entirely with bond breaker before placement. The last application must be applied not more than 8 hours before placing the dowel bars. Apply each curing compound application at a rate of 1 gallon per 150 square feet.

If dowel bars are placed by mechanical insertion, eliminate evidence of the insertion by reworking the concrete over the dowel bars. If drilling and bonding dowel bars at construction joints, use a grout retention ring.

If using dowel bar baskets, anchor them with fasteners.

Use at least 10 fasteners for basket sections greater than 12 feet and less than or equal to 16 feet. Baskets must be anchored at least 200 feet in advance of the concrete placement activity unless the Engineer approves your waiver request. If requesting a waiver, describe the construction limitations or restricted access preventing the advanced anchoring. After the baskets are anchored and before the concrete is placed, cut and remove temporary spacer wires and demonstrate the dowel bars do not move from their specified depth and alignment during concrete placement.

Place dowel bars in compliance with:

**Dowel Bar Tolerances**

Dimension	Tolerance
Horizontal offset	±1 inch
Longitudinal translation	±2 inches
Horizontal skew	3/8 inch, max
Vertical skew	3/8 inch, max
Vertical depth	<p>The minimum distance below the concrete pavement surface must be:</p> <p align="center"><math>DB = d/3 + 1/2</math> inch</p> <p>where:            DB = vertical distance in inches, measured from concrete pavement surface to any point along the top of dowel bar            d = concrete pavement thickness in inches</p> <p>The maximum distance below the depth shown on the plans must be 0.05 foot.</p>

If dowel bars are not placed correctly, stop paving activities until you demonstrate to the Engineer correction of the cause.

Remove and replace the concrete pavement 3 feet on either side of a joint with a rejected dowel bar.

**40-3.07 BAR REINFORCEMENT**

Place bar reinforcement under Section 52, "Reinforcement." Bar reinforcement must be more than 1/2 inch below the saw cut depth at concrete pavement joints.

**40-3.08 JOINTS**

**40-3.08A General**

Concrete pavement joints consist of:

1. Longitudinal and transverse construction joints
2. Longitudinal and transverse contraction joints
3. Isolation joints

Construction joints must be normal to the concrete pavement surface.

Until contract acceptance and except for joint filler material, keep joints free of foreign material including soil, gravel, concrete, or asphalt mix.

Volunteer cracks are cracks not coincident with constructed joints.

Repair concrete pavement damaged during joint construction under Section 40-3.17B, "Repair of Spalls, Raveling, and Tearing."

Do not bend tie bars or reinforcement in existing concrete pavement joints.

**40-3.08B Construction Joints**

Construction joints form where fresh concrete is placed against hardened concrete, existing pavements, or structures.

Before placing concrete at construction joints, apply a curing compound under Section 90-7.01B, "Curing Compound Method," to the vertical surface of existing or hardened concrete and allow it to dry.

Use a metal or wooden bulkhead to form transverse construction joints. If dowel bars are specified, the bulkhead must allow dowel bar installation.

**40-3.08C Contraction Joints**

In multilane monolithic concrete pavement, use the sawing method to construct longitudinal contraction joints. Construct transverse contraction joints by the sawing method.

Construct transverse contraction joints within 1 foot of their specified spacing. If a slab length of less than 5 feet would be formed, adjust the transverse contraction joint spacing.

Construct transverse contraction joints across the full concrete pavement width regardless of the number or types of longitudinal joints crossed. In areas of converging and diverging pavements, space transverse contraction joints so their alignment is continuous across the full width where converging and diverging pavements are contiguous. Longitudinal contraction joints must be parallel with the concrete pavement centerline. Transverse and longitudinal contraction joints must not deviate by more than 0.1 foot from either side of a 12-foot straight line, except for longitudinal joints parallel to a curving centerline.

#### **40-3.08D Isolation Joints**

Construct isolation joints by saw cutting a minimum 1/8-inch width to full concrete pavement depth at the existing concrete pavement's edge and removing the concrete to expose a flat vertical surface. Before placing concrete, secure joint filler material that prevents new concrete from adhering to the existing concrete face.

Dispose of concrete saw cutting residue under Section 7-1.13, "Disposal of Materials Outside the Highway Right of Way."

#### **40-3.08E Sawing Method**

The sawing method is cutting a groove in the concrete pavement with a power driven concrete saw. Grooves for longitudinal and transverse contraction joints must be the minimum width possible for the type of saw used. If necessary, the top of the joint must be sawn wider to provide space for joint sealant. Immediately wash slurry from the joint with water under 100 psi maximum pressure.

Saw longitudinal and transverse contraction joints before volunteer cracking occurs and after the concrete is hard enough to saw without spalling, raveling, or tearing.

To keep foreign material out of grooves before joint sealant or compression seal installation, you may use joint filler in sawed contraction joints. Joint filler must not react adversely with the concrete or cause concrete pavement damage. After sawing and washing a joint, install joint filler material that keeps moisture in the adjacent concrete during the 72 hours after paving. If you install joint filler material, the specifications for spraying the sawed joint with additional curing compound under Section 40-3.13, "Curing," do not apply. If using absorptive filler material, moisten the filler immediately before or after installation.

### **40-3.09 JOINT SEALANT AND COMPRESSION SEAL INSTALLATION**

#### **40-3.09A General**

At least 7 days after concrete pavement placement and not more than 4 hours before installing joint sealant or compression seal materials, use dry sand blasting and other methods to clean the joint walls of objectionable material such as soil, asphalt, curing compound, paint, and rust. The maximum sand blasting nozzle diameter must be 1/4 inch. The minimum pressure must be 90 psi. Sand blast each side of the joint at least once, in at least 2 separate passes. Hold the nozzle at an angle to the joint from 1 to 2 inches from the concrete pavement. Using a vacuum, collect sand, dust, and loose material at least 2 inches on each side of the joint. Remove surface moisture and dampness at the joints with compressed air that may be moderately hot.

Before you install joint sealant or compression seal, the joint wall must be free of moisture, residue, or film.

If grinding or grooving over or adjacent to sealed joints, remove joint sealant or compression seal materials and dispose of them under Section 7-1.13, "Disposal of Material Outside the Highway Right of Way." After grinding or grooving, replace the joint sealant or compression seal materials.

#### **40-3.09B Liquid Sealant**

Do not install liquid sealant in construction joints.

Install backer rods when the concrete pavement temperature is above the air dew point and when the air temperature is at least 40 °F.

Install liquid sealant immediately after installing the backer rod. Install sealant using a mechanical device with a nozzle shaped to introduce the sealant from inside the joint. Extrude sealant evenly and with continuous contact with the joint walls. Recess the sealant surface after placement. Remove excess sealant from the concrete pavement surface.

Do not allow traffic over sealed joints until the sealant is set.

#### **40-3.09C Preformed Compression Seal**

Do not install preformed compression seal in construction or isolation joints.

Install longitudinal seals before transverse seals. Longitudinal seals must be continuous except at intersections with transverse seals. Install transverse seals in 1 continuous piece for the entire transverse length of concrete pavement. With a sharp instrument, cut across the longitudinal seal at the intersection with transverse construction joints. If the longitudinal

seal does not relax enough to properly install the transverse seal, trim the longitudinal seal to form a tight seal between the 2 joints.

Use a machine specifically designed for preformed compression seal installation. The machine must install the seal:

1. To the specified depth
2. To make continuous contact with the joint walls
3. Without cutting, nicking, or twisting the seal
4. With less than 4 percent stretch

Lay a length of preformed compression seal material cut to the exact length of the pavement joint to be sealed. The Engineer measures this length. After you install the length of preformed compression joint sealant, the Engineer measures the excess amount of material at the joint end. The Engineer divides the excess amount length by the original measured length to determine the percentage of stretch.

#### **40-3.10 SHOULDER RUMBLE STRIP**

If specified, construct shoulder rumble strips by rolling or grinding indentations in new concrete pavement.

Select the method and equipment for constructing ground-in indentations.

Do not construct shoulder rumble strips on structures or approach slabs.

Construct rumble strips within 2 inches of the specified alignment. Roller or grinding equipment must be equipped with a sighting device enabling the operator to maintain the rumble strip alignment.

Indentations must not vary from the specified dimensions by more than 1/16 inch in depth or more than 10 percent in length and width.

The Engineer orders grinding or removal and replacement of noncompliant rumble strips to bring them within specified tolerances. Ground surface areas must be neat and uniform in appearance.

The grinding equipment must be equipped with a vacuum attachment to remove residue.

Dispose of removed material under Section 7-1.13, "Disposal of Material Outside the Highway Right of Way."

#### **40-3.11 PRELIMINARY FINISHING**

##### **40-3.11A General**

Preliminary finishing must produce a smooth and true-to-grade finish. After preliminary finishing, mark each day's concrete pavement with a stamp. The stamp must be approved by the Engineer before paving starts. The stamp must be approximately 1' x 2' in size. The stamp must form a uniform mark from 1/8 to 1/4 inch deep. Locate the mark 20 feet ± 5 feet from the transverse construction joint formed at each day's start of paving and 1 foot ± 0.25 foot from the concrete pavement's outside edge. The stamp mark must show the month, day, and year of placement and the station of the transverse construction joint. Orient the stamp mark so it can be read from the concrete pavement's outside edge.

Do not apply more water to the concrete pavement surface than can evaporate before float finishing and texturing are completed.

Allow enough time to complete finishing activities during daylight. Work may continue after daylight if the Engineer approves lighting you provide.

##### **40-3.11B Stationary Side Form Finishing**

If stationary side form construction is used, give the concrete a preliminary finish by the machine float method or the hand method.

If using the machine float method:

1. Use self-propelled machine floats.
2. Determine the number of machine floats required to perform the work at a rate equal to the concrete delivery rate. When the time from concrete placement to machine float finishing exceeds 30 minutes, stop concrete delivery. When machine floats are in proper position, you may resume concrete delivery and paving.
3. Machine floats must run on side forms or adjacent concrete pavement lanes. If running on adjacent concrete pavement, protect the adjacent concrete pavement surface under Section 40-3.15, "Protecting Concrete Pavement."
4. Floats must be hardwood, steel, or steel-shod wood. Floats must be equipped with devices that adjust the under side to a true flat surface.

If using the hand method, finish concrete smooth and true to grade with manually operated floats or powered finishing machines.

#### **40-3.11C Slip-Form Finishing**

If slip-form construction is used, the slip-form paver must give the concrete pavement a preliminary finish. You may supplement the slip-form paver with machine floats.

Before the concrete hardens, correct concrete pavement edge slump in excess of 0.02 foot exclusive of edge rounding.

#### **40-3.12 FINAL FINISHING**

After completing preliminary finishing, round the edges of the initial paving widths to a 0.04-foot radius. Round transverse and longitudinal construction joints to a 0.02-foot radius.

Before curing, texture the pavement. Perform initial texturing with a burlap drag or broom device that produces striations parallel to the centerline. Perform final texturing with a steel-tined device that produces grooves parallel with the centerline.

Construct longitudinal grooves with a self-propelled machine designed specifically for grooving and texturing concrete pavement. The machine must have tracks to maintain constant speed, provide traction, and maintain accurate tracking along the pavement surface. The machine must have a single row of rectangular spring steel tines. The tines must be from 3/32 to 1/8 inch wide, on 3/4-inch centers, and must have enough length, thickness, and resilience to form grooves approximately 3/16 inch wide. The machine must have horizontal and vertical controls. The machine must apply constant down pressure on the pavement surface during texturing. The machines must not cause ravels.

Construct grooves over the entire pavement width in a single pass except do not construct grooves 3 inches from the concrete pavement edges and longitudinal joints. Final texture must be uniform and smooth. Use a guide to properly align the grooves. Grooves must be parallel and aligned to the pavement edge across the pavement width. Grooves must be from 1/8 to 3/16 inch deep and 3/16 inch wide after concrete has hardened.

For irregular areas and areas inaccessible to the grooving machine, you may hand-construct grooves in compliance with the hand method under Section 40-3.11B, "Stationary Side Form Finishing." Hand-constructed grooves must comply with the specifications for machine-constructed grooves.

Initial and final texturing must produce a coefficient of friction of at least 0.30 when tested under California Test 342. Notify the Engineer when the concrete pavement is scheduled to be opened to traffic. Allow at least 25 days for the Department to test for coefficient of friction from the later of:

1. Seven days after concrete placement
2. When the concrete pavement has attained a modulus of rupture of 550 psi

Do not open the concrete pavement to traffic unless the coefficient of friction is at least 0.30.

Correct concrete pavement not complying with the Engineer's acceptance criteria for coefficient of friction by grooving or grinding under Section 42, "Groove and Grind Pavement."

Do not grind before:

1. Ten days after concrete pavement placement
2. Concrete has developed a modulus of rupture of at least 550 psi

Before opening to traffic, allow at least 25 days for the Department to retest sections for coefficient of friction after corrections are made.

#### **40-3.13 CURING**

Cure the concrete pavement's exposed area with waterproof membrane or curing compound (1) or (2) under Section 90-7.01, "Methods of Curing." When side forms are removed within 72 hours of the start of curing, also cure the concrete pavement edges.

If curing compound is used, apply it with mechanical sprayers. Reapply curing compound to sawcuts and disturbed areas.

#### **40-3.14 EARLY USE OF CONCRETE PAVEMENT**

If requesting early use of concrete pavement:

1. Furnish molds and machines for modulus of rupture testing
2. Sample concrete
3. Fabricate beam specimens
4. Test for modulus of rupture under California Test 523

When you request early use, concrete pavement must have a modulus of rupture of at least 350 psi. Protect concrete pavement under Section 40-3.15, "Protecting Concrete Pavement."

#### **40-3.15 PROTECTING CONCRETE PAVEMENT**

Protect concrete pavement under Section 90-8, "Protecting Concrete."

Maintain the concrete pavement temperature at not less than 40 °F for the initial 72 hours.

Protect the concrete pavement surface from activities that cause damage and reduce texture and coefficient of friction. Do not allow soil, gravel, petroleum products, concrete, or asphalt mixes on the concrete pavement surface.

Construct crossings for traffic convenience. If the Engineer approves your request, you may use Type III portland cement in the concrete for crossings. Do not open crossings until the Department determines by California Test 523 the concrete pavement's modulus of rupture is at least 550 psi.

Do not open concrete pavement to traffic or use equipment on the concrete pavement for 10 days after paving or before the concrete has attained a modulus of rupture of 550 psi except:

1. If the equipment is for sawing contraction joints
2. If the Engineer approves your request, one side of paving equipment's tracks may be on the concrete pavement after a modulus of rupture of 350 psi has been attained, provided:
  - 2.1. Unit pressure exerted on the concrete pavement by the paver does not exceed 20 psi
  - 2.2. You change the paving equipment tracks to prevent damage or the paving equipment tracks travel on protective material such as planks
  - 2.3. No part of the track is closer than 1 foot from the concrete pavement's edge

If concrete pavement damage including visible cracking occurs, stop operating paving equipment on the concrete pavement and repair the damage.

#### **40-3.16 OBTAINING DRILLED CORES**

Drill concrete pavement cores under ASTM C 42/ C 42M. Core drilling equipment must use diamond impregnated bits.

Clean, dry, and fill core holes with hydraulic cement grout (non-shrink) or pavement concrete. Coat the core hole walls with epoxy under the specifications for epoxy adhesive for bonding new concrete to old concrete in Section 95, "Epoxy." The backfill must match the adjacent concrete pavement surface elevation and texture.

Do not allow residue from core drilling to fall on traffic, flow across shoulders or lanes occupied by traffic, or flow into drainage facilities including gutters.

#### **40-3.17 REPAIR, REMOVAL, AND REPLACEMENT**

##### **40-3.17A General**

Working cracks are full-depth cracks essentially parallel to a planned contraction joint beneath which a contraction crack has not formed. If the Engineer orders, take 4-inch nominal diameter cores on designated cracks under Section 40-3.16, "Obtaining Drilled Cores."

##### **40-3.17B Repair of Spalls, Raveling, and Tearing**

Before concrete pavement is open to traffic, repair spalls, raveling, and tearing in sawed joints. Make repairs in compliance with the following:

1. Saw a rectangular area with a diamond-impregnated blade at least 2 inches deep.
2. Remove unsound and damaged concrete between the saw cut and the joint and to the saw cut's depth. Do not use a pneumatic hammer heavier than 15 pounds. Do not damage concrete pavement to remain in place.
3. Dispose of removed concrete pavement under Section 7-1.13, "Disposal of Materials Outside the Highway Right of Way."
4. Clean the repair area's exposed surfaces with high pressure abrasive water blasting. Further clean and dry the exposed surfaces with compressed air free of moisture and oil.
5. Apply epoxy as specified for epoxy resin adhesive for bonding new concrete to old concrete under Section 95, "Epoxy." Apply the epoxy with a stiff bristle brush.
6. Apply a portland cement concrete or mortar patch immediately following the epoxy application. Install an insert to prevent bonding of the sides of planned joints.

Repair spalls if they are:

1. Deeper than 0.05 foot
2. Wider than 0.04 foot
3. Longer than 0.3 foot

#### **40-3.17C Route and Seal Working Cracks**

Treat working cracks within 0.5 foot of either side of a planned contraction joint in compliance with the following:

1. Route and seal the crack with epoxy resin in compliance with the following:
  - 1.1. Use a powered rotary router mounted on wheels, with a vertical shaft and a routing spindle that casters as it moves along the crack
  - 1.2. Form a reservoir 3/4 inch deep by 3/8 inch wide in the crack
  - 1.3. Use equipment that does not cause raveling or spalling
  - 1.4. Place liquid sealant
2. Treat the contraction joint adjacent to the working crack in compliance with the following:
  - 2.1. Use epoxy resin under ASTM C 881/C 881M, Type IV, Grade 2 for Type B joints and secondary saw cuts for Type A1 and Type A2 joints
  - 2.2. Pressure inject epoxy resin under ASTM C 881/C881M, Type IV, Grade 1 for narrow saw cuts including initial saw cuts for Type A1 and Type A2 joints

If a working crack intersects a contraction joint, route and seal the working crack and seal the contraction joint as specified for installing liquid sealant under Section 40-3.09, "Joint Seal and Joint Sealant Installation."

#### **40-3.17D Removal and Replacement of Slabs**

As specified, remove and replace slabs or partial slabs for:

1. Insufficient thickness
2. Dowel bar misalignment
3. Working cracks more than 0.5 foot from a planned contraction joint

### **40-4 MEASUREMENT AND PAYMENT**

#### **40-4.01 MEASUREMENT**

The contract item for concrete pavement as designated in the Verified Bid Item List is measured by the cubic yard. The Engineer calculates the pay quantity volume based on the plan dimensions. The Engineer does not measure concrete pavement placed outside those dimensions unless it was ordered by the Engineer.

The contract items for sealing joints as designated in the Verified Bid Item List are measured by the linear foot.

The contract item for shoulder rumble strips is measured by the station along each shoulder on which the rumble strips are constructed without deductions for gaps between indentations.

#### **40-4.02 PAYMENT**

The contract price paid per cubic yard for concrete pavement as designated in the Verified Bid Item List includes full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in constructing the concrete pavement, complete in place including bar reinforcement, tie bars, dowel bars, anchors, and fasteners, as shown on the plans and as specified in these specifications and the special provisions, and as directed by the Engineer.

The Engineer adjusts payment for each primary area deficient in average thickness in compliance with the following:

**Pay Adjustments for Deficient Thickness**

Average Thickness Deficiency (foot)	Deficiency Adjustment (\$/yd <sup>2</sup> )
0.01	0.90
0.02	2.30
0.03	4.10
0.04	6.40
0.05	9.11

If the average thickness deficiency is less than 0.01 foot, the Engineer does not adjust payment for thickness deficiency. If the average thickness deficiency is more than 0.01 foot, the Engineer rounds to the nearest 0.01 foot and uses the adjustment table.

Full compensation for core drilling and backfilling the cores ordered by the Engineer for measuring concrete pavement thickness and determining full-depth cracks is included in the contract price paid per cubic yard for concrete pavement as designated in the Engineer's Estimate and no additional compensation will be allowed therefor. The Department does not pay for additional concrete pavement thickness measurements requested by the Contractor.

The Department does not pay for the portion of concrete that penetrates treated permeable base.

Full compensation for the quality control plan is included in the contract price paid per cubic yard for concrete pavement as designated in the Verified Bid Item List and no separate payment will be made therefor.

Full compensation for furnishing and applying asphaltic emulsion on cement treated permeable base is included in the contract price paid per cubic yard for concrete pavement as designated in the Engineer's Estimate and no separate payment will be made therefor.

Full compensation for repairing joints is included in the contract price paid per cubic yard for concrete pavement as designated in the Verified Bid Item List and no separate payment will be made therefor.

Full compensation for furnishing, calibrating, and operating profilograph equipment for Profile Index, for submitting profilograms, and for performing corrective work is included in the contract price paid per cubic yard for concrete pavement as designated in the Verified Bid Item List and no separate payment will be made therefor.

Full compensation for grooving and grinding for final finishing is included in the contract price paid per cubic yard for concrete pavement as designated in the Verified Bid Item List and no separate payment will be made therefor.

Full compensation for removing and replacing joint material for grooving and grinding is included in the contract price per cubic yard for concrete pavement as designated in the Verified Bid Item List and no separate payment will be made therefor.

Full compensation for removing and replacing slabs is included in the contract price paid per cubic yard for concrete pavement as designated in the Verified Bid Item List and no separate payment will be made therefor.

Full compensation for drilling holes and bonding tie bars with chemical adhesive is included in the contract price paid per cubic yard for concrete pavement as designated in the Verified Bid Item List and no additional compensation will be allowed therefor.

Full compensation for repairing damage caused by operating paving equipment on new concrete pavement is included in the contract price paid per cubic yard for concrete pavement as designated in the Verified Bid Item List and no separate payment will be made therefor.

The material and work necessary for the construction of crossings for public convenience, and their subsequent removal and disposal, will be paid for at the contract prices for the items of work involved and if there are no contract items for the work involved, payment for concrete pavement crossings will be made by extra work as specified in Section 4-1.03D, "Extra Work."

The Department will reduce payments to the Contractor by \$56.12 per square yard for concrete pavement slabs allowed to remain in place represented by cores indicating dowel bars placed with their centers from ±2 inches to ±3 inches from the saw cut of a transverse contraction joint

The Engineer will calculate the reduced payment using the slab dimensions adjacent to and inclusive of the joints with misplaced dowel bars. This reduced payment is in addition to other specified payment reductions.

The Department will reduce payments to the Contractor by \$59.56 per square yard for concrete pavement allowed to remain in place represented by cores indicating either of the following:

1. Tie bars placed outside their specified placement and position tolerances
2. Bar reinforcement placed outside their specified placement and position tolerances

The Engineer will calculate the reduced payment using the slab dimensions adjacent to and inclusive of the joints with misplaced tie bars. This reduced payment is in addition to other specified payment reductions.







**In Section 51-1.05 in the 11th paragraph, replace the 1st sentence with:**

Form panels for exposed surfaces shall be furnished and placed in uniform widths of not less than 3 feet and in uniform lengths of not less than 6 feet, except at the end of continuously formed surfaces where the final panel length required is less than 6 feet.

**In Section 51-1.06C in the 11th paragraph, replace the 1st sentence with:**

Falsework for box culverts and other structures with decks lower than the roadway pavement and with span lengths of 14 feet or less shall not be released until the last placed concrete has attained a compressive strength of 1,600 psi, provided that curing of the concrete is not interrupted.

**In Section 51-1.11 replace the 6th paragraph with:**

Construction methods and equipment employed by the Contractor shall conform to the provisions in Section 7-1.02, "Load Limitations."

**In Section 51-1.12D replace the 4th paragraph with:**

Expanded polystyrene shall be a commercially available polystyrene board. Expanded polystyrene shall have a minimum flexural strength of 35 psi determined in conformance with the requirements in ASTM Designation: C 203 and a compressive yield strength of between 16 and 40 psi at 5 percent compression. Surfaces of expanded polystyrene against which concrete is placed shall be faced with hardboard. Hardboard shall be 1/8 inch minimum thickness, conforming to ANSI A135.4, any class. Other facing materials may be used provided they furnish equivalent protection. Boards shall be held in place by nails, waterproof adhesive, or other means approved by the Engineer.

**In Section 51-1.12F replace the 3rd paragraph with:**

Type A and AL joint seals shall consist of a groove in the concrete that is filled with field-mixed silicone sealant.

**In Section 51-1.12F in the 6th paragraph, replace the table with:**

Movement Rating (MR)	Seal Type
MR ≤ 1 inch	Type A or Type B
1 inch < MR ≤ 2 inches	Type B
2 inches < MR ≤ 4 inches	Joint Seal Assembly (Strip Seal)
MR > 4 inches	Joint Seal Assembly (Modular Unit) or Seismic Joint

**In Section 51-1.12F(3)(a) replace the 1st and 2nd paragraphs with:**

The sealant must consist of a 2-component silicone sealant that will withstand up to ±50 percent movement. Silicone sealants must be tested under California Test 435 and must comply with the following:

Specification	Requirement
Modulus at 150 percent elongation	8-75 psi
Recovery	21/32 inch max.
Notch Test	Notched or loss of bond 1/4 inch, max.
Water Resistance	Notched or loss of bond 1/4 inch, max.
Ultraviolet Exposure ASTM Designation: G 154, Table X2.1, Cycle 2.	No more than slight checking or cracking.
Cone Penetration	4.5-12.0 mm

**In Section 51-1.12F(3)(a) delete the 3rd and 8th paragraphs.**

**In Section 51-1.12F(3)(a) replace the 10th paragraph with:**

A Certificate of Compliance accompanied by a certified test report must be furnished for each batch of silicone sealant in conformance with the provisions in Section 6-1.07, "Certificates of Compliance."

**In Section 51-1.12F(3)(b) replace the 2nd paragraph with:**

The preformed elastomeric joint seal must conform to the requirements in ASTM D 2628 and the following:

1. The seal must consist of a multichannel, nonporous, homogeneous material furnished in a finished extruded form.
2. The minimum depth of the seal measured at the contact surface must be at least 95 percent of the minimum uncompressed width of the seal as designated by the manufacturer.
3. When tested in conformance with the requirements in California Test 673 for Type B seals, joint seals must provide a movement rating (MR) of not less than that shown on the plans.
4. The top and bottom edges of the joint seal must maintain continuous contact with the sides of the groove over the entire range of joint movement.
5. The seal must be furnished full length for each joint with no more than 1 shop splice in any 60-foot length of seal.
6. The Contractor must demonstrate the adequacy of the procedures to be used in the work before installing seals in the joints.
7. One field splice per joint may be made at locations and by methods approved by the Engineer. The seals are to be manufactured full length for the intended joint, then cut at the approved splice section and rematched before splicing. The Contractor must submit splicing details prepared by the joint seal manufacturer for approval before beginning splicing work.
8. Shop splices and field splices must have no visible offset of exterior surfaces and must show no evidence of bond failure.
9. At all open ends of the seal that would admit water or debris, each cell must be filled to a depth of 3 inches with commercial quality open cell polyurethane foam or closed by other means subject to approval by the Engineer.

**In Section 51-1.12F(3)(b) replace the 7th paragraph with:**

The joint seal must be installed full length for each joint with equipment that does not twist or distort the seal, elongate the seal longitudinally, or otherwise cause damage to the seal or to the concrete forming the groove.

**In Section 51-1.12F(3)(b) in the 11th paragraph, replace the 1st sentence with:**

Samples of the prefabricated joint seals, not less than 3 feet in length, will be taken by the Engineer from each lot of material.

**In Section 51-1.12H(1) in the 6th paragraph, replace the 4th and 5th sentences with:**

Each ply of fabric shall have a breaking strength of not less than 800 pounds per inch of width in each thread direction when 3" x 36" samples are tested on split drum grips. The bond between double plies shall have a minimum peel strength of 20 pounds per inch.

**In Section 51-1.12H(1) in the 8th paragraph in the table, replace the hardness (Type A) requirements with:**

Hardness (Type A)	D 2240 with 2kg mass.	55 ±5
-------------------	-----------------------	-------

**In Section 51-1.12H(2) in the 1st paragraph in item A, replace the 1st and 2nd sentences with:**

The bearings shall consist of alternating steel laminates and internal elastomer laminates with top and bottom elastomer covers. Steel laminates shall have a nominal thickness of 0.075 inch (14 gage).

**In Section 51-1.135 replace the 1st paragraph with:**

Mortar shall be composed of cementitious material, sand, and water proportioned and mixed as specified in this Section 51-1.135.

**In Section 51-1.135 replace the 3rd paragraph with:**

The proportion of cementitious material to sand, measured by volume, shall be 1 to 2 unless otherwise specified.

**In Section 51-1.17 in 4th paragraph, replace the 3rd sentence with:**

The surfaces shall have a profile trace showing no high points in excess of 0.25 inch, and the portions of the surfaces within the traveled way shall have a profile count of 5 or less in any 100 foot section.

**Add:**

**51-1.17A Deck Crack Treatment**

The Contractor shall use all means necessary to minimize the development of shrinkage cracks.

The Contractor shall remove all equipment and materials from the deck and clean the surface as necessary for the Engineer to measure the surface crack intensity. Surface crack intensity will be determined by the Engineer after completion of concrete cure, before prestressing, and before the release of falsework. In any 500 square foot portion of deck within the limits of the new concrete deck, should the intensity of cracking be such that there are more than 50 feet of cracks whose width at any location exceeds 0.02 inch, the deck shall be treated with a high molecular weight methacrylate (HMWM) resin system. The area of deck to be treated shall have a width that extends for the entire width of new deck inside the concrete barriers and a length that extends at least 5 feet beyond the furthest single continuous crack outside the 500 square foot portion, measured from where that crack exceeds 0.02 inch in width, as determined by the Engineer.

Deck crack treatment shall include furnishing, testing, and applying the HMWM resin system, with sand and absorbent material. If grinding is required, deck crack treatment shall take place before grinding.

**51-1.17A(1) Submittals**

Submit a HMWM resin system placement plan. When HMWM resin is to be applied within 100 feet of a residence, business, or public space including sidewalks under a structure, also submit a public safety plan. Submit plans under Section 5-1.02, "Plans and Working Drawings," of the Standard Specifications. The review time is 15 days.

The HMWM resin system placement plan must include:

1. Schedule of work and testing for each bridge
2. Description of equipment for applying HMWM resin
3. Range of gel time and final cure time for HMWM resin
4. Absorbent material to be used
5. Description of equipment for applying and removing excess sand and absorbent material
6. Procedure for removing HMWM resin from the deck, including equipment
7. Storage and handling of HMWM resin components and absorbent material
8. Disposal of excess HMWM resin and containers

The public safety plan must include:

1. A public notification letter with a list of delivery and posting addresses. The letter must state HMWM resin work locations, dates, times, and what to expect. Deliver the letter to residences and businesses within 100 feet of HMWM resin work locations and to local fire and police officials at least 7 days before starting work. Post the letter at the job site.
2. An airborne emissions monitoring plan prepared and executed by a certified industrial hygienist (CIH) certified in comprehensive practice by the American Board of Industrial Hygiene. The plan must have at least 4 monitoring points including the mixing point, application point, and point of nearest public contact. Monitor airborne emissions during HMWM resin work and submit emissions monitoring results after completing the work.
3. An action plan for protection of the public when airborne emissions levels exceed permissible levels.
4. A copy of the CIH's certification.

If the measures proposed in the safety plan are inadequate to provide for public safety associated with the use of HMWM resin, the Engineer will reject the plan and direct the Contractor to revise the plan. Directions for revisions will be in writing and include detailed comments. The Engineer will notify the Contractor of the approval or rejection of a submitted or revised plan within 15 days of receipt of that plan.

### 51-1.17A(2) Quality Control and Assurance

Submit samples of HMWM resin components 15 days before use under Section 6-3, "Testing," of the Standard Specifications. Notify the Engineer 15 days before delivery of HMWM resin components in containers over 55 gallons to the job site.

Complete a test area before starting work. Results from airborne emissions monitoring of the test area must be submitted to the Engineer before starting production work.

The test area must:

1. Be approximately 500 square feet
2. Be placed within the project limits outside the traveled way at an approved location
3. Be constructed using the same equipment as the production work
4. Replicate field conditions for the production work
5. Demonstrate proposed means and methods meet the acceptance criteria
6. Demonstrate production work will be completed within the time allowed
7. Demonstrate suitability of the airborne emissions monitoring plan

The test area will be acceptable if:

1. The treated deck surface is tack free and non-oily
2. The sand cover adheres and resists brushing by hand
3. Excess sand and absorbent material has been removed
4. The coefficient of friction is at least 0.35 when tested under California Test 342

### 51-1.17A(3) Materials

HMWM resin system consists of a resin, promoter, and initiator. HMWM resin must be low odor and comply with the following:

HMWM Resin		
Property	Requirement	Test Method
Volatile Content*	30 percent, maximum	ASTM D 2369
Viscosity*	25 cP, maximum, (Brookfield RVT with UL adaptor, 50 RPM at 77°F)	ASTM D 2196
Specific Gravity*	0.90 minimum, at 77°F	ASTM D 1475
Flash Point*	180°F, minimum	ASTM D 3278
Vapor Pressure*	1.0 mm Hg, maximum, at 77°F	ASTM D 323
Tack-free Time	400 minutes, maximum, at 25°C	Specimens prepared per California Test 551
PCC Saturated Surface-Dry Bond Strength	3.5 MPa, minimum at 24 hours and 21 ± 1°C	California Test 551

\* Test must be performed before adding initiator.

Sand for abrasive sand finish must:

1. Be commercial quality dry blast sand
2. Have at least 95 percent pass the No. 8 sieve and at least 95 percent retained on the No. 20 sieve when tested under California Test 205

Absorbent material must be diatomaceous earth, abrasive blast dust, or substitute recommended by the HMWM resin supplier and approved by the Engineer.

### 51-1.17A(4) Construction

HMWM resin system applied by machine must be:



**SECTION 52 REINFORCEMENT**

**(Issued 06-05-09)**

**In Section 52-1.02(B) between the 3rd and 4th paragraphs, add:**

The epoxy powder coating shall be selected from the Department's Pre-Qualified Products List.

**In Section 52-1.02(B) replace the 14th paragraph with:**

Except for lap splices, splices for epoxy-coated reinforcement shall be coated with a corrosion protection covering that is selected from the Department's Pre-Qualified Products List. The covering shall be installed in accordance with the manufacturer's recommendations.

**In Section 52-1.07 in the 11th paragraph, replace the table with:**

Height Zone (H) (Feet above ground)	Wind Pressure Value (psf)
$H \leq 30$	20
$30 < H \leq 50$	25
$50 < H \leq 100$	30
$H > 100$	35

**In Section 52-1.08B(1) replace the 1st paragraph with:**

Mechanical splices to be used in the work shall be selected from the Department's Pre-Qualified Products List.

**In Section 52-1.08B(1) in the 2nd paragraph, replace the table with:**

Reinforcing Bar Number	Total Slip
4	0.020-inch
5	0.020-inch
6	0.020-inch
7	0.028-inch
8	0.028-inch
9	0.028-inch
10	0.036-inch
11	0.036-inch
14	0.048-inch
18	0.060-inch

**In Section 52-1.08B(1), in the 6th paragraph, delete item C.**

**In Section 52-1.08B(2) in the 6th paragraph, replace the subparagraph with:**

The minimum preheat and interpass temperatures shall be 400° F for Grade 40 bars and 600° F for Grade 60 bars. Immediately after completing the welding, at least 6 inches of the bar on each side of the splice shall be covered by an insulated wrapping to control the rate of cooling. The insulated wrapping shall remain in place until the bar has cooled below 200° F.

**Replace Section 52-1.08B(3) with:**

**52-1.08B(3) Resistance Butt Welds**

Shop produced resistance butt welds shall be produced by a fabricator who is selected from the Department's Pre-Qualified Products List.

A Certificate of Compliance conforming to the provisions in Section 6-1.07, "Certificates of Compliance," shall be furnished for each shipment of splice material. The Certificate of Compliance shall include heat number, lot number and mill certificates.

**In Section 52-1.08C replace the 3rd paragraph with:**

Testing on prequalification and production sample splices shall be performed at an approved independent testing laboratory. The laboratory shall not be employed or compensated by any subcontractor, or by other persons or entities hired by subcontractors who will provide other services or materials for the project.

The independent testing laboratory shall be selected from the Department's Pre-Qualified Products List.

**In Section 52-1.08C replace the 5th paragraph with:**

Prequalification and production sample splices and testing shall conform to California Test 670 and these specifications.

**In Section 52-1.08C delete the 6th paragraph.**

**In Section 52-1.08C replace the 8th paragraph with:**

Each sample splice, as defined herein, shall be identified as representing either a prequalification or production test sample splice.

**In Section 52-1.08C in the 10th paragraph, delete the last sentence.**

**Replace Section 52-1.08C(1) with:**

**52-1.08C(1) Splice Prequalification Report**

Before using any service splices or ultimate butt splices in the work, the Contractor shall submit a Splice Prequalification Report. The report shall include the following:

- A. A copy of the manufacturer's product literature giving complete data on the splice material and installation procedures.
- B. Names of the operators who will be performing the splicing.
- C. Descriptions of the positions, locations, equipment, and procedures that will be used in the work.
- D. Certifications from the fabricator for prequalification of operators and procedures based on sample tests performed no more than 2 years before submitting the report. Each operator shall be certified by performing 2 sample splices for each bar size of each splice type that the operator will be performing in the work. For deformation-dependent types of splice devices, each operator shall be certified by performing 2 additional samples for each bar size and deformation pattern that will be used in the work.

Prequalification sample splices shall be tested by an approved independent testing laboratory and shall conform to the appropriate production test criteria and slip requirements specified herein. When epoxy-coated reinforcement is required, resistance butt welded sample splices shall have the weld flash removed by the same procedure as will be used in the work, before coating and testing. The Splice Prequalification Report shall include the certified test results for all prequalification sample splices.

The QCM shall review and approve the Splice Prequalification Report before submitting it to the Engineer for approval. The Contractor shall allow 2 weeks for the review and approval of a complete report before performing any service splicing or ultimate butt splicing in the work.

**In Section 52-1.08C(2)(a) replace the 1st, 2nd, 3rd, 4th, and 5th paragraphs with:**

Production tests shall be performed by an approved independent testing laboratory for all service splices used in the work. A production test shall consist of testing 4 sample splices prepared for each lot of completed splices. The samples shall be prepared by the Contractor using the same splice material, position, operators, location, and equipment, and following the same procedure as used in the work.

At least one week before testing, the Contractor shall notify the Engineer in writing of the date and location where the testing of the samples will be performed.

The 4 samples from each production test shall be securely bundled together and identified with a completed sample identification card before shipment to the approved independent testing laboratory. The card will be furnished by the Engineer. Bundles of samples containing fewer than 4 samples of splices shall not be tested.

Before performing any tensile tests on production test sample splices, one of the 4 samples shall be tested for, and shall conform to, the requirements for total slip in Section 52-1.08B(1), "Mechanical Splices." Should this sample not meet the total slip requirements, one retest, in which the 3 remaining samples are tested for total slip, will be allowed. Should any of the 3 remaining samples not conform to the total slip requirements, all splices in the lot represented by this production test will be rejected.

If 3 or more sample splices from a production test conform to the provisions in this Section 52-1.08C(2), "Service Splice Test Criteria," all splices in the lot represented by this production test will be considered acceptable.

**Replace Section 52-1.08C(2)(b) with:**

**52-1.08C(2)(b) Quality Assurance Test Requirements for Service Splices**

In addition to the required production tests, the Contractor shall concurrently prepare 4 service quality assurance sample splices for:

- A. The first production test performed.
- B. One of every 5 subsequent production tests, or fraction thereof, randomly selected by the Engineer.

These service quality assurance sample splices shall be prepared in the same manner as specified herein for service production sample splices.

The service quality assurance sample splices shall be shipped to the Transportation Laboratory for quality assurance testing. Each set of 4 sample splices shall be securely bundled together and identified by location and contract number with weatherproof markings before shipment. Bundles containing fewer than 4 samples of splices will not be tested. Sample splices not accompanied by the supporting documentation required in Section 52-1.08B(1), "Mechanical Splices," for mechanical splices, or in Section 52-1.08B(3), "Resistance Butt Welds," for resistance butt welds, will not be tested.

Quality assurance testing will be performed in conformance with the requirements for service production sample splices in Section 52-1.08C(2)(a), "Production Test Requirements for Service Splices."

**Replace Section 52-1.08C(3) with:**

**52-1.08C(3) Ultimate Butt Splice Test Criteria**

Ultimate production and quality assurance sample splices shall be tensile tested in conformance with the requirements described in ASTM Designation: A 370 and California Test 670.

Each sample splice shall be identified as representing a prequalification, production, or quality assurance sample splice.

The portion of hoop reinforcing bar, removed to obtain a sample splice, shall be replaced using a prequalified ultimate mechanical butt splice, or the hoop shall be replaced in kind.

Reinforcing bars, other than hoops, from which sample splices are removed, shall be repaired using ultimate mechanical butt splices conforming to the provisions in Section 52-1.08C(1), "Splice Prequalification Report," or the bars shall be replaced in kind. These bars shall be repaired or replaced such that no splices are located in any "No Splice Zone" shown on the plans.

Ultimate production and quality assurance sample splices shall rupture either: 1) in the reinforcing bar but outside of the affected zone, provided that the sample splice has visible necking or 2) anywhere, provided that the sample splice has achieved the strain requirement for necking.

When tested in conformance with the requirements in California Test 670, "Necking (Option I)," the visible necking shall be such that there is a visible decrease in the sample's cross-sectional area at the point of rupture.

When tested in conformance with the requirements in California Test 670, "Necking (Option II)," the strain requirement for necking shall be such that the largest measured strain is not less than 6 percent for No. 11 and larger bars, or not less than 9 percent for No. 10 and smaller bars.

The affected zone is the portion of the reinforcing bar where any properties of the bar, including the physical, metallurgical, or material characteristics, have been altered by fabrication or installation of the splice. The weld and one inch adjacent to the weld will be considered part of the affected zone.

**In Section 52-1.08C(3)(a) replace the 1st paragraph with:**

Production tests shall be performed for all ultimate butt splices used in the work. A production test shall consist of testing 4 sample splices removed from each lot of completed splices.

**In Section 52-1.08C(3)(a) replace the 3rd paragraph with:**

After notification has been received, the Engineer will randomly select the 4 sample splices to be removed from the lot and place tamper-proof markings or seals on them. These ultimate production sample splices shall be removed by the Contractor, and tested by an approved independent testing laboratory.

**In Section 52-1.08C(3)(a) replace the 5th, 6th, and 7th paragraphs with:**

A sample splice will be rejected if a tamper-proof marking or seal is disturbed before testing.























or dual component (with a prepackaged liquid activator). Modified high alumina based concrete and portland cement based concrete shall be water activated. Bonding materials shall conform to the following requirements:

Property	Test Method	Requirements
Compressive Strength		
at 3 hours, MPa	California Test 551	21 min.
at 24 hours, MPa	California Test 551	35 min.
Flexure Strength		
at 24 hours, MPa	California Test 551	3.5 min.
Bond Strength: at 24 hours		
SSD Concrete, MPa	California Test 551	2.1 min.
Dry Concrete, MPa	California Test 551	2.8 min.
Water Absorption, %	California Test 551	10 max.
Abrasion Resistance		
at 24 hours, grams	California Test 550	25 max.
Drying Shrinkage at 4 days, %	ASTM Designation: C 596	0.13 max.
Soluble Chlorides by weight, %	California Test 422	0.05 max.
Water Soluble Sulfates by weight, %	California Test 417	0.25 max.

2. Magnesium phosphate concrete shall be formulated for minimum initial set time of 15 minutes and minimum final set time of 25 minutes at 70° F. The materials, prior to use, shall be stored in a cool, dry environment.
3. Mix water used with water activated material shall conform to the provisions in Section 90-2.03, "Water."
4. The quantity of water for single component type or liquid activator (for dual component type) to be blended with the dry component, shall be within the limits recommended by the manufacturer and shall be the least amount required to produce a pourable batter.
5. Addition of retarders, when required and approved by the Engineer, shall be in conformance with the manufacturer's recommendations.
6. Before using concrete material that has not been previously approved, a minimum of 45 pounds shall be submitted to the Engineer for testing. The Contractor shall allow 45 days for the testing. Each shipment of concrete material that has been previously approved shall be accompanied by a Certificate of Compliance as provided in Section 6-1.07, "Certificates of Compliance."
7. Magnesium phosphate concrete shall not be mixed in containers or worked with tools containing zinc, cadmium, aluminum or copper metals. Modified high alumina based concrete shall not be mixed in containers or worked with tools containing aluminum.
8. The surface of any dowel coated with zinc or cadmium shall be coated with a colored lacquer before installation of the dowel. The lacquer shall be allowed to dry thoroughly before embedment of the dowels.
9. The holes shall be drilled by methods that will not shatter or damage the concrete adjacent to the hole. The diameter of the drilled hole shall be 1/2 inch larger than the nominal diameter of the dowels.
10. The drilled holes shall be clean and dry at the time of placing the bonding material and the steel dowels. Bonding material and dowel shall completely fill the drilled hole. The surface temperature shall be 40° F or above when the bonding material is placed.
11. After bonding, dowels shall remain undisturbed for a minimum of 3 hours or until the bonding material has reached a strength sufficient to support the dowels. Dowels that are improperly bonded, as determined by the Engineer, shall be removed. The holes shall be cleaned or new holes shall be drilled and the dowels replaced and securely bonded to the concrete. Removing, redrilling and replacing improperly bonded dowels shall be performed at the Contractor's expense. Modified high alumina based concrete and portland cement based concrete shall be cured in conformance with the provisions in Section 90-7.01B, "Curing Compound Method," of the Standard Specifications. Magnesium phosphate concrete shall not be cured.

**In Section 83-2.02D(2) in the 1st paragraph, replace item b with:**

- b. If the 3/8-inch maximum size aggregate grading is used to construct extruded or slip-formed concrete barriers, the cementitious material content of the minor concrete shall be not less than 675 pounds per cubic yard.

**In Section 83-2.02D(2) replace the 3rd paragraph with:**

The concrete paving between the tops of the 2 walls of concrete barrier (Types 50E, 60E, 60GE, and 60SE) and the optional concrete slab at the base between the 2 walls of concrete barrier (Types 50E, 60E, 60GE, and 60SE) shall be



**electrolier:** Complete assembly of lighting standard and luminaire.

**flasher:** Device to open and close signal circuits at a repetitive rate.

**flashing beacon control assembly:** Switches, circuit breakers, terminal blocks, flasher, wiring, and necessary electrical components all housed in a single enclosure to properly operate a beacon.

**inductive loop detector:** Detector capable of being actuated by inductance change caused by vehicle passing or standing over the loop.

**lighting standard:** Pole and mast arm supporting the luminaire.

**luminaire:** Consists of housing, reflector, refractor or lens, lamp socket, integral ballast, terminal strip, and lamp.

**magnetic detector:** Detector capable of being actuated by induced voltage caused by vehicle passing through the earth's magnetic field.

**powder coating:** A coating applied electrostatically using UV-stable polyester triglycidyl isocyanurate exterior grade powder

**pre-timed controller assembly:** Operates traffic signals under a predetermined cycle length.

**signal face:** As defined in the California MUTCD.

**signal head:** As defined in the California MUTCD.

**signal indication:** As defined in the California MUTCD.

**signal section:** As defined in the California MUTCD.

**signal standard:** Pole and mast arm supporting one or more signal faces with or without a luminaire mast arm.

**traffic-actuated controller assembly:** Operates traffic signals under the varying demands of traffic as registered by detector actuation.

**traffic phase:** Signal phase as defined in the California MUTCD.

**vehicle:** As defined in the California Vehicle Code.

#### **86-1.02 REGULATIONS AND CODE**Electrical equipment must comply with one or more of the following:

1. EIA
2. ETL
3. NEMA
4. NETA
5. UL

Materials and workmanship must comply with:

1. ANSI
2. ASTM
3. 8 CA Code of Regs § 2299 et seq.
4. FCC
5. ITE
6. NEC
7. Public Utilities Commission, General Order No. 95, "Rules for Overhead Electrical Line Construction"
8. Public Utilities Commission, General Order No. 128, "Rules for Construction of Underground Electric Supply and Communication Systems"

#### **86-1.03 COST BREAK-DOWN**

Determine quantities required to complete work. Submit the quantities as part of the cost breakdown.

The sum of the amounts for the units of work listed in the cost breakdown must equal the contract lump sum price bid for the work. Include overhead and profit for each unit of work listed in the cost breakdown. If mobilization is a bid item, include bond premium, temporary construction facilities, and material plants into the mobilization bid item, otherwise, include in each unit of work listed in the cost breakdown. Do not include costs for traffic control system in the cost breakdown.

The cost breakdown may be used to determine partial payment and to calculate payment adjustments for additional costs incurred due to a change order. If a change order increases or decreases the quantities, payment adjustment may be determined under Section 4-1.03B, "Increased or Decreased Quantities."

The cost breakdown must include type, size, and installation method for:

1. Foundations
2. Standards and poles
3. Conduit
4. Pull boxes

5. Conductors
6. Service equipment enclosures
7. Telephone demarcation cabinet
8. Signal heads and hardware
9. Pedestrian signal heads and hardware
10. Pedestrian push buttons
11. Loop detectors
12. Luminaires and lighting fixtures

#### **86-1.04 EQUIPMENT LIST AND DRAWINGS**

Within 15 days of contract approval, submit for review a list of equipment and materials that you propose to install. Comply with Section 5-1.02, "Plans and Working Drawings." The list must include:

1. Name of manufacturer
2. Dimension
3. Item identification number
4. List of components

The list must be supplemented by other data as required, including:

1. Schematic wiring diagrams
2. Scale drawings of cabinets showing location and spacing of shelves, terminal blocks, and equipment, including dimensioning
3. Operation manual

Submit 2 copies of the above data. The Engineer will review within 15 days.

Electrical equipment that is manufactured as detailed on the plans will not require detailed drawings and diagrams.

Furnish 3 sets of computer-generated cabinet schematic wiring diagrams.

The cabinet schematic wiring diagram must be placed in a heavy duty plastic envelope and attached to the inside of the door of each cabinet.

Prepare diagrams, plans, and drawings using graphic symbols in IEEE 315, "Graphic Symbols for Electrical and Electronic Diagrams."

#### **86-1.05 CERTIFICATE OF COMPLIANCE**

Submit a Certificate of Compliance for all electrical material and equipment to the Engineer under Section 6-1.07, "Certificates of Compliance."

#### **86-1.06 MAINTAINING EXISTING AND TEMPORARY ELECTRICAL SYSTEMS**

Keep existing electrical system or approved temporary replacement in working order during the progress of the work. Shutdown is allowed for alteration or removal of the system. Traffic signal shutdown must be limited to normal working hours. Lighting system shutdown must not interfere with the regular lighting schedule.

Notify the Engineer before performing work on the existing system.

Notify the local traffic enforcement agency before traffic signal shutdown.

If existing or temporary system must be modified, work not shown on the plans or specified in the special provisions, but required to keep the system in working order will be paid for as extra work as specified in Section 4-1.03D, "Extra Work."

The State or local agency will:

1. Continue the operation and maintenance of existing electrical facilities
2. Continue to provide electrical energy to operate existing electrical facilities
3. Repair or replace existing facilities damaged by public traffic
4. Pay for electrical energy to operate existing or new facilities undergoing the functional tests described in Section 86-2.14C, "Functional Testing"

Verify location and depth of existing detectors, conduits, pull boxes, and other electrical facilities before using tools or equipment that may damage those facilities or interfere with an electrical system.

Notify the Engineer immediately if existing facility is damaged by your activities. Repair or replace damaged facility promptly. If you fail to complete the repair or replacement, promptly, the State will repair or replace and deduct the costs.

Damaged detectors must be replaced within 24 hours at your expense. If you fail to complete the repair within 24 hours, the State will repair and deduct the repair costs.

If roadway remains open to traffic while an existing lighting system is modified:

1. Keep existing system in working order
2. Make final connection so the modified circuit is in operation by nightfall

Keep temporary electrical installations in working order until no longer required. Remove temporary installations as specified in Section 86-7, "Removing, Reinstalling or Salvaging Electrical Equipment."

These provisions do not void your responsibilities as specified in Section 7-1.12, "Indemnification and Insurance," and Section 7-1.16, "Contractor's Responsibility for the Work and Materials."

During traffic signal system shutdown, place W3-1a, "STOP AHEAD," and R1-1, "STOP," signs in each direction to direct traffic through the intersection. For 2-lane approaches, place 2 R1-1 signs.

W3-1a and R1-1 signs must comply with Section 12-3.06, "Construction Area Signs." Use a minimum size of 30 inches for the R1-1 sign.

Cover signal faces when the system is shut down overnight. Cover temporary W3-1a and R1-1 signs when the system is turned on.

### **86-1.07 SCHEDULING OF WORK**

Except service installation and service equipment enclosure, do not work above ground until all materials are on hand to complete electrical work at each location. Schedule work to allow each system to be completed and ready for operation before opening the corresponding section of the roadway to traffic.

If street lighting exists or is installed in conjunction with traffic signals, do not turn on the signals until the street lighting is energized.

Traffic signals will not be placed in operation until the roadways to be controlled are open to public traffic.

Lighting and traffic signals, including flashing operation, will not be placed in operation before starting the functional test period specified in Section 86-2.14, "Testing."

Do not pull conductors into conduit until:

1. Pull boxes are set to grade
2. Metallic conduit is bonded

In vehicular undercrossings, soffit lights must be in operation as soon as practicable after falsework has been removed from the structure. Lighting for pedestrian structures must be in operation before opening the structure to pedestrian traffic.

If the Engineer orders soffit lights or lighting for pedestrian structures to be activated before permanent power service is available, the cost of installing and removing temporary power service will be paid for as extra work as specified in Section 4-1.03D, "Extra Work."

The initial traffic signal turn-on must be made between 9:00 a.m. and 2:00 p.m. Before the initial turn-on, all equipment, including pedestrian signals, pedestrian push buttons, vehicle detectors, lighting, signs, and pavement delineation must be installed and in working order. Direct louvers, visors, and signal faces to maximize visibility.

Start functional tests on any working day except Friday or the day before a legal holiday. You must notify the Engineer 48 hours before the start of functional test.

### **86-1.08 (BLANK)**

## **86-2 MATERIALS AND INSTALLATION**

### **86-2.01 EXCAVATING AND BACKFILLING**

Dispose of surplus excavated material under Section 7-1.13, "Disposal of Materials Outside the Highway Right of Way."

Backfill as specified in Section 19-3, "Structure Excavation and Backfill." Compact backfill in conduit trenches outside the hinge point of slopes and not under pavement to a minimum relative compaction of 90 percent. Compact backfill within hinge points and in areas where pavement is to be constructed to a minimum relative compaction of 95 percent.

Backfill trenches and restore sidewalk, pavement, and landscaping at one intersection before starting excavation at another intersection.

If excavating on a street or highway, restrict closure to 1 lane at a time.

## 86-2.02 REMOVING AND REPLACING IMPROVEMENTS

Replace or reconstruct sidewalk, curb, gutter, concrete pavement, asphalt concrete pavement, underlying material, lawn, plant, and other facilities damaged by your activities. Replacement material must be of equal or better quality than the material replaced. Work must be in a serviceable condition.

If a part of a square or slab of concrete sidewalk, curb, gutter, or driveway is broken or damaged, the entire square or slab must be removed and reconstructed.

Cut outline of PCC sidewalk or driveway to be removed:

1. Using a power-driven saw
2. On a neat line
3. To a 0.17-foot minimum depth

## 86-2.03 FOUNDATIONS

Except for concrete for cast-in-drilled-hole concrete pile foundation, PCC must comply with Section 90-10, "Minor Concrete."

Construct concrete foundation on firm ground.

After each post, standard, and pedestal is properly positioned, place mortar under the base plate. Finish exposed portion to present a neat appearance. Mortar must comply with Section 51-1.135, "Mortar," except mortar must have:

1. 1 part by volume of cementitious material
2. 3 parts by volume of clean sand

Reinforced cast-in-drilled-hole concrete pile foundation must comply with Section 49, "Piling," except:

1. Material resulting from drilling holes must be disposed of as specified in Section 86-2.01, "Excavating and Backfilling"
2. Concrete for cast-in-drilled-hole concrete pile will not be considered as designated by compressive strength

Form exposed portion of the foundation to present a neat appearance and true to line and grade. The top of a foundation for post and standard must be finished to curb or sidewalk grade. Forms must be rigid and securely braced in place. Conduit ends and anchor bolts must be placed at proper height and position. Anchor bolts must be installed a maximum of 1:40 from vertical and held in place by rigid top and bottom templates. Use a steel bottom template at least 1/2 inch thick that provides proper spacing and alignment of anchor bolts near the embedded bottom end. Install bottom template before placing footing concrete.

Provide new foundation and anchor bolts of the proper type and size for relocated standards.

Steel parts must be galvanized as specified in Section 75-1.05, "Galvanizing."

Provide 2 nuts and washers for the upper threaded part of each anchor bolt. Provide 3 nuts and washers for each anchor bar or stud.

Do not weld high-strength steel used for anchor bolt, anchor bar, or stud.

Before placing concrete, moisten forms and ground. Keep forms in place until the concrete sets for at least 24 hours and is strong enough to prevent damage to surface.

Except if located on a structure, construct foundation for post, standard, and pedestal monolithically.

Apply ordinary surface finish as specified in Section 51-1.18A, "Ordinary Surface Finish."

If a foundation must be extended for additional depth, the extension work will be paid for as extra work as specified in Section 4-1.03D, "Extra Work."

Do not erect post, pole, standard, pedestal, or cabinet until the foundation is set for a minimum of 7 days.

The Engineer will choose the plumbing or raking technique for posts, standards, and pedestals. Plumb or rake by adjusting the leveling nuts before tightening nuts. Do not use shims or similar devices. After final adjustments of both top nuts and leveling nuts on anchorage assemblies have been made, and each post, standard, and pedestal on structure is properly positioned, tighten nuts as follows:

1. Tighten leveling nuts and top nuts, following a crisscross pattern, until bearing surfaces of all nuts, washers, and base plates are in firm contact.
2. Use an indelible marker to mark the top nuts and base plate with lines showing relative alignment of the nut to the base plate.
3. Tighten top nuts, following a crisscross pattern, an additional 1/6th of a turn.

In unpaved areas, construct a raised PCC pad in front of each controller cabinet.

Completely remove foundations not to be reused or abandoned.

If abandoning a foundation, remove the top of foundation, anchor bolts, and conduits to a minimum depth of 0.5 foot below sidewalk surface or original ground. Backfill the resulting hole with material equivalent to the surrounding material.

#### **86-2.04 STANDARDS, STEEL PEDESTALS AND POSTS**

Bolts, including anchor bolts, nuts, and washers for signal and lighting support structures must comply with Section 55-2, "Materials." Except for bearing-type connection or slip-base, high-strength bolted connection must comply with Section 55-3.14, "Bolted Connections." Welding, nondestructive testing of welds, and acceptance and repair criteria for steel member nondestructive testing must comply with American Welding Society (AWS) D1.1.

Using stainless steel rivets, attach rectangular corrosion-resistant metal identification tag on all standards and poles, except Type 1:

1. Above the hand hole, near the base of standards and poles
2. On the underside of mast arms near the arm plate

The lettering on each identification tag must be depressed or raised, 1/4 inch tall, legible, and include the following information:

1. Name of the manufacturer
2. Date of manufacture
3. Identification number
4. Contract number
5. Unique identification code that is:
  - 5.1. Assigned by the manufacturer
  - 5.2. Traceable to a particular contract and the welds on that component
  - 5.3. Readable after the support structure is coated and installed

Type 1 standard and steel pedestal for controller cabinet must be manufactured of one of the following:

1. 0.12-inch or thicker galvanized steel
2. 4-inch standard weight galvanized steel pipe as specified in ASTM A 53
3. 4-inch Type 1 conduit with the top designed for post-top slip-fitter

Ferrous metal parts of a standard that has a shaft length of 15 feet or longer must comply with the provisions in Section 55-2, "Materials," and the following:

1. Standard must be manufactured from sheet steel of weldable grade having a minimum yield strength of 40,000 psi after manufacturing.
2. Certified test report verifying compliance with minimum yield strength requirements must be submitted. Test report may be the mill test report for the as-received steel or if the as-received steel has a lower yield strength than required you must provide test data assuring that your method of cold forming will consistently increase the tensile properties of the steel to meet the specified minimum yield strength. Test data must include tensile properties of the steel after cold forming for specific heats and thicknesses.
3. If a single-ply 5/16-inch thick pole is specified, a 2-ply pole with equivalent section modulus may be substituted.
4. Standard may be manufactured of full-length sheets or shorter sections. Each section must be manufactured from 1 or 2 pieces of sheet steel. If 2 pieces are used, the longitudinal welded seams must be directly opposite from one another. If the sections are butt-welded together, the longitudinal welded seams of adjacent sections must be placed to form continuous straight seams from base to top of standard.
5. Butt-welded circumferential joints of tubular sections requiring CJP groove welds must be made using a metal sleeve backing ring inside each joint. The sleeve must be 1/8 inch nominal thickness, or thicker, and manufactured from steel having the same chemical composition as the steel in the tubular sections to be joined. If the sections to be joined have different specified minimum yield strengths, the steel in the sleeve must have the same chemical composition as the tubular section having the higher minimum yield strength. The width of the metal sleeve must be consistent with the type of nondestructive testing selected and must be a minimum width of 1 inch. At fitting time, the sleeve must be centered at the joint and in contact with the tubular section at the point of the weld.
6. Welds must be continuous.
7. Weld metal at the transverse joint must extend to the sleeve, making the sleeve an integral part of the joint.

8. During manufacturing, longitudinal seams on vertical tubular members of cantilevered support structures must be centered on and along the side of the pole that the pole plate is located. Longitudinal seams on horizontal tubular members, including signal and luminaire arms, must be within  $\pm 45$  degrees of the bottom of the arm.
9. Longitudinal seam weld in steel tubular section may be made by the electric resistance welding process.
10. Longitudinal seam weld must have 60 percent minimum penetration, except:
  - 10.1. Within 6 inches of circumferential weld, longitudinal seam weld must be CJP groove weld.
  - 10.2. Longitudinal seam weld on lighting support structure having telescopic pole segment splice must be CJP groove weld on the female end for a length on each end equal to the designated slip-fit splice length plus 6 inches.
11. Exposed circumferential weld, except fillet and fatigue-resistant weld, must be ground flush with the base metal before galvanizing or painting. Ground flush is specified as -0, +0.08-inch.
12. Circumferential weld and base plate-to-pole weld may be repaired only one time.
13. Exposed edges of the plates that make up the base assembly must be finished smooth and exposed corners of the plates must be broken. Provide shafts with slip-fitter shaft caps.
14. Surface flatness requirements of ASTM A 6 apply to plates:
  - 14.1. In contact with concrete, grout, or washers and leveling nuts
  - 14.2. In high-strength bolted connections
  - 14.3. In joints, where cap screws are used to secure luminaire and signal arms
  - 14.4. Used for breakaway slip-base assemblies
15. Standard must be straight with a maximum variation of:
  - 15.1. 1 inch measured at the midpoint of a 30-foot to 35-foot standard
  - 15.2. 3/4 inch measured at the midpoint of a 17-foot to 20-foot standard
  - 15.3. 1 inch measured 15 feet above the base plate for Type 35 and Type 36 standards
16. Zinc-coated nuts used on fastener assemblies having a specified preload obtained by specifying a prescribed tension, torque value, or degree of turn must be provided with a colored lubricant, clean and dry to the touch. The lubricant color must contrast the zinc coating color on the nut so the presence of the lubricant is visually obvious. Lubricant must be insoluble in water or the fastener components must be shipped to the job site in a sealed container.
17. Do not make additional holes in structural members.
18. Standard with an outside diameter of 12 inches or less must be round. Standard with an outside diameter greater than 12 inches must be round or multisided. Multisided standard must be convex with a minimum of 12 sides and have a minimum bend radius of 4 inches.
19. Manufacture mast arm from material specified for standard.
20. Manufacture cast steel option for slip base from material of Grade 70-40, as specified in ASTM A 27/A 27M. Other comparable material may be used if approved by the Engineer. The casting tolerances must comply with the Steel Founders' Society of America's recommendations for green sand molding.
21. One casting from each lot of a maximum of 50 castings must be radiographed as specified in ASTM E 94. Casting must comply with the acceptance criteria for severity level 3 or better for the types and categories of discontinuities in ASTM E 186 and E 446. If the casting fails the inspection, 2 additional castings must be radiographed. If the 2 additional castings fail the inspection, the entire lot will be rejected.
22. Material certification, consisting of physical and chemical properties, and radiographic film of the casting must be filed at the manufacturer's office. Certification and film must be available for inspection.
23. High-strength bolts, nuts, and flat washers used to connect slip-base plate must comply with ASTM A 325 or A 325M and be galvanized as specified in Section 75-1.05, "Galvanizing."
24. Plate washers must be manufactured by saw cutting and drilling steel plate. Steel plate must comply with AISI 1018 and be galvanized as specified in Section 75-1.05, "Galvanizing." Before galvanizing, remove burrs and sharp edges and chamfer both sides of holes to allow the bolt head to make full contact with the washer without tension.
25. High-strength cap screws for attaching arms to standards must comply with ASTM A 325, A 325M, or A 449, and the mechanical requirements in ASTM A 325 or A 325M after galvanizing. Cap screws must be galvanized as specified in Section 75-1.05, "Galvanizing." Coat threads of cap screws with a colored lubricant, clean and dry to the touch. Lubricant color must contrast the zinc-coating color on the cap screw so the presence of the lubricant is visually obvious. Lubricant must be insoluble in water or the fastener components must be shipped to the job site in a sealed container.

26. Bolted connection attaching signal or luminaire arm to pole must be considered slip critical. Galvanized faying surfaces of plates on luminaire, signal arm, and pole must be roughened by hand using a wire brush before assembly and must comply with requirements for Class C surface conditions for slip-critical connections in "Specification for Structural Joints Using ASTM A 325 or A 490 Bolts," a specification approved by the Research Council on Structural Connections (RCSC). Paint for faying surfaces must be as specified in the RCSC specification for Class B coating.
27. The Engineer will randomly take samples of fastener components from each production lot and submit to the Transportation Laboratory with test reports as specified in ASTM fastener specifications for QA testing and evaluation. The Engineer will determine sample sizes for each fastener component.

Change in mast arm configuration is allowed as long as the mounting height and stability are maintained.

Before manufacturing, details must be adjusted to ensure that cap screw heads can be turned using conventional installation tools. During manufacturing process, to avoid interference with the cap screw heads, the position of the luminaire arm on the arm plate must be properly located.

Configure mast arm as a smooth curving arm.

Push button post, pedestrian barricade, and guard post must comply with ASTM A 53.

Assemble and tighten slip base when pole is on the ground. Threads of heavy hex nuts for each slip-base bolt must be coated with additional lubricant that is clean and dry to the touch. Tighten high strength slip-base bolts to within  $\pm 10$  foot-pounds of the following:

**Slip-Base Bolt-Tightening Requirements**

Standard Type	Torque (foot-pounds)
15-SB	150
30	150
31	200
36-20A	165

Hole in shaft of existing standard, due to removal of equipment or mast arms, must be sealed by fastening a galvanized steel disk to cover the hole. Fasten using a single central galvanized steel fastener. Seal edges of disk and hole with polysulfide or polyurethane sealing compound of Type S, Grade NS, Class 25, and Use O, as specified in ASTM C 920.

If existing standard is ordered to be relocated or reused, remove large dents, straighten shafts, and replace parts that are in poor condition. You must furnish anchor bolts or bars and nuts required for relocating or reusing standard. Repair and replacement work will be paid for as extra work as specified in Section 4-1.03D, "Extra Work."

New nuts, bolts, cap screws, and washers must be provided if:

1. Standard or mast arm is relocated
2. Used standard or mast arm is State furnished

If the standard has a slip base, a new keeper plate must be provided.

### **86-2.05 CONDUIT**

Run conductors in conduit except for overhead and where conductors are run inside poles.

You may use a larger size conduit than specified as long as you use it for the entire length between outlets. Do not use reducing coupling.

New conduit must not pass through existing foundations for standards.

#### **86-2.05A Material**

Conduit and conduit fitting must be UL or ETL listed and comply with the following:

### Conduit and Conduit Fitting Requirements

Type 1	Hot-dip galvanized rigid steel conduit and conduit couplings must comply with UL 6 and ANSI C80.1. Zinc coating testing must comply with copper sulfate test requirements in UL 6. Conduit couplings for rigid steel conduit must be electrogalvanized.
Type 2	Hot-dip galvanized rigid steel conduit must comply with requirements for Type 1 conduit and be coated with polyvinyl chloride (PVC) or polyethylene. Exterior thermoplastic coating must have a minimum thickness of 35 mils. Internal coating must have a minimum thickness of 2 mils. Coated conduit must comply with UL 6; NEMA RN 1; or ETL PVC-001.
Type 3	Rigid non-metallic conduit must comply with UL 651, UL 651A or UL 651B. Install at underground locations only.
Type 4	Waterproof flexible metal conduit must consist of conduit with a waterproof non-metallic sunlight-resistant jacket over an inner flexible metal core. Type 4 conduit must be UL listed for use as the grounding conductor.
Type 5	Intermediate steel conduit and conduit couplings must comply with UL 1242 and ANSI C80.6. Zinc coating testing must comply with copper sulfate test requirements in UL 1242. Conduit couplings for intermediate rigid steel conduit must be electrogalvanized. Type 5 conduit must only be used if specified.

Bonding bushings to be installed on metal conduit must be insulated and either galvanized or zinc alloy type. Fittings for steel conduit and for watertight flexible metal conduit must be UL listed at UL 514B.

#### 86-2.05B Use

Install Type 1 conduit on all exposed surfaces and at the following locations:

1. In concrete structures
2. Between a structure and nearest pull box

Exposed conduit installed on painted structure must be painted the same color as the structure.

Change or extend existing conduit runs using the same material. Install pull box if an underground conduit changes from the metallic type to Type 3.

Minimum trade size of conduit must be:

1. 1-1/2 inches from electrolier to adjacent pull box
2. 1 inch from pedestrian push button post to adjacent pull box
3. 2 inches from signal standard to adjacent pull box
4. 3 inches from controller cabinet to adjacent pull box
5. 2 inches from overhead sign to adjacent pull box
6. 1-1/2 inches if unspecified

Two conduits must be installed between controller cabinet and adjacent pull box.

#### 86-2.05C Installation

Whether shop or field cut, ream ends of conduit to remove burrs and rough edges. Make cuts square and true. Slip joints and running threads are not allowed for coupling conduit. If a standard coupling cannot be used for coupling metal type conduit, use a threaded union coupling that is UL or ETL listed. Tighten couplings for metal conduit to maintain a good electrical connection through conduit run.

Cut Type 3 conduit with tools that will not deform the conduit. Use solvent weld for connections.

Cut Type 2 conduit with pipe cutters; do not use hacksaws. Coated conduit must be threaded with standard conduit-threading dies. Tighten conduit into couplings or fittings using strap wrenches or approved groove-joint pliers.

Protect shop-cut threads from corrosion as follows:

**Shop-Cut Thread Protection**

Steel conduit and conduit couplings	ANSI C80.1
Intermediate metal conduit and conduit couplings	ANSI C80.6

Paint conduits as specified in Section 91, "Paint." Apply 2 coats of approved unthinned zinc-rich primer of organic vehicle type. Do not use aerosol cans. Paint the following parts of conduits:

1. All exposed threads
2. Field-cut threads before installing conduit couplings to steel conduit
3. Damaged surfaces on metal conduit

Do not remove shop-installed conduit couplings.

Damaged Type 2 conduit or conduit coupling must be wrapped with at least 1 layer of 2 inch wide, 20 mil minimum thickness PVC tape, as specified in ASTM D 1000, with a minimum tape overlap of 1/2 inch. Before applying the tape, conduit or fitting must be cleaned and painted with 1 coat of rubber-resin based adhesive as recommended by the tape manufacturer. You may repair damaged spots in the thermoplastic coating by painting over with a brushing type compound supplied by the conduit manufacturer instead of the tape wrap.

The ends of Types 1, 2, or 5 conduit must be threaded and capped with standard pipe caps until wiring is started. The ends of Types 3 and 4 conduit must be capped until wiring is started. If caps are removed, replace with conduit bushings. Fit insulated bonding bushings on the end of metal conduit ending in pull box or foundation. Bell or end bushings for Type 3 conduit must be non-metallic type.

Conduit bends, except factory bends, must have a radius of not less than 6 times the inside diameter of the conduit. If factory bends are not used, bend the conduit without crimping or flattening using the longest radius practicable. Bend conduits as follows:

**Conduit-Bending Requirements**

Type 1	By methods recommended by the conduit manufacturer and with equipment approved for the purpose.
Type 2	Use standard bending tool designed for use on thermoplastic coated conduit. Conduit must be free of burrs and pits.
Type 3	By methods recommended by the conduit manufacturer and with equipment approved for the purpose. Do not expose conduit to direct flame.
Type 4	--
Type 5	By methods recommended by the conduit manufacturer and with equipment approved for the purpose.

Install pull tape in conduit that is to receive future conductors. The pull tape must be a flat woven lubricated soft-fiber polyester tape with a minimum tensile strength of 1,800 pounds and have printed sequential measurement markings every 3 feet. At least 2 feet of pull tape must be doubled back into the conduit at each end.

Existing underground conduit to be incorporated into a new system must be cleaned with a mandrel or cylindrical wire brush and blown out with compressed air.

Install conduit to a depth of not less than 30 inches below finished grade, except in sidewalk and curbed paved median areas, where it must be at least 18 inches below grade. You may lay conduit on existing pavement within new curbed median.

Conduit coupling must be a minimum of 6 inches from face of foundation.

Place a minimum of 2 inches of sand bedding in the trench before installing Type 2 or Type 3 conduit. Place a minimum of 4 inches of same material over conduit before placing additional backfill material.

Obtain approval from the Engineer before disturbing pavement. If obstruction is encountered, obtain approval from Engineer to cut small holes in the pavement to locate or remove obstruction. If jacking or drilling method is used, keep jacking or drilling pit 2 feet away from edge of pavement. Pavement must not be weakened or subgrade softened from excess water use.

Conduit used for drilling or jacking must be removed; install new conduit for completed work. If a hole larger than the conduit is pre-drilled and you install conduit by hand or by method recommended by the conduit manufacturer with equipment approved for purpose, you may install Type 2 or Type 3 conduit under pavement.

If trenching in pavement method is specified, conduit installation under pavement that is not a freeway lane or freeway to freeway connector ramp, must comply with the following:

1. Use Type 3 conduit. Place conduit under pavement in a trench approximately 2 inches wider than the outside diameter of conduit, but not exceeding 6 inches in width. Trench depth must not exceed the greater of 12 inches or conduit trade size plus 10 inches, except that at pull boxes the trench may be hand dug to required depth. The top of the installed conduit must be a minimum of 9 inches below finished grade.
2. Trenching installation must be completed before placing final pavement layer.
3. Cut pavement to be removed with a rock cutting excavator. Minimize shatter outside the removal area.
4. Place conduit in bottom of trench and backfill with minor concrete as specified in Section 90-10, "Minor Concrete.". Minor concrete must contain a minimum of 590 pounds of cementitious material per cubic yard. If the trench is in asphalt concrete pavement and pavement overlay is not placed, backfill the top 1-3/4-inch of trench with minor HMA.
5. Before spreading HMA, apply tack coat as specified in Section 39, "Hot Mix Asphalt."
6. Backfill trenches, except for the top 0.10 foot, by the end of each day. The top 0.10 foot must be filled within 3 days after trenching.

Conduit installed beneath railroad tracks must be:

1. Type 1 or 2
2. 1-1/2-inch minimum diameter
3. Placed a minimum depth of 3 feet below bottom of tie

If jacking or drilling method is used, construct jacking pit to a minimum of 13 feet from the centerline of track at the near side of jacking pit. Cover jacking pit with substantial planking if left overnight.

Conduit ending in standard or pedestal must not extend more than 3 inches vertically above the foundation and must be sloped toward the handhole opening. Conduit entering through the side of non-metallic pull box must end inside the box within 2 inches of the wall and 2 inches above the bottom and be sloped toward the top of box to facilitate pulling of conductors. Conduit entering through the bottom of a pull box must end 2 inches above the bottom and be located near the end walls to leave the major portion of the box clear. At outlet, conduit must enter from the direction of the run.

Underground conduit runs, including under sidewalks, that are adjacent to gasoline service stations or other underground gasoline or diesel storage, piping, or pumps and that lead to a controller cabinet, circuit breaker panel, service, or enclosure where an arc may occur during normal operations must be sealed if the conduit is within the limits specified in the NEC for Class 1, Division 1. Use Type 1 or Type 2 conduit for these runs.

Conduit for future use in structures must be threaded and capped. Conduit leading to soffit, wall, or other lights or fixtures below pull box grade must be sealed and made watertight, except where conduit ends in a No. 9 or No. 9A pull box.

Support for conduit in or on wall or bridge superstructure must comply with the following:

1. Steel hangers, steel brackets, and other fittings must comply with Section 75-1.03, "Miscellaneous Bridge Metal."
2. Construct precast concrete conduit cradles using minor concrete and commercial quality welded wire fabric. Minor concrete must comply with Section 90-10, "Minor Concrete," and contain a minimum of 590 pounds of cementitious material per cubic yard.. The cradles must be moist cured for a minimum of 3 days. Bond precast concrete cradles to structure with epoxy adhesives specified in one of the following:

- 2.1. Section 95-2.03, "Epoxy Resin Adhesive for Bonding New Concrete to Old Concrete"
- 2.2. Section 95-2.04, "Rapid Set Epoxy Adhesive for Pavement Markers"
- 2.3. Section 95-2.05, "Standard Set Epoxy Adhesive for Pavement Markers"

3. Use pipe sleeve or form opening for conduit through bridge superstructure concrete. Sleeve or opening through either prestressed member or conventionally reinforced precast member must be:

- 3.1. Transverse to the member
- 3.2. Through the web
- 3.3. Not more than 3 inches maximum gross opening in concrete

4. Where conduits pass through the abutment concrete, wrap conduit with 2 layers of asphalt-felt building paper securely taped or wired in place. Fill space around conduit that runs through bridge abutment wall with mortar as specified in Section 51-1.135, "Mortar," except the proportion of cementitious material to sand must be 1 to 3. Fill the space around conduits that run through abutments after prestressing is completed.

5. Run surface-mounted conduit straight and true, horizontal or vertical on the wall, and parallel to wall on ceiling or other similar surfaces. Support conduit at a maximum of 5-foot intervals or closer where necessary to prevent

vibration or unsightly deflection. The supports must include galvanized malleable iron conduit clamps and clamp backs secured with expansion anchorage devices as specified for concrete anchorage devices in Section 75-1.03, "Miscellaneous Bridge Metal." Threaded studs must be galvanized and be of the largest diameter that will pass through the mounting hole in conduit clamp.

6. Where pull boxes are placed in conduit runs, conduit must be fitted with threaded bushings and bonded.
7. Mark location of conduit end in structure, curb, or wall with a "Y" that is a minimum of 3 inches tall, directly above conduit.

#### **86-2.05D Expansion Fittings**

Install expansion fitting where the conduit crosses an expansion joint in structure. Each expansion fitting for metal conduit must include a copper bonding jumper having the ampacity specified in NEC.

Each expansion-deflection fitting for expansion joints of 1-1/2-inch movement rating must be watertight and include a molded neoprene sleeve, a bonding jumper, and 2 silicon bronze or zinc-plated iron hubs. Each fitting must allow a minimum of 3/4-inch expansion, contraction, and lateral deflection.

#### **86-2.06 PULL BOXES**

You may use a larger standard size pull box than that shown on the plans or specified. Pull box, cover, and extensions must be of the same material.

##### **86-2.06A Materials**

Pull box, cover, and extension for installation in ground or sidewalk area must be precast reinforced PCC or non-PCC material. Non-PCC material must:

1. Be fire resistant with a burn rate no greater than 0.3-inch per minute per 0.1 inch of thickness when tested as specified in ASTM D 635
2. Show no significant change in physical properties with exposure to weather
3. Be dense, free of voids or porosity, and gray or brown in color

Non-PCC pull box must comply with the following:

1. Top dimensions must not exceed the bottom dimensions by more than 1 inch.
2. Extension must be attached to pull box to maintain the minimum combined depths.
3. Cover must not fail and must not deflect more than 1/4 inch when a vertical force of 1,500 pounds is applied through a 1/2" x 3" x 6" steel plate to a non-PCC cover on a pull box. Center the steel plate on cover with its longitudinal axis coinciding with longitudinal axis of cover.

Non-PCC pull boxes must be of sufficient rigidity that when a designated concentrated force is applied perpendicularly to the midpoint of one of the long sides at the top while the opposite long side is supported by a rigid surface, it must be possible to remove the cover without the use of tools. The designated concentrated force must be 150 pounds for a No. 3-1/2 pull box and must be 100 pounds for a No. 5 or No. 6 pull box.

If a transformer or other device must be placed in a non-metallic pull box, include recesses for hanger.

Secure cover, except ceiling pull box cover, with 3/8-inch hold down bolts, cap screws, or studs, washers, and brass stainless steel or other non-corroding-metal nut. Stainless steel hardware must have an 18 percent or greater chromium content and an 8 percent or greater nickel content.

Galvanize ferrous metal parts as specified in Section 75-1.05, "Galvanizing."

Traffic pull box must be provided with steel cover and special concrete footing. Steel cover must have an embossed non-skid pattern.

Traffic pull box and cover must have a vertical proof-load strength of 25,000 pounds. Comply with Federal Specification RR-F-621 and distribute the 25,000 pound load through a 9" x 9" x 2" steel plate. You must be able to place the load anywhere on box and cover for 1 minute without causing cracks or permanent deformations.

No. 3-1/2(T) and No. 5(T) traffic pull box must be reinforced with a galvanized Z bar welded frame and cover similar to that shown on the plans for No. 6(T) pull box. Frame must be anchored to box with 1/4" x 2-1/4" concrete anchors. Four concrete anchors must be included for No. 3-1/2(T) pull box; one placed in each corner. Six concrete anchors for must be included for No. 5(T) and No. 6(T) pull boxes; one placed in each corner and one near the middle of each of the longer sides.

Hold down screws must be 3/8 inch hex flange cap screws of Type 316 stainless steel. Nut must be zinc plated carbon steel, vibration resistant, and have a wedge ramp at the root of the thread. Nut must be spot welded to the underside or manufactured with galvanized Z bar pull box frame.

Steel cover must be countersunk approximately 1/4 inch to accommodate bolt head. When tightened, bolt head must not exceed more than 1/8 inch above the top of cover. A 1/4 inch tapped hole and brass bonding screw must be included.

Concrete placed around and under traffic pull box must be minor concrete as specified in Section 90-10, "Minor Concrete."

**86-2.06B Cover Marking**

Marking must be clearly defined, uniform in depth, and parallel to either the long or short sides of cover.

Marking letters must be between 1 inch to 3 inch high.

Before galvanizing steel or cast iron cover, apply marking by one of the following methods:

1. Use cast iron strip at least 1/4-inch thick with letters raised a minimum of 1/16 inch. Fasten strip to cover with 1/4 inch flathead stainless steel machine bolts and nuts. Peen bolts after tightening.
2. Use sheet steel strip at least 0.027-inch thick with letters raised a minimum of 1/16 inch. Fasten strip to cover by spot welding, tack welding, or brazing, with 1/4 inch stainless steel rivets or 1/4 inch roundhead stainless steel machine bolts and nuts. Peen bolts after tightening.
3. Bead weld the letters on cover so that letters are raised a minimum of 3/32 inch.

**86-2.06C Installation and Use**

Space pull boxes no more than 200 feet apart. You may install additional pull boxes to facilitate the work.

Pull box in ground or sidewalk area must be installed as follows:

1. Embed bottom of pull box in crushed rock.
2. Place a layer of roofing paper on crushed rock.
3. Place mortar over layer of roofing paper. Mortar must be 0.50 inch to 1 inch thick and be sloped toward the drain hole.
4. Make a 1-inch drain hole in center of pull box through mortar and roofing paper.
5. Place mortar between pull box and pull box extension, and around conduits.

Reconstruct sump of existing pull box if disturbed by your operations. Remove old grout and replace with new if the sump was grouted.

After installation of traffic pull box, install steel cover and keep bolted down when your activities are not in progress at the pull box. When steel cover is placed for final time, cover and Z bar frame must be cleaned of debris and securely tightened.

**86-2.07 (BLANK)**

**86-2.08 CONDUCTORS AND CABLES**

Conductor must be copper wire that complies with ASTM B 3 and B 8.

Wire size must comply with the following:

**Wire Size Requirements**

Conductor usage	Requirement
In loop detector lead-in cable	ASTM B 286
Everywhere except in loop detector lead-in cable	American Wire Gage (AWG) <sup>a</sup>

<sup>a</sup>Except conductor diameter must not be less than 98 percent of specified AWG diameter.

Single conductor and cable, except detector lead-in cable, must have clear, distinctive, and permanent markings on the outer surface throughout its length. The markings must include the manufacturer's name or trademark, insulation type letter designation, conductor size, voltage, and temperature rating, and for cables, it must also include number of conductors.

**86-2.08A Conductor Identification**

Conductor insulation must be a solid color with a permanent stripe as specified below. The solid color must be homogeneous through the full depth of insulation. Identification stripe must be continuous throughout the length of conductor. For conductor sizes No. 2 and larger, the insulation may be black and the ends of the conductors must be taped for a minimum length of 20 inches with electrical insulating tape of the required color.

**Conductor Identification**

Circuit	Signal Phase or Function	Identification			Size
		Insulation Color <sup>j</sup>		Band Symbols <sup>f</sup>	
		Base	Stripe <sup>a</sup>		
Vehicle Signals <sup>a,b,d</sup>	2,6	Red, Yel, Brn	Blk	2,6	14
	4,8	Red, Yel, Brn	Ora	4,8	14
	1,5	Red, Yel, Brn	None	1,5	14
	3,7	Red, Yel, Brn	Pur	3,7	14
	Ramp Meter 1	Red, Yel, Brn	None	NBR	14
	Ramp Meter 2	Red, Yel, Brn	Blk	NBR	14
Pedestrian Signals <sup>d</sup>	2p,6p	Red, Brn	Blk	2p,6p	14
	4p,8p	Red, Brn	Ora	4p,8p	14
	1p,5p	Red, Brn	None	1p,5p	14
	3p,7p	Red, Brn	Pur	3p,7p	14
Pedestrian Push Buttons <sup>d</sup>	2p,6p	Blu	Blk	P-2,P-6	14
	4p,8p	Blu	Ora	P-4,P-8	14
	1p,5p	Blu	None	P-1,P-5	14
	3p,7p	Blu	Pur	P-3,P-7	14
Traffic Signal Controller Cabinet	Ungrounded Circuit Conductor	Blk	None	CON-1	6
	Grounded Circuit Conductor	Wht	None	CON-2	6
Highway Lighting Pull Box to Luminaire	Ungrounded-Line 1	Blk	None	NBR	14
	Ungrounded-Line 2	Red	None	NBR	14
	Grounded	Wht	None	NBR	14
Multiple Highway Lighting	Ungrounded-Line 1	Blk	None	ML1	10
	Ungrounded-Line 2	Red	None	ML2	10
Lighting Control	Ungrounded to PEU	Blk	None	C1	14
	Switching leg from PEU unit or SM transformer	Red	None	C2	14
Multiple Service	Ungrounded-Line 1 (Signals)	Blk	None	NBR <sup>e</sup>	6
	Ungrounded-Line 2 (Lighting)	Red <sup>i</sup>	None	NBR <sup>e</sup>	8
Sign Lighting <sup>h</sup>	Ungrounded-Line 1	Blk	None	SL-1	10
	Ungrounded-Line 2	Red	None	SL-2	10
Flashing Beacons <sup>g</sup>	Ungrounded between Flasher and Beacons	Red or Yel	None	F-Loc. <sup>c</sup>	14
Grounded and Common	Pedestrian Push Buttons	Wht	Blk	NBR	14
	Signals and Multiple Lighting	Wht	None	NBR	10
	Flashing Beacons and Sign Lighting	Wht	None	NBR	12
	Lighting Control	Wht	None	C-3	14
	Multiple Service	Wht	None	NBR	14
Railroad Preemption		Blk	None	R	14
Spares		Blk	None	NBR	14

NBR = No Band Required PEU=Photoelectric unit

<sup>a</sup>On overlaps, insulation is striped for 1st phase in designation. e.g., phase (2+3) conductor is striped as for phase 2.

<sup>b</sup>Band for overlap and special phases as required.

<sup>c</sup>Flashing beacons having separate service do not require banding.

<sup>d</sup>These requirements do not apply to signal cable.

<sup>e</sup>"S" if circuit is switched on line side of service equipment by utility.

<sup>f</sup>Band conductors in each pull box and near ends of termination points. On signal light circuits, a single band may be placed around 2 or 3 ungrounded conductors comprising a phase.

<sup>g</sup>Ungrounded conductors between service switch and flasher mechanism must be black and banded.

<sup>h</sup>Conductors between ballasts and sign lighting lamps must be No. 16 and color must correspond to the ballast leads.

<sup>i</sup>Black acceptable for size No. 2 and larger. Tape ends for 20 inches with indicated color.

<sup>j</sup>Color Code: Yel-Yellow, Brn-Brown, Blu-Blue, Blk-Black, Wht-White, Ora-Orange, Pur-Purple.

### 86-2.08B Multiple Circuit Conductors

Conductor for multiple circuit must be UL or ETL listed and rated for 600 V(ac) operation. Insulation for No. 14 to No. 4 conductors must be one of the following:

1. Type TW PVC as specified in ASTM D 2219
2. Type THW PVC
3. Type USE, RHH, or RHW cross-linked polyethylene

Minimum insulation thickness must comply with the following:

Insulation Thickness		
Insulation Type	Conductor Size	Insulation Thickness (mils)
USE, RHH, or RHW	No. 14 to No. 10	39
	No. 8 to No. 2	51
THW or TW	No. 14 to No. 10	27
	No. 8	40
	No. 6 to No. 2	54

Insulation for No. 2 and larger conductor must be one of the types listed above or Type THWN.

Conductor for wiring wall and soffit luminaire must be stranded copper with insulation rated for use at temperatures up to 125 °C.

### 86-2.08C Signal Cable

Signal cable, except for the 28-conductor type, must:

1. Not be spliced
2. Be marked in each pull box with the signal standard information it is connecting to

Signal cable must comply with the following:

1. Cable jacket must be:
  - 1.1. Black polyethylene with an inner polyester binder sheath
  - 1.2. Rated for 600 V(ac) and 75 °C
2. Filler material, if used, must be polyethylene material.
3. Conductor must be solid copper with Type THWN insulation as specified in Section 86-2.08, "Conductors and Cables," and ASTM B 286. The minimum thickness of Type THWN insulation must be 12 mils for conductor sizes No. 14 to No. 12 and 16 mils for conductor size No. 10. The minimum thickness of nylon jacket must be 4 mils.

### Conductor Signal Cable Requirements

Cable Type <sup>a</sup>	Conductor Quantity and Type	Cable Jacket Thickness (mils)		Maximum Nominal Outside Diameter (inch)	Conductor Color Code	Remarks
		Average	Minimum			
3CSC	3 - No. 14	44	36	0.40	blue/black, blue/orange, white/black stripe	Use for pedestrian push buttons and spare
5CSC	5 - No. 14	44	36	0.50	red, yellow, brown, black, white	
9CSC	8 - No. 14 1 - No. 12	60	48	0.65	No. 12 - white No. 14 - red, yellow, brown, black, and red/black, yellow/black, brown/black, white/black stripe	
12CSC	11 - No. 14 1 - No. 12	60	48	0.80	No. 12 - white No. 14 - see "12CSC Color Code and Functional Connection" table	Use for vehicle signals, pedestrian signals, spares, and signal common
28CSC	27 - No. 14 1 - No. 10	80	64	0.90	No. 10 - white No. 14 - see "28CSC Color Code and Functional Connection" table	Keep signal commons in each cable separate except at the signal controller. Label each cable as "C1" or "C2" in pull box. Use "C1" for signal phases 1, 2, 3, and 4. Use "C2" for phases 5, 6, 7, and 8.

<sup>a</sup>Conductor signal cable description starts with the number of conductors, followed by "CSC". (e.g., a signal cable with 3 conductors is labeled "3CSC".)

#### 12CSC Color Code and Functional Connection

Color Code	Termination	Phase
Red	Vehicle signal red	2, 4, 6, or 8
Yellow	Vehicle signal yellow	2, 4, 6, or 8
Brown	Vehicle signal green	2, 4, 6, or 8
Red/black stripe	Vehicle signal red	1, 3, 5, or 7
Yellow/black stripe	Vehicle signal yellow	1, 3, 5, or 7
Brown/black stripe	Vehicle signal green	1, 3, 5, or 7
Black/red stripe	Spare, or use as required for red or DONT WALK	
Black/white stripe	Spare, or use as required for yellow	
Black	Spare, or use as required for green or WALK	
Red/white stripe	Ped signal DONT WALK	
Brown/white stripe	Ped signal WALK	

### 28CSC Color Code and Functional Connection

Color Code	Termination	Phase
Red/black stripe	Vehicle signal red	2 or 6
Yellow/black stripe	Vehicle signal yellow	2 or 6
Brown/black stripe	Vehicle signal green	2 or 6
Red/orange stripe	Vehicle signal red	4 or 8
Yellow/orange stripe	Vehicle signal yellow	4 or 8
Brown/orange stripe	Vehicle signal green	4 or 8
Red/silver stripe	Vehicle signal red	1 or 5
Yellow/silver stripe	Vehicle signal yellow	1 or 5
Brown/silver stripe	Vehicle signal green	1 or 5
Red/purple stripe	Vehicle signal red	3 or 7
Yellow/purple stripe	Vehicle signal yellow	3 or 7
Brown/purple stripe	Vehicle signal green	3 or 7
Red/2 black stripes	Ped signal DONT WALK	2 or 6
Brown/2 black stripes	Ped signal WALK	2 or 6
Red/2 orange stripes	Ped signal DONT WALK	4 or 8
Brown/2 orange stripes	Ped signal WALK	4 or 8
Red/2 silver stripes	Overlap A, C red	OLA, OLC
Brown/2 silver stripes	Overlap A, C green	OLA, OLC
Red/2 purple stripes	Overlap B, D red	OLB, OLD
Brown/2 purple stripes	Overlap B, D green	OLB, OLD
Blue/black stripe	Ped push button	2 or 6
Blue/orange stripe	Ped push button	4 or 8
Blue/silver stripe	Overlap A, C yellow	OLA(y), OLC(y)
Blue/purple stripe	Overlap B, D yellow	OLB(y), OLD(y)
White/black stripe	Ped push button common	
Black/red stripe	Railroad preemption	
Black	Spare	

#### 86-2.08D Signal Interconnect Cable (SIC)

Signal interconnect cable must be a 3-pair or 6-pair type with stranded tinned copper No. 20 conductors. Each conductor insulation must be 13 mils minimum nominal thickness, color-coded, polypropylene material. Conductors must be in twisted pairs. Color coding distinguishes each pair. Each pair must be wrapped with an aluminum polyester shield and must have a No. 22 or larger stranded tinned copper drain wire inside the shielded pair.

Cable jacket must be black, high density polyethylene, rated for a minimum of 300 V(ac) and 60 °C, and must have a minimum nominal wall thickness of 40 mils. Cable jacket or moisture-resistant tape directly under the outer jacket must be marked as specified in Section 86-2.08.

You must have a minimum of 6 feet of slack at each controller cabinet. Splicing is allowed only if shown on the plans.

Insulate conductor splice with heat-shrink tubing and overlap at least 0.6 inch. Cover overall cable splice with heat-shrink tubing and overlap the cable jacket at least 1-1/2 inch.

#### 86-2.09 WIRING

Run conductors in conduit, except for overhead and temporary installations and where conductors are run inside poles.

Solder by hot iron, pouring, or dipping method, connectors and terminal lugs for conductor sizes No. 8 and smaller. Do not perform open-flame soldering.

##### 86-2.09A Circuitry

Do not run traffic signal indication conductors to a terminal block on a standard unless connected to a mounted signal head.

Use only 1 conductor to connect to each terminal of a pedestrian push button.

The common for pedestrian push button circuit must be separate from traffic signal circuit grounded conductor.

##### 86-2.09B Installation

Use a UL- or ETL-listed inert lubricant for placing conductors in conduit.

Pull conductors into conduit by hand using pull tape specified in Section 86-2.05C, "Installation." Do not use winches or other power-actuated pulling equipment.

If adding new conductors or removing existing conductors, remove all conductors, clean conduit as specified in Section 86-2.05C, "Installation," and pull all conductors in conduit as 1 unit.

If traffic signal conductors are run in lighting standard containing street lighting conductors from a different service point, you must encase the traffic signal conductors or the lighting conductors with a flexible or rigid metal conduit for a length until the 2 types of conductors are no longer in the same raceway.

If less than 10 feet above grade, enclose temporary conductors in flexible or rigid metal conduit. Leave slack for each conductor as follows:

**Conductor Slack Requirements**

Location	Slack (feet)
Signal standard	1
Lighting standard	1
Signal and lighting standard	1
Pull box	3
Splice	3
Standards with slip base	0

After conductors are installed, seal ends of conduits with an approved sealing compound.

To form a watertight seal, tape ends of spare conductors and conductors ending in pull boxes.

Conductors and cables inside fixture or cabinet must be neatly arranged and tied together by function with self-clinching nylon cable ties or enclosed in plastic tubing or raceway.

Identify conductors for:

1. Signal overlap phase as specified for vehicle signals in the table titled "Conductor Identification."
2. Metered and unmetered conductors occupying the same pull box. Identify unmetered circuit conductors with "UNMETERED-STREET LTG," or "UNMETERED-COUNT STATION."

Permanently identify conductors by function. Place identification on each conductor, or each group of conductors forming a signal phase, at each pull box and near the end of conductors.

Label, tag, or band conductors by mechanical methods. Identification must not move along the conductors.

**86-2.09C Connectors and Terminals**

Connectors and terminals must be UL- or ETL-listed crimp type. Use manufacturer-recommended tool for connectors and terminals to join conductors. Comply with MIL-T-7928.

Terminate stranded conductors smaller than No. 14 in crimp style terminal lugs.

**86-2.09D Splicing and Terminations**

Splices are allowed for:

1. Grounded conductors in pull box.
2. Pedestrian push button conductors in pull box.
3. Conductors in pull box adjacent to each electrolier or luminaire.
4. Ungrounded traffic signal conductors in pull box, if traffic signals are modified.
5. Ungrounded traffic signal conductors to a terminal compartment or signal head on a standard with conductors of the same phase in the pull box adjacent to the standard.
6. Ungrounded lighting circuit conductors in pull box, if lighting circuits are modified.

**86-2.09E Splice Insulation**

Splice must function under continuous submersion in water.

Multi-conductor cable must be spliced and insulated to form a watertight joint and to prevent moisture absorption by the cable.

Low-voltage tape must be:

1. UL or ETL listed
2. Self-fusing, oil and flame-resistant, synthetic rubber
3. PVC, pressure-sensitive adhesive of 6 mils minimum thickness

Insulating pad must be a combination of an 80-mils thick electrical grade PVC laminate and a 120-mils thick butyl splicing compound with removable liner.

Heat-shrink tubing must comply with the following:

1. Be medium or heavy wall thickness, irradiated polyolefin tubing with an adhesive mastic inner wall.
2. Before contraction, minimum wall thickness must be 40 mils.
3. Heating must be as recommended by the manufacturer. Do not perform open-flame heating.
4. When heated, the inner wall must melt and fill crevices and interstices of the covered object and the outer wall must shrink to form a waterproof insulation.
5. After contraction, each end of the heat-shrink tubing or the open end of end cap of heat-shrink tubing must overlap the conductor insulation at least 1-1/2 inches. Coat ends and seams with electrical insulation coating.
6. Comply with requirements for extruded insulated tubing at 600 V(ac) in UL Standard 468D and ANSI C119.1, and the following requirements:

**Heat-Shrink Tubing Requirements**

Shrinkage Ratio	33 percent, maximum, of supplied diameter when heated to 125 °C and allowed to cool to 25 °C
Dielectric Strength	350 kV per inch, minimum
Resistivity	25 <sup>13</sup> Ω per inch, minimum
Tensile Strength	2,000 psi, minimum
Operating Temperature	-40 °C to 90 °C (135 °C in emergency)
Water Absorption	0.5 percent, maximum

7. If 3 or more conductors are to be enclosed in 1 splice, place mastic around each conductor before placing inside tubing. Use mastic type recommended by heat-shrink tubing manufacturer.

You may use "Method B" as an alternative method for splice insulation. Use at least 2 thicknesses of electrical insulating pad. Apply pad to splice as recommended by manufacturer.

**86-2.095 FUSED SPLICE CONNECTORS**

Install a fused disconnect splice connector in each ungrounded conductor, between the line and the ballast, in the pull box adjacent to each luminaire. Connector must be accessible in the pull box.

For 240 and 480 V(ac) circuits, each connector must simultaneously disconnect both ungrounded conductors. Connector must not have exposed metal parts, except for the head of stainless steel assembly screw. Recess head of stainless steel assembly screw a minimum of 1/32 inch below top of plastic boss that surrounds the head.

Splice connector must protect fuse from water or weather damage. Contact between fuse and fuseholder must be spring loaded. Splice connector terminals must be:

1. Rigidly crimped, using a tool recommended by manufacturer of fused splice connector, onto ungrounded conductors
2. Insulated
3. Watertight

Fuses must be standard midjet ferrule type, with "Non-Time-Delay" feature, and 13/32" x 1-1/2".

**86-2.10 BONDING AND GROUNDING**

Secure all metallic components, mechanically and electrically, to form a continuous system that is effectively grounded.

Bonding jumper must be copper wire or copper braid of the same cross sectional area as a No. 8 or larger to match the load. Equipment grounding conductors must be color coded as specified in NEC or be bare.

Attach bonding jumper to standard as follows:

### Bonding Jumper Attachment

Standard type	Requirements
Standard with handhole and traffic pull box lid cover	Use UL-listed lug and 3/16-inch diameter or larger brass or bronze bolt. Run jumper to conduit or bonding wire in adjacent pull box. Grounding jumper must be visible after the standard is installed and mortar pad is placed on foundation.
Standard without handhole	Use UL-listed ground clamp on each anchor bolt.
Slip-base standard	Use UL-listed ground clamp on each anchor bolt or attach UL-listed lug to bottom slip-base plate with 3/16-inch diameter or larger brass or bronze bolt.

Ground one side of secondary circuit of step-down transformer.

Ground metal conduit, service equipment, and grounded conductor at service point as specified by NEC and service utility, except grounding electrode conductor must be No. 6 or larger.

Equipment bonding and grounding conductors are required in conduit. Run a No. 8 minimum bare copper wire continuously in conduit system. The bonding wire must be sized as specified in the NEC.

Ground electrode must be:

1. 1 piece
2. 10-foot minimum length of one of the following:
  - 2.1. Galvanized steel rod or pipe not less than 3/4 inch in diameter
  - 2.2. Copper clad steel rod not less than 5/8 inch in diameter
3. Installed as specified in NEC
4. Bonded to service equipment using one of the following:
  - 4.1. Ground clamp
  - 4.2. Exothermic weld
  - 4.3. No. 6 or larger copper conductor

On wood pole, metallic equipment mounted less than 8 feet above ground surface must be grounded.

Bond metallic conduit in non-metallic pull box using bonding bushing or bonding jumper.

Bond metallic conduit in metal pull box using bonding bushings and bonding jumpers connected to bonding wire running in the conduit system.

#### 86-2.11 SERVICE

Electrical service installation and materials must comply with service utility requirements.

If service equipment is to be installed on utility-owned pole, you must furnish and install conduit, conductors, and other necessary material to complete service installation. Service utility will decide riser and equipment position.

Install service equipment early on to allow service utility to schedule its work before project completion.

Furnish each service with a circuit breaker that simultaneously disconnects all ungrounded service entrance conductors.

Circuit breakers must:

1. Be quick-break on either automatic or manual operation.
2. Have operating mechanism that is enclosed and trip-free from operating handle on overload.
3. Be trip indicating.
4. Have frame size plainly marked.
5. Have trip rating clearly marked on operating handle.
6. Have overload tripping of breakers not influenced by ambient temperature range of -18 °C to 50 °C.
7. Be internal trip type.
8. Be UL or ETL listed and comply with UL 489 or equal.
9. Have minimum interrupting capacity of 10,000 A, rms, if used as service disconnect.

Service equipment enclosure must be a NEMA 3R enclosure with dead-front panel and a hasp with a 7/16-inch hole for a padlock. Enclosure must be field marked as specified in the NEC to warn qualified persons of potential electric arc flash hazards.

Service equipment enclosure, except Types II and III, must be galvanized or have a factory-applied rust-resistant prime coat and finish coat.

Types II and III service equipment enclosures must be manufactured from one of the following:

1. Galvanized sheet steel
2. Sheet steel plated with zinc or cadmium after manufacturing
3. Aluminum

Manufacture service equipment enclosure as specified in Section 86-3.04A, "Cabinet Construction." Overlapping exterior seams and doors must comply with requirements for NEMA 3R enclosures in the NEMA Enclosure Standards.

If an alternative design is proposed for Type II or III service equipment enclosure, submit plans and shop drawings to the Engineer for approval before manufacturing.

Except for falsework lighting and power for your activities, when you submit a written request, the Engineer will arrange:

1. With the service utility to complete service connections for permanent installations and the Department will pay all costs and fees required by the service utility. Submit request at least 15 days before service connections are required.
2. For furnishing electrical energy. Energy used before contract completion will be charged to you, except cost of energy used for public benefit as ordered by the Engineer will be paid by the Department or local authorities.

Full compensation for furnishing and installing State-owned or permanent service poles, service equipment, conduit, conductors, and pull boxes, including equipment, conduit, and conductors placed on utility-owned poles, is included in the contract item of electrical work involved and no additional compensation will be allowed therefor.

If the service point is indeterminate and is shown on the plans as "approximate location" or "service point not yet established," the labor and materials required for making the connection between the service point, when established, and the nearest pull box shown on the plans will be paid for as extra work as specified in Section 4-1.03D, "Extra Work."

#### **86-2.12 WOOD POLES**

Wood poles must comply with the following:

1. Class 5 or larger as specified in ANSI O 5.1
2. Less than 180-degree twist in grain over the full length
3. 4-inch or less sweep
4. Beveled top
5. Placed in ground at least 6 feet
6. Length must be:
  - 6.1. 25 feet for service pole
  - 6.2. 35 feet for other

After each pole is set in ground, backfill space around pole with selected earth or sand, free of rocks and other deleterious material, placed in 4-inch thick layers. Moisten each layer and thoroughly compact.

Manufacture mast arm from standard pipe, free from burrs. Each mast arm must have an insulated wire inlet and wood pole mounting brackets for mast arm and tie-rod cross arm. Manufacture tie rod from structural steel and pipe.

Mount mast arm for luminaire to provide a 34-foot mounting height for a 200 W high pressure sodium luminaire and 40-foot mounting height for 310 W high pressure sodium luminaire. Traffic signals and flashing beacons on mast arm must provide a minimum vertical clearance of 17 feet from bottom of equipment to pavement.

After manufacturing, pressure-treat pole as specified in Section 58, "Preservative Treatment of Lumber, Timber and Piling," and AWPAs Use Category System: UC4B, Commodity Specification D.

If specified, treat pole with waterborne wood preservative.

#### **86-2.13 LIGHTING AND SIGN ILLUMINATION CONTROL**

Enclosure for the circuit breaker for lighting and sign illumination control must:

1. Be NEMA 3R
2. Be galvanized, cadmium plated, or powder-coated
3. Include dead front panel and a hasp with a 7/16 inch diameter hole for padlock

## **86-2.14 TESTING**

### **86-2.14A Materials Testing**

Deliver material and equipment to be tested to either the Transportation Laboratory or a testing location ordered by the Engineer.

Allow 30 days for acceptance testing from the time material or equipment is delivered to test site. You must pay for all shipping, handling, and related transportation costs associated with testing. If equipment is rejected, you must allow 30 days for retesting. Retesting period starts when corrected equipment is delivered to test site. You must pay for all retesting costs. Delays resulting from submittal of non-compliant materials do not relieve you from executing the contract within the allotted time.

If equipment submitted for testing does not comply with specifications, remove the equipment within 5 business days after notification that the equipment is rejected. If equipment is not removed within that period, it may be shipped to you at your expense.

When testing is complete, you will be notified. You must pick up the equipment at the test site and deliver it to the job site.

Testing and quality control procedures for all other traffic signal controller assemblies must comply with NEMA TS Standards for Traffic Control Systems.

### **86-2.14B Field Testing**

Before starting functional testing, perform the following tests in the presence of the Engineer:

#### **86-2.14B(1) Continuity**

Test each circuit for continuity.

#### **86-2.14B(2) Ground**

Test each circuit for grounds.

#### **86-2.14B(3) Insulation Resistance**

Perform insulation resistance test at 500 V(dc) on each circuit between the circuit and a ground. Insulation resistance must be 10 MΩ minimum on all circuits, except for inductive loop detector circuits that must have an insulation resistance value at least 100 MΩ.

### **86-2.14C Functional Testing**

Test periods must comply with Section 86-1.07, "Scheduling of Work."

Acceptance of new or modified traffic signal will be made only after all traffic signal circuits have been thoroughly tested.

Perform functional test to show that each part of the system functions as specified.

Functional test for each new or modified system must include at least 5 business days of continuous, satisfactory operation. If unsatisfactory performance of the system occurs, the condition must be corrected and the system retested until the 5 business days of continuous, satisfactory operation is obtained.

Except for new or modified parts of existing lighting circuit and sign illumination system, the State or local agency will maintain the system during test period and pay the electrical energy cost. Except for electrical energy, you must pay the cost of necessary maintenance performed by the State or local agency on new circuits or on the portions of existing circuits modified under the contract.

Shutdown of electrical system caused by traffic from a power interruption or from unsatisfactory performance of State-furnished materials does not constitute discontinuity of the functional test.

## **86-2.15 GALVANIZING**

Galvanize as specified in Section 75-1.05, "Galvanizing." Cabinet material may be galvanized before manufacturing as specified in ASTM A 653/653M, Coating Designation G 90.

Steel pipe standard and pipe mast arm must be hot-dip galvanized after manufacturing and must comply with Section 75-1.05, "Galvanizing." . Remove spikes from galvanized surfaces.

A minimum of 10 inches of upper end of anchor bolts, anchor bars or studs, and nuts and washers must be galvanized as specified in Section 75-1.05, "Galvanizing."

After galvanizing, bolt threads must accept galvanized standard nuts without requiring tools or causing removal of protective coatings.

Galvanizing existing materials in an electrical installation will not be required.

## **86-2.16 PAINTING**

Paint electrical equipment and material as specified in Section 59, "Painting," and the following:

1. Use paint material specified in Section 91, "Paint."
2. Factory or shop cleaning methods for metals are acceptable if equal to the methods specified.
3. Instead of temperature and seasonal restrictions for painting as specified in Section 59, "Painting," paint may be applied to equipment and materials for electrical installations if ordered by the Engineer.
4. Ungalvanized ferrous surface to be painted must be cleaned before applying prime coat. Blast cleaning is not required.
5. If an approved prime coat is applied by manufacturer, and in good condition, the 1st primer application is not required.
6. Existing equipment to be painted in the field, including State-furnished equipment, must be washed with a stiff bristle brush using a solution of water containing 2 tablespoons of heavy duty detergent powder per gallon. After rinsing, surface must be wire-brushed with a coarse, cup-shaped, power-driven brush to remove badly bonded paint, rust, scale, corrosion, grease, or dirt. Dust or residue remaining after wire brushing must be removed before priming.
7. Do not paint galvanized metal guard post, galvanized equipment, State-furnished controller cabinet, and wood poles for traffic signal or flashing beacon.
8. New galvanized metal surface to be painted in the field must be cleaned as specified for existing equipment before applying the prime coat. Do not wire brush new galvanized surface.
9. After erection, examine exterior surface for damaged primer, clean, and spot coat with primer.
10. Paint Types II and III steel service equipment enclosures with a polymeric or an enamel coating system matching Color No. 14672, light green, of Federal Standard 595B. Coating must be commercially smooth and free of flow lines, paint washout, streaks, blisters, and other defects that would impair serviceability or detract from general appearance. Coating must comply with the following:
  - 10.1. Coating hardness - Finish must have pencil lead hardness of HB, minimum, using an Eagle Turquoise pencil.
  - 10.2. Salt spray resistance - Undercutting coating system's film must not exceed 1/8-inch average, from lines scored diagonally and deep enough to expose the base metal, after 336 hours of exposure in a salt spray cabinet complying with ASTM B 117.
  - 10.3. Adherence - Must not have coating loss when tested as specified in California Test 645. Perform testing by applying coating to 4" x 8" x 0.024" test specimens of the same material as the cabinet, using the same application method.
11. Finish interior of metal signal visor, louver, and front face of back plates with 2 applications of lusterless black exterior grade latex paint formulated for application to properly prepared metal surface. Good condition factory finish will be acceptable.
12. Finish metal signal section, signal head mounting, brackets and fittings, outside of visor, pedestrian push button housing, pedestrian signal section and visor, and back face of back plate with 2 applications of lusterless black or dark olive green exterior grade latex paint formulated for application to properly prepared metal surface. Match dark olive green color to Color Chip No. 68 filed at the Transportation Laboratory.
13. Prepare and finish conduit and conduit fitting above ground the same as adjacent standard or post.
14. Relocated, reset or modified equipment previously finished as specified in this section, except for previously-finished galvanized standard with traffic signal yellow enamel, must be given a spot finishing application on newly primed areas and 1 finishing application over the entire surface. If signal face or mounting brackets are required to be painted under this section, all signal faces and mounting brackets on the same mounting must be repainted.
15. Small rusted or repaired areas of relocated or reset galvanized equipment must be cleaned and painted as specified in Section 75-1.05, "Galvanizing," for repairing damaged galvanized surfaces.
16. Stencil equipment number neatly on the standard or adjacent structure. Obtain number from the Engineer.
17. Perform painting neatly. The Engineer reserves the right to require use of brushes if the work performed by paint spraying machine is unsatisfactory.

## **86-3 CONTROLLER ASSEMBLIES**

### **86-3.01 CONTROLLER ASSEMBLIES**

A controller assembly houses a complete mechanism for controlling the operation of traffic signals or other systems.

Model 170 and Model 2070, specified as a Model 170/2070 controller assembly, includes a Model 170, 170E or 2070 controller unit, a wired cabinet, and all auxiliary equipment required to control the system.

## 86-3.02 (BLANK)

## 86-3.03 (BLANK)

### 86-3.04 CONTROLLER CABINETS

Controller cabinets for controller assemblies other than Model 170/2070 must comply with the following:

#### 86-3.04A Cabinet Construction

Cabinet must be rainproof and the top crowned 1/2 inch or slanted toward the back to prevent standing water.

Cabinet and door must be manufactured from one of the following:

1. 0.073-inch minimum thickness cold-rolled steel with continuously-welded exterior seams
2. 0.073-inch minimum thickness stainless steel with overlapping exterior seams complying with Type 4 enclosures of the NEMA Enclosure Standards
3. 0.125-inch minimum thickness aluminum with continuously-welded exterior seams

Exterior welds must be ground smooth and edges filed to a radius of at least 0.03 inch.

Cabinet manufactured from cold-rolled steel must comply with Section 86-2.16, "Painting," and the following:

1. Cabinet manufactured from cold-rolled steel must be finished with a polymeric or an enamel coating system conforming to Color No. 14672 of Federal Standard 595B.
2. Cabinet must not have coating loss when 2 test specimens, 4" x 8", of the same material and coating as the cabinet are tested. Two 9-inch-diagonal scratches exposing bare metal will be made on a specimen. Soak specimen in demineralized water for 192 hours. Tightly affix a 1-inch wide strip of masking tape to the surface and remove with one quick motion. Specimen showing evidence of blistering, softening, or peeling of paint or coating from the base metal will be rejected. Testing must comply with California Test 645, except passing 180 Degree Bend Test is not required.
3. Metal must be prepared by the 3-step, iron phosphate conversion coating bonderizing technique.
4. Inside walls, doors, and ceiling of the housing must be the same as the outside finish.

Cabinet manufactured from stainless steel must comply with the following:

1. Use annealed or quarter-hard stainless steel that complies with ASTM A 666 for Type 304, Grades A or B.
2. Use gas tungsten arc welding (GTAW) process with bare stainless steel welding electrodes. Electrodes must comply with AWS A5.9 for ER308 chromium-nickel bare arc welding electrodes.
3. Procedures, welder, and welding operator must comply with requirements and practices recommended in AWS C5.5.
4. Ground or brush exposed, exterior surfaces of stainless steel cabinet to a 25 to 50-microinch finish using iron-free abrasives or stainless steel brushes.
5. After grinding or brushing, cabinet must not show rust discoloration when:
  - 5.1. Exposed for 48 hours in a salt spray cabinet as specified in ASTM B 117
  - 5.2. Exposed 24 hours in a tap water spray cabinet with the water temperature between 38 °C and 45 °C
6. After the test, cabinet showing rust discoloration anywhere on its surface will be rejected. Rejected cabinets may be cleaned, passivated, and resubmitted for testing.

Cabinet manufactured from aluminum sheet must comply with ASTM B 209 or B 209M for 5052-H32 aluminum sheet, and the following:

1. Use gas metal arc welding (GMAW) process with bare aluminum welding electrodes. Electrodes must comply with AWS A5.10 for ER5356 aluminum alloy bare welding electrodes.
2. Procedures, welder, and welding operator for welding must comply with requirements in AWS B3.0, "Welding Procedure and Performance Qualification," and to practices recommended in AWS C5.6.
3. Surface finish of each aluminum cabinet must comply with MIL-A-8625 for a Type II, Class I coating, except anodic coating must have a minimum thickness of 0.0007 inch and a minimum coating weight of 0.001 ounce per

square inch. The anodic coating must be sealed in a 5 percent aqueous solution of nickel acetate, pH 5.0 to 6.5, for 15 minutes at 97 °C. Before applying anodic coating, clean and etch cabinets using the steps below:

- 3.1. Clean by immersing into inhibited alkaline cleaner, Oakite 61A, Diversey 909, or equal, 6 to 8 ounces per gallon at 71 °C for 5 minutes.
- 3.2. Rinse in cold water.
- 3.3. Etch in solution of 1-1/2 ounce of sodium fluoride and 4 to 6 ounces of sodium hydroxide per gallon of distilled water at 60 °C to 65 °C for 5 minutes.
- 3.4. Rinse in cold water.
- 3.5. Immerse in 50 percent by volume nitric acid solution at room temperature for 2 minutes.
- 3.6. Rinse in cold water.

Cabinet must have:

1. Single front door with:
  - 1.1. 44-inch maximum door width.
  - 1.2. Lock, when closed and latched, that is locked.
  - 1.3. Police panel mounted on door, equipped with a keyed lock and 2 police keys. Each police key must have a shaft at least 1-3/4 inch in length.
2. Dust-tight gasketing on all door openings, permanently bonded to the metal. Mating surface of the gasketing must be covered with silicone lubricant to prevent sticking.
3. Handle that:
  - 3.1. Allows padlocking in closed position
  - 3.2. Has a minimum length of 7 inches
  - 3.3. Has a 5/8-inch, minimum, steel shank
  - 3.4. Is manufactured of cast aluminum, or zinc-plated or cadmium-plated steel
4. Cabinet door frame with:
  - 4.1. Latching mechanism that:
    - 4.1.1. Holds tension on and forms a firm seal between door gasketing and frame.
    - 4.1.2. Is a 3-point cabinet latch with nylon rollers that have a minimum diameter of 3/4 inch and equipped with ball bearings.
    - 4.1.3. Has a center catch and a pushrod made of zinc-plated or cadmium-plated steel. Pushrod must be at least 1/4" x 3/4" and turned edgewise at outer supports. Cadmium plating must comply with MIL-QQ-416. Zinc plating must comply with MIL-QQ-325.
  - 4.2. Hinging that:
    - 4.2.1. Has 3-bolt butt hinges, each having a stainless steel fixed pin. Hinges must be stainless steel or may be aluminum for aluminum cabinet.
    - 4.2.2. Is bolted or welded to the cabinet. Hinge pins and bolts must not be accessible when door is closed.
    - 4.2.3. Has a catch to hold the door open at 90 degrees and 180 degrees, ± 10 degrees, if a door is larger than 22 inches in width or 6 square feet in area. Catch must be at least 3/8-inch diameter, stainless steel plated rod capable of holding door open at 90 degrees in a 60 mph wind at an angle perpendicular to the plane of the door.
5. Lock that:
  - 5.1. Is solid brass, 6-pin tumbler, rim type
  - 5.2. Has rectangular, spring-loaded bolts
  - 5.3. Is left hand and rigidly mounted with stainless steel machine screws approximately 2 inches apart
  - 5.4. Extends 1/8 to 3/8 inch beyond the outside surface of door
6. 2 keys that are removable in the locked and unlocked positions.

Submit alternative design details for review and approval before manufacturing cabinet.  
Use metal shelves or brackets that will support controller unit and auxiliary equipment.  
Machine screws and bolts must not protrude outside the cabinet wall.

### 86-3.04B Cabinet Ventilation

Each controller cabinet must have:

1. 8 screened, 1/2-inch diameter or larger, raintight vent holes, in lower side or bottom of cabinet. You may use louvered vents with a permanent metal mesh or 4-ply woven polypropylene air filter held firmly in place, instead.
2. Electric fan with ball or roller bearings and capacity of at least 100 cubic feet per minute. Fan must be thermostatically controlled and manually adjustable to turn on between 32 °C and 65 °C with a differential of not more than 6 °C between automatic turn on and turn off. Fan circuit must be fused at 125 percent of ampacity of installed fan motor.

Fan and cabinet vent holes must be positioned to direct bulk of airflow over controller unit or through ventilating holes of controller unit.

### 86-3.04C Cabinet Wiring

Conductors used in controller cabinet wiring must:

1. Be neatly arranged and laced, or enclosed in plastic tubing or raceway.
2. End with properly sized captive or spring-spade terminal or be soldered to a through-panel solder lug on the back side of the terminal block. Apply crimp-style connector with proper tool to prevent opening of handle until crimp is completed.

Controller cabinet must have an equipment grounding conductor bus that is grounded to the cabinet and connected to metal conduit system or other approved ground with a No. 8, or larger, grounding conductor.

With all cabinet equipment in place and connected, resistance between grounded conductor terminal bus and equipment grounding conductor bus must be 50 MΩ, minimum, when measured with an applied voltage of 150 V(dc).

If direct current is to be grounded, connect to equipment ground only.

Use two or more terminal blocks for field connection. Install field terminal within 22 inches from front of cabinet and orient for screwdriver operation. Terminal must be a minimum of 5 inches above foundation.

No more than 3 conductors per terminal are allowed. Two flat metal jumpers, straight or U shaped, may be placed under terminal screw. At least 2 full threads of terminal screws must be fully engaged when screw is tightened. Live parts must not extend beyond the barrier.

## 86-3.05 CABINET ACCESSORIES

### 86-3.05A Labels

Include permanently printed, engraved, or silk-screened label for equipment and removable items of equipment.

Labeling must match cabinet wiring diagram. Label for shelf-mounted equipment must be on shelf face below item. Label for wall-mounted equipment must be below item.

### 86-3.05B Convenience Receptacle

Mount convenience receptacle in a readily accessible location inside the cabinet.

Convenience receptacle must be a duplex, 3-prong, NEMA 5-15R grounding type outlet that complies with UL Standard 943.

### 86-3.05C Surge Arrestor

Surge arrestor must reduce effects of power line voltage transients and have ratings as follows:

**Surge Arrestor Requirements**

Recurrent peak voltage	184 V(ac)
Energy rating, maximum	20 J
Power dissipation, average	0.85 W
Peak current for pulses less than 7 μs	1,250 A

Standby current must be 1 mA or less for 120 V(ac), 60 Hz sinusoidal input.

### **86-3.05D Terminal Blocks**

Terminal block must be rated 600 V(ac), minimum, and have nickel-, silver-, or cadmium-plated brass binder head screw terminal.

Heavy duty terminal block must be rated at 20 A and have 12 position with No. 10 x 5/16-inch nickel-plated brass binder head screws and nickel-plated brass inserts. Each position must have 2 screw-type terminals. Terminal block must be barrier type with shorting bars in each of the 12 positions, and must have integral type marking strips.

Light duty terminal block must be rated at 5 A and have 12 positions with No. 6 x 1/8 inch binder head screws. Each position must have 1 screw-type terminal.

## **86-3.06 COMPONENTS**

### **86-3.06A Toggle Switches**

Toggle switch must

1. Have poles as required
2. Be rated at 200 percent of circuit current for circuits of 10 A or less and 125 percent of circuit current for circuits over 10 A

### **86-3.06B Cartridge Fuses**

Install cartridge fuse in panel-mounted fuseholder. Fuse type and rating must be as recommended by the fuse manufacturer for protecting the load.

### **86-3.06C Circuit Breakers**

Circuit breaker must comply with Section 86-2.11, "Service," except breaker must have a minimum interrupting capacity of 5,000 A, rms.

### **86-3.06D Connectors**

Use connector designed to interconnect various parts of circuit together and constructed for the application involved. Design connector for positive connection of circuit and easy insertion and removal of mating contacts. Connector must be permanently keyed to prevent improper connection of circuit.

Connector, or device plugging into connector, must have positive connection to prevent a circuit from breaking due to vibration, a pull on connecting cable, or similar disruptive force.

## **86-3.07 ACCESSORIES**

Accessories must comply with the following:

### **86-3.07A Telephone Bridge**

Telephone bridge must comply with the following:

#### **86-3.07A(1) General Description**

Dual 5-way active data bridge must include:

1. 4-wire transmission interconnection between a dedicated common port and 4 multiple ports. Ports must be characterized by a balanced 600  $\Omega$  terminating impedance. The module's active circuit must allow unused multiple ports to be left unterminated without affecting the transmission response of ports in use.
2. Splitter channel and combiner channel. Connect multiple inputs to a common output in combiner channel. Connect common input to multiple outputs in splitter channel. Splitter and combiner must be separate and independent, allowing operation in full-duplex data transmission applications. Input, output, and line monitor jacks on front panel of bridge must allow isolated-module, isolated-facility, and cross-bridge measurement of transmission parameters in both, splitter and combiner channels.
3. Front-panel-accessible potentiometers with continuous adjustment of cross-bridge loss or gain within -30 to -10 dB and -10 to +10 dB ranges. Select either range for each channel. Adjusted level must be same for all cross-bridge port combinations so if the splitter-channel potentiometer is set for +3 dB gain, all common-to-multiple-port paths in the splitter channel must receive a +3 dB level increase.
4. Input voltage of -22 to -56 V(dc) at a maximum current of 60 mA.

Individually package each dual 5-way active bridge unit in housing. Circuitry must be solid state, constructed on removable industry standard circuit boards with plug in edge connectors. Test jack, edge connector, and external plug connector must be made of material suitable for use in above stated environment without deterioration of electrical connection for useful life of equipment. Physical size of case must not exceed 225 cubic inches and must be suitable for mounting to frame of field cabinet. Use mounting holes to attach unit to one side of frame of relay rack.

Include input and output ports for 5 full duplex telephone circuits with input and output ports labeled as to function. Level control, or switches and level adjustment potentiometers, and input and output level test jacks must provide external adjustments without removal of the housing.

#### **86-3.07A(2) Application**

Use dual 5-way active data bridge to interconnect 4-wire data modems to a common data channel or link. At the distant end, terminate common data link into a computer that may time sequentially poll outlying or remote data terminals. Use bridge for central transmission arrangement, or "hubbing" network, to extend data transmission to outlying terminals.

To expand number of multiple ports of a 4-wire data hubbing network in a tandem bridge arrangement, directly connect 1 multiple port in each channel of 1st bridge to common port of the same channel of 2nd bridge to get a 4-wire data bridge with 1 common and 7 multiple ports.

#### **86-3.07A(3) Circuit Description**

Combiner channel of dual 5-way active data bridge must have a variable-gain-integrated-circuit operational amplifier with an input summing circuit. Summing circuit must add transmission energy from all multiple input ports at low-impedance summing point for input port isolation. Connect amplifier output to transformer for balanced connection to facility.

Splitter channel must include a transformer-input, variable-gain, integrated-circuit operational amplifier and power amplifier. Power transformer output must be very low impedance and drive eight 300  $\Omega$  resistors to derive proper impedance at multiple output circuits and provide isolation between output circuits.

Multiple ports in bridge splitter and combiner channels must be isolated, and balanced by output transformer and matched precision resistors in each channel.

#### **86-3.07A(4) Electrical Requirements**

Comply with following electrical requirements:

### Electrical Requirements

Specification	Requirement
Splitter channel loss or gain	-30 to +10 dB usable range
Combiner channel loss or gain	-30 to +10 dB usable range
Maximum output level (overload point)	Splitter: +5 dBm Combiner: +12 dBm
Level change with loading	1 dB max, 1 port to all ports loaded
Input port impedance	Splitter (multiple ports): 600 $\Omega$ balanced Combiner (common port): 600 $\Omega$ balanced
Output port impedance	Splitter (multiple ports): 600 $\Omega$ balanced Combiner (common port): 600 $\Omega$ balanced
Harmonic distortion	Splitter: less than 1 percent at +3 dBm Combiner: less than 1 percent at +8 dBm
Noise	20 dBm max
Frequency response	$\pm 1$ dB re 1,000 Hz level, 300 to 5,000 Hz
Delay distortion	Less than 75 $\mu$ s, 400 to 3,000 Hz
Cross-port coupling loss (crosstalk)	Greater than 55 dB
Input power	-22 to -56 V(dc), 60 mA max
Operating environment	-7 $^{\circ}$ C to 54 $^{\circ}$ C, humidity to 95% (no condensation)
Mounting	1 position

#### 86-3.07A(5) Testing and Troubleshooting

You must have complete testing and troubleshooting instructions, circuit diagrams and pictorial component location, and identification guides for each unit.

### 86-4 TRAFFIC SIGNAL FACES AND FITTINGS

#### 86-4.01 VEHICLE SIGNAL FACES

Each vehicle signal face must:

1. Be adjustable and allow for 360-degree rotation about vertical axis
2. Comply with ITE publication ST-017B, "Vehicle Traffic Control Signal Heads"
3. Comply with California Test 604, except for arrow and "X" faces
4. Have 3 sections arranged vertically: red at top, yellow at center, and green at bottom
5. Be of the same manufacturer and material, if more than 1 is installed at an intersection, except for programmed visibility type
6. Be sealed with neoprene gasket at top opening
7. Be LED modules

#### 86-4.01A Signal Sections

Each signal section must comply with the following:

1. Maximum height must be 10-1/4 inches for an 8-inch section and 14-3/4 inches for a 12-inch section.
2. Housing must:
  - 2.1. Be either die-cast or permanent mold-cast aluminum, or if specified, be structural plastic.
  - 2.2. Comply with ITE publication ST-017B if die-cast or permanent mold-cast aluminum is used.
  - 2.3. Have a 1-piece, hinged, square-shaped door designed to allow access for relamping without the use of tools. Door must be secured to hold the door closed during loading tests. Module or lens must be watertight and mounted in the door.

3. Hinge pins, door latching devices, and other exposed hardware must be Type 304 or 305 stainless steel. Interior screws and fittings must be stainless steel, or steel with a corrosion resistant plating or coating.
4. Opening must be placed on top and bottom to receive 1-1/2-inch pipe. The 8-inch and 12-inch sections of an individual manufacturer must be capable of joining to form a signal face in any combination. This interchangeability is not required between metal and plastic sections.
5. Gaskets must be made of a material that is not affected if installed in a section with metal or plastic housing that is continuously operated for 336 hours.

Structural failure is described as follows:

**Signal Section Structural Failure**

Signal Section Type	Requirements	Description of Structural Failure
Metal	California Test 666	Fracture within housing assembly or deflection of more than half the lens diameter of signal section during wind load test
Plastic	California Test 605	Fracture within housing assembly or deflection of more than 10 degrees in either the vertical or horizontal plane after wind load has been removed from front of signal face, or deflection of more than 6 degrees in either the vertical or horizontal plane after wind load has been removed from back of signal face

**86-4.01A(1) Metal Signal Sections**

Each metal signal section must have a metal visor. Metal signal faces requiring backplates must have metal backplates.

**86-4.01A(2) Plastic Signal Sections**

Housing must be molded in 1 piece, or fabricated from 2 or more pieces and joined into a single piece. Plastic must have ultraviolet stability, be unaffected by lamp heat, and be self-extinguishing. Housing and door must be colored throughout and be black, matching Color No. 17038, 27038, or 37038 of Federal Standard 595B.

Each face section must be joined to adjacent section by one of the following:

1. Minimum of 3 machine screws for 8-inch sections and 4 machine screws for 12-inch sections, installed through holes near front and back of housing. Each screw must be a No. 10 and have a nut, flat washer, and lock washer.
2. Two machine screws, each with a nut, flat washer, and lock washer, installed through holes near the front of the housing, and a fastening through the 1-1/2-inch pipe opening. Fastening must have 2 large flat washers to distribute the load around the pipe opening and 3 carriage bolts, each with a nut and lock washer. Minimum screw size must be No. 10. Minimum carriage bolt size must be 1/4 inch.

Supporting section of each signal face supported only at top or bottom must have reinforcement.

Reinforcement plate must be either sheet aluminum, galvanized steel, or cast aluminum. Each plate must be a minimum of 0.11-inch thick and have a hole concentric with 1-1/2-inch pipe-mounting hole in the housing. Place reinforcement plate as follows:

**Reinforcement Plate Placement**

Type of Reinforcement Plate	Placement
Sheet aluminum	Inside and outside of housing
Galvanized steel	Inside of housing
Cast aluminum	Outside of housing

Reinforcement plates placed outside of the housing must be finished to match signal housing color and be designed to allow proper serrated coupling between signal face and mounting hardware. Minimum of 3 No. 10 machine screws must be installed through holes in each plate and matching holes in the housing. Each screw must have a round or binder head, a nut, and lock washer.

If signal face is supported by a Type MAS side attachment slip-fitter inserted between 2 sections, place spacers between the 2 sections. Vertical dimension of spacers must allow proper seating of serrations between the slip-fitter and the 2 sections. In addition to the fastening through the large openings in housing, the 2 sections must join with at least 2 machine screws through holes near the front of housing and the spacers, and through matching holes in a reinforcing plate installed in housing. Machine screws must be No. 10 minimum size. Spacers must be made of same material as signal housing.

If reinforcing webs are used to connect back of housing to top, bottom, and sides, reinforcing plates are not required.

Holes for machine screws must be either cast or drilled during signal section manufacturing. Surround each hole with a 1/8-inch minimum width boss to allow contact between signal sections about axis of hole.

Each plastic signal section must have a plastic or metal visor. Plastic signal faces requiring backplates must have plastic backplates.

Serrated nylon washer must be inserted between each plastic signal section and metal mounting assembly. Each washer must be between 3/16- and 1/4-inch thick. Serrations must match those on signal section and mounting assembly.

#### **86-4.01B Visors**

Include removable visor with each signal section. Comply with ITE publication ST-017B. Visors are classified by lens enclosure as full circle, tunnel or cap. Bottom opens for tunnel type and both, bottom and lower sides open for cap type. Visors must be tunnel type.

Visor must have a downward tilt between 3 and 7 degrees with a length of:

1. 9-1/2-inch minimum for nominal 12-inch round lenses
2. 7 inch for nominal 8-inch round lenses

Metal visor must be formed from 0.050-inch, minimum thickness, aluminum alloy sheet.

Plastic visor must be either formed from sheet plastic or assembled from one or more injection, rotational, or blow-molded plastic sections. Material must be of a black homogeneous color with lusterless finish. Sections must be joined using thermal, chemical, or ultrasonic bonding, or with aluminum rivets and washers permanently colored to match visor.

Secure each visor to its door and prevent removal or permanent deformation when wind load specified in California Test 605 for plastic visors or 666 for metal visors is applied to its side for 24 hours.

If directional louvers are used, fit louvers snugly into full-circular signal visors. Outside cylinder must be constructed of 0.030-inch nominal thickness, or thicker, sheet steel and vanes must be constructed of 0.016-inch nominal thickness, or thicker, sheet steel, or the cylinder and vanes must be constructed of 5052-H32 aluminum alloy of equal thickness.

#### **86-4.02 (BLANK)**

#### **86-4.03 (BLANK)**

#### **86-4.04 BACKPLATES**

Background light must not be visible between backplate and signal face or between sections.

Plastic backplates must be either formed from sheet plastic or assembled from extruded, molded, or cast sections. Sections must be factory joined using one of the following:

1. Appropriate solvent cement
2. Aluminum rivets and washers painted or permanently colored to match backplate
3. No. 10 machine screws with washers, lock washers, and nuts, painted to match backplate

Backplate material must be of black homogeneous color with a lusterless finish. Secure each plastic backplate to the plastic signal face in a manner that prevents its removal or permanent deformation when the wind-load test is applied to either the front or back of signal face. Permanent deformation of any portion of backplate must not exceed 5 degrees forward or backward after wind loading is applied for 24 hours.

If plastic backplate requires field assembly, join with at least 4 No. 10 machine screws at each field-assembled joint. Each machine screw must have an integral or captive flat washer, a hexagonal head slotted for a standard screwdriver, and either a locking nut or a nut and lockwasher. Machine screws, nuts, and washers must be stainless steel or steel with a zinc or black-oxide finish.

If a metal backplate has 2 or more sections, fasten sections with rivets or aluminum bolts peened after assembly to avoid loosening.

Instead of the screws shown on the plans, you may use self-threading No. 10 steel screws to fasten plastic backplates to plastic signal face. Each screw must have an integral or captive flat washer, a hexagonal head slotted for a standard screwdriver, and is stainless steel or steel with a zinc or black-oxide finish.

#### **86-4.05 PROGRAMMED VISIBILITY VEHICLE SIGNAL FACES**

Programmed visibility signal face and its installation must comply with Section 86-4.01, "Vehicle Signal Faces," Section 86-4.04, "Backplates," and Section 86-4.08, "Signal Mounting Assemblies."

Each programmed visibility signal section must:

1. Have a nominal 12-inch diameter circular or arrow indication
2. Comply with ITE publication ST-017B for color and arrow configuration
3. Have a cap visor
4. Have an adjustable connection that provides incremental tilting from 0 to 10 degrees above or below horizontal while maintaining a common vertical axis through couplers and mountings

Terminal connection must allow external adjustment about the mounting axis in 5-degree increments.

Signal must be mountable with ordinary tools and capable of servicing without tools. Preset adjustment at 4 degrees below horizontal.

Visibility of each programmed visibility signal face must be capable of adjustment or programming, within the face. When programmed, each signal face's indication must be visible only in those areas or lanes to be controlled, except that during dusk and darkness a faint glow to each side is allowed.

You must program the head as recommended by the manufacturer.

#### **86-4.06 PEDESTRIAN SIGNAL FACES**

Message symbols for pedestrian signal faces must be white "WALKING PERSON" and Portland orange "UPRAISED HAND." Comply with ITE Standards: "Pedestrian Traffic Control Signal Indications" and California MUTCD. Each symbol's height must be at least 10 inches and width must be at least 6-1/2 inches.

Luminance of "UPRAISED HAND" symbol must be 1,100 foot-lamberts, minimum, and luminance of "WALKING PERSON" symbol must be 1,550 foot-lamberts, minimum, when tested as specified in California Test 606.

Uniformity ratio of an illuminated symbol must not exceed 4 to 1 between the highest luminance area and the lowest luminance area.

Luminance difference between a nonilluminated symbol and the background around the symbol must be less than 30 percent when viewed with the visor and front screen in place and at a low sun angle.

Each housing, including front screen, must have maximum overall dimensions of 18-1/2-inch width, 19-inch height, and 11-1/2-inch depth.

All new pedestrian signal faces installed at an intersection must be the same make and type.

##### **86-4.06A Type A**

Each Type A pedestrian signal face must include a housing, 1 LED pedestrian signal combo module and a front screen.

##### **86-4.06B Front Screen**

Front screen installation for each Type A signal must comply with one of the following:

1. Install, tilting downward, at an angle of  $15 \pm 2$  degrees out from the top, an aluminum honeycomb screen with 0.2-inch cells, 3/8-inch thick, or a plastic screen of 3/8-inch squares, 1/2-inch thick with wall thickness of 1/16-inch. Completely cover message plate. Include a clear front cover of 1/8-inch minimum thickness acrylic plastic sheet or 1/16-inch minimum thickness polycarbonate plastic. Hold screen and cover firmly in place with stainless steel or aluminum clips or stainless steel metal screws.
2. Install a 1-1/2-inch deep eggcrate or Z crate type screen of 1/32-inch nominal thickness polycarbonate. Mount screening in a frame constructed of 0.040-inch minimum thickness aluminum alloy or polycarbonate. Install screen parallel to face of message plate and hold in place with stainless steel screws. Visor as specified in Section 86-4.06D, "Visors," is not required.

The Department will test screens in a horizontal position with its edges supported. When a 3-inch diameter, 4-pound steel ball is dropped on the screen from a height of 4 feet above, the front screen must not fracture, separate at the welds, or compress more than 1/8-inch. When pedestrian housing is used to support front screen during test, remove message plate from pedestrian signal housing, so there is no back support for the screen.

Screen and frame must be one of the following:

1. Manufactured from aluminum anodized flat black
2. Finished with lusterless black exterior grade latex paint formulated for application to properly prepared metal surfaces
3. Manufactured from flat black plastic

##### **86-4.06C Housing**

Pedestrian signal housing must comply with Section 86-4.01A, "Signal Sections."

#### **86-4.06D Visors**

Use material similar to housing. Extend top of visor a minimum length of 6 inches at top and 5 inches at bottom when measured from front surface of line. Front must be normal to top.

#### **86-4.06E Finish**

Paint exterior of each housing and visor, and interior of visor as specified in Section 86-2.16, "Painting."

#### **86-4.06F Control**

Pedestrian signals must be controllable by solid-state switching devices specified for traffic signal controller assemblies.

#### **86-4.06G Terminal Blocks**

Include light duty terminal block, as specified in Section 86-4.01B, "Electrical Components," with each pedestrian signal face.

#### **86-4.07 (BLANK)**

#### **86-4.08 SIGNAL MOUNTING ASSEMBLIES**

Signal mounting assembly must include:

1. 1-1/2-inch standard steel pipe or galvanized conduit
2. Pipe fitting made of ductile iron, galvanized steel, aluminum alloy Type AC-84B No. 380, or bronze
3. Mast arm and post top slip-fitters, and terminal compartments made of cast bronze or hot-dip galvanized ductile iron

After installation, clean and paint exposed threads of galvanized conduit brackets and bracket areas damaged by wrench or vise jaws. Use wire brush to clean and apply 2 coats of approved unthinned zinc-rich primer, organic vehicle type, as specified in Section 91, "Paint." Do not use aerosol can.

Fit each terminal compartment with a terminal block having a minimum of 12 positions, each with 2 screw-type terminals. Each terminal must accommodate at least five No. 14 conductors. Include a cover on compartment for ready access to terminal block. Terminal compartment used to bracket mount signals must be bolted securely to pole or standard.

Horizontal dimension of mounting assembly members between vertical centerline of terminal compartment or slip-fitter, and the vertical centerline of each signal face must not exceed 11 inches, except where required for proper signal face alignment or to allow programming of programmed visibility signal faces.

Mounting assembly members must be plumb or level, symmetrically arranged, and securely assembled.

Mounting assembly must be watertight, and free of sharp edges or protrusions that might damage conductor insulation. Include positive locking serrated fittings that, if mated with similar fittings on signal faces, will prevent faces from rotating.

Orient each mounting assembly to allow maximum horizontal clearance to adjacent roadway.

Use slip-fitter for post-top mounting of signals. Fit slip-fitter over a 4-1/2-inch outside diameter pipe or tapered standard end. Include cadmium-plated steel set screws. Include an integral terminal compartment for each slip-fitter used to post-top mount signals with brackets.

Do not install signal faces at an intersection until all other signal equipment, including complete controller assembly, is in place and ready for operation. You may mount signal faces if covered or not directed toward traffic.

#### **86-4.09 FLASHING BEACONS**

Flashing beacon must include:

1. Single section traffic signal face with yellow or red LED module indications
2. Backplate
3. Tunnel visor
4. Flashing beacon control assembly

Beacon flasher unit must be independent of intersection flasher unit.

#### **86-4.09A Flashing Beacon Control Assembly**

##### **86-4.09A(1) Enclosure**

Enclosure must be:

1. NEMA 3R with a dead front panel and a hasp with a 7/16-inch hole for a padlock

2. Powder coated, hot-dip galvanized, or factory-applied rust resistant prime coat and finish coat

**86-4.09A(2) Circuit Breakers and Switches**

Circuit breakers must comply with Section 86-2.11, "Service."

Switch for manually operating sign lighting circuit must be a single-hole-mounting toggle type with a single pole and throw and rated at 12 A, 120 V(ac). Furnish switch with an indicating nameplate reading "Auto-Test."

**86-4.09A(3) Flasher**

Comply with Section 8, "Solid-State Flashers," of NEMA Standards publication No. TS 1.

Flasher must be a solid-state device with no contact points or moving parts.

Include 2 output circuits to allow alternate flashing of signal faces. Flasher must be able to carry a minimum of 10 A per circuit at 120 V(ac).

**86-4.09A(4) Wiring**

Conductors and wiring in the enclosure must comply with Section 86-2.09B(1), "Cabinet and Enclosure Installation."

**86-4.09A(5) Terminal Blocks**

Terminal blocks must be:

1. Rated 25 A, 600 V(ac)
2. Molded phenolic or nylon material
3. Barrier type with plated brass screw terminals and integral marking strips

**86-5 DETECTORS**

**86-5.01 VEHICLE DETECTORS**

Sensor unit and isolator must comply with TEES.

**86-5.01A Inductive Loop Detectors**

**86-5.01A(1) General**

Inductive loop detector includes a completely installed loop or group of loops, in the roadway, lead-in cable, and a sensor unit, with power supply installed in a controller cabinet.

**86-5.01A(2) Sensor Unit Construction**

Card type sensor unit must comply with TEES, issued by the Department. Shelf-mounted sensor unit must comply with Section 11 of the NEMA Standards Publication No. TS 1.

**86-5.01A(3) Construction Materials**

Conductor for each inductive loop detector must be continuous, unspliced, and one of the following:

**Conductor Options for Inductive Loop Detector**

Option	Specifications
Type 1 loop wire	Type RHW-USE neoprene-jacketed or Type USE cross-linked polyethylene insulated, No. 12, stranded copper wire with a 40 mils minimum thickness at any point.
Type 2 loop wire	Type THWN or Type XHHW, No. 14, stranded copper wire in a plastic tubing. Plastic tubing must be polyethylene or vinyl, rated for use at 105 °C, and resistant to oil and gasoline. Outside diameter of tubing must be 0.27 inch maximum with a wall thickness of 0.028 inch minimum.

Conductor for loop detector lead-in cable must be two No. 16, 19 x 29, stranded, tinned copper wires, comply with the calculated cross sectional area of ASTM B 286, Table 1, and be one of the following:

### Conductor Options for Loop Detector Lead-In Cable

Option	Specifications
Type B lead-in cable	Insulated with 20 mils of high-density polyethylene. Conductors must be twisted together with at least 2 turns per foot and the twisted pair must be protected with a copper or aluminum polyester shield. A No. 20, minimum, copper drain wire must be connected to equipment ground within cabinet. Cable must have a high-density polyethylene or high-density polypropylene outer jacket with a nominal thickness of 32 mils. Include an amorphous interior moisture penetration barrier of nonhydroscopic polyethylene or polypropylene fillers.
Type C lead-in cable	Comply with International Municipal Signal Association (IMSA) Specification No. 50-2. A No. 20, minimum, copper drain wire must be connected to equipment ground within cabinet.

#### 86-5.01A(4) Installation Details

Install loop conductors without splices and end in nearest pull box. Seal open end of cable jacket or tubing similar to splicing requirements to prevent water from entering. Do not make final splices between loops and lead-in cable until loop operations under actual traffic conditions is approved.

Splice all loop conductors for each direction of travel for same phase of a traffic signal system, in same pull box, to a detector lead-in cable that runs from pull box adjacent to loop detector to a sensor unit mounted in controller cabinet.

End all loop conductors in a pull box or terminal strip in the cabinet.

Identify and band conductors for inductive loop installations. Band, in pairs, by lane, in the pull box adjacent to the loops and near the end of conductors in the cabinet. Bands must comply with Section 86-2.09, "Wiring."

If HMA surfacing is to be placed, install loop conductors before placing uppermost layer of HMA. Install conductors in compacted layer of HMA immediately below the uppermost layer. Install conductors as shown on the plans, except fill slot with sealant flush to the surface.

When cutting loops:

1. Residue from slot cutting activities must not be allowed to flow across shoulders or lanes occupied by public traffic and must be removed from the pavement surface before residue flows off. Dispose of residue from slot cutting activities under Section 7-1.13, "Disposal of Materials Outside the Highway Right of Way."
2. Surplus sealant must be removed from adjacent road surface without using solvents before setting.

Sealant for filling slots must comply with one of the following:

#### Elastomeric Sealant

Polyurethane material that will, within stated shelf life, cure only in the presence of moisture. Sealant must be suitable for use in both HMA and PCC.

The cured sealant must have the following performance characteristics:

#### Performance Characteristics of Cured Sealant

Specification	ASTM	Requirement
Hardness (indentation) at 25 °C and 50% relative humidity. (Type A, Model 1700 only)	D 2240 Rex.	65-85
Tensile Strength: Pulled at 508 mm per minute	D 412 Die C	3.45 MPa, min.
Elongation: Pulled at 508 mm per minute	D 412 Die C	400%, min.
Flex at -40 °C: 0.6-mm free film bend (180°) over 13-mm mandrel	--	No cracks
Weathering Resistance: Weatherometer 350 h, cured 7 days at 25 °C @ 50% relative humidity	D 822	Slight chalking
Salt Spray Resistance: 28 days at 38 °C with 5% NaCl, Die C & pulled at 508 mm per minute	B 117	3.45 MPa, min. tensile 400%, min. elongation
Dielectric Constant over a temperature range of -30 °C to 50 °C	D 150	Less than 25% change

### Asphaltic Emulsion Sealant

Comply with State Specification 8040-41A-15. Use for filling slots in HMA pavement that are a maximum of 5/8 inch in width. Do not use where the slope causes the material to run from the slot. Material must not be thinned beyond manufacturer's recommendations. Place material when air temperature is at least 7 °C.

### Hot-Melt Rubberized Asphalt Sealant

Hot-melt rubberized asphalt must be:

1. In solid form at room temperature and fluid at application temperature of 190 °C to 205 °C. Fumes must be non-toxic.
2. Suitable for use in both HMA and PCC.
3. Melted in a jacketed, double-boiler type melting unit. Temperature of heat transfer medium must not exceed 245 °C.
4. Applied with a pressure feed applicator or pour pot, when the pavement surface temperature is greater than 4 °C.
5. Packaged in containers clearly marked "Detector Loop Sealant" and specifying manufacturer's batch and lot number.

The cured sealant must have the following performance characteristics:

**Performance Characteristics of Cured Sealant**

Specification	ASTM	Requirement
Cone Penetration, 25 °C, 150 g, 5 s	D 5329, Sec. 6	3.5 mm, max
Flow, 60 °C	D 5329, Sec. 8	5 mm, max
Resilience, 25 °C	D 5329, Sec. 12	25%, min
Softening Point	D 36	82 °C, min
Ductility, 25 °C, 50 mm/min	D 113	300 mm, min
Flash Point, COC, °C	D 92	288 °C, min
Viscosity, Brookfield Thermosel, No. 27 Spindle, 20 rpm, 190 °C	D 150	Less than 25% change

### 86-5.01B Magnetic Detectors

Cable from pull box, adjacent to magnetic detector sensing element, to the field terminals in the controller cabinet must be the type specified for inductive loop detectors.

### 86-5.02 PEDESTRIAN PUSH BUTTON ASSEMBLIES

Housing must be either die-cast or permanent mold-cast aluminum, or ultraviolet stabilized, self-extinguishing structural plastic, if specified. Plastic housing must be black matching Color No. 17038, 27038 or 37038 of Federal Standard 595B, and colored throughout. Assembly must be rainproof and shockproof in any weather condition.

Switch must be a single-pole, double-throw, switching unit, with screw type terminals, rated 15 A at 125 V(ac), and must have:

1. Plunger actuator and a U frame to allow recessed mounting in push button housing
2. Operating force of 3.5 pounds
3. 1/64-inch maximum pretravel
4. 7/32-inch minimum overtravel
5. 0.0004- to 0.002-inch differential travel
6. 2-inch minimum diameter actuator

Where pedestrian push button is attached to a pole, shape housing to fit the pole curvature and secure. Include saddles to make a neat fit if needed.

Where a pedestrian push button is mounted on top of a 2-1/2-inch diameter post, fit housing with a slip-fitter and use screws for securing rigidly to post.

Pedestrian push button signs must be porcelain enameled metal or structural plastic.

Install push button and sign on crosswalk side of pole.

Point arrows on push button signs in the same direction as the corresponding crosswalk.

Attach sign on Type B push button assembly.

For Type C pedestrian push button assembly, mount instruction sign on the same standard as the push button assembly, using 2 straps and saddle brackets. Straps and saddle brackets must be corrosion-resisting chromium nickel steel and comply

with ASTM A 167, Type 302B. Theft-proof bolts must be stainless steel with a chromium content of at least 17 percent and a nickel content of at least 8 percent.

**86-6 LIGHTING**

**86-6.01 HIGH PRESSURE SODIUM LUMINAIRES**

High pressure sodium luminaires must be the enclosed cutoff type.

Housing must be manufactured from aluminum. Painted or powder-coated housing must withstand a 1,000-hour salt spray test as specified in ASTM B 117.

Other metal parts must be corrosion resistant.

Each housing must include a slip-fitter that can be mounted on a 2-inch pipe tenon and can be adjusted 5 degrees from the axis of the tenon. Clamping brackets of slip-fitter must not bottom out on housing bosses when adjusted within the ±5 degree range.

The slip-fitter mounting bracket must not permanently set in excess of 0.020-inch when the 3/8-inch diameter cap screw used for mounting is tightened to 10 foot-pounds.

Luminaire to be mounted horizontally on mast arm, when tested as specified in California Test 611, must be capable of withstanding cyclic loading for a minimum of 2 million cycles without failure of any luminaire parts as follows:

**Cyclic Loading**

Plane	Internal Ballast	Minimum Peak Acceleration Level <sup>a</sup>
Vertical	Removed	3.0 G peak-to-peak sinusoidal loading (same as 1.5 G peak)
Horizontal <sup>b</sup>	Installed	1.5 G peak-to-peak sinusoidal loading (same as 0.75 G peak)
Vertical	Installed	1.0 G peak-to-peak sinusoidal loading (same as 0.5 G peak)

<sup>a</sup>G = Acceleration of gravity

<sup>b</sup>Perpendicular to direction of mast arm

If a photoelectric unit receptacle is included, a raintight shorting cap must be installed. If luminaire housing has a hole for the receptacle, hole must be permanently closed, covered, and sealed with weatherproof material.

Optical system must be in a sealed chamber and include:

1. Reflector shaped so that a minimum of light is reflected through the arc tube of the lamp. Reflector surface must be specular and protected by either an anodized finish or a silicate film on it's specular surface.
2. Refractor or lens mounted in a door frame that is hinged to the housing and secured with a spring-loaded latch. Refractor must be made of glass or polycarbonate plastic. Lens must be made of heat- and impact-resistant glass.
3. Lamp socket that is a porcelain enclosed mogul-multiple type. Shell must include integral lamp grips to assure electrical contact under conditions of normal vibration. Socket must be mounted in the luminaire to allow presetting a variety of specified light distribution patterns. Socket must be rated for 1,500 W and 600 V(ac), and a 4 kV pulse.
4. Lamp.

Sealing must be provided by a gasket between the reflector and:

1. Refractor or lens
2. Lamp socket

Chamber must allow for filtered flow of air in and out of the chamber from lamp heat. Filtering must be accomplished by either a separate filter or a filtering gasket.

If components are mounted on a down-opening door, door must be hinged and secured to luminaire housing separately from refractor or flat lens frame. Door must be easily removable and replaceable, and secured to housing to prevent accidental opening when refractor or flat lens frame is opened.

Field wires connected to luminaire must terminate on a barrier-type terminal block secured to the housing. Terminal screws must be captive and equipped with wire grips for conductors up to No. 6. Each terminal positions must be clearly identified.

Minimum light distribution for each luminaire must meet the isolux diagrams.

Maximum brightness of each cutoff luminaire, with the lamp indicated, must be as follows:

### Cutoff Type

Lamp ANSI Code No.	Lamp Wattage	Maximum Brightness foot-lamberts
S55	150	40
S66	200	40
S50	250	50
S67	310	60
S51	400	75

Brightness readings will be taken using a brightness meter with an acceptance angle of 1.5 degrees. When measured on the 90-degree and 270-degree lateral angle line, maximum brightness must not exceed above specified brightness when meter is located at a horizontal distance of 120 feet and a vertical distance of 7.5 feet between luminaire and meter, or at an angle of 3 degrees 35 minutes from the horizontal to the line between luminaire and meter. Measurements must be made from 90-degree line and 270-degree line, and averaged. Lamp used for each test must operate at wattage necessary to produce the following light output:

### Light Output

Lamp Wattage	Lumens
150	16,000
200	22,000
250	27,000
310	37,000
400	50,000

#### 86-6.01A High Pressure Sodium Lamp Ballasts

Each ballast must:

1. Operate the lamp for its rated characteristics and wattage
2. Continuously operate at ambient air temperatures from -20 °C to 25 °C without reduction in ballast life
3. Operate for at least 180 cycles of 12 hours on and 12 hours off, with the lamp circuit in an open or short-circuited condition and without measurable reduction in operating requirements
4. Have a design life of not less than 60,000 hours
5. Provide proper starting and operating waveforms, voltage, and current
6. Provide reliable lamp starting and operation at ambient temperature down to -20 °C for the rated life of lamp

Ballast must be tested as specified in ANSI C82.6-1980, "Methods of Measurement of High-Intensity-Discharge Lamp Ballasts."

Starting aids for ballast of a given lamp wattage must be interchangeable between ballasts of same wattage and manufacturer, without adjustment.

Each integral ballast must consist of separate components that can be easily replaced. An encapsulated starting aid will be counted as a single component. Each component must include screw terminals, NEMA tab connectors, or a single multi-circuit connector. Conductors and terminals must be identified.

Mount heat-generating component so as to use the portion of the luminaire it is mounted to as a heat sink. Place capacitor a maximum practicable distance from heat-generating components or thermally shield to limit the case temperature to 75 °C.

Transformer and inductor must be resin-impregnated for protection against moisture. Capacitors, except those in starting aids, must be metal cased and hermetically sealed.

The Department will test high-pressure sodium lamp ballast. High-pressure sodium lamp ballast must have a characteristic curve that will intersect both of the lamp-voltage limit lines between the wattage limit lines and remain between the wattage limit lines throughout the full range of lamp voltage. This requirement must be met at the rated input voltage of the ballast and at the lowest and highest rated input voltage of the ballast.

Throughout the lifetime of the lamp, ballast curve must fall within the specified limits of the lamp voltage and wattage.

Ballast for luminaires must be located in the luminaire housing.

#### 86-6.01A(1) Regulator Type Ballasts

Regulator type ballast must comply with the following:

1. For nominal input voltage and lamp voltage, ballast design center must not vary more than 7.5 percent from rated lamp wattage.
2. Ballast must be designed for a capacitance variance of  $\pm 6$  percent that will not cause more than  $\pm 8$  percent variation in lamp wattage regulation during rated lamp life.
3. Lamp current crest factor must not exceed 1.8 for input voltage variation of  $\pm 10$  percent at any lamp voltage during lamp life.

Regulator-type ballast must be one of the following:

**Regulator-Type Ballast**

Ballast Type	Power Factor	Lamp Regulation
Lag-type <sup>a</sup>	Not less than 90 percent throughout the life of lamp when ballast is operated at nominal line voltage with a nominally-rated reference lamp	Lamp wattage regulation spread does not vary by more than 18 percent for $\pm 10$ percent input voltage variation from nominal through life
Lead-type <sup>b</sup>	Not less than 90 percent throughout the life of lamp when ballast is operated at nominal line voltage with a nominally-rated reference lamp	Lamp wattage regulation spread does not vary by more than 30 percent for $\pm 10$ percent input voltage variation from nominal through life

<sup>a</sup>Primary and secondary windings must be electrically isolated

<sup>b</sup>Constant wattage autoregulator (CWA)

**86-6.01A(2) Nonregulator Type Ballasts**

Each nonregulator type ballast must comply with the following:

1. For nominal input voltage and lamp voltage, ballast design center must not vary more than 7.5 percent from rated lamp wattage.
2. Lamp current crest factor must not exceed 1.8 for input voltage variation of  $\pm 5$  percent at any lamp voltage during lamp life.

**Nonregulator-Type Ballast**

Ballast Type	Power Factor	Lamp Regulation
Autotransformer or High-Reactance	Not less than 90 percent throughout the life of lamp when ballast is operated at nominal line voltage with a nominally-rated reference lamp	Lamp wattage regulation spread does not vary by more than 25 percent for $\pm 5$ percent input voltage variation from nominal through life

**86-6.01B High Pressure Sodium Lamps**

High pressure sodium lamps must comply with ANSI C 78.42, "High Pressure Sodium Lamps," when tested as specified in ANSI C 78.389, "American National Standard for Electric Lamps - High Intensity Discharge-Methods of Measuring Characteristics." High pressure sodium lamps must have a minimum average rated life of 24,000 hours.

**86-6.02 LOW PRESSURE SODIUM LUMINAIRES**

Each low pressure sodium luminaire must be completely assembled with a lamp and ballast, and must:

1. Be the enclosed type, either semi-cutoff or cutoff type.
2. Include housing, reflector, refractor or lens, lamp socket, integral ballast, removable ballast tray, lamp support, terminal strip, capacitor, and slip fitter. Reflector may be an integral part of the housing.

Luminaire housing must be minimum 1/16-inch thick, corrosion resistant die cast aluminum sheet and plate with concealed continuous welds, or minimum nominal wall thickness of 3/32-thick acrylonitrile-butadiene-styrene sheet material, on a cast aluminum frame that provides mounting for all electrical components and slip fitter. Housing must be divided into optical and power compartments that are individually accessible for service and maintenance. Position and clamp luminaire to pipe tenon by tightening mounting bolts.

Painted exterior surface of luminaire must be finished with a fused coating of electrostatically applied polyester powder paint or other ultraviolet inhibiting film. Color must be aluminum gray.

High temperature neoprene, or equal, sealing ring must be installed in pipe tenon opening to prevent entry of water and insects into power and optical compartments.

Access to power unit assembly must be through a weathertight hinged cover, secured with spring type latches or captive screws, to luminaire housing.

Hardware must be stainless steel or cadmium plated. Use machine screws or bolts to secure removable components. Do not use sheet metal screws.

Semi-cutoff luminaires and molded refractor style cutoff luminaires must include a refractor. Other cutoff luminaires must include a flat lens.

Refractor must be 1-piece injection molded polycarbonate of 3/32 inch minimum thickness, or 1-piece injection molded acrylic of 1/8 inch minimum thickness. Flat lens must be 1-piece polycarbonate of 3/32 inch minimum thickness, mounted to metal frame. Refractor assembly and flat lens assembly must be constructed to rigidly maintain its shape, and hinged and secured with spring type latches to luminaire housing. Alternate methods of manufacturing refractor may be approved provided minimum specified thicknesses are maintained.

Lamp socket must be high temperature, flame retardant thermoset material with self-wiping contacts or equivalent. Socket must be rated for 660 W and 1,000 V(ac). Position of socket and support must maintain the lamp in correct relationship with reflector and refractor for designed distribution pattern.

Isofootcandle distribution must be ANSI Type III, short or Type IV, medium distribution, for cutoff or semi-cutoff luminaires.

With a 40-foot mounting height, each type of luminaire must maintain a minimum of 0.2 footcandle at least 60 feet each side, along the longitudinal roadway line below the luminaire, and a minimum of 0.35 footcandle at a transverse roadway distance from luminaire location equal to 1.5 times the luminaire mounting height.

Certified luminaire performance data must be provided. This data must include complete photometric test data in isofootcandle charts at a scale of 1 inch equals 20 feet, for the luminaire and lamp sizes shown on the plans.

Alternate data may be in horizontal footcandle values recorded on a 15' x 15' area extending 90 feet longitudinally each side of the light source, and 15 feet behind and 90 feet in front of the light source, for luminaire and lamp sizes, and mounting height shown on the plans. Horizontal footcandle levels in data submitted must equal or exceed levels specified. Failure to meet referenced values will be justification for rejection of the luminaires.

Photometric testing must be performed and certified by an independent and recognized testing laboratory.

Low pressure sodium lamps must:

1. Be 180 W, single-ended, bayonet base, tubular gas discharge lamp
2. Maintain a minimum of 93 percent of initial lumens during rated life and must comply with the following minimum performance requirements:

**Performance Requirements**

Lamp Designation	ANSI L74-RF-180
Initial Lumens	33,000 lumens
Rated Ave. Life (@ 10 hrs/Start)	18,000 hours
Operating Position	Horizontal ±20 degrees

3. Reach 80 percent of light output within 10 minutes and must restrike within 1 minute after an outage due to power interruption or voltage drop at the lamp socket
4. Identify the month and year of installation.
5. Have an autotransformer or high-reactance type ballast. The ballast must comply with the following:
  - 5.1. Lamp current crest factor must not exceed 1.8 at nominal line voltage
  - 5.2. Ballast loss must not exceed 24 percent for 180 W ballast at nominal line voltage

**Autotransformer or High-Reactance Type Ballast**

Ballast Type	Power Factor	Lamp Operation
Autotransformer or High-Reactance	Not less than 90 percent when ballast is operated at nominal line voltage with a nominally-rated reference lamp	Lamp wattage regulation spread does not vary by more than ±6 percent for ±10 percent input voltage variation from nominal through life

A multi-circuit connector must be included for quick disconnection of ballast tray.

### **86-6.03 SOFFIT AND WALL LUMINAIRES**

Soffit and wall luminaire must be weatherproof and corrosion resistant.

Each flush-mounted soffit luminaire must consist of:

1. Metal body with two 1-inch minimum conduit hubs and provisions for anchoring into concrete
2. Prismatic refractor made of heat-resistant polycarbonate mounted in a door frame and clearly identified as to street side
3. Specular anodized aluminum reflector
4. Ballast located either within housing or in a ceiling pull box as shown on the plans
5. Lamp socket

The door frame assembly must be hinged, gasketed, and secured to body by at least 3 machine screws.

Each pendant soffit luminaire must be enclosed and gasketed, have an aluminum finish, and include:

1. Reflector with a specular anodized aluminum finish
2. Refractor made of heat-resistant polycarbonate
3. Optical assembly hinged and latched for lamp access and a device to prevent dropping
4. Ballast designed for operation in a raintight enclosure
5. Galvanized metal box with a gasketed cover, 2 captive screws, and 2 chains to prevent dropping and for luminaire mounting

Each wall-mounted luminaire must consist of:

1. Cast metal body
2. Prismatic refractor, made of glass, mounted in a door frame
3. Aluminum reflector with a specular anodized finish
4. Integral ballast
5. Lamp socket
6. Gasket between refractor and body
7. At least two 5/16-inch minimum diameter mounting bolts

Cast-aluminum bodies to be cast into or mounted against concrete must have a thick application of alkali-resistant bituminous paint on all surfaces to be in contact with concrete.

Each soffit luminaire and wall luminaire must include a 70 W high-pressure sodium lamp with a minimum average rated life of 24,000 hours. Each lamp socket must be positioned to locate the light center of the lamp within 1/2 inch of light center location of the luminaire design.

Ballast must comply with Section 86-6.01A, "High Pressure Sodium Lamp Ballasts." Wall luminaire ballast must be located in luminaire housing or, if shown on the plans, in a pull box adjacent to luminaire.

### **86-6.04 PEDESTRIAN CROSSING FIXTURES**

Before starting fixture manufacturing, submit fixture design for approval. If requested, submit 1 complete prototype fixture for approval at least 30 days before manufacturing the fixtures. The prototype fixture will be returned to you, and if permitted, the fixture may be installed in the work.

Lens unit in door section must be formed of 1-1/2-inch methyl methacrylate rod cut and fire-glazed for a clear finish or a cast unit with equivalent tolerances and finish.

Lens must be secured to door section with an extruded lens retainer of 6063-T5 aluminum alloy that fits the lens shape. Lens retainer must fit the full length of lens on both sides. Continuous lens retainer for the full length of 3 lenses is allowed. Z bars of 5052-H32 or 5005-H14 aluminum alloy, 1/16 inch minimum thickness may be substituted for extruded lens retainer.

A captive positive-keyed screw-type latching device requiring a special socket wrench must be installed at upper edge to secure door in the closed position as shown on the plans. Furnish 2 special wrenches to the Engineer.

Each fixture must include a F48T12/CW rapid start fluorescent lamp with recessed, double contact base installed on back side of door directly behind lens.

Each lampholder must be UL listed for outdoor use without an enclosure and with 1,500 mA rapid start fluorescent lamp. Lampholder must be spring-loaded type.

For each lamp, the distance from face of lampholder to the lamp must be designed to provide a compression of at least 0.10-inch on the spring-type lampholder when lamp is in place. Lamp must have positive mechanical and electrical contact when lamp is in place. Socket on spring-type lampholder must have enough travel to allow lamp installation. Spring must not be a part of current-carrying circuit.

Ballast must be high-power-factor type with weatherproof leads for operation of one 48-inch rapid-start lamp. Ballast must be UL listed for outdoor operation on 110 to 125 V(ac) 60 Hz circuit and rated at 1,500 mA.

Conductors from ballast leads to lampholder must be minimum size of No. 16, stranded, and UL-listed copper AWM. Splicing of lampholder conductors to ballast leads must be performed by using mechanically secure connectors.

Conductors in fixture except ballast leads and entrance line conductors, must be UL-listed AWM.

Provide sufficient slack in the conductors to allow the fixture door to fully open.

Circuit conductors entering the fixture must be terminated on molded phenolic barrier-type terminal blocks rated at 15 A and 600 V(ac) and must have integral-type white waterproof-marking strips. Current-carrying parts of terminal blocks must be insulated from fixture with integral plugs or strips to provide protection from line-to-ground flashover voltage. Terminal blocks must be attached to wireway cover in top section. If you use sectionalized terminal blocks, each section must include an integral barrier on each side and be capable of rigid mounting and alignment.

Exposed surfaces of fixture must be uniform in appearance and free from significant defects, including improper fit, dents, deep scratches and abrasions, burrs, roughness, off-square ends, holes off-center or jagged, and surface irregularities. Screws for attaching components to fixture door, including Z bars, ballasts, and terminal block, must be tapped into door from the inside only. Screwheads, nuts, or other fasteners must not be removable from the outside.

#### **86-6.04A Pedestrian Undercrossing Fixtures**

Fixture shell must be cast aluminum alloy, industrial type or Federal Class 18 aluminum of 1/4 inch minimum thickness.

Door must be 1 piece of 6061-T6 aluminum alloy of 1/8 inch minimum thickness.

Continuous piano hinge must be Type 1100 aluminum alloy. The piano hinge must be welded or riveted to door section with 1/8 inch aluminum rivets. Matching holes must be drilled in the hinge and lower edge of fixture. After shell is in place, door assembly must be attached by minimum 3/8-inch No. 8 stainless steel self-tapping screws.

A neoprene gasket must be attached to frame to provide a cushion between the shell and the door.

Chain or other device must be included to prevent the door, when fully opened, from coming in contact with the undercrossing wall.

Fixture must be held in place by three 3/8" x 8" anchor bolts with 2 nuts each.

Fixture surfaces in contact with concrete, and with anchor bolts and nuts must be painted with a thick application of alkali-resistant bituminous paint. Paint must comply with MIL-P-6883.

Circuit conductor entering the fixture must be terminated on 2-position terminal blocks.

Both ends of fixture must have holes for 1-inch conduit. Unused holes must be plugged with pressed metal closures.

#### **86-6.04B Pedestrian Overcrossing Fixtures**

Fixture shell must consist of:

1. Top section and a door section of extruded 6063-T5 aluminum alloy, each with a nominal 1/8 inch wall thickness
2. 2 cast-end sections of 319 aluminum alloy
3. Internal wireway cover of 505-H32 aluminum alloy

Top section and door section must be joined together on one side by a continuous hinge formed as part of the 2 extrusions and must overlay to allow locking on the other side. Hinge must be treated with a silicone grease that will prevent the entrance of water by capillary action.

Wireway cover with 3/16 inch hemmed ends up and terminal blocks and circuit conductors must be inserted before welding end sections and must provide clearance at both ends for conductors. Cover must be fastened by at least two 1/4 inch No. 4 self-threading sheet metal screws with binding head and blunt point. You may substitute blind rivets of equivalent strength.

One or more bronze sash chains or other device must be included to prevent door from opening to an extent that will damage the hinge.

Lampholder must include heat-resistant circular cross section neoprene sealing gasket, silver-coated contacts, and waterproofed lead entrance for use with a 1,500 mA rapid start fluorescent lamp.

Ballast must be at most 13-1/4 inches long.

Circuit conductors entering the fixture must be terminated on 3-position terminal blocks.

Electrical system of pedestrian overcrossing must be grounded by a No. 8 copper wire installed in conduit from fixture to fixture, from end fixture to conduit fitting on end post and from conduit fitting on end post to grounding bushing in nearest pull box.

Ground wire must be secured to inside of telescoping sleeve end casting where conductors are carried and to the inside of Type LB conduit fitting on end post by a connecting lug and a No. 8 self-threading pan screw.

Lamp, lampholder, ballast, and fixture wire, must be attached to door section. Terminal blocks must be attached to top section or wireway cover.

Three No. 10, solid copper circuit conductors must be installed between terminal blocks as part of each completed fixture.

Before shipment to job site, fixture must be completely manufactured and assembled in the shop.

### 86-6.05 INDUCTION SIGN LIGHTING FIXTURES

Each induction sign lighting fixture must include housing with door, reflector, refractor or lens, lamp, power coupler, high frequency generator, socket assembly, fuse block, and fuses.

Each induction sign lighting fixture must:

1. Be designed for mounting near the bottom of sign panel on an overhead sign structure.
2. Be an enclosed design and be raintight and corrosion resistant.
3. Have a minimum average rating of 60,000 hours.
4. Be for a wattage of 87 W, 120/240 V(ac).
5. Have a power factor greater than 90 percent and total harmonic distortion less than 10 percent.
6. Be UL approved for wet locations and be FCC Class A-listed.
7. Not exceed 44 pounds in weight.
8. Include the manufacturer's brand name, trademark, model number, serial number, and date of manufacture on packaged assembly. Same information must be permanently marked on the outside and inside of housing.
9. Comply with minimum horizontal footcandle requirement shown on the plans.
10. Be a maximum height of 12 inches above the top of the mounting rails.

If fixture is located so that the light center of the lamp is 55 inches in front of, 1 foot below, and centered on a 10-foot high by 20-foot wide sign panel, the ratio of maximum to minimum illuminance level on the panel must not exceed 12 to 1 in 95 percent of the points measured. Illuminance gradient must not exceed 2 to 1 and is defined as the ratio of minimum illuminance on a 1-foot square of panel to that on an adjacent 1-foot square of panel.

Each fixture must have a mounting assembly that will allow fixture to be mounted on continuous slot channels. Mounting assembly must be either cast aluminum, hot-dip galvanized steel plate, or steel plate that has been galvanized and finished with a polymeric coating system or same finish that is used for housing.

Housing must have a door designed to hold a refractor or lens, and to open without the use of special tools. Housing and door must be manufactured of sheet or cast aluminum, and have a powder coat or polyester paint finish of a gray color resembling unfinished manufacturing. Sheet aluminum must comply with ASTM B 209 or B 209M for 5052-H32 aluminum sheet. External bolts, screws, hinges, hinge pins, and door closure devices must be corrosion resistant.

Housing must include weep holes.

Door must be hinged to housing on side of fixture away from the sign panel and include 2 captive latch bolts or other latching device. Door must be designed to lock in the open position, 50 degrees minimum from the plane of the door opening, with an 85-mph 3-second-wind-gust load striking the door from either side.

Door and housing must be gasketed to be raintight and dusttight. Thickness of gasket must be 1/4 inch, minimum.

Fixture height must be less than 12 inches above the top of mounting rails.

Reflector must be 1 piece, made from specularly finished aluminum protected with an electrochemically applied anodized finish or a chemically applied silicate film, and designed so deposited water due to condensation will drain away. Reflector must be secured to housing with a minimum of 2 screws and removable without removing any fixture parts. Do not attach reflectors to outside of housing.

Refractor or lens must have a smooth exterior and must be manufactured from the material as follows:

**Refractor and Lens Material Requirements**

Component	Manufactured From
Flat lens	Heat-resistant glass
Convex lens	Heat resistant, high-impact resistant tempered glass
Refractor	Borosilicate heat resistant glass

Refractor and convex lens must be designed or shielded so no fixture luminance is visible if fixture is approached directly from the rear and viewing level is the bottom of the fixture. If a shield is used, it must be an integral part of the door casting.

Each fixture must include an 85 W induction lamp with an interior wall that is fluorescent phosphor-coated. Light output must be at least 70 percent at 60,000 hours. Lamp must have a minimum color-rendering index of 80, be rated at a color temperature of 4,000K and be removable without the use of tools.

Lamp socket must be a porcelain enclosed mogul type with a shell that contains integral lamp grips to assure electrical contact under normal vibration conditions. Center contact must be spring-loaded. Shell and center contact must be nickel-plated brass. Socket must be rated for 1,500 W and 600 V(ac).

Power coupler must include a construction base with antenna, heat sink, and electrical connection cable, and be designed so it can be removed with common hand tools.

High frequency generator must:

1. Start and operate lamps at an ambient temperature of -25 °C or greater for the rated life of the lamp
2. Operate continuously at ambient air temperatures from -25 °C to 25 °C without reduction in generator life
3. Have a design life of at least 100,000 hours at 55 °C
4. Have an output frequency of 2.65 MHz ± 10 percent
5. Have radio frequency interference that complies with FCC Title 47, Part 18, regulations regarding harmful interference
6. Be replaceable with common hand tools
7. Mounted so the fixture can be used as a heat sink

Conductor terminal must be identified by the component terminal the conductor connects to.

Submit a copy of the high frequency generator test methods and results from the manufacturer with each lot of fixtures.

Each fixture must include a barrier-type fuse block for terminating field connections. Fuse block must:

1. Be secured to housing and be accessible without removal of any fixture parts
2. Be mounted to leave a minimum of 1/2 inch air space from sidewalls of housing
3. Be designed for easy removal of fuses with a fuse puller, be rated at 600 V(ac), and have box terminals.

Fuses must be 13/32-inch diameter, 1-1/2 inch long ferrule type and UL or ETL listed. For 120 V(ac) input fixture, only the ungrounded conductor must be fused and there must be a solid link between the neutral and the high frequency generator.

If shown on the plans, include a wire guard to prevent damage to the refractor or lens. Guard must be constructed of 1/4-inch minimum diameter galvanized steel wire, and either hot-dip galvanized or electroplated-zinc coated as specified in ASTM B 633, Service Condition SC4 with a clear chromate dip treatment. Guard elements must be spaced to prevent rocks larger than 1-1/2-inch diameter from passing through.

#### **86-6.06 SIGN LIGHTING FIXTURES FOR FLASHING BEACON**

Sign lighting fixture must:

1. Be UL or ETL listed for outdoor installation
2. Include a hood with side outlet tapped for conduit, a symmetrical 10-inch steel reflector with a white porcelain-enamel finish, and a medium base socket
3. Be rated at 150 W minimum

#### **86-6.07 INTERNALLY ILLUMINATED STREET NAME SIGNS**

Sign fixture must be:

1. Designed and constructed to prevent deformation or failure when subjected to an 85 mph 3-second-wind-gust load as specified in AASHTO publication, "Standard Specifications for Structural Supports of Highway Signs, Luminaires and Traffic Signals," and its interim revisions
2. Manufactured from all new material and all ferrous parts must be galvanized or cadmium-plated
3. Type A or B signs

Top and bottom must be formed or extruded aluminum and must be attached to formed or cast aluminum end fittings. Housing must be designed for continuous sealing between top and bottom assemblies, and end fittings, and be constructed to resist torsional twist and warp. Opening or removing 1 panel must allow access to the interior of the sign for lamp, ballast, and fuse replacement.

Photoelectric unit sockets are not allowed.

For Type A sign, both sides must be hinged at the top to allow installation or removal of sign panel, and to allow access to interior of sign.

For Type B sign, sign panel must be slide-mounted into housing.

Reflectors may be used to obtain required sign brightness. Reflectors must be formed aluminum with acrylic baked white enamel surface having a minimum reflectance of 0.85.

Sign panel must be slide-mounted or rigid-mounted in a frame, with white legend, symbols, arrows, and border on each face. Background must be green.

Sign panels surface must be evenly illuminated. Average of brightness readings for letters must be 150 foot-lamberts, minimum. Light transmission factor of sign panel must provide a letter to background brightness ratio between 10 to 1 and 20 to 1. Background luminance must not vary by more than 40 percent from the average background brightness reading. Luminance of letters, symbols, and arrows must not vary by more than 20 percent from their average brightness readings.

Sign panels must be translucent, high impact, resistant plastic panels of one of the following:

1. Glass fiber reinforced acrylated resin
2. Polycarbonate resin
3. Cellulose acetate butyrate plastic

Paint on the outside of plastic must be protected by a plastic film that seals the front surface of panel and filters out ultraviolet radiation. Paint must be acrylic plastic type.

Surface must be free of blemishes in the plastic or coating that may impair the serviceability or detract from the general appearance and color matching of sign.

White or green color must not fade or darken when sign is exposed to an accelerated test of ultraviolet light equivalent to 2 years of outdoor exposure. Green color of sign, when not illuminated, must match Color No. 14109 of Federal Standard 595B.

Sign panel must not crack or shatter when a 1-inch diameter, steel ball with a weight of 2.4 ounces is dropped from a height of 8.5 feet above the sign panel to any point of sign panel. For this test, sign panel must be lying in a horizontal position and supported within its frame.

For Type A sign, gasket must be installed between sign panel frame and fixture housing to prevent water entry between frame and fixture housing. Gasket must be uniform and even-textured, and be the closed-cell, sponge-neoprene type, designed for use at temperatures between -20 °C and +74 °C.

Gasket must be neatly applied to thoroughly degreased, clean surface with a suitable heat-resistant adhesive that will not allow the gasket to slip at temperatures between -20 °C and +74 °C.

Ballast must be high power factor type and capable of starting the lamp at -20 °C and above.

Ballast for Type A sign must be rated at 200 mA. Ballasts for Type B sign must be rated at 430 mA. Ballast must be UL or ETL listed for operation on 110 to 125 V(ac), 60 Hz circuits, and comply with ANSI C 82.1 and ANSI C 82.2.

Lampholder must be UL or ETL listed for outdoor use and of the spring-loaded type. Lampholder must have silver-coated contacts and waterproofed entrance leads for use with a rapid-start fluorescent lamp. Removal of lamp from socket must de-energize the primary of ballast. Each lampholder must include heat-resistant, circular cross section, partially-recessed neoprene ring to seal against lamp ends and protect electrical contacts from moisture, dirt or other injurious elements.

Distance between face of lampholders must be designed to provide compression of at least 0.10 inch on the spring-type lampholder when lamp is in place. Lamp must have positive mechanical and electrical contact when lamp is in place. Socket on spring-type lampholder must have sufficient travel to allow lamp installation. Spring must not be a part of current carrying circuit. Lampholder must match lamp requirements and must not increase cathode filament circuit resistance by more than 0.10 Ω.

Lamp must comply with ANSI C 78.

Wiring connections in fixture must be terminated on molded, phenolic, barrier-type, terminal blocks rated at 15 A, 1,000 V(ac), and must have integral-type white waterproof-marking strips. Current carrying parts of terminal blocks must be insulated from fixture with integral plugs or strips to provide protection from line-to-ground flashover voltage. If you choose to use sectionalized terminal blocks, each section must include an integral barrier on each side and be capable of rigid mounting and alignment. Terminal screws must be No. 10, minimum.

Fuses must be Type 3AG, miniature, slow-blowing type with appropriate current and voltage ratings.

Fuseholder must be a panel-mounting type with threaded or bayonet-type knob that grips the fuse tightly for extraction. Use a separate fuse for each ballast.

Screened weep holes must be constructed at strategic locations in members subject to moisture collection.

Fasteners, screws, and hardware must be passive stainless steel, Type 302 or 304, or aluminum Type 6060-T6.

Top of fixture housing must have 2 free-swinging mounting brackets. Each bracket must be adjustable vertically for leveling the sign to either a straight or curved mast arm. Bracket assembly must allow fixture to swing perpendicular to the sign panel.

Hinge pins for the free-swinging brackets must have a minimum diameter of 1/4 inch.

Message, as shown on the plans, must be displayed on both sign panels.

If not shown on the plans, the message and the size of symbols or arrows will be given by the Engineer at your request. Letters must be 8-inch upper case and 6-inch lower case, Series E.

Fixture conductors must be UL- or ETL-listed AWM stranded copper wire with 28 mils, minimum, thermoplastic insulation, rated at 1,000 V(ac) and rated for use at 90 °C. Conductors must be No. 16 minimum and must match color coding of ballast leads.

Conductors within the fixture must be secured with easily removable spring cross straps, not clamped, in the chassis or fixture. Straps must be installed 12 inches apart or less.

Stranded copper conductors connected to screw-type terminals must terminate in approved crimp-type ring connectors.

Splices are not allowed within fixture.

Submit shop drawings showing the message for each sign, including size of letters, symbols or arrows, as shown on the plans. If requested, you must supply, without cost to the State, sufficient samples of materials to be used in the manufacturing of the sign or a complete sign assembly, to allow adequate testing and evaluation of compliance to specified requirements.

**86-6.08 PHOTOELECTRIC CONTROLS**

Photoelectric controls must be capable of directly switching multiple lighting systems.

**86-6.08A Types**

Photoelectric control type must comply with the following:

<b>Photoelectric Control Types</b>	
Type I	Includes a remote photoelectric unit and a test switch housed in an enclosure.
Type II	Includes a remote photoelectric unit, a separate contactor located in a service equipment enclosure, and a test switch located in service equipment enclosure.
Type III	Includes a remote photoelectric unit, a separate contactor, and a test switch housed in an enclosure.
Type IV	Includes a photoelectric unit that plugs into an EEI-NEMA twist-lock receptacle integral with the luminaire.
Type V	Includes a photoelectric unit, contactor, and test switch located in service equipment enclosure.

A switch to allow manual operation of lighting circuit must be included for each Type I, Type II, Type III, and Type V photoelectric control. Switches must be single-hole mounting toggle type, single-pole, single-throw, rated at 12 A with a voltage rating that matches the circuit. Switches must have an indicating nameplate reading "Auto-Test" and be connected in parallel with the load contacts of the photoelectric unit. Test switches must not have an "OFF" position.

Photoelectric unit for Types I, II, and III photoelectric controls, must be pole-top mounted.

**86-6.08B Equipment Details**

**86-6.08B(1) Photoelectric Unit**

Photoelectric unit must:

1. Have an output in response to changing light levels. Response level must remain stable throughout life of control unit.
2. Have a "turn-on" between 1 and 5 footcandles, and a "turn-off" between 1.5 and 5 times "turn-on." Measurements must be made by procedures in EEI-NEMA standards for physical and electrical interchangeability of light-sensitive control devices used in the control of roadway lighting.
3. Have a EEI-NEMA type receptacle. Mounting brackets must be used where pole-top mounting is not possible. Photoelectric controls must be installed at locations show on the plans and oriented.
4. Be screened to prevent artificial light from causing cycling.
5. Have a supply voltage rating of 60 Hz, 105-130 V(ac), 210-240 V(ac), or 105-240 V(ac), as specified.
6. Have a load rating of 800 W minimum, incandescent, high intensity discharge, or fluorescent.
7. Operate at a temperature range of -20 °C to 55 °C.
8. Have a power consumption less than 10 W.
9. Be housed in a weatherproof enclosure.
10. Have a base with a 3-prong, EEI-NEMA standard, twist-lock plug mounting.
11. Have a "fail-on" feature.

Unit components must not require periodic replacement.

Photoelectric controls, except Type IV and Type V, must include a 4-inch minimum inside diameter, pole-top mounting adaptor containing a terminal block, and cable supports or clamps to support pole wires.

For switching 480 V(ac), 60 Hz circuits, a 100 VA, minimum, 480/120 V(ac) transformer must be installed in the contactor enclosure to allow 120 V(ac) for the photoelectric control unit. If more than 1 photoelectric unit is to be installed at a location, a single transformer with a volt-ampere rating capable of handling the total controlled load, may be used.

**86-6.08B(2) Contactor**

Contactor must:

1. Have contacts rated to switch the specified lighting load
2. Be normally open
3. Be the mechanical armature type with contacts of fine silver, silver alloy, or superior alternative material

**86-6.08B(3) Enclosure**

Enclosure for Type I and Type III photoelectric controls must be NEMA 3R. Enclosure must be supplied with a factory-applied rust-resistant prime coat and finish coat. Two applications of paint to match the color of the standard must be applied as specified in Section 86-2.16, "Painting." Enclosure may be hot-dip galvanized instead of painting. A minimum of 2-1/2 inches must be provided between contactor terminals and end of enclosure for wiring connections. Enclosure must be mounted on the same standard as the photoelectric unit at a height of about 6 feet above finished grade.

**86-6.08B(4) Terminal Blocks**

Terminal blocks must be rated at 25 A, 600 V(ac), molded from phenolic or nylon material, and of the barrier type with plated-brass screw terminals and integral-type marking strips.

**86-6.09 TRANSFORMERS**

Multiple-to-multiple transformers must be single-phase dry type designed for operation on a 60 Hz supply.

**86-6.09A Electrical Requirements**

Transformers must have a decal showing a connection diagram. Diagram must show either color-coding or wire-tagging with primary (H1, H2) or secondary (X1, X2) markers, and the primary and secondary voltage and volt-ampere rating. Transformers must comply with the following:

<b>Transformer Electrical Requirements</b>	
Transformer Characteristic	Multiple-to-Multiple Unit
Rating	120/480 V(ac), 240/480 V(ac), or 480/120 V(ac)
Efficiency	Exceed 95 percent
Secondary Voltage Regulation and Tolerance	±3 percent from half load to full load

Secondary 480 V(ac) windings must be center-tapped.

**86-6.09B Physical Requirements**

External leads for multiple-to-multiple secondary connections must be Type USE, No. 10, rated 600 V(ac).

Transformer leads must extend a minimum of 12 inches from the case.

Transformer insulation must be NEMA 185 C or better.

Multiple-to-multiple transformers must withstand the application of 2,200 V(ac) from core to coils and from coil to coil for a 1-minute period.

The above tests must be made immediately after operation of transformer at full load for 24 hours.

Non-submersible transformers must include metal half-shell coil protection, have moisture resistant synthetic varnish impregnated windings, and be suitable for outdoor operation in a raintight enclosure.

Each transformer to be installed in a pull box must be the submersible type and include a handle and a hanger.

**86-6.09C Submersible Type Transformers**

Submersible type transformers must be securely encased in a rugged corrosion resistant, watertight case and must withstand a 5-day test submerged in 2 feet of salt water, 2 percent salt by weight, with 12-hour on and off periods. The operating periods must be at full load.

Leads of submersible transformers must be brought out through one or more sealed hubs and secured to withstand a 100 pound static pull without loosening or leaking.

## **86-6.10 (BLANK)**

### **86-6.11 FALSEWORK LIGHTING**

#### **86-6.11A General**

Falsework lighting must include lighting to illuminate the pavement, portals, and pedestrian walkways at or under openings in the falsework required for traffic.

Lighting for pedestrian walkway illumination must be installed at all pedestrian openings through or under falsework.

Before starting falsework opening construction, you must submit a plan of proposed lighting installations for review and obtain approval. Approval will be made as specified in Section 5-1.02, "Plans and Working Drawings."

You must design falsework lighting so that required maintenance can be performed with a minimum of inconvenience to public traffic. Closing of traffic lanes for routine maintenance will not be permitted on roadways with posted speed limits greater than 25 mph.

Pavement under falsework with portals less than 150 feet apart and falsework portals must be illuminated only during the hours of darkness as defined in Division 1, Section 280, of the California Vehicle Code. Photoelectric switches must be used to control falsework lighting systems. Pavement under falsework with portals 150 feet or more apart and all pedestrian openings through falsework must be illuminated 24 hours per day.

Lighting fixtures must be aimed to avoid glare to oncoming motorists.

Type NMC cable with No. 12 minimum conductors, with ground wire, must be used. Fasten cable to supporting structure at sufficient intervals to adequately support cable and within 12 inches from every box or fitting. Conductors within 8 feet of ground must be enclosed in a 1/2 inch or larger metal conduit.

Each illumination system must be on a minimum of 1 separate branch circuit at each bridge location. Each branch circuit must be fused, not to exceed 20 A.

For falsework lighting, you must arrange with the serving utility to complete service connections. You must pay for energy, line extension, service, and service hookup costs.

At completion of project or when ordered by the Engineer, falsework lighting equipment will become your property and you must remove it from the job site.

You may propose a lighting plan that fulfills light intensity requirements to the systems specified herein. You must supply sufficient data to allow evaluation of alternative methods.

#### **86-6.11B Pavement Illumination**

Illumination of pavement at vehicular openings through falsework must comply with the following:

1. Fixture must include R/FL commercial type floodlamp holder with protective covers.
2. Fixture must be fully adjustable with brackets and locking screws, and allow mounting directly to a standard metal junction box.
3. Lamp must be medium-base 120 V(ac), 120 W, minimum, PAR-38 quartz-halogen floodlamp.
4. A continuous row of fixture types required must be installed at locations and spacing specified. Fixtures must be installed beneath falsework structure, with the end fixtures not further than 10 feet inside portal faces. Fixtures must be installed and energized immediately after the members supporting them have been erected.
5. Fixtures along the sides of the opening must be placed not more than 4 feet behind or 2 feet in front of the roadway face of the temporary railing. Mounting heights of fixtures must be between 12 and 16 feet above the roadway surface and must present an unobstructed light pattern on the pavement.

#### **86-6.11C Portal Illumination**

Illumination of falsework portals must comply with the following:

1. On each side of each entrance portal, plywood sheet clearance guides, 4 feet wide by 8 feet high, must be fastened vertically, facing traffic, with the bottom of the panel 3 feet to 4 feet above the roadway. The center of the panel must be located approximately 3 feet horizontally behind the roadway face of the railing. Panels must be freshly painted for each installation with not less than 2 applications of flat white paint. Paint testing will not be required.
2. If ordered by the Engineer, in order to improve the general appearance of the painted surfaces, you must repaint designated areas and that painting will be paid for as extra work as specified in Section 4-1.03D, "Extra Work."
3. Falsework portals must be illuminated on the side facing traffic with 150 W, minimum, PAR reflector floodlamps mounted on the structure directly over each vertical support adjacent to the traveled way, as needed to uniformly illuminate the exterior falsework beam, the clearance guides, and the overhead clearance sign. Each lamp must be supported approximately 16 feet above the pavement and approximately 6 feet in front of the portal face.
4. Portal lighting and clearance guides must be installed on the day that vertical members are erected.

### **86-6.11D Pedestrian Walkway Illumination**

Illumination of pedestrian openings through or under falsework must comply with the following:

1. Fixtures must be flush-mounted in the overhead protection shield and equipped with a damage-resistant clear polycarbonate diffuser lens. Lamps must be standard incandescent 100 W, 120 V(ac).
2. Fixtures must be centered over the passageway at intervals of not more than 15 feet with the end fixtures not more than 7 feet inside the end of the pedestrian openings.
3. Pedestrian passageway light systems must be installed immediately after the overhead protection shield is erected.

## **86-7 REMOVING, REINSTALLING OR SALVAGING ELECTRICAL EQUIPMENT**

### **86-7.01 REMOVING ELECTRICAL EQUIPMENT**

Existing electrical equipment, pull boxes, and conduits, to be removed and not reused or salvaged, become your property and you must dispose of it under Section 7-1.13, "Disposal of Materials Outside the Highway Right of Way." Unused underground conduit may be abandoned in place after all conductors have been removed, except that conduit terminations from conduit to be abandoned must be removed from pull boxes to remain.

Exercise care in salvaging equipment so that it will not be damaged or destroyed. Mast arms must be removed from standards. Luminaires, signal heads, and signal mounting assemblies must be removed from standards and mast arms.

Holes resulting from removing pull boxes must be filled with material equivalent to the surrounding material.

### **86-7.02 REINSTALLING REMOVED ELECTRICAL EQUIPMENT**

If removed electrical equipment is to be reinstalled, you must supply all necessary materials and equipment, including signal mounting assemblies, anchor bolts, nuts, washers, and concrete as required to complete the new installation.

Luminaires to be reinstalled must be cleaned and relamped.

Existing materials required to be reused and found to be unsatisfactory by the Engineer must be replaced with new material and the replacement cost will be paid for as extra work as specified in Section 4-1.03D, "Extra Work."

## **86-8 PAYMENT**

### **86-8.01 PAYMENT**

The contract lump sum price or prices paid for signal, ramp metering, flashing beacon, lighting, sign illumination, traffic monitoring station, highway advisory radio systems, closed circuit television systems, or combinations thereof; for modifying or removing those systems; for temporary systems; or the lump sum or unit prices paid for various units of those systems; or the lump sum or per foot price paid for conduit of the various sizes, types, and installation methods listed in the Engineer's Estimate include full compensation for furnishing all labor, materials, tools, equipment and incidentals, and for doing all the work involved in furnishing and installing, modifying, or removing the systems, combinations or units thereof, including any necessary pull boxes (except if the type required is shown as a separate contract item); excavation and backfill; concrete foundations (except if shown as a separate contract item); pedestrian barricades; furnishing and installing illuminated street name signs; installing sign panels on pedestrian barricades, on flashing beacon standards, and on traffic signal mast arms; restoring sidewalk, pavement and appurtenances damaged or destroyed during construction; salvaging existing materials; and making all required tests, as shown on the plans, as specified in these specifications and the special provisions, and as directed by the Engineer.

If poles for electrical systems are manufactured from a source located more than 300 air-line miles from Sacramento and Los Angeles, the Department will deduct \$5,000 for inspection costs for each inspection site. If poles for electrical systems are manufactured from a source located more than 3,000 air-line miles from Sacramento and Los Angeles, the Department will deduct \$8,000 for inspection costs for each inspection site.

Full compensation for all additional materials and labor, not shown on the plans or specified, that are necessary to complete the installation of the various systems, is included in the prices paid for the systems, or units thereof, except as provided in Section 86-1.06, "Maintaining Existing and Temporary Electrical Systems," and no additional compensation will be allowed therefor.

If shown as a contract item, the contract price paid per foot for cast-in-drilled-hole concrete pile (signal foundation) includes full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in constructing reinforced concrete pile foundations of the size shown on the Engineer's Estimate, including drilling holes, disposing of the material resulting from drilling holes, furnishing and placing anchor bolt assemblies and reinforcing steel, complete in place, as shown on the plans, and as specified in these specifications and the special provisions, and as directed by the Engineer.

If shown as a contract item, non-reinforced PCC foundations will be measured and paid for by the cubic yard for foundation concrete in the same manner as specified for minor concrete (minor structure) in Section 51, "Concrete Structures."



<b>Filter Fabric</b>				
Property	ASTM	Specification		
		Class A	Class B	Class C
Grab breaking load, 1-inch grip, lb minimum in each direction	D 4632	157		
Apparent elongation, percent minimum in each direction	D 4632	50		
Hydraulic bursting strength, psi minimum	D 3786	210		
Ultraviolet resistance, percent minimum retained grab breaking load, 500 hr	D 4355	70		
Permittivity, sec <sup>-1</sup> minimum	D 4491	0.5	0.2	0.1
Apparent opening size, average roll value, U.S. Standard sieve size maximum	D 4751	40	60	70

### 88-1.03 DRAINAGE

#### 88-1.03A Geocomposite Wall Drain

Geocomposite wall drain must consist of a polymeric core with filter fabric integrally bonded to 1 or both sides of the core creating a stable drainage void.

Filter fabric must comply with Section 88-1.02, "Filtration."

Geocomposite wall drain must comply with:

<b>Geocomposite Wall Drain</b>		
Property	ASTM	Specification
Thickness with fabric, inches maximum	--	2
Transmissivity, gradient = 1.0, normal stress = 5,000 psf, gal/min/ft	D 4716	4

### 88-1.04 REINFORCEMENT

#### 88-1.04A Geotechnical Subsurface Reinforcement

##### General

Geosynthetic used for geotechnical subsurface reinforcement must be either of the following:

1. Geotextile
2. Geogrid

Geotextile permittivity must be at least 0.05 sec<sup>-1</sup> determined under ASTM D 4491.

Geogrid must have a regular and defined open area. The open area must be from 50 to 90 percent of the total grid area.

##### Long Term Design Strength

Long Term Design Strength (LTDS) of geosynthetic reinforcement is the ultimate tensile strength in the primary strength direction divided by reduction factors. Calculate the LTDS from the guidelines in Geosynthetic Research Institute (GRI) Standard Practice GG4a, GRI GG4b, or GRI GT7.

The product of the appropriate reduction factors must be at least 1.30. Determine the reduction factor for creep using a 75-year design life for permanent applications and a 5-year design life for temporary applications. Determine the installation damage reduction factor based on the characteristics of the backfill materials used.

If test data is not available, use default values of reduction factors in the GRI Standard Practice to calculate LTDS.

Submit the LTDS and its supporting calculations at least 15 days before placing geosynthetic reinforcement. Do not install before the Engineer's approval. The LTDS must be signed by an engineer who is registered as a civil engineer in the State.

**88-1.05 WATER POLLUTION CONTROL**

Geosynthetics used for water pollution control must comply with:

**Water Pollution Control Geosynthetics**

Property	ASTM	Application				
		Silt Fence		Sediment Filter Bag	Gravel-Filled Bags	Temporary Cover
		Woven	Non-woven			
Grab breaking load, 1-inch grip, lb minimum in each direction	D 4632	120	120	255	205	200
Apparent elongation, percent minimum, in each direction	D 4632	15	50	--	--	50
Water flow rate, gallons per minute/square foot minimum and maximum average roll value	D 4491	10 - 100	100 - 150	80 - 200	80 - 150	75 - 120
Permittivity, sec <sup>-1</sup> minimum	D 4491	0.1	1.1	1.0	0.2	1.0
Apparent opening size, inches maximum average roll value	D 4751	0.023	0.023	0.033	0.016	0.007
Ultraviolet resistance, percent minimum retained grab breaking load, 500 hr.	D 4355	70	70	70	70	70

**88-1.06 CHANNEL AND SHORE PROTECTION**

**88-1.06A Rock Slope Protection**

Rock slope protection (RSP) fabric must be a permeable, nonwoven, needle-punched geotextile. RSP fabric consists of 1 of the following:

1. Polyester
2. Polypropylene
3. Combined polyester and polypropylene

Polymers must be either virgin compounds or clean reworked material. Do not subject virgin compounds to use or processing other than required for initial manufacture. Clean reworked material must be previously processed material from the processor's own production that has been reground, pelletized, or solvated. RSP fabric must not consist of more than 20 percent by weight of clean reworked material. Do not use recycled materials from either post-consumer or post-industrial sources.

Class 8 or Class 10 RSP fabric must comply with:

**Rock Slope Protection Fabric**

Property	ASTM	Specification	
		Class 8	Class 10
Weight, oz/yd <sup>2</sup> minimum	D 5261	7.5	9.5
Grab breaking load, lb 1-inch grip, min. in each direction	D 4632	200	250
Apparent elongation, percent min., in each direction	D 4632	50	50
Permittivity, sec <sup>-1</sup> , minimum	D 4491	1.0	0.70
Apparent opening size, U.S. Standard sieve size minimum and maximum	D 4751	70 - 100	70 - 100
Ultraviolet resistance, percent minimum retained grab breaking load, 500 hr.	D4355	70	70

**88-1.07 PAVEMENT INTERLAYER**

**88-1.07A Paving Fabric**

Geosynthetics used for paving fabric must be nonwoven. Paving fabric must comply with:

**Geosynthetic Paving Fabric**

Property	ASTM	Specification
Mass per unit area, oz/yd <sup>2</sup> minimum	D 5261	4.1
Grab breaking load, lb 1-inch grip, minimum, in each direction	D 4632	100
Apparent elongation, percent minimum in each direction	D 4632	50
Hydraulic bursting strength, psi minimum	D 3786	200
Melting point, °F minimum	D 276	325
Asphalt retention, gal/yd <sup>2</sup> minimum	D 6140	0.2

**88-1.07B Paving Mat**

Geosynthetics used for paving mat must be a nonwoven fiberglass and polyester hybrid material. Paving mat must comply with:

**Geosynthetic Paving Mat**

Property	ASTM	Specification
Breaking force, lb/2 inches minimum	D 5035	45
Ultimate elongation, percent maximum	D 5035	5
Mass per unit area, oz/ sq yd minimum	D 5261	3.7
Melting point, °F minimum	D 276	400
Asphalt retention, gal/yd <sup>2</sup> minimum	D 6140	0.10

### 88-1.07C Paving Grid

Geosynthetics used for paving grid must be a geopolymer material formed into a grid of integrally connected elements with openings. Paving grid must comply with:

Property	Test	Specification		
		Class I	Class II	Class III
Tensile strength at ultimate, lb/in <sup>a</sup> minimum	ASTM D 6637	560 x 1,120	560	280
Aperture size, inch minimum	Calipered	0.5	0.5	0.5
Elongation, % maximum	ASTM D 6637	12	12	12
Mass per area, oz / sqyd minimum	ASTM D 5261	16	10	5.5
Melting point, °F minimum	ASTM D 276	325	325	325

Note:

<sup>a</sup> For Class I, machine direction x cross direction. For Class II and Class III, both directions.

### 88-1.07D Paving Geocomposite Grid

Paving geocomposite grid consists of paving grid specified under Section 88-1.07C, "Paving Grid," bonded or integrated with paving fabric specified under Section 88-1.07A, "Paving Fabric."

Paving geocomposite grid must have a peel strength of at least 10 pounds per foot determined under ASTM D 413.

### 88-1.07E Geocomposite Strip Membrane

Geocomposite strip membrane must consist of various widths of strips manufactured from of asphaltic rubber and geosynthetics. Geocomposite strip membrane must comply with:

Property	ASTM	Specification
Strip tensile strength, lbs/inch minimum	D 882	50
Elongation at break, % minimum	D 882	50
Resistance to puncture, lbs. minimum	E 154	200
Permeance, perms maximum	E 96/E 96M	0.10
Pliability, 1/4 inch mandrel with sample conditioned at 25 °F	D 146	No cracks in fabric or bitumen
Melting point, °F	D 276	325

## 88-1.08 SEPARATION AND STABILIZATION

### 88-1.08A Subgrade Enhancement Geotextile

Subgrade enhancement geotextile must consist of either of the following:

1. Polyester
2. Polypropylene

Subgrade enhancement geotextile must comply with:



Use	Cementitious Material Content (Pounds/CY)
Concrete designated by compressive strength: Deck slabs and slab spans of bridges Roof sections of exposed top box culverts Other portions of structures	675 min., 800 max. 675 min., 800 max. 590 min., 800 max.
Concrete not designated by compressive strength: Deck slabs and slab spans of bridges Roof sections of exposed top box culverts Prestressed members Seal courses Other portions of structures	675 min. 675 min. 675 min. 675 min. 590 min.
Concrete for precast members	590 min., 925 max.

Except for when a modulus of rupture is specified, the minimum required compressive strength for concrete shall be the strength specified, or 2,500 pounds per square inch, whichever is greater. Concrete shall be proportioned such that the concrete will attain the minimum required compressive strength.

If the specified 28-day compressive strength is greater than 3,600 pounds per square inch, the concrete shall be designated by compressive strength, and 42 days will be allowed to obtain the specified strength.

For concrete not designated by compressive strength, the Engineer may test the concrete for compressive strength. The concrete will be accepted if the compressive strength at 28 days attains 85 percent or more of the minimum required compressive strength.

Concrete shall be proportioned to conform to the following shrinkage limitations when tested in conformance with the requirements of AASHTO Designation: T 160, modified as follows:

Condition	Maximum Shrinkage of Laboratory Cast Specimens at 28 days Drying (average of 3, %)
Paving and approach slab concrete	0.050
Bridge deck concrete	0.045

Note: Shrinkage requirement is waived for concrete that is used for precast elements.

Shrinkage tests shall be either:

- A. Performed by a laboratory accredited to perform AASHTO Designation: T 160, or
- B. Performed by a laboratory that maintains a current rating of 3 or better for the Cement and Concrete Reference Laboratory (CCRL) concrete proficiency sample program.

Laboratory cast specimens shall have a 4" x 4" cross section. Specimens shall be removed from the molds 23 ± 1 hours after mixing the concrete and placed in lime water at 73 ± 3 °F to 7 days age. A comparator reading shall be taken at 7 days age and recorded as the initial reading. Specimens then shall be stored in a humidity controlled room maintained at 73 ± 3 °F and 50 ± 4 percent relative humidity for the remainder of the test. Subsequent readings shall be taken at 7, 14, 21, and 28 days drying.

Test data verifying conformance to the shrinkage limitations shall be submitted with the mix design. Shrinkage testing data accepted by the Engineer no more than 3 years prior to the first working day of this contract will be acceptable for this entire contract, provided the data was for concrete with similar proportions and the same materials and material sources to be used on this contract. Concrete shall be considered to have similar proportions if, when compared to concrete to be used on this project, no more than 2 mix design elements are varied. Varied mix design elements shall fall within the tolerances in the following table:

Mix Design Element	Tolerance (±)
Water to cementitious material ratio	0.03
Total water content	5 %
Coarse aggregate (weight per cubic yard)	10 %
Fine aggregate (weight per cubic yard)	10 %
Supplementary cementitious material content	5 %
Admixture (as originally dosed)	25 %

Note: Admixtures must be of the same brand.

Before using concrete or in advance of revising the mix proportions, the Contractor shall submit in writing to the Engineer a copy of the mix design.

Compliance with cementitious material content requirements will be verified in conformance with procedures described in California Test 518 for cement content. For testing purposes, supplementary cementitious material (SCM) shall be considered to be cement. Batch proportions shall be adjusted as necessary to produce concrete having the specified cementitious material content.

If any concrete has a cementitious material, portland cement, or SCM content that is less than the minimum required, the concrete shall be removed. However, if the Engineer determines that the concrete is structurally adequate, the concrete may remain in place and the Contractor shall pay to the State \$0.25 for each pound of cementitious material, portland cement, or SCM that is less than the minimum required. The Department may deduct the amount from any moneys due, or that may become due, the Contractor under the contract. The deductions will not be made unless the difference between the contents required and those actually provided exceeds the batching tolerances permitted by Section 90-5, "Proportioning." No deductions will be made based on the results of California Test 518.

The requirements of the preceding paragraph shall not apply to minor concrete.

## **90-2 MATERIALS**

### **90-2.01 CEMENTITIOUS MATERIALS**

Unless otherwise specified, cementitious material shall be either a combination of Type II or Type V portland cement and SCM, or a blended cement. No cementitious material shall be used in the work unless it is on the Department's Pre-Qualified Products List at the time of mix design submittal. Information regarding cementitious material qualification and placement on the Department's approved list can be obtained at the Transportation Laboratory.

Cementitious materials used in cast-in-place concrete for exposed surfaces of like elements of a structure shall be from the same sources and of the same proportions.

Cementitious materials shall be protected from moisture until used. Sacked cementitious materials shall be piled to permit access for tallying, inspecting, and identifying each shipment.

Facilities shall be provided to ensure that the various cementitious materials meeting this Section 90-2.01 are kept separate from each other and from other cementitious materials. A storage silo containing a cementitious material shall be emptied before using that silo for a different cementitious material. Blended cements with a percentage of SCM differing by more than 2 percentage points are considered different cementitious materials. Sampling cementitious materials shall be in conformance with California Test 125.

The Contractor shall furnish a Certificate of Compliance for cementitious materials in conformance with the provisions in Section 6-1.07, "Certificates of Compliance." The Certificate of Compliance shall indicate the source by name and location (including country, state, and city). If cementitious material is delivered directly to the job site, the Certificate of Compliance shall be signed by the cementitious material supplier. If the cementitious material is used in ready-mixed concrete or in precast concrete products purchased as such by the Contractor, the Certificate of Compliance shall be signed by the manufacturer of the concrete or product. If blended cement is used, the Certificate of Compliance shall include a statement signed by the blended cement supplier that indicates the actual percentage, by weight, of SCM in the blend. Weight of SCM shall be by weighing device conforming to Section 9-1.01, "Measurement of Quantities," or as determined by chemical analysis.

#### **90-2.01A Cement**

Portland cement shall conform to the requirements in ASTM Designation: C 150 except the  $C_3S$  content of Type II cement shall not exceed 65 percent.

Blended cement shall conform to the requirements for Portland Blast-Furnace Slag Cement, Type IS (MS) or Portland-Pozzolan Cement, Type IP (MS) in AASHTO Designation: M 240, except that the maximum limits on the pozzolan content shall not apply. Blended cement shall be comprised of Type II or Type V cement and SCM produced either by intergrinding portland cement clinker and SCM, by blending portland cement and either finely ground granulated blast furnace slag or finely divided pozzolan, or a combination of intergrinding and blending.

In addition, Type II portland cement and Type V portland cement shall conform to the following requirements:

- A. The cement shall not contain more than 0.60-percent by mass of alkalis, calculated as the percentage of  $Na_2O$  plus 0.658 times the percentage of  $K_2O$ , when determined by methods as required in AASHTO Designation: T 105; and
- B. The autoclave expansion shall not exceed 0.50-percent

Type III portland cement shall be used only as specified or with the approval of the Engineer. Type III portland cement shall conform to the additional requirements listed above for Type II portland cement. The Contractor may use Type III portland cement in the manufacturing of precast concrete.

**90-2.01B Supplementary Cementitious Materials**

Each supplementary cementitious material shall conform to one of the following:

- A. Fly ash conforming to the requirements in AASHTO Designation: M 295, Class F, and these specifications. The available alkali, as sodium oxide equivalent, shall not exceed 1.5 percent when determined in conformance with the requirements in ASTM Designation: C 311 or the total alkali, as sodium oxide equivalent, shall not exceed 5.0 percent when determined in conformance with the requirements in AASHTO Designation: T 105.
- B. Ultra fine fly ash (UFFA) conforming to the requirements in AASHTO Designation: M 295, Class F, and the following chemical and physical requirements:

Chemical Requirements	Percent
Sulfur Trioxide (SO <sub>3</sub> )	1.5 max.
Loss on ignition	1.2 max.
Available Alkalies (as Na <sub>2</sub> O) equivalent	1.5 max.

Physical Requirements	Percent
Particle size distribution	
Less than 3.5 microns	50
Less than 9.0 microns	90
Strength Activity Index with portland cement	
7 days	95 (minimum % of control)
28 days	110 (minimum % of control)
Expansion at 16 days when testing job materials in conformance with ASTM C 1567*	0.10 max.

\* In the test mix, Type II or Type V portland cement shall be replaced with at least 12% UFFA by weight.

- C. Raw or calcined natural pozzolans conforming to the requirements in AASHTO Designation: M 295, Class N, and the following requirements and these specifications. The available alkali, as sodium oxide equivalent, shall not exceed 1.5 percent when determined in conformance with the requirements in ASTM Designation: C 311 or the total alkali, as sodium oxide equivalent, shall not exceed 5.0 percent when determined in conformance with the requirements in AASHTO Designation: T 105.
- D. Metakaolin conforming to the requirements in AASHTO Designation: M 295, Class N, and the following chemical and physical requirements:

Chemical Requirements	Percent
Silicon Dioxide (SiO <sub>2</sub> ) + Aluminum Oxide (Al <sub>2</sub> O <sub>3</sub> )	92.0 min.
Calcium Oxide (CaO)	1.0 max
Sulfur Trioxide (SO <sub>3</sub> )	1.0 max.
Loss on ignition	1.2 max.
Available Alkalies (as Na <sub>2</sub> O) equivalent	1.0 max.

Physical Requirements	Percent
Particle size distribution	95
Less than 45 microns	
Strength Activity Index with portland cement	
7 days	100 (minimum % of control)
28 days	100 (minimum % of control)

- E. Ground Granulated Blast Furnace Slag (GGBFS) conforming to the requirements in AASHTO Designation: M 302, Grade 100 or Grade 120.
- F. Silica Fume conforming to the requirements of AASHTO Designation: M 307, with reduction in mortar expansion of 80 percent, minimum, using the cement from the proposed mix design.

Commingling of fly ash from different sources at uncontrolled ratios is permissible only if the following criteria are satisfied:

- A. Sources of fly ash to be commingled shall each produce fly ash that conforms to the requirements in AASHTO Designation: M 295, Class F.
- B. Testing of the commingled product is the responsibility of the fly ash supplier.
- C. Each fly ash's running average of relative density shall not differ from any other by more than 0.25 pound per cubic inch at the time of commingling.
- D. Each fly ash's running average of loss on ignition shall not differ from any other by more than one percent at the time of commingling.
- E. The final product of commingled fly ash shall conform to the requirements in AASHTO Designation: M 295, Class F.

**90-2.01C Required Use Of Supplementary Cementitious Materials**

**General**

The amount of portland cement and SCM used in portland cement concrete shall conform to the minimum cementitious material content provisions in Section 90-1.01, "Description," or Section 90-4.05, "Optional Use of Chemical Admixtures," and these specifications.

The SCM content in portland cement concrete shall conform to one of the following:

- A. Any combination of portland cement and at least one SCM, satisfying Equations (1) and (2):

Equation (1)

$$\frac{(25 \times UF) + (12 \times FA) + (10 \times FB) + (6 \times SL)}{MC} \geq X$$

Where:

- UF = Silica fume, metakaolin, or UFFA, including the amount in blended cement, pounds per cubic yard.
- FA = Fly ash or natural pozzolan conforming to the requirements in AASHTO Designation: M 295, Class F or N with a CaO content up to 10 percent, including the amount in blended cement, pounds per cubic yard.
- FB = Fly ash or natural pozzolan conforming to the requirements in AASHTO Designation: M 295, Class F or N with a CaO content up to 15 percent, including the amount in blended cement, pounds per cubic yard.
- SL = GGBFS, including the amount in blended cement, pounds per cubic yard.
- MC = Minimum amount of cementitious material specified, pounds per cubic yard.
- X = 1.8 for innocuous aggregate, 3.0 for all other aggregate.

Equation (2)

$$MC - MSCM - PC \geq 0$$

Where:

- MC = Minimum amount of cementitious material specified, pounds per cubic yard.
- MSCM = The minimum sum of SCMs that satisfies Equation (1) above, pounds per cubic yard.
- PC = The amount of portland cement, including the amount in blended cement, pounds per cubic yard.

- B. 15 percent of Class F fly ash with at least 48 ounces of LiNO<sub>3</sub> solution added per 100 pounds of portland cement. CaO content of the fly ash shall not exceed 15 percent.

**Precast Concrete**

The SCM content in precast portland cement concrete shall conform to one of the following:

- A. Any combination of portland cement and SCM, satisfying the following equation:

Equation (3)

$$\frac{(25 \times UF) + (12 \times FA) + (10 \times FB) + (6 \times SL)}{TC} \geq X$$

Where:

- UF = Silica fume, metakaolin, or UFFA, including the amount in blended cement, pounds per cubic yard.
- FA = Fly ash or natural pozzolan conforming to the requirements in AASHTO Designation: M 295, Class F or N with a CaO content up to 10 percent, including the amount in blended cement, pounds per cubic yard.
- FB = Fly ash or natural pozzolan conforming to the requirements in AASHTO Designation: M 295, Class F or N with a CaO content up to 15 percent, including the amount in blended cement, pounds per cubic yard.
- SL = GGBFS, including the amount in blended cement, pounds per cubic yard.
- TC = Total amount of cementitious material used in the mix, pounds per cubic yard.
- X = 0.0 if precast members are constructed with portland cement concrete using aggregate that is "innocuous" in conformance with the provisions in Section 90-2.02, "Aggregates."
- X = 3.0 for all other aggregate.

- B. 15 percent of Class F fly ash with at least 48 ounces of LiNO<sub>3</sub> solution added per 100 pounds of portland cement. CaO content of the fly ash shall not exceed 15 percent.
- C. Any combination of supplementary cementitious material and portland cement may be used if the expansion of cementitious material and aggregate does not exceed 0.10 percent when tested in conformance with the requirements in ASTM C 1567. Test data shall be submitted with each mix design. Test data accepted by the Engineer no more than 3 years prior to the first working day of this contract will be acceptable for this entire contract, provided the data was for the same concrete mix and the same materials and material sources to be used on this contract.

#### 90-2.02 AGGREGATES

To be considered innocuous, aggregate must be on the Department's approved list, "Innocuous Aggregates for use in Concrete." Information regarding aggregate qualification and placement on the Department's approved list can be obtained at the Transportation Laboratory.

Both coarse and fine aggregate must be on the approved list for the aggregate used in concrete to be considered innocuous.

Aggregates shall be free from deleterious coatings, clay balls, roots, bark, sticks, rags, and other extraneous material.

The Contractor shall provide safe and suitable facilities, including necessary splitting devices for obtaining samples of aggregates, in conformance with California Test 125.

Aggregates shall be of such character that it will be possible to produce workable concrete within the limits of water content provided in Section 90-6.06, "Amount of Water and Penetration."

Aggregates shall have not more than 10 percent loss when tested for soundness in conformance with the requirements in California Test 214. The soundness requirement for fine aggregate will be waived, provided that the durability index, D<sub>f</sub>, of the fine aggregate is 60 or greater when tested for durability in conformance with California Test 229.

If the results of any one or more of the Cleanness Value, Sand Equivalent, or aggregate grading tests do not meet the requirements specified for "Operating Range" but all meet the "Contract Compliance" requirements, the placement of concrete shall be suspended at the completion of the current pour until tests or other information indicate that the next material to be used in the work will comply with the requirements specified for "Operating Range."

If the results of either or both the Cleanness Value and coarse aggregate grading tests do not meet the requirements specified for "Contract Compliance," the concrete that is represented by the tests shall be removed. However, if the Engineer determines that the concrete is structurally adequate, the concrete may remain in place, and the Contractor shall pay to the State \$3.50 per cubic yard for paving concrete and \$5.50 per cubic yard for all other concrete for the concrete represented by these tests and left in place. The Department may deduct the amount from any moneys due, or that may become due, the Contractor under the contract.

If the results of either or both the Sand Equivalent and fine aggregate grading tests do not meet the requirements specified for "Contract Compliance," the concrete which is represented by the tests shall be removed. However, if the Engineer determines that the concrete is structurally adequate, the concrete may remain in place, and the Contractor shall pay to the State \$3.50 per cubic yard for paving concrete and \$5.50 per cubic yard for all other concrete for the concrete represented by these tests and left in place. The Department may deduct the amount from any moneys due, or that may become due, the Contractor under the contract.

The 2 preceding paragraphs apply individually to the "Contract Compliance" requirements for coarse aggregate and fine aggregate. When both coarse aggregate and fine aggregate do not conform to the "Contract Compliance" requirements, both paragraphs shall apply. The payments specified in those paragraphs are in addition to any payments made in conformance with the provisions in Section 90-1.01, "Description."

No single Cleanness Value, Sand Equivalent, or aggregate grading test shall represent more than 300 cubic yards of concrete or one day's pour, whichever is smaller.

When the source of an aggregate is changed, the Contractor shall adjust the mix proportions and submit in writing to the Engineer a copy of the mix design before using the aggregates.

**90-2.02A Coarse Aggregate**

Coarse aggregate shall consist of gravel, crushed gravel, crushed rock, reclaimed aggregate, crushed air-cooled iron blast furnace slag or combinations thereof. Crushed air-cooled blast furnace slag shall not be used in reinforced or prestressed concrete.

Reclaimed aggregate is aggregate that has been recovered from plastic concrete by washing away the cementitious material. Reclaimed aggregate shall conform to all aggregate requirements.

Coarse aggregate shall conform to the following quality requirements:

Tests	California Test	Requirements
Loss in Los Angeles Rattler (after 500 revolutions)	211	45% max.
Cleanness Value		
Operating Range	227	75 min.
Contract Compliance	227	71 min.

In lieu of the above Cleanness Value requirements, a Cleanness Value "Operating Range" limit of 71, minimum, and a Cleanness Value "Contract Compliance" limit of 68, minimum, will be used to determine the acceptability of the coarse aggregate if the Contractor furnishes a Certificate of Compliance, as provided in Section 6-1.07, "Certificates of Compliance," certifying that:

- A. Coarse aggregate sampled at the completion of processing at the aggregate production plant had a Cleanness Value of not less than 82 when tested in conformance with the requirements in California Test 227; and
- B. Prequalification tests performed in conformance with the requirements in California Test 549 indicated that the aggregate would develop a relative strength of not less than 95 percent and would have a relative shrinkage not greater than 105 percent, based on concrete.

**90-2.02B Fine Aggregate**

Fine aggregate shall consist of natural sand, manufactured sand produced from larger aggregate or a combination thereof. Manufactured sand shall be well graded.

Fine aggregate shall conform to the following quality requirements:

Test	California Test	Requirements
Organic Impurities	213	Satisfactory <sup>a</sup>
Mortar Strengths Relative to Ottawa Sand	515	95%, min.
Sand Equivalent:		
Operating Range	217	75, min.
Contract Compliance	217	71, min.

<sup>a</sup> Fine aggregate developing a color darker than the reference standard color solution may be accepted if it is determined by the Engineer, from mortar strength tests, that a darker color is acceptable.

In lieu of the above Sand Equivalent requirements, a Sand Equivalent "Operating Range" limit of 71, minimum, and a Sand Equivalent "Contract Compliance" limit of 68, minimum, will be used to determine the acceptability of the fine aggregate if the Contractor furnishes a Certificate of Compliance, as provided in Section 6-1.07, "Certificates of Compliance," certifying that:

- A. Fine aggregate sampled at the completion of processing at the aggregate production plant had a Sand Equivalent value of not less than 82 when tested by California Test 217; and
- B. Prequalification tests performed in conformance with California Test 549 indicated that the aggregate would develop a relative strength of not less than 95 percent and would have a relative shrinkage not greater than 105 percent, based on concrete.

### 90-2.03 WATER

In conventionally reinforced concrete work, the water for curing, for washing aggregates, and for mixing shall be free from oil and shall not contain more than 1,000 parts per million of chlorides as Cl, when tested in conformance with California Test 422, nor more than 1,300 parts per million of sulfates as SO<sub>4</sub>, when tested in conformance with California Test 417. In prestressed concrete work, the water for curing, for washing aggregates, and for mixing shall be free from oil and shall not contain more than 650 parts per million of chlorides as Cl, when tested in conformance with California Test 422, nor more than 1,300 parts per million of sulfates as SO<sub>4</sub>, when tested in conformance with California Test 417. In no case shall the water contain an amount of impurities that will cause either: 1) a change in the setting time of cement of more than 25 percent when tested in conformance with the requirements in ASTM Designation: C 191 or ASTM Designation: C 266 or 2) a reduction in the compressive strength of mortar at 14 days of more than 5 percent, when tested in conformance with the requirements in ASTM Designation: C 109, when compared to the results obtained with distilled water or deionized water, tested in conformance with the requirements in ASTM Designation: C 109.

In nonreinforced concrete work, the water for curing, for washing aggregates and for mixing shall be free from oil and shall not contain more than 2,000 parts per million of chlorides as Cl, when tested in conformance with California Test 422, or more than 1,500 parts per million of sulfates as SO<sub>4</sub>, when tested in conformance with California Test 417.

In addition to the above provisions, water for curing concrete shall not contain impurities in a sufficient amount to cause discoloration of the concrete or produce etching of the surface.

Water reclaimed from mixer wash-out operations may be used in mixing concrete. The water shall not contain coloring agents or more than 300 parts per million of alkalis (Na<sub>2</sub>O + 0.658 K<sub>2</sub>O) as determined on the filtrate. The specific gravity of the water shall not exceed 1.03 and shall not vary more than ±0.010 during a day's operations.

### 90-2.04 Admixture Materials

Admixture materials shall be stored and dispersed in liquid form and conform to the following requirements:

- A. Chemical Admixtures—ASTM Designation: C 494.
- B. Air-entraining Admixtures—ASTM Designation: C 260.
- C. Lithium Nitrate shall be in an aqueous solution conforming to the following:
  - 1. Lithium Nitrate (LiNO<sub>3</sub>) must be 30 percent +/- 0.5 percent by weight
  - 2. Sulfate (SO<sub>4</sub>) must be less than 1000 ppm
  - 3. Chloride (Cl) must be less than 1000 ppm
  - 4. Alkalis (Na<sub>2</sub>O + 0.658 K<sub>2</sub>O) must be less than 1000 ppm

## 90-3 AGGREGATE GRADINGS

### 90-3.01 GENERAL

Before beginning concrete work, the Contractor shall submit in writing to the Engineer the gradation of the primary aggregate nominal sizes that the Contractor proposes to furnish. If a primary coarse aggregate or the fine aggregate is separated into 2 or more sizes, the proposed gradation shall consist of the gradation for each individual size, and the proposed proportions of each individual size, combined mathematically to indicate one proposed gradation. The proposed gradation shall meet the grading requirements shown in the table in this section, and shall show the percentage passing each of the sieve sizes used in determining the end result.

The Engineer may waive, in writing, the gradation requirements in this Section 90-3.01 and in Sections 90-3.02, "Coarse Aggregate Grading," 90-3.03, "Fine Aggregate Grading," and 90-3.04, "Combined Aggregate Gradings," if, in the Engineer's opinion, furnishing the gradation is not necessary for the type or amount of concrete work to be constructed.

Gradations proposed by the Contractor shall be within the following percentage passing limits:

Primary Aggregate Nominal Size	Sieve Size	Limits of Proposed Gradation
1-1/2" x 3/4"	1"	19 - 41
1" x No. 4	3/4"	52 - 85
1" x No. 4	3/8"	15 - 38
1/2" x No. 4	3/8"	40 - 78
3/8" x No. 8	3/8"	50 - 85
Fine Aggregate	No. 16	55 - 75
Fine Aggregate	No. 30	34 - 46
Fine Aggregate	No. 50	16 - 29

Should the Contractor change the source of supply, the Contractor shall submit in writing to the Engineer the new gradations before their intended use.

**90-3.02 COARSE AGGREGATE GRADING**

The grading requirements for coarse aggregates are shown in the following table for each size of coarse aggregate:

Sieve Sizes	Percentage Passing Primary Aggregate Nominal Sizes							
	1-1/2" x 3/4"		1" x No. 4		1/2" x No. 4		3/8" x No. 8	
	Operating Range	Contract Compliance	Operating Range	Contract Compliance	Operating Range	Contract Compliance	Operating Range	Contract Compliance
2"	100	100	—	—	—	—	—	—
1-1/2"	88 - 100	85 - 100	100	100	—	—	—	—
1"	X ±18	X ±25	88 - 100	86 - 100	—	—	—	—
3/4"	0 - 17	0 - 20	X ±15	X ±22	100	100	—	—
1/2"	—	—	—	—	82 - 100	80 - 100	100	100
3/8"	0 - 7	0 - 9	X ±15	X ±22	X ±15	X ±22	X ±15	X ±20
No. 4	—	—	0 - 16	0 - 18	0 - 15	0 - 18	0 - 25	0 - 28
No. 8	—	—	0 - 6	0 - 7	0 - 6	0 - 7	0 - 6	0 - 7

In the above table, the symbol X is the gradation that the Contractor proposes to furnish for the specific sieve size as provided in Section 90-3.01, "General."

Coarse aggregate for the 1-1/2 inch, maximum, combined aggregate grading as provided in Section 90-3.04, "Combined Aggregate Gradings," shall be furnished in 2 or more primary aggregate nominal sizes. Each primary aggregate nominal size may be separated into 2 sizes and stored separately, provided that the combined material conforms to the grading requirements for that particular primary aggregate nominal size.

When the one inch, maximum, combined aggregate grading as provided in Section 90-3.04, "Combined Aggregate Gradings," is to be used, the coarse aggregate may be separated into 2 sizes and stored separately, provided that the combined material shall conform to the grading requirements for the 1" x No. 4 primary aggregate nominal size.

**90-3.03 FINE AGGREGATE GRADING**

Fine aggregate shall be graded within the following limits:

Sieve Sizes	Percentage Passing	
	Operating Range	Contract Compliance
3/8"	100	100
No. 4	95 - 100	93 - 100
No. 8	65 - 95	61 - 99
No. 16	X ±10	X ±13
No. 30	X ±9	X ±12
No. 50	X ±6	X ±9
No. 100	2 - 12	1 - 15
No. 200	0 - 8	0 - 10

In the above table, the symbol X is the gradation that the Contractor proposes to furnish for the specific sieve size as provided in Section 90-3.01, "General."

In addition to the above required grading analysis, the distribution of the fine aggregate sizes shall be such that the difference between the total percentage passing the No. 16 sieve and the total percentage passing the No. 30 sieve shall be between 10 and 40, and the difference between the percentage passing the No. 30 and No. 50 sieves shall be between 10 and 40.

Fine aggregate may be separated into 2 or more sizes and stored separately, provided that the combined material conforms to the grading requirements specified in this Section 90-3.03.

**90-3.04 COMBINED AGGREGATE GRADINGS**

Combined aggregate grading limits shall be used only for the design of concrete mixes. Concrete mixes shall be designed so that aggregates are combined in proportions that shall produce a mixture within the grading limits for combined aggregates as specified herein.

The combined aggregate grading, except when otherwise specified in these specifications or the special provisions, shall be either the 1-1/2 inch, maximum grading, or the 1 inch, maximum grading, at the option of the Contractor.

Grading Limits of Combined Aggregates

Sieve Sizes	Percentage Passing			
	1-1/2" Max.	1" Max.	1/2" Max.	3/8" Max.
2"	100	—	—	—
1-1/2"	90 - 100	100	—	—
1"	50 - 86	90 - 100	—	—
3/4"	45 - 75	55 - 100	100	—
1/2"	—	—	90 - 100	100
3/8"	38 - 55	45 - 75	55 - 86	50 - 100
No. 4	30 - 45	35 - 60	45 - 63	45 - 63
No. 8	23 - 38	27 - 45	35 - 49	35 - 49
No. 16	17 - 33	20 - 35	25 - 37	25 - 37
No. 30	10 - 22	12 - 25	15 - 25	15 - 25
No. 50	4 - 10	5 - 15	5 - 15	5 - 15
No. 100	1 - 6	1 - 8	1 - 8	1 - 8
No. 200	0 - 3	0 - 4	0 - 4	0 - 4

Changes from one grading to another shall not be made during the progress of the work unless permitted by the Engineer.

**90-4 ADMIXTURES**

**90-4.01 GENERAL**

Admixtures used in portland cement concrete shall conform to and be used in conformance with the provisions in this Section 90-4 and the special provisions. Admixtures shall be used when specified or ordered by the Engineer and may be used at the Contractor's option as provided herein.

Chemical admixtures and air-entraining admixtures containing chlorides as Cl in excess of one percent by weight of admixture, as determined by California Test 415, shall not be used.

Admixtures shall be uniform in properties throughout their use in the work. Should it be found that an admixture as furnished is not uniform in properties, its use shall be discontinued.

If more than one admixture is used, the admixtures shall be compatible with each other so that the desirable effects of all admixtures used will be realized.

Chemical admixtures shall be used in conformance with the manufacturer's written recommendations. The manufacturer's written recommendations shall include a statement that the admixtures are compatible with the types and amounts of SCMs used.

**90-4.02 MATERIALS**

Admixture materials shall conform to the provisions in Section 90-2.04, "Admixture Materials."

**90-4.03 ADMIXTURE APPROVAL**

No admixture brand shall be used in the work unless it is on the Department's current list of approved brands for the type of admixture involved. Information regarding admixture qualification and placement on the Department's list can be obtained at the Transportation Laboratory.

If the Contractor proposes to use an admixture of a brand and type on the current list of approved admixture brands, the Contractor shall furnish a Certificate of Compliance from the manufacturer, as provided in Section 6-1.07, "Certificates of Compliance," certifying that the admixture furnished is the same as that previously approved. If a previously approved admixture is not accompanied by a Certificate of Compliance, the admixture shall not be used in the work until the Engineer has had sufficient time to make the appropriate tests and has approved the admixture for use. The Engineer may take samples for testing at any time, whether or not the admixture has been accompanied by a Certificate of Compliance.

**90-4.04 REQUIRED USE OF CHEMICAL ADMIXTURES**

If the use of a chemical admixture is specified, the admixture shall be used at the dosage specified, except that if no dosage is specified, the admixture shall be used at the dosage normally recommended by the manufacturer of the admixture.

#### **90-4.05 OPTIONAL USE OF CHEMICAL ADMIXTURES**

The Contractor may use Type A or F, water-reducing; Type B, retarding; or Type D or G, water-reducing and retarding admixtures as described in ASTM Designation: C 494 to conserve cementitious material or to facilitate any concrete construction application subject to the following conditions:

- A. If a water-reducing admixture or a water-reducing and retarding admixture is used, the cementitious material content specified or ordered may be reduced by a maximum of 5 percent by weight, except that the resultant cementitious material content shall be not less than 505 pounds per cubic yard; and
- B. When a reduction in cementitious material content is made, the dosage of admixture used shall be no less than the dosage used in determining approval of the admixture.

The Contractor may use Type S admixtures conforming to the requirements in ASTM Designation: C 494.

Unless otherwise specified, a Type C accelerating chemical admixture conforming to the requirements in ASTM Designation: C 494, may be used in portland cement concrete. Inclusion in the mix design submitted for approval will not be required provided that the admixture is added to counteract changing conditions that contribute to delayed setting of the portland cement concrete, and the use or change in dosage of the admixture is approved in writing by the Engineer.

#### **90-4.06 REQUIRED USE OF AIR-ENTRAINING ADMIXTURES**

When air-entrainment is specified or ordered by the Engineer, the air-entraining admixture shall be used in amounts to produce a concrete having the specified air content as determined by California Test 504.

#### **90-4.07 OPTIONAL USE OF AIR-ENTRAINING ADMIXTURES**

When air-entrainment has not been specified or ordered by the Engineer, the Contractor will be permitted to use an air-entraining admixture to facilitate the use of any construction procedure or equipment provided that the average air content, as determined by California Test 504, of 3 successive tests does not exceed 4 percent, and no single test value exceeds 5.5 percent. If the Contractor elects to use an air-entraining admixture in concrete for pavement, the Contractor shall so indicate at the time the Contractor designates the source of aggregate.

#### **90-4.08 BLANK**

#### **90-4.09 BLANK**

#### **90-4.10 PROPORTIONING AND DISPENSING LIQUID ADMIXTURES**

Chemical admixtures and air-entraining admixtures shall be dispensed in liquid form. Dispensers for liquid admixtures shall have sufficient capacity to measure at one time the prescribed quantity required for each batch of concrete. Each dispenser shall include a graduated measuring unit into which liquid admixtures are measured to within  $\pm 5$  percent of the prescribed quantity for each batch. Dispensers shall be located and maintained so that the graduations can be accurately read from the point at which proportioning operations are controlled to permit a visual check of batching accuracy prior to discharge. Each measuring unit shall be clearly marked for the type and quantity of admixture.

Each liquid admixture dispensing system shall be equipped with a sampling device consisting of a valve located in a safe and readily accessible position such that a sample of the admixture may be withdrawn slowly by the Engineer.

If more than one liquid admixture is used in the concrete mix, each liquid admixture shall have a separate measuring unit and shall be dispensed by injecting equipment located in such a manner that the admixtures are not mixed at high concentrations and do not interfere with the effectiveness of each other. When air-entraining admixtures are used in conjunction with other liquid admixtures, the air-entraining admixture shall be the first to be incorporated into the mix, unless it is demonstrated that a different sequence improves performance.

When automatic proportioning devices are required for concrete pavement, dispensers for liquid admixtures shall operate automatically with the batching control equipment. The dispensers shall be equipped with an automatic warning system in good operating condition that will provide a visible or audible signal at the point at which proportioning operations are controlled when the quantity of admixture measured for each batch of concrete varies from the preselected dosage by more than 5 percent, or when the entire contents of the measuring unit are not emptied from the dispenser into each batch of concrete.

Unless liquid admixtures are added to premeasured water for the batch, their discharge into the batch shall be arranged to flow into the stream of water so that the admixtures are well dispersed throughout the batch, except that air-entraining admixtures may be dispensed directly into moist sand in the batching bins provided that adequate control of the air content of the concrete can be maintained.

Liquid admixtures requiring dosages greater than one-half gallon per cubic yard shall be considered to be water when determining the total amount of free water as specified in Section 90-6.06, "Amount of Water and Penetration."

## 90-4.11 BLANK

### 90-5 PROPORTIONING

#### 90-5.01 STORAGE OF AGGREGATES

Aggregates shall be stored or stockpiled in such a manner that separation of coarse and fine particles of each size shall be avoided and the various sizes shall not become intermixed before proportioning.

Aggregates shall be stored or stockpiled and handled in a manner that prevent contamination by foreign materials. In addition, storage of aggregates at batching or mixing facilities that are erected subsequent to the award of the contract and that furnish concrete to the project shall conform to the following:

- A. Intermingling of the different sizes of aggregates shall be positively prevented. The Contractor shall take the necessary measures to prevent intermingling. The preventive measures may include, but are not necessarily limited to, physical separation of stockpiles or construction of bulkheads of adequate length and height; and
- B. Contamination of aggregates by contact with the ground shall be positively prevented. The Contractor shall take the necessary measures to prevent contamination. The preventive measures shall include, but are not necessarily limited to, placing aggregates on wooden platforms or on hardened surfaces consisting of portland cement concrete, asphalt concrete, or cement treated material.

In placing aggregates in storage or in moving the aggregates from storage to the weigh hopper of the batching plant, any method that may cause segregation, degradation, or the combining of materials of different gradings that will result in any size of aggregate at the weigh hopper failing to meet the grading requirements, shall be discontinued. Any method of handling aggregates that results in excessive breakage of particles shall be discontinued. The use of suitable devices to reduce impact of falling aggregates may be required by the Engineer.

#### 90-5.02 PROPORTIONING DEVICES

Weighing, measuring, or metering devices used for proportioning materials shall conform to the requirements in Section 9-1.01, "Measurement of Quantities," and this Section 90-5.02. In addition, automatic weighing systems shall comply with the requirements for automatic proportioning devices in Section 90-5.03A, "Proportioning for Pavement." Automatic devices shall be automatic to the extent that the only manual operation required for proportioning the aggregates, cement, and SCM for one batch of concrete is a single operation of a switch or starter.

Proportioning devices shall be tested as frequently as the Engineer may deem necessary to ensure their accuracy.

Weighing equipment shall be insulated against vibration or movement of other operating equipment in the plant. When the plant is in operation, the weight of each batch of material shall not vary from the weight designated by the Engineer by more than the tolerances specified herein.

Equipment for cumulative weighing of aggregate shall have a zero tolerance of  $\pm 0.5$  percent of the designated total batch weight of the aggregate. For systems with individual weigh hoppers for the various sizes of aggregate, the zero tolerance shall be  $\pm 0.5$  percent of the individual batch weight designated for each size of aggregate. Equipment for cumulative weighing of cement and SCM shall have a zero tolerance of  $\pm 0.5$  percent of the designated total batch weight of the cement and SCM. Equipment for weighing cement or SCM separately shall have a zero tolerance of  $\pm 0.5$  percent of their designated individual batch weights. Equipment for measuring water shall have a zero tolerance of  $\pm 0.5$  percent of its designated weight or volume.

The weight indicated for any batch of material shall not vary from the preselected scale setting by more than the following:

- A. Aggregate weighed cumulatively shall be within 1.0 percent of the designated total batch weight of the aggregate. Aggregates weighed individually shall be within 1.5 percent of their respective designated batch weights; and
- B. Cement shall be 99 to 102 percent of its designated batch weight. When weighed individually, SCM shall be 99 to 102 percent of its designated batch weight. When SCM and cement are permitted to be weighed cumulatively, cement shall be weighed first to 99 to 102 percent of its designated batch weight, and the total for cement and SCM shall be 99 to 102 percent of the sum of their designated batch weights. When a blended cement is used, the percentages of cement and SCM used for calculating batch weights shall be based on the percentage of SCM indicated in the Certificate of Compliance from the blended cement supplier; and
- C. Water shall be within 1.5 percent of its designated weight or volume.

Each scale graduation shall be approximately 0.001 of the total capacity of the scale. The capacity of scales for weighing cement, SCM, or cement plus SCM and aggregates shall not exceed that of commercially available scales having single

graduations indicating a weight not exceeding the maximum permissible weight variation above, except that no scale shall be required having a capacity of less than 1,000 pounds, with one pound graduations.

### **90-5.03 PROPORTIONING**

Proportioning shall consist of dividing the aggregates into the specified sizes, each stored in a separate bin, and combining them with cementitious material and water as provided in these specifications. Aggregates shall be proportioned by weight.

At the time of batching, aggregates shall have been dried or drained sufficiently to result in a stable moisture content such that no visible separation of water from aggregate will take place during transportation from the proportioning plant to the point of mixing. In no event shall the free moisture content of the fine aggregate at the time of batching exceed 8 percent of its saturated, surface-dry weight.

Should separate supplies of aggregate material of the same size group, but of different moisture content or specific gravity or surface characteristics affecting workability, be available at the proportioning plant, withdrawals shall be made from one supply exclusively and the materials therein completely exhausted before starting upon another.

Bulk Type IP (MS) or Type IS (MS) cement shall be weighed in an individual hopper and shall be kept separate from the aggregates until the ingredients are released for discharge into the mixer.

Bulk cement and SCM may be weighed in separate, individual weigh hoppers or may be weighed in the same weigh hopper and shall be kept separate from the aggregates until the ingredients are released for discharge into the mixer. If the cement and SCM are weighed cumulatively, the cement shall be weighed first.

If cement and SCM are weighed in separate weigh hoppers, the weigh systems for the proportioning of the aggregate, the cement, and the SCM shall be individual and distinct from all other weigh systems. Each weigh system shall be equipped with a hopper, a lever system, and an indicator to constitute an individual and independent material-weighing device. The cement and the SCM shall be discharged into the mixer simultaneously with the aggregate.

The scales and weigh hoppers for bulk weighing cement, SCM, or cement plus SCM shall be separate and distinct from the aggregate weighing equipment.

For batches of one cubic yard or more, the batching equipment shall conform to one of the following combinations:

- A. Separate boxes and separate scale and indicator for weighing each size of aggregate.
- B. Single box and scale indicator for all aggregates.
- C. Single box or separate boxes and automatic weighing mechanism for all aggregates.

In order to check the accuracy of batch weights, the gross weight and tare weight of batch trucks, truck mixers, truck agitators, and non-agitating hauling equipment shall be determined when ordered by the Engineer. The equipment shall be weighed on scales designated by the Engineer.

#### **90-5.03A Proportioning For Pavement**

Aggregates and bulk SCM for use in pavement shall be proportioned by weight by means of automatic proportioning devices of approved type conforming to these specifications.

The Contractor shall install and maintain in operating condition an electronically actuated moisture meter that will indicate, on a readily visible scale, changes in the moisture content of the fine aggregate as it is batched within a sensitivity of 0.5 percent by weight of the fine aggregate.

The batching of cement, SCM, or cement plus SCM and aggregate shall be interlocked so that a new batch cannot be started until all weigh hoppers are empty, the proportioning devices are within zero tolerance, and the discharge gates are closed. The interlock shall permit no part of the batch to be discharged until all aggregate hoppers and the cement and SCM hoppers or the cement plus SCM hopper are charged with weights that are within the tolerances specified in Section 90-5.02, "Proportioning Devices."

If interlocks are required for cement and SCM charging mechanisms and cement and SCM are weighed cumulatively, their charging mechanisms shall be interlocked to prevent the introduction of SCM until the weight of cement in the cement weigh hopper is within the tolerances specified in Section 90-5.02, "Proportioning Devices."

If concrete is completely mixed in stationary paving mixers, the SCMs shall be weighed in a separate weigh hopper and the SCM and cement shall be introduced simultaneously into the mixer proportionately with the aggregate. If the Contractor provides certification that the stationary mixer is capable of mixing the cement, SCM, aggregates, and water uniformly before discharge, weighing the SCM cumulatively with the cement is permitted. Certification shall contain the following:

- A. Test results for 2 compressive strength test cylinders of concrete taken within the first one-third and 2 compressive strength test cylinders of concrete taken within the last one-third of the concrete discharged from a single batch from the stationary paving mixer. Strength tests and cylinder preparation will be in conformance with the provisions of Section 90-9, "Compressive Strength";

- B. Calculations demonstrating that the difference in the averages of 2 compressive strengths taken in the first one-third is no greater than 7.5 percent different than the averages of 2 compressive strengths taken in the last one-third of the concrete discharged from a single batch from the stationary paving mixer. Strength tests and cylinder preparation will be in conformance with the provisions of Section 90-9, "Compressive Strength;" and
- C. The mixer rotation speed and time of mixing before discharge that are required to produce a mix that meets the requirements above.

The discharge gate on the cement and SCM hoppers or the cement plus SCM hopper shall be designed to permit regulating the flow of cement, SCM, or cement plus SCM into the aggregate as directed by the Engineer.

If separate weigh boxes are used for each size of aggregate, the discharge gates shall permit regulating the flow of each size of aggregate as directed by the Engineer.

Material discharged from the several bins shall be controlled by gates or by mechanical conveyors. The means of withdrawal from the several bins, and of discharge from the weigh box, shall be interlocked so that not more than one bin can discharge at a time, and so that the weigh box cannot be tripped until the required quantity from each of the several bins has been deposited therein. Should a separate weigh box be used for each size of aggregate, all may be operated and discharged simultaneously.

If the discharge from the several bins is controlled by gates, each gate shall be actuated automatically so that the required mass is discharged into the weigh box, after which the gate shall automatically close and lock.

The automatic weighing system shall be designed so that all proportions required may be set on the weighing controller at the same time.

## **90-6 MIXING AND TRANSPORTING**

### **90-6.01 GENERAL**

Concrete shall be mixed in mechanically operated mixers, except that when permitted by the Engineer, batches not exceeding 1/3 cubic yard may be mixed by hand methods in conformance with the provisions in Section 90-6.05, "Hand-Mixing."

Equipment having components made of aluminum or magnesium alloys that would have contact with plastic concrete during mixing, transporting, or pumping of portland cement concrete shall not be used.

Concrete shall be homogeneous and thoroughly mixed, and there shall be no lumps or evidence of undispersed cementitious material.

Uniformity of concrete mixtures will be determined by differences in penetration as determined by California Test 533, or slump as determined by ASTM Designation: C 143, and by variations in the proportion of coarse aggregate as determined by California Test 529.

When the mix design specifies a penetration value, the difference in penetration, determined by comparing penetration tests on 2 samples of mixed concrete from the same batch or truck mixer load, shall not exceed 1/2 inch. When the mix design specifies a slump value, the difference in slump, determined by comparing slump tests on 2 samples of mixed concrete from the same batch or truck mixer load, shall not exceed the values given in the table below. Variation in the proportion of coarse aggregate will be determined by comparing the results of tests of 2 samples of mixed concrete from the same batch or truck mixer load and the difference between the 2 results shall not exceed 170 pounds per cubic yard of concrete.

Average Slump	Maximum Permissible Difference
Less than 4"	1"
4" to 6"	1-1/2"
Greater than 6" to 9"	2"

The Contractor shall furnish samples of the freshly mixed concrete and provide satisfactory facilities for obtaining the samples.

### **90-6.02 MACHINE MIXING**

Concrete mixers may be of the revolving drum or the revolving blade type, and the mixing drum or blades shall be operated uniformly at the mixing speed recommended by the manufacturer. Mixers and agitators that have an accumulation of hard concrete or mortar shall not be used.

The temperature of mixed concrete, immediately before placing, shall be not less than 50 °F or more than 90 °F. Aggregates and water shall be heated or cooled as necessary to produce concrete within these temperature limits. Neither aggregates nor mixing water shall be heated to exceed 150 °F. If ice is used to cool the concrete, discharge of the mixer will not be permitted until all ice is melted.

The batch shall be so charged into the mixer that some water will enter in advance of cementitious materials and aggregates. All water shall be in the drum by the end of the first one-fourth of the specified mixing time.

Cementitious materials shall be batched and charged into the mixer by means that will not result either in loss of cementitious materials due to the effect of wind, in accumulation of cementitious materials on surfaces of conveyors or hoppers, or in other conditions that reduce or vary the required quantity of cementitious material in the concrete mixture.

Paving and stationary mixers shall be operated with an automatic timing device. The timing device and discharge mechanism shall be interlocked so that during normal operation no part of the batch will be discharged until the specified mixing time has elapsed.

The total elapsed time between the intermingling of damp aggregates and all cementitious materials and the start of mixing shall not exceed 30 minutes.

The size of batch shall not exceed the manufacturer's guaranteed capacity.

When producing concrete for pavement or base, suitable batch counters shall be installed and maintained in good operating condition at job site batching plants and stationary mixers. The batch counters shall indicate the exact number of batches proportioned and mixed.

Concrete shall be mixed and delivered to the job site by means of one of the following combinations of operations:

- A. Mixed completely in a stationary mixer and the mixed concrete transported to the point of delivery in truck agitators or in nonagitating hauling equipment (central-mixed concrete).
- B. Mixed partially in a stationary mixer, and the mixing completed in a truck mixer (shrink-mixed concrete).
- C. Mixed completely in a truck mixer (transit-mixed concrete).
- D. Mixed completely in a paving mixer.

Agitators may be truck mixers operating at agitating speed or truck agitators. Each mixer and agitator shall have attached thereto in a prominent place a metal plate or plates on which is plainly marked the various uses for which the equipment is designed, the manufacturer's guaranteed capacity of the drum or container in terms of the volume of mixed concrete and the speed of rotation of the mixing drum or blades.

Truck mixers shall be equipped with electrically or mechanically actuated revolution counters by which the number of revolutions of the drum or blades may readily be verified.

When shrink-mixed concrete is furnished, concrete that has been partially mixed at a central plant shall be transferred to a truck mixer and all requirements for transit-mixed concrete shall apply. No credit in the number of revolutions at mixing speed will be allowed for partial mixing in a central plant.

### **90-6.03 TRANSPORTING MIXED CONCRETE**

Mixed concrete may be transported to the delivery point in truck agitators or truck mixers operating at the speed designated by the manufacturer of the equipment as agitating speed, or in non-agitating hauling equipment, provided the consistency and workability of the mixed concrete upon discharge at the delivery point is suitable for adequate placement and consolidation in place, and provided the mixed concrete after hauling to the delivery point conforms to the provisions in Section 90-6.01, "General."

Truck agitators shall be loaded not to exceed the manufacturer's guaranteed capacity and shall maintain the mixed concrete in a thoroughly mixed and uniform mass during hauling.

Bodies of nonagitating hauling equipment shall be constructed so that leakage of the concrete mix, or any part thereof, will not occur at any time.

Concrete hauled in open-top vehicles shall be protected during hauling against rain or against exposure to the sun for more than 20 minutes when the ambient temperature exceeds 75 °F.

No additional mixing water shall be incorporated into the concrete during hauling or after arrival at the delivery point.

The rate of discharge of mixed concrete from truck mixer-agitators shall be controlled by the speed of rotation of the drum in the discharge direction with the discharge gate fully open.

If a truck mixer or agitator is used for transporting concrete to the delivery point, discharge shall be completed within 1.5 hours or before 250 revolutions of the drum or blades, whichever occurs first, after the introduction of the cement to the aggregates. Under conditions contributing to quick stiffening of the concrete, or if the temperature of the concrete is 85 °F or above, the time allowed may be less than 1.5 hours. If an admixture is used to retard the set time, the temperature of the concrete shall not exceed 85 °F, the time limit shall be 2 hours, and the revolution limitation shall be 300.

If nonagitating hauling equipment is used for transporting concrete to the delivery point, discharge shall be completed within one hour after the addition of the cement to the aggregates. Under conditions contributing to quick stiffening of the concrete, or when the temperature of the concrete is 85 °F or above, the time between the introduction of cement to the aggregates and discharge shall not exceed 45 minutes.

Each load of concrete delivered at the job site shall be accompanied by a weighmaster certificate showing the mix identification number, nonrepeating load number, date and time at which the materials were batched, the total amount of water added to the load, and for transit-mixed concrete, the reading of the revolution counter at the time the truck mixer is charged with cement. This weighmaster certificate shall also show the actual scale weights (pounds) for the ingredients batched. Theoretical or target batch weights shall not be used as a substitute for actual scale weights.

Weighmaster certificates shall be provided in printed form, or if approved by the Engineer, the data may be submitted in electronic media. Electronic media shall be presented in a tab-delimited format on a CD or DVD. Captured data, for the ingredients represented by each batch shall be "line feed, carriage return" (LFCR) and "one line, separate record" with allowances for sufficient fields to satisfy the amount of data required by these specifications.

The Contractor may furnish a weighmaster certificate accompanied by a separate certificate that lists the actual batch weights or measurements for a load of concrete provided that both certificates are imprinted with the same nonrepeating load number that is unique to the contract and delivered to the jobsite with the load.

Weighmaster certificates furnished by the Contractor shall conform to the provisions in Section 9-1.01, "Measurement of Quantities."

**90-6.04 TIME OR AMOUNT OF MIXING**

Mixing of concrete in paving or stationary mixers shall continue for the required mixing time after all ingredients, except water and admixture, if added with the water, are in the mixing compartment of the mixer before any part of the batch is released. Transfer time in multiple drum mixers shall not be counted as part of the required mixing time.

The required mixing time, in paving or stationary mixers, of concrete used for concrete structures, except minor structures, shall be not less than 90 seconds or more than 5 minutes, except that when directed by the Engineer in writing, the requirements of the following paragraph shall apply.

The required mixing time, in paving or stationary mixers, except as provided in the preceding paragraph, shall be not less than 50 seconds or more than 5 minutes.

The minimum required revolutions at the mixing speed for transit-mixed concrete shall not be less than that recommended by the mixer manufacturer, but in no case shall the number of revolutions be less than that required to consistently produce concrete conforming to the provisions for uniformity in Section 90-6.01, "General."

When a high range water-reducing admixture is added to the concrete at the job site, the total number of revolutions shall not exceed 300.

**90-6.05 HAND-MIXING**

Hand-mixed concrete shall be made in batches of not more than 1/3 cubic yard and shall be mixed on a watertight, level platform. The proper amount of coarse aggregate shall be measured in measuring boxes and spread on the platform and the fine aggregate shall be spread on this layer, the 2 layers being not more than one foot in total depth. On this mixture shall be spread the dry cementitious materials and the whole mass turned no fewer than 2 times dry; then sufficient clean water shall be added, evenly distributed, and the whole mass again turned no fewer than 3 times, not including placing in the carriers or forms.

**90-6.06 AMOUNT OF WATER AND PENETRATION**

The amount of water used in concrete mixes shall be regulated so that the penetration of the concrete as determined by California Test 533 or the slump of the concrete as determined by ASTM Designation: C 143 is within the nominal values shown in the following table. When the penetration or slump of the concrete is found to exceed the nominal values listed, the mixture of subsequent batches shall be adjusted to reduce the penetration or slump to a value within the nominal range shown. Batches of concrete with a penetration or slump exceeding the maximum values listed shall not be used in the work. If Type F or Type G chemical admixtures are added to the mix, the penetration requirements shall not apply and the slump shall not exceed 9 inches after the chemical admixtures are added.

Type of Work	Nominal		Maximum	
	Penetration (inches)	Slump (inches)	Penetration (inches)	Slump (inches)
Concrete Pavement	0 - 1	—	1-1/2	—
Non-reinforced concrete facilities	0 - 1-1/2	—	2	—
Reinforced concrete structures				
Sections over 12 inches thick	0 - 1-1/2	—	2-1/2	—
Sections 12 inches thick or less	0 - 2	—	3	—
Concrete placed under water	—	6 - 8	—	9
Cast-in-place concrete piles	2-1/2 - 3-1/2	5 - 7	4	8

The amount of free water used in concrete shall not exceed 310 pounds per cubic yard, plus 20 pounds for each required 100 pounds of cementitious material in excess of 550 pounds per cubic yard.

The term free water is defined as the total water in the mixture minus the water absorbed by the aggregates in reaching a saturated surface-dry condition.

If there are adverse or difficult conditions that affect the placing of concrete, the above specified penetration and free water content limitations may be exceeded providing the Contractor is granted permission by the Engineer in writing to increase the cementitious material content per cubic yard of concrete. The increase in water and cementitious material shall be at a ratio not to exceed 30 pounds of water per added 100 pounds of cementitious material per cubic yard. Full compensation for additional cementitious material and water added under these conditions shall be considered as included in the contract price paid for the concrete work involved and no additional compensation will be allowed therefor.

The equipment for supplying water to the mixer shall be constructed and arranged so that the amount of water added can be measured accurately. Any method of discharging water into the mixer for a batch shall be accurate within 1.5 percent of the quantity of water required to be added to the mix for any position of the mixer. Tanks used to measure water shall be designed so that water cannot enter while water is being discharged into the mixer and discharge into the mixer shall be made rapidly in one operation without dribbling. All equipment shall be arranged so as to permit checking the amount of water delivered by discharging into measured containers.

## **90-7 CURING CONCRETE**

### **90-7.01 METHODS OF CURING**

Newly placed concrete shall be cured by the methods specified in this Section 90-7.01 and the special provisions.

#### **90-7.01A Water Method**

The concrete shall be kept continuously wet by the application of water for a minimum curing period of 7 days after the concrete has been placed.

Cotton mats, rugs, carpets, or earth or sand blankets may be used as a curing medium to retain the moisture during the curing period.

If a curing medium consisting of cotton mats, rugs, carpets, polyethylene sheeting, polyethylene sheeting on burlap, or earth or sand blankets is to be used to retain the moisture, the entire surface of the concrete shall be kept damp by applying water with a nozzle that so atomizes the flow that a mist and not a spray is formed, until the surface of the concrete is covered with the curing medium. The moisture from the nozzle shall not be applied under pressure directly upon the concrete and shall not be allowed to accumulate on the concrete in a quantity sufficient to cause a flow or wash the surface. At the expiration of the curing period, the concrete surfaces shall be cleared of all curing media.

At the option of the Contractor, a curing medium consisting of white opaque polyethylene sheeting extruded onto burlap may be used to cure concrete structures. The polyethylene sheeting shall have a minimum thickness of 4-mil, and shall be extruded onto 10-ounce burlap.

At the option of the Contractor, a curing medium consisting of polyethylene sheeting may be used to cure concrete columns. The polyethylene sheeting shall have a minimum thickness of 10-mil achieved in a single layer of material.

If the Contractor chooses to use polyethylene sheeting or polyethylene sheeting on burlap as a curing medium, these media and any joints therein shall be secured as necessary to provide moisture retention and shall be within 3 inches of the concrete at all points along the surface being cured. When these media are used, the temperature of the concrete shall be monitored during curing. If the temperature of the concrete cannot be maintained below 140° F, use of these curing media shall be disallowed.

When concrete bridge decks and flat slabs are to be cured without the use of a curing medium, the entire surface of the bridge deck or slab shall be kept damp by the application of water with an atomizing nozzle as specified above, until the concrete has set, after which the entire surface of the concrete shall be sprinkled continuously with water for a period of not less than 7 days.

#### **90-7.01B Curing Compound Method**

Surfaces of the concrete that are exposed to the air shall be sprayed uniformly with a curing compound.

Curing compounds to be used shall be as follows:

1. Pigmented curing compound conforming to the requirements in ASTM Designation: C 309, Type 2, Class B, except the resin type shall be poly-alpha-methylstyrene.
2. Pigmented curing compound conforming to the requirements in ASTM Designation: C 309, Type 2, Class B.
3. Pigmented curing compound conforming to the requirements in ASTM Designation: C 309, Type 2, Class A.
4. Nonpigmented curing compound conforming to the requirements in ASTM Designation: C 309, Type 1, Class B.
5. Nonpigmented curing compound conforming to the requirements in ASTM Designation: C 309, Type 1, Class A.
6. Nonpigmented curing compound with fugitive dye conforming to the requirements in ASTM Designation: C 309, Type 1-D, Class A.

The infrared scan for the dried vehicle from curing compound (1) shall match the infrared scan on file at the Transportation Laboratory.

The loss of water for each type of curing compound, when tested in conformance with the requirements in California Test 534, shall not be more than 0.28 pounds per square yard in 24 hours.

The curing compound to be used will be specified elsewhere in these specifications or in the special provisions.

If the use of curing compound is required or permitted elsewhere in these specifications or in the special provisions and no specific kind is specified, any of the curing compounds listed above may be used.

Curing compound shall be applied at a nominal rate of one gallon per 150 square feet, unless otherwise specified.

At any point, the application rate shall be within  $\pm 50$  square feet per gallon of the nominal rate specified, and the average application rate shall be within  $\pm 25$  square feet per gallon of the nominal rate specified when tested in conformance with the requirements in California Test 535. Runs, sags, thin areas, skips, or holidays in the applied curing compound shall be evidence that the application is not satisfactory.

Curing compounds shall be applied using power operated spray equipment. The power operated spraying equipment shall be equipped with an operational pressure gage and a means of controlling the pressure. Hand spraying of small and irregular areas that are not reasonably accessible to mechanical spraying equipment, in the opinion of the Engineer, may be permitted.

The curing compound shall be applied to the concrete following the surface finishing operation, immediately before the moisture sheen disappears from the surface, but before any drying shrinkage or craze cracks begin to appear. In the event of any drying or cracking of the surface, application of water with an atomizing nozzle as specified in Section 90-7.01A, "Water Method," shall be started immediately and shall be continued until application of the compound is resumed or started; however, the compound shall not be applied over any resulting freestanding water. Should the film of compound be damaged from any cause before the expiration of 7 days after the concrete is placed in the case of structures and 72 hours in the case of pavement, the damaged portion shall be repaired immediately with additional compound.

At the time of use, compounds containing pigments shall be in a thoroughly mixed condition with the pigment uniformly dispersed throughout the vehicle. A paddle shall be used to loosen all settled pigment from the bottom of the container, and a power driven agitator shall be used to disperse the pigment uniformly throughout the vehicle.

Agitation shall not introduce air or other foreign substance into the curing compound.

The manufacturer shall include in the curing compound the necessary additives for control of sagging, pigment settling, leveling, de-emulsification, or other requisite qualities of a satisfactory working material. Pigmented curing compounds shall be manufactured so that the pigment does not settle badly, does not cake or thicken in the container, and does not become granular or curdled. Settlement of pigment shall be a thoroughly wetted, soft, mushy mass permitting the complete and easy vertical penetration of a paddle. Settled pigment shall be easily redispersed, with minimum resistance to the sideways manual motion of the paddle across the bottom of the container, to form a smooth uniform product of the proper consistency.

Curing compounds shall remain sprayable at temperatures above 40 °F and shall not be diluted or altered after manufacture.

The curing compound shall be packaged in clean 274-gallon totes, 55-gallon barrels or 5-gallon pails shall be supplied from a suitable storage tank located at the jobsite. The containers shall comply with "Title 49, Code of Federal Regulations, Hazardous Materials Regulations." The 274-gallon totes and the 55-gallon barrels shall have removable lids and airtight fasteners. The 5-gallon pails shall be round and have standard full open head and bail. Lids with bungholes will not be permitted. Settling or separation of solids in containers, except tanks, must be completely redispersed with low speed mixing prior to use, in conformance with these specifications and the manufacturer's recommendations. Mixing shall be accomplished either manually by use of a paddle or by use of a mixing blade driven by a drill motor, at low speed. Mixing blades shall be the type used for mixing paint. On-site storage tanks shall be kept clean and free of contaminants. Each tank shall have a permanent system designed to completely redisperse settled material without introducing air or other foreign substances.

Steel containers and lids shall be lined with a coating that will prevent destructive action by the compound or chemical agents in the air space above the compound. The coating shall not come off the container or lid as skins. Containers shall be filled in a manner that will prevent skinning. Plastic containers shall not react with the compound.

Each container shall be labeled with the manufacturer's name, kind of curing compound, batch number, volume, date of manufacture, and volatile organic compound (VOC) content. The label shall also warn that the curing compound containing pigment shall be well stirred before use. Precautions concerning the handling and the application of curing compound shall be shown on the label of the curing compound containers in conformance with the Construction Safety Orders and General Industry Safety Orders of the State.

Containers of curing compound shall be labeled to indicate that the contents fully comply with the rules and regulations concerning air pollution control in the State.

When the curing compound is shipped in tanks or tank trucks, a shipping invoice shall accompany each load. The invoice shall contain the same information as that required herein for container labels.

Curing compound will be sampled by the Engineer at the source of supply, at the job site, or at both locations.

Curing compound shall be formulated so as to maintain the specified properties for a minimum of one year. The Engineer may require additional testing before use to determine compliance with these specifications if the compound has not been used within one year or whenever the Engineer has reason to believe the compound is no longer satisfactory.

Tests will be conducted in conformance with the latest ASTM test methods and methods in use by the Transportation Laboratory.

#### **90-7.01C Waterproof Membrane Method**

The exposed finished surfaces of concrete shall be sprayed with water, using a nozzle that so atomizes the flow that a mist and not a spray is formed, until the concrete has set, after which the curing membrane, shall be placed. The curing membrane shall remain in place for a period of not less than 72 hours.

Sheeting material for curing concrete shall conform to the requirements in AASHTO Designation: M 171 for white reflective materials.

The sheeting material shall be fabricated into sheets of such width as to provide a complete cover for the entire concrete surface. Joints in the sheets shall be securely cemented together in such a manner as to provide a waterproof joint. The joint seams shall have a minimum lap of 0.33 foot.

The sheets shall be securely weighted down by placing a bank of earth on the edges of the sheets or by other means satisfactory to the Engineer.

Should any portion of the sheets be broken or damaged before the expiration of 72 hours after being placed, the broken or damaged portions shall be immediately repaired with new sheets properly cemented into place.

Sections of membrane that have lost their waterproof qualities or have been damaged to such an extent as to render them unfit for curing the concrete shall not be used.

#### **90-7.01D Forms-In-Place Method**

Formed surfaces of concrete may be cured by retaining the forms in place. The forms shall remain in place for a minimum period of 7 days after the concrete has been placed, except that for members over 20 inches in least dimension the forms shall remain in place for a minimum period of 5 days.

Joints in the forms and the joints between the end of forms and concrete shall be kept moisture tight during the curing period. Cracks in the forms and cracks between the forms and the concrete shall be resealed by methods subject to the approval of the Engineer.

### **90-7.02 BLANK**

#### **90-7.03 CURING STRUCTURES**

Newly placed concrete for cast-in-place structures, other than highway bridge decks, shall be cured by the water method, the forms-in-place method, or, as permitted herein, by the curing compound method, in conformance with the provisions in Section 90-7.01, "Methods of Curing."

The curing compound method using a pigmented curing compound may be used on concrete surfaces of construction joints, surfaces that are to be buried underground, and surfaces where only ordinary surface finish is to be applied and on which a uniform color is not required and that will not be visible from a public traveled way. If the Contractor elects to use the curing compound method on the bottom slab of box girder spans, the curing compound shall be curing compound (1).

The top surface of highway bridge decks shall be cured by both the curing compound method and the water method. The curing compound shall be curing compound (1).

Concrete surfaces of minor structures, as defined in Section 51-1.02, "Minor Structures," shall be cured by the water method, the forms-in-place method or the curing compound method.

When deemed necessary by the Engineer during periods of hot weather, water shall be applied to concrete surfaces being cured by the curing compound method or by the forms-in-place method, until the Engineer determines that a cooling effect is no longer required. Application of water for this purpose will be paid for as extra work as provided in Section 4-1.03D, "Extra Work."

#### **90-7.04 CURING PRECAST CONCRETE MEMBERS**

Precast concrete members shall be cured in conformance with any of the methods specified in Section 90-7.01, "Methods of Curing." Curing shall be provided for the minimum time specified for each method or until the concrete reaches its design strength, whichever is less. Steam curing may also be used for precast members and shall conform to the following provisions:

- A. After placement of the concrete, members shall be held for a minimum 4-hour presteaming period. If the ambient air temperature is below 50 °F, steam shall be applied during the presteaming period to hold the air surrounding the member at a temperature between 50 °F and 90 °F.

- B. To prevent moisture loss on exposed surfaces during the presteaming period, members shall be covered as soon as possible after casting or the exposed surfaces shall be kept wet by fog spray or wet blankets.
- C. Enclosures for steam curing shall allow free circulation of steam about the member and shall be constructed to contain the live steam with a minimum moisture loss. The use of tarpaulins or similar flexible covers will be permitted, provided they are kept in good repair and secured in such a manner as to prevent the loss of steam and moisture.
- D. Steam at the jets shall be at low pressure and in a saturated condition. Steam jets shall not impinge directly on the concrete, test cylinders, or forms. During application of the steam, the temperature rise within the enclosure shall not exceed 40 °F per hour. The curing temperature throughout the enclosure shall not exceed 150 °F and shall be maintained at a constant level for a sufficient time necessary to develop the required transfer strength. Control cylinders shall be covered to prevent moisture loss and shall be placed in a location where temperature is representative of the average temperature of the enclosure.
- E. Temperature recording devices that will provide an accurate, continuous, permanent record of the curing temperature shall be provided. A minimum of one temperature recording device per 200 feet of continuous bed length will be required for checking temperature.
- F. Members in pretension beds shall be detensioned immediately after the termination of steam curing while the concrete and forms are still warm, or the temperature under the enclosure shall be maintained above 60 °F until the stress is transferred to the concrete.
- G. Curing of precast concrete will be considered completed after termination of the steam curing cycle.

#### **90-7.05 CURING PRECAST PRESTRESSED CONCRETE PILES**

Newly placed concrete for precast prestressed concrete piles shall be cured in conformance with the provisions in Section 90-7.04, "Curing Precast Concrete Members," except that piles in a corrosive environment shall be cured as follows:

- A. Piles shall be either steam cured or water cured. If water curing is used, the piles shall be kept continuously wet by the application of water in conformance with the provisions in Section 90-7.01A, "Water Method."
- B. If steam curing is used, the steam curing provisions in Section 90-7.04, "Curing Precast Concrete Members," shall apply except that the piles shall be kept continuously wet for their entire length for a period of not less than 3 days, including the holding and steam curing periods.

#### **90-7.06 CURING SLOPE PROTECTION**

Concrete slope protection shall be cured in conformance with any of the methods specified in Section 90-7.01, "Methods of Curing."

Concreted-rock slope protection shall be cured in conformance with any of the methods specified in Section 90-7.01, "Methods of Curing," with a blanket of earth kept wet for 72 hours, or by sprinkling with a fine spray of water every 2 hours during the daytime for a period of 3 days.

#### **90-7.07 CURING MISCELLANEOUS CONCRETE WORK**

Exposed surfaces of curbs shall be cured by pigmented curing compounds as specified in Section 90-7.01B, "Curing Compound Method."

Concrete sidewalks, gutter depressions, island paving, curb ramps, driveways, and other miscellaneous concrete areas shall be cured in conformance with any of the methods specified in Section 90-7.01, "Methods of Curing."

Shotcrete shall be cured for at least 72 hours by spraying with water, by a moist earth blanket, or by any of the methods provided in Section 90-7.01, "Methods of Curing."

Mortar and grout shall be cured by keeping the surface damp for 3 days.

After placing, the exposed surfaces of sign structure foundations, including pedestal portions, if constructed, shall be cured for at least 72 hours by spraying with water, by a moist earth blanket, or by any of the methods provided in Section 90-7.01, "Methods of Curing."

### **90-8 PROTECTING CONCRETE**

#### **90-8.01 GENERAL**

In addition to the provisions in Section 7-1.16, "Contractor's Responsibility for the Work and Materials," the Contractor shall protect concrete as provided in this Section 90-8. If required by the Engineer, the Contractor shall submit a written outline of the proposed methods for protecting the concrete.

The Contractor shall protect concrete from damage from any cause, which shall include, but not be limited to: rain, heat, cold, wind, Contractor's actions, and actions of others.

Concrete shall not be placed on frozen or ice-coated ground or subgrade nor on ice-coated forms, reinforcing steel, structural steel, conduits, precast members, or construction joints.

Under rainy conditions, placing of concrete shall be stopped before the quantity of surface water is sufficient to damage surface mortar or cause a flow or wash of the concrete surface, unless the Contractor provides adequate protection against damage.

Concrete that has been frozen or damaged by other causes, as determined by the Engineer, shall be removed and replaced by the Contractor at the Contractor's expense.

## **90-8.02 PROTECTING CONCRETE STRUCTURES**

Structure concrete and shotcrete used as structure concrete shall be maintained at a temperature of not less than 45 °F for 72 hours after placing and at not less than 40 °F for an additional 4 days.

## **90-9 COMPRESSIVE STRENGTH**

### **90-9.01 GENERAL**

Concrete compressive strength requirements consist of a minimum strength that shall be attained before various loads or stresses are applied to the concrete and, for concrete designated by compressive strength, a minimum strength at the age of 28 days or at the age otherwise allowed in Section 90-1.01, "Description." The various strengths required are specified in these specifications or the special provisions or are shown on the plans.

The compressive strength of concrete will be determined from test cylinders that have been fabricated from concrete sampled in conformance with the requirements of California Test 539. Test cylinders will be molded and initially field cured in conformance with California Test 540. Test cylinders will be cured and tested after receipt at the testing laboratory in conformance with the requirements of California Test 521. A strength test shall consist of the average strength of 2 cylinders fabricated from material taken from a single load of concrete, except that, if any cylinder should show evidence of improper sampling, molding, or testing, that cylinder shall be discarded and the strength test shall consist of the strength of the remaining cylinder.

When concrete compressive strength is specified as a prerequisite to applying loads or stresses to a concrete structure or member, test cylinders for other than steam cured concrete will be cured in conformance with Method 1 of California Test 540. The compressive strength of concrete determined for these purposes will be evaluated on the basis of individual tests.

When concrete is designated by compressive strength rather than by cementitious material content, the concrete strength to be used as a basis for acceptance of other than steam cured concrete will be determined from cylinders cured in conformance with Method 1 of California Test 540. If the result of a single compressive strength test at the maximum age specified or allowed is below the specified strength but is 95 percent or more of the specified strength, the Contractor shall make corrective changes, subject to approval of the Engineer, in the mix proportions or in the concrete fabrication procedures, before placing additional concrete, and shall pay to the State \$10 for each in-place cubic yard of concrete represented by the deficient test. If the result of a single compressive strength test at the maximum age specified or allowed is below 95 percent of the specified strength, but is 85 percent or more of the specified strength, the Contractor shall make the corrective changes specified above, and shall pay to the State \$15 for each in-place cubic yard of concrete represented by the deficient test. In addition, such corrective changes shall be made when the compressive strength of concrete tested at 7 days indicates, in the judgment of the Engineer, that the concrete will not attain the required compressive strength at the maximum age specified or allowed. Concrete represented by a single test that indicates a compressive strength of less than 85 percent of the specified 28-day compressive strength will be rejected in conformance with the provisions in Section 6-1.04, "Defective Materials."

If the test result indicates that the compressive strength at the maximum age specified or allowed is below the specified strength, but is 85 percent or more of the specified strength, payments to the State as required above shall be made, unless the Contractor, at the Contractor's expense, obtains and submits evidence acceptable to the Engineer that the strength of the concrete placed in the work meets or exceeds the specified 28-day compressive strength. If the test result indicates a compressive strength at the maximum age specified or allowed below 85 percent, the concrete represented by that test will be rejected, unless the Contractor, at the Contractor's expense, obtains and submits evidence acceptable to the Engineer that the strength and quality of the concrete placed in the work are acceptable. If the evidence consists of tests made on cores taken from the work, the cores shall be obtained and tested in conformance with the requirements in ASTM Designation: C 42.

No single compressive strength test shall represent more than 320 cubic yards.

If a precast concrete member is steam cured, the compressive strength of the concrete will be determined from test cylinders that have been handled and stored in conformance with Method 3 of California Test 540. The compressive strength of steam cured concrete will be evaluated on the basis of individual tests representing specific portions of production. If the concrete is designated by 28-day compressive strength rather than by cementitious material content, the concrete shall be considered to be acceptable whenever its compressive strength reaches the specified 28-day compressive strength provided that strength is reached in not more than the maximum number of days specified or allowed after the member is cast.

When concrete is specified by compressive strength, prequalification of materials, mix proportions, mixing equipment, and procedures proposed for use will be required prior to placement of the concrete. Prequalification shall be accomplished by the submission of acceptable certified test data or trial batch reports by the Contractor. Prequalification data shall be

based on the use of materials, mix proportions, mixing equipment, procedures, and size of batch proposed for use in the work.

Certified test data, in order to be acceptable, shall indicate that not less than 90 percent of at least 20 consecutive tests exceed the specified strength at the maximum number of days specified or allowed, and none of those tests are less than 95 percent of specified strength. Strength tests included in the data shall be the most recent tests made on concrete of the proposed mix design and all shall have been made within one year of the proposed use of the concrete.

Trial batch test reports, in order to be acceptable, shall indicate that the average compressive strength of 5 consecutive concrete cylinders, taken from a single batch, at not more than 28 days (or the maximum age allowed) after molding shall be at least 580 pounds per square inch greater than the specified 28-day compressive strength, and no individual cylinder shall have a strength less than the specified strength at the maximum age specified or allowed. Data contained in the report shall be from trial batches that were produced within one year of the proposed use of specified strength concrete in the project. Whenever air-entrainment is required, the air content of trial batches shall be equal to or greater than the air content specified for the concrete without reduction due to tolerances.

Tests shall be performed in conformance with either the appropriate California Test methods or the comparable ASTM test methods. Equipment employed in testing shall be in good condition and shall be properly calibrated. If the tests are performed during the life of the contract, the Engineer shall be notified sufficiently in advance of performing the tests in order to witness the test procedures.

The certified test data and trial batch test reports shall include the following information:

- A. Date of mixing.
- B. Mixing equipment and procedures used.
- C. The size of batch in cubic yards and the weight, type, and source of all ingredients used.
- D. Penetration or slump (if the concrete will be placed under water or placed in cast-in-place concrete piles) of the concrete.
- E. The air content of the concrete if an air-entraining admixture is used.
- F. The age at time of testing and strength of all concrete cylinders tested.

Certified test data and trial batch test reports shall be signed by an official of the firm that performed the tests.

When approved by the Engineer, concrete from trial batches may be used in the work at locations where concrete of a lower quality is required and the concrete will be paid for as the type of concrete required at that location.

After materials, mix proportions, mixing equipment, and procedures for concrete have been prequalified for use, additional prequalification by testing of trial batches will be required prior to making changes that, in the judgment of the Engineer, could result in a strength of concrete below that specified.

The Contractor's attention is directed to the time required to test trial batches and the Contractor shall be responsible for production of trial batches at a sufficiently early date so that the progress of the work is not delayed.

When precast concrete members are manufactured at the plant of an established manufacturer of precast concrete members, the mix proportions of the concrete shall be determined by the Contractor, and a trial batch and prequalification of the materials, mix proportions, mixing equipment, and procedures will not be required.

## 90-10 MINOR CONCRETE

### 90-10.01 GENERAL

Concrete for minor structures, slope paving, curbs, sidewalks and other concrete work, when designated as minor concrete on the plans, in the specifications, or in the contract item, shall conform to the provisions specified herein.

The Engineer, at the Engineer's discretion, will inspect and test the facilities, materials and methods for producing the concrete to ensure that minor concrete of the quality suitable for use in the work is obtained.

Before using minor concrete or in advance of revising the mix proportions, the Contractor shall submit in writing to the Engineer a copy of the mix design. When required by the following table, the Contractor shall include compressive strength test results verifying the minimum specified compressive strength:

SCM	Test Submittal Required
Fly Ash used alone	When portland cement content < 350 lbs/cy
GGBFS used alone	When portland cement content < 250 lbs/cy
Natural Pozzolan used alone	When portland cement content < 350 lbs/cy
More than 1 SCM	Always

Tests shall be performed by an ACI certified technician.

## **90-10.02 MATERIALS**

Minor concrete shall conform to the following requirements:

### **90-10.02A Cementitious Material**

Cementitious material shall conform to the provisions in Section 90-1.01, "Description," and 90-2, "Materials."

### **90-10.02B Aggregate**

Aggregate shall be clean and free from deleterious coatings, clay balls, roots, and other extraneous materials.

Use of crushed concrete or reclaimed aggregate is acceptable only if the aggregate satisfies all aggregate requirements.

The Contractor shall submit to the Engineer for approval, a grading of the combined aggregate proposed for use in the minor concrete. After acceptance of the grading, aggregate furnished for minor concrete shall conform to that grading, unless a change is authorized in writing by the Engineer.

The Engineer may require the Contractor to furnish periodic test reports of the aggregate grading furnished. The maximum size of aggregate used shall be at the option of the Contractor, but in no case shall the maximum size be larger than 1-1/2-inch or smaller than 3/4 inch.

The Engineer may waive, in writing, the gradation requirements in this Section 90-10.02B, if, in the Engineer's opinion, the furnishing of the gradation is not necessary for the type or amount of concrete work to be constructed.

### **90-10.02C Water**

Water used for washing, mixing, and curing shall be free from oil, salts, and other impurities that would discolor or etch the surface or have an adverse affect on the quality of the concrete.

### **90-10.02D Admixtures**

The use of admixtures shall conform to the provisions in Section 90-4, "Admixtures."

## **90-10.03 PRODUCTION**

Cementitious material, water, aggregate, and admixtures shall be stored, proportioned, mixed, transported, and discharged in conformance with recognized standards of good practice that will result in concrete that is thoroughly and uniformly mixed, that is suitable for the use intended, and that conforms to requirements specified herein. Recognized standards of good practice are outlined in various industry publications such as are issued by American Concrete Institute, AASHTO, or the Department.

The cementitious material content of minor concrete shall conform to the provisions in Section 90-1.01, "Description."

The amount of water used shall result in a consistency of concrete conforming to the provisions in Section 90-6.06, "Amount of Water and Penetration." Additional mixing water shall not be incorporated into the concrete during hauling or after arrival at the delivery point, unless authorized by the Engineer.

Discharge of ready-mixed concrete from the transporting vehicle shall be made while the concrete is still plastic and before stiffening occurs. An elapsed time of 1.5 hours (one hour in non-agitating hauling equipment), or more than 250 revolutions of the drum or blades, after the introduction of the cementitious material to the aggregates, or a temperature of concrete of more than 90 °F will be considered conditions contributing to the quick stiffening of concrete. The Contractor shall take whatever action is necessary to eliminate quick stiffening, except that the addition of water will not be permitted.

The required mixing time in stationary mixers shall be not less than 50 seconds or more than 5 minutes.

The minimum required revolutions at mixing speed for transit-mixed concrete shall be not less than that recommended by the mixer manufacturer, and shall be increased, if necessary, to produce thoroughly and uniformly mixed concrete.

When a high range water-reducing admixture is added to the concrete at the job site, the total number of revolutions shall not exceed 300.

Each load of ready-mixed concrete shall be accompanied by a weighmaster certificate that shall be delivered to the Engineer at the discharge location of the concrete, unless otherwise directed by the Engineer. The weighmaster certificate shall be clearly marked with the date and time of day when the load left the batching plant and, if hauled in truck mixers or agitators, the time the mixing cycle started.

A Certificate of Compliance conforming to the provisions in Section 6-1.07, "Certificates of Compliance," shall be furnished to the Engineer, prior to placing minor concrete from a source not previously used on the contract, stating that minor concrete to be furnished meets contract requirements, including minimum cementitious material content specified.

## **90-10.04 CURING MINOR CONCRETE**

Curing minor concrete shall conform to the provisions in Section 90-7, "Curing Concrete."





Performance Graded Asphalt Binder

Property	AASHTO Test Method	Specification				
		Grade				
		PG 58-22 <sup>a</sup>	PG 64-10	PG 64-16	PG 64-28	PG 70-10
Original Binder						
Flash Point, Minimum °C	T 48	230	230	230	230	230
Solubility, Minimum % <sup>b</sup>	T 44	99	99	99	99	99
Viscosity at 135°C, <sup>c</sup> Maximum, Pa·s	T 316	3.0	3.0	3.0	3.0	3.0
Dynamic Shear, Test Temp. at 10 rad/s, °C Minimum G*/sin(delta), kPa	T 315	58 1.00	64 1.00	64 1.00	64 1.00	70 1.00
RTFO Test, <sup>e</sup> Mass Loss, Maximum, %	T 240	1.00	1.00	1.00	1.00	1.00
RTFO Test Aged Binder						
Dynamic Shear, Test Temp. at 10 rad/s, °C Minimum G*/sin(delta), kPa	T 315	58 2.20	64 2.20	64 2.20	64 2.20	70 2.20
Ductility at 25°C Minimum, cm	T 51	75	75	75	75	75
PAV <sup>f</sup> Aging, Temperature, °C	R 28	100	100	100	100	110
RTFO Test and PAV Aged Binder						
Dynamic Shear, Test Temp. at 10 rad/s, °C Maximum G*/sin(delta), kPa	T 315	22 <sup>d</sup> 5000	31 <sup>d</sup> 5000	28 <sup>d</sup> 5000	22 <sup>d</sup> 5000	34 <sup>d</sup> 5000
Creep Stiffness, Test Temperature, °C Maximum S-value, Mpa Minimum M-value	T 313	-12 300 0.300	0 300 0.300	-6 300 0.300	-18 300 0.300	0 300 0.300

Notes:

- a. Use as asphalt rubber base stock for high mountain and high desert area.
- b. The Engineer waives this specification if the supplier is a Quality Supplier as defined by the Department's "Certification Program for Suppliers of Asphalt."
- c. The Engineer waives this specification if the supplier certifies the asphalt binder can be adequately pumped and mixed at temperatures meeting applicable safety standards.
- d. Test the sample at 3°C higher if it fails at the specified test temperature. G\*/sin(delta) remains 5000 kPa maximum.
- e. "RTFO Test" means the asphaltic residue obtained using the Rolling Thin Film Oven Test, AASHTO Test Method T 240 or ASTM Designation: D 2872. The residue from mass change determination may be used for other tests.
- f. "PAV" means Pressurized Aging Vessel.

Performance graded polymer modified asphalt binder (PG Polymer Modified) is:

Performance Graded Polymer Modified Asphalt Binder <sup>a</sup>

Property	AASHTO Test Method	Specification Grade		
		PG 58-34 PM	PG 64-28 PM	PG 76-22 PM
<b>Original Binder</b>				
Flash Point, Minimum °C	T 48	230	230	230
Solubility, Minimum % <sup>b</sup>	T 44 <sup>c</sup>	98.5	98.5	98.5
Viscosity at 135°C, <sup>d</sup> Maximum, Pa·s	T 316	3.0	3.0	3.0
Dynamic Shear, Test Temp. at 10 rad/s, °C Minimum G*/sin(delta), kPa	T 315	58 1.00	64 1.00	76 1.00
RTFO Test , Mass Loss, Maximum, %	T 240	1.00	1.00	1.00
<b>RTFO Test Aged Binder</b>				
Dynamic Shear, Test Temp. at 10 rad/s, °C Minimum G*/sin(delta), kPa	T 315	58 2.20	64 2.20	76 2.20
Dynamic Shear, Test Temp. at 10 rad/s, °C Maximum (delta), %	T 315	Note e 80	Note e 80	Note e 80
Elastic Recovery <sup>f</sup> , Test Temp., °C Minimum recovery, %	T 301	25 75	25 75	25 65
PAV <sup>g</sup> Aging, Temperature, °C	R 28	100	100	110
<b>RTFO Test and PAV Aged Binder</b>				
Dynamic Shear, Test Temp. at 10 rad/s, °C Maximum G*/sin(delta), kPa	T 315	16 5000	22 5000	31 5000
Creep Stiffness, Test Temperature, °C Maximum S-value, MPa Minimum M-value	T 313	-24 300 0.300	-18 300 0.300	-12 300 0.300

Notes:

- a. Do not modify PG Polymer Modified using acid modification.
- b. The Engineer waives this specification if the supplier is a Quality Supplier as defined by the Department's "Certification Program for Suppliers of Asphalt."
- c. The Department allows ASTM D 5546 instead of AASHTO T 44
- d. The Engineer waives this specification if the supplier certifies the asphalt binder can be adequately pumped and mixed at temperatures meeting applicable safety standards.
- e. Test temperature is the temperature at which G\*/sin(delta) is 2.2 kPa. A graph of log G\*/sin(delta) plotted against temperature may be used to determine the test temperature when G\*/sin(delta) is 2.2 kPa. A graph of (delta) versus temperature may be used to determine delta at the temperature when G\*/sin(delta) is 2.2 kPa. The Engineer also accepts direct measurement of (delta) at the temperature when G\*/sin(delta) is 2.2 kPa.
- f. Tests without a force ductility clamp may be performed.
- g. "PAV" means Pressurized Aging Vessel.

**SAMPLING**

Provide a sampling device in the asphalt feed line connecting the plant storage tanks to the asphalt weighing system or spray bar. Make the sampling device accessible between 24 and 30 inches above the platform. Provide a receptacle for flushing the sampling device.

Include with the sampling device a valve:

1. Between 1/2 and 3/4 inch in diameter



**Characteristics of Adhesive:**

Test <sup>a</sup>	California Test	Requirement
Brookfield Viscosity, No. 3 Spindle at 20 rpm, Poise at 77°F	434, Part 4	0.9 max.
Gel time, minutes	434, Part 1	2 to 15
Slant Shear Strength on Dry Concrete, psi, after 4 days of cure in air at 77° F ±2° F	434, Part 5 <sup>b</sup>	3,000 min.
Slant Shear Strength on Wet Concrete, psi, after 4 days of cure in air at 77° F ±2° F	434, Part 5 <sup>b</sup>	1,700 min.
Tensile Strength, psi	434, Part 7, except test after 4 days of cure at 77° F ±2° F	4,500 min.
Elongation, %	434, Part 7, except test after 4 days of cure at 77° F ±2° F	10 max.

<sup>a</sup> The mixing ratio used will be that recommended by the manufacturer.

<sup>b</sup> For slant shear strength on concrete, delete Sections B-1 and B-5 of California Test 434, Part 5. For dry concrete, use Step "2" below only. For wet concrete, use both Steps "1" & "2":

1. Soak blocks in water for 24 hours at 77° F ±2° F. Remove and wipe off excess water.
2. Mix epoxy as described in California Test 434, Part 1, and apply a coat approximately 0.010-inch thick to each diagonal surface. Place four 0.125-inch square pieces of shim stock 0.012-inch thick on one block to control final film thickness. Before pressing the coated surfaces together, leave the blocks so that the coated surfaces are horizontal until the epoxy reacts slightly to prevent excessive flow.