


DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS

Randell D. Hiatt
REGISTERED CIVIL ENGINEER

May 20, 2011
PLANS APPROVAL DATE


THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

Randell D. Hiatt
REGISTERED PROFESSIONAL ENGINEER
No. CS0200
Exp. 6-30-11
CIVIL
STATE OF CALIFORNIA

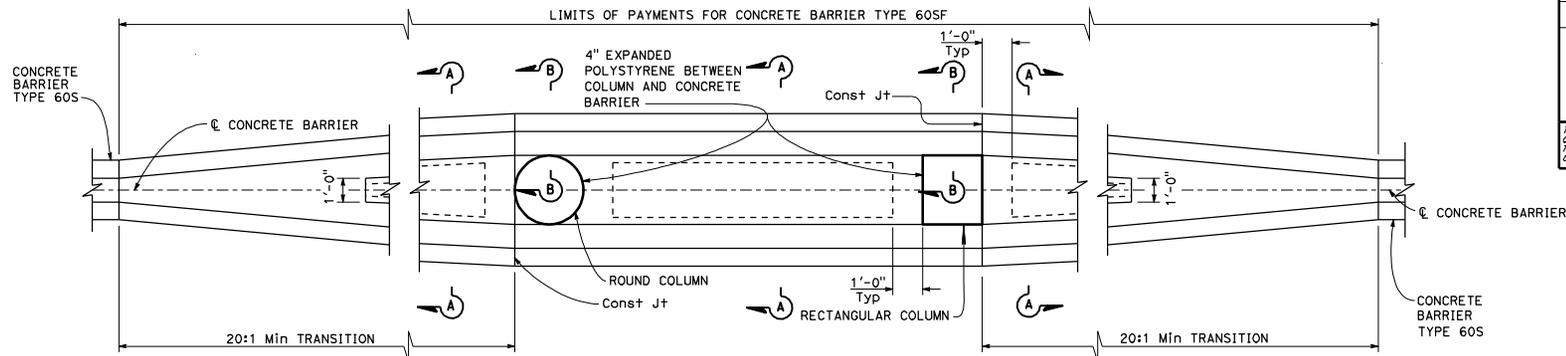


TRANSITION AT BRIDGE COLUMNS


Concrete Barrier Type 60SF
See Note 7

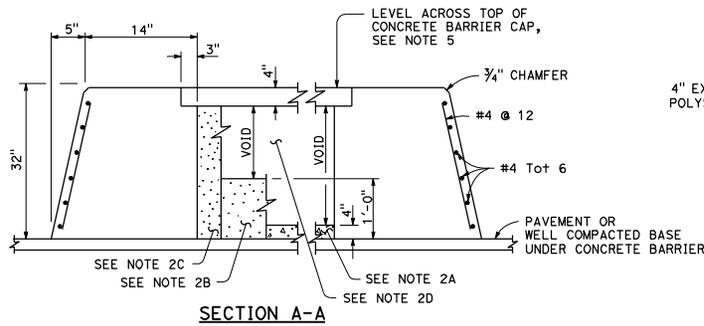

SECTION A-A

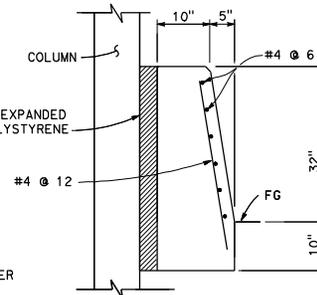


SECTION B-B

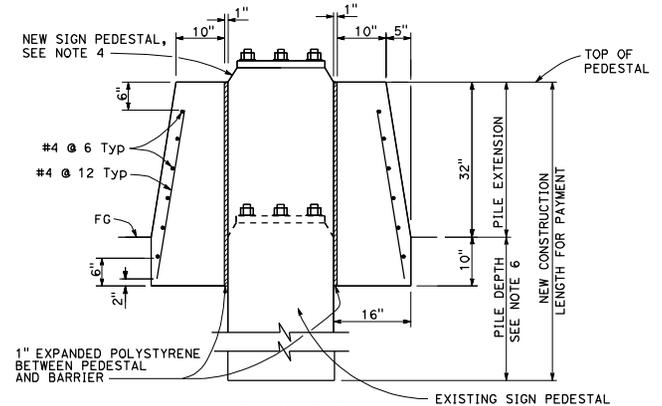

SECTION C-C

NOTES:

- See Standard Plan A76G for Concrete Barrier Type 60S.
- Contractor options for fill between concrete barrier walls:
 - A. Place 4" PCC at base between concrete barrier walls.
 - B. Place 1'-0" of granular material at base between walls.
 - C. Place granular material from base to bottom of 4" cap.
 - D. Monolithic concrete with foam blockouts is not permitted.
- Reinforcing steel shall extend continuous through construction joints.
- See "Overhead Sign" plans for sign pedestal elevations on new construction.
- Adjust height of concrete barrier wall on low side of offset or super-elevated roadways to provide level grade across top of concrete barrier cap.
- See Overhead Signs Standard Plan Pile Foundation Tables.
- All locations with limited shoulder width available for barrier, see Standard Plan A76F for use of Concrete Barrier Type 60GE.

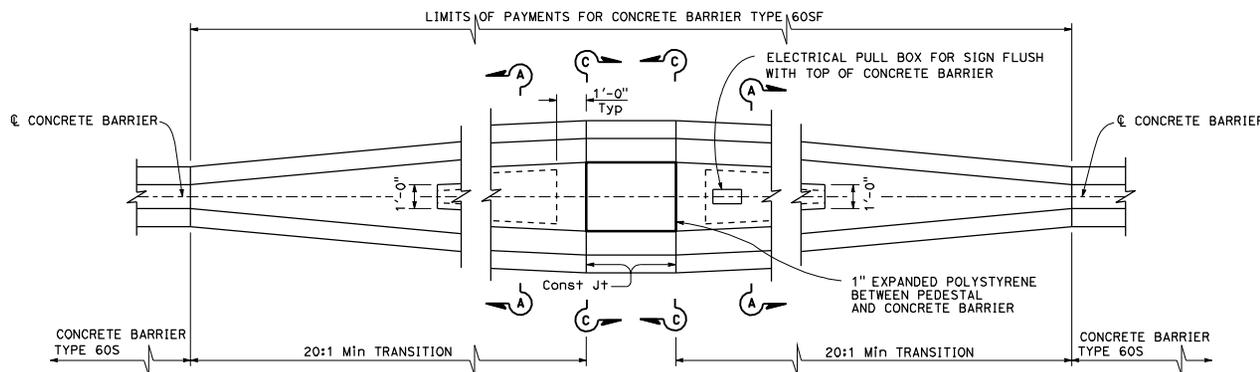

TRANSITION AT SIGN PEDESTAL

Concrete Barrier Type 60SF
See Note 7

CONCRETE BARRIER TYPE 60SF

NO SCALE

A76I