



DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS

Amir M. Malek
 REGISTERED CIVIL ENGINEER
 No. C62397
 Exp. 9-30-17
 CIVIL
 STATE OF CALIFORNIA



October 30, 2015
 PLANS APPROVAL DATE
 THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

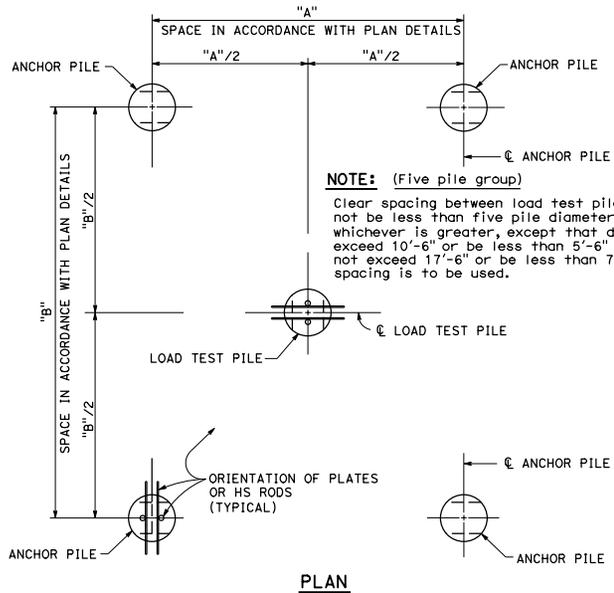

NOTE: (Five pile group)
 Clear spacing between load test pile and anchor pile shall not be less than five pile diameters or 7'-0", whichever is greater, except that dimension "A" shall not exceed 10'-6" or be less than 5'-6" and dimension "B" shall not exceed 17'-6" or be less than 7'-6". When possible, maximum spacing is to be used.

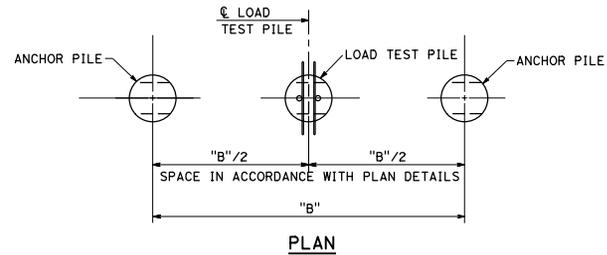

NOTE: (Three pile group)
 Clear spacing between load test pile and anchor pile shall not be less than five pile diameters or 7'-0", whichever is greater, except that dimension "B" shall not exceed 17'-6" or be less than 6'-6". When possible, maximum spacing is to be used.

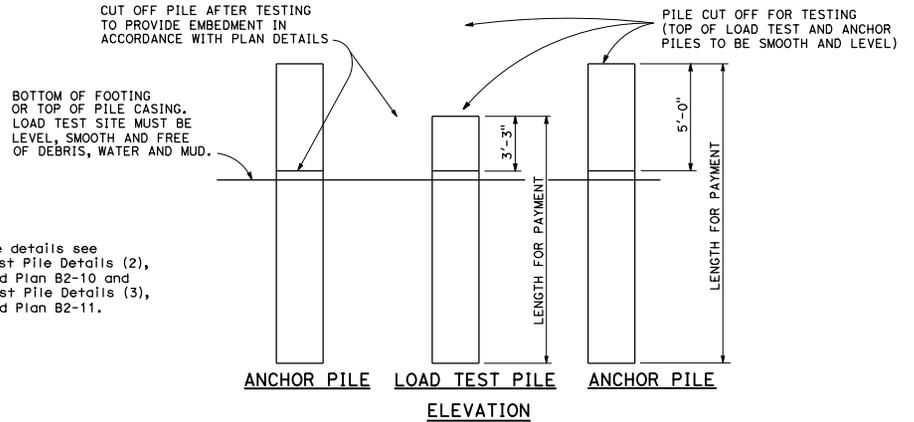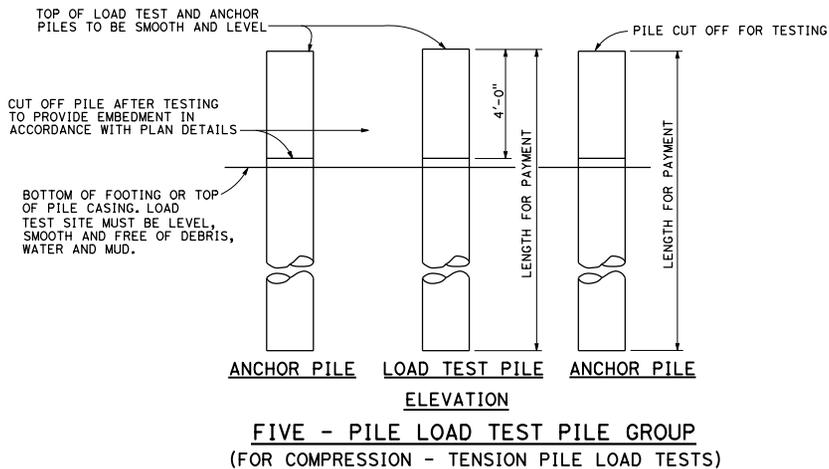

NOTE:
 For pile details see Load Test Pile Details (2), Standard Plan B2-10 and Load Test Pile Details (3), Standard Plan B2-11.

STATE OF CALIFORNIA
 DEPARTMENT OF TRANSPORTATION
LOAD TEST PILE DETAILS (1)
 NO SCALE